

Cutting Tools

GENERAL CATALOG

Vol.6



New Products	A
Tool Materials / Selection Guide	B
BiEMCS, PCD, CBN and ceramic	C
Micro-grain Carbide, Carbide	D
Insert Stock List	E
Outside Machining Toolholders	F
Swiss Tools	G
Grooving Tools	H
Threading Tools	I
Shaper	J
Internal machining tool range	K
Original Tools for Various Applications	L
Indexable End Milling Tools	M
Milling Cutters	N
Technical Data	O
Index	P



App for iOS




NTK Technology


Disc and Drum Brakes



Aerospace Components



Ceramic Endmill (HRSA Materials)

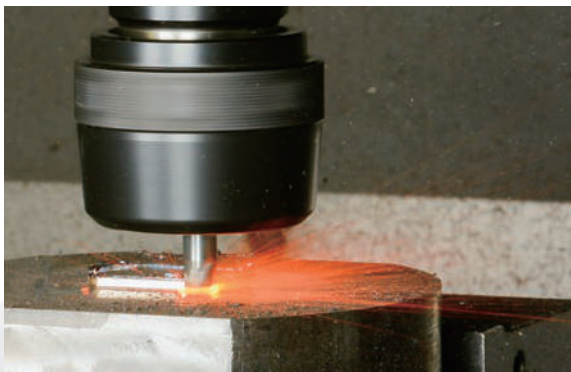

Ceramic Endmill (Cast iron)




Cylinder Liners



Hardened Materials



Steel Machining




Grooving



Poly - V Pulleys



Swiss Tools for Small Parts Machining



Mill Rolls



High Speed Machining of Aluminum



Safety instructions for using ultra hard cutting tools

1. Instructions for using ultra hard cutting tools

As required by the laws concerning Product Liability enforced on July 1, 1996, we place warning or caution labels on the packages of applicable NTK products. However, each tool body itself bears no detailed safety instructions. Therefore, you are requested to read and understand fully the "Safety instructions for the use of carbide cutting tools" before putting any ultra hard tool materials into use. In addition, we request all relevant staff and operators fully understand these safety instructions prior to use.

2. Basic characteristics of ultra hard tool materials

2-1. Meaning and classifications of terms used in this leaflet

Ultra hard tool materials: The collective name for materials used as cutting tools, including carbides, ceramics, CBN and diamond (PCD) sintered materials.

Carbide: Tool materials where the main component is WC (Tungsten Carbide)

Ultra hard materials: The collective name for materials used as ultra hard tools. Also used as a convenient way of referring to carbides under a narrower definition.

Ultra hard tools: The collective name for tools using ultra hard tool materials.

2-2. Physical properties

Appearance: Varies depending on the material. Example: gray, black or gold

Odour: No odour

Hardness: Cemented carbide: HV500 up to 3,000 kg/mm²

Specific gravity: Carbide: 9 up to 19

2-3. Constituents

Carbide, nitride, carbo-nitride, or oxidized materials of W, Ti, Al, Ta, B or the like; some contain metallic components such as Co, Ni, Cr and/or Mo.

3. Precautions for handling ultra hard tool materials

- *One of the properties specific to these materials is high hardness, another is brittleness. Therefore, shock loads or impacts, or excessive clamping of these materials may result in breakage or other damage.
- *As the specific gravity (density) of these materials is very high, a large component made up of these materials or such products in large quantity should be handled with care.
- *Ultra hard materials are different in their thermal expansion ratio from metals. These products are prone to thermal shock and subsequent breakage when subjected to sudden increase or decrease in temperature.
- *As cutting oil, lubricant and general moisture may corrode ultra hard materials and affect their strength, pay extra attention to storing them in good conditions.

4. Precautions for processing ultra hard tools

- *The strength of ultra hard tools may be significantly lowered depending on the surface condition. Always use diamond grinding wheels for finish machining.
- *Dust is produced when ultra hard tools are ground. Install appropriate ventilation/disposal equipment and wear protective gear such as masks, as inhalation of such dust may be hazardous to health. If such dust contacts your skin or comes into contact with your eyes, flush well with flowing water.
- *After the grinding of ultra hard tools or brazed tools, the waste coolant contains components of heavy metals. Be sure to dispose of such waste liquid properly.
- *After re-grinding ultra hard tools, check that they are free of cracks or damage before use.
- *When ultra hard material or products made of ultra hard material is marked with lasers or an electric pen, cracking may occur to the marked area. Do not mark in areas where stress is applied during use.
- *Processing ultra hard material by electric discharge may cause residual cracks on the surface, resulting in lower strength. Thus, remove any cracks completely by grinding as required.
- *Be careful when brazing ultra hard material. If the temperature is lower or higher than the melting point of the brazing material, the insert may not be permanently fixed.

■ Precautions for Safe Use of Cutting Tools

Applicable Products	Possible Risks	Safety Measures
General Cutting Tools	◎Contact with a sharp cutting edge with bare hands may result in injury.	*Use protective gear such as protective gloves when taking the tool out of packaging and installing into the machine.
	◎Misuse or using under inappropriate conditions may cause the cutting tool to break and/or shatter into pieces, resulting in personal injury.	*Use protective equipment, machine guarding and/or protective glasses. *Use within the range of recommended conditions. Please refer to the instruction manual and catalogue.
	◎Sudden increase in cutting resistance due to sudden impact load or excessive wear may cause the cutting tool to break and/or shatter into pieces, resulting in personal injury.	*Use protective gear such as protective gloves when taking the tool out of packaging and installing into the machine.
	◎High-temperature chips may be produced and long chips may be ejected, resulting in injury and/or burns.	*Use protective equipment, machine guarding and/or protective glasses. *Before removing chips, always stop the machine. Wear protective gloves and use proper equipment for chip removal.
	◎The tool and material/work being cut can become very hot. Touching them immediately after use may cause burns.	*Use protective gear such as protective gloves.
	◎Sparks, heat generation due to breakage and/or chips during cutting may cause fire.	*Do not use the machine and tools in locations where there are risks of ignition or explosion. *When using water-insoluble cutting oil, fire prevention measures must be implemented.
	◎Out of balance machine set ups when used at a high-speed, may cause insert breakage due to excess vibration or chatter, resulting in injury.	*Use protective equipment, machine guarding and/or protective glasses. *Perform a trial-run beforehand to make sure the setup is stable, free of chatter, vibration and abnormal noise.
	◎Touching burrs and flashes on machined work may result in personal injury.	*Use adequate hand protection.
Throw-Away Type Tools (With indexable insert)	◎Inappropriately clamped inserts and/or components may become detached from the machine during cutting, resulting in injury.	*Before installing the insert, clean the seating surface and clamping components so that they are free of debris. *Use the wrench supplied to install the insert and check that the insert and components are securely clamped. Do not use any inserts or components other than the items specified.
	◎Excessively tightening with a device such as a pipe extension may cause the insert and/or components to break or detach due to over clamping.	*Do not use tightening devices such as pipe extensions to obtain further torque. Always use the supplied wrench.
	◎At a high speeds inserts and/or components may lose clamping pressure due to the loosening effect of centrifugal force. This is very dangerous. Always ensure secure clamping systems and check regularly.	*Use within the range the recommended conditions. Please refer to the instruction manual and catalogue.
Cutters and Rotational Tools	◎As cutters have sharp cutting edges, contact with bare hands may result in injury.	*Use protective equipment such as protective gloves.
	◎Imbalance or eccentric rotation may cause the tool to break due to vibration or chatter, resulting in potential injury.	*Use at a rotational speed within the recommended conditions. *To prevent eccentric rotation and vibration due to worn bearings, regularly check the machine rotor/rotating parts for the accuracy and balance and adjust as required.
Drills	◎Extra care should be taken when through hole drilling as chips may be ejected at high speed as the drill breaks through the workpiece.	*Use protective equipment such as machine guards and/or protective glasses. Additional guarding around the chuck and drill may be advisable.
	◎Drill tips of a very small diameter are usually pointed and extremely sharp. Extra care and safety precautions should be taken when handling to avoid puncture wounds.	*Always use precautions and secure safe handling methods. *Wear protective gloves and glasses.
Brazed Inserts / Tools	◎Inserts may break or become, detached due to incorrect brazing.	*Use protective equipment such as machine guards and/or protective glasses. Additional guarding around the chuck and drill may be advisable.
Others	◎It is not advisable to use repeatedly brazed inserts as the braze may progressively weaken.	*Do not use repeatedly brazed inserts as the strength of such inserts is lowered.
	◎Use only for the original and intended purpose. Using outside recommended parameters is very dangerous, causing damages to machines and/or tools.	*Always use and operate as specified, observing the required safety rules and conditions.

Guidelines for Catalog

- This catalog lists products as of May 2020.
- Please note that specifications of the products listed in this catalog may be changed without notice due to continuous research & development and product improvements.
- This catalog contains the major features and relevant information on all of our products. Please contact our sales representatives or dealers if more detailed information is needed.
- Stock Status Symbols
 - : Standard stock available for Right-Hand, Left-Hand and neutral products
 - R : Stock available only in Right-Hand
 - L : Stock available only in Left-Hand
 - ★ : 1 weeks delivery
 - : 3 weeks delivery
 - : While stock lasts
 - No symbol : Not stocked

■ Standard

1) Holder Type	Package quantity	Notes
Turning holder	1 pc/case	
Milling cutter	1 pc/case	
2) Spare parts	Package quantity	Notes
Screw	10 pcs/case	Clamp screw, Clamp bolt, Double screw, Button screw
Seat	10 pcs/case	Shim seat
Clamp	10 pcs/case	Clamp
Wrench and cutter parts (such as cartridges)	5 pcs/case	Wrench, bit, cutter product
Blade	1 pc/case	
Handle, Hose	1 pc/case	Handle with magnet, handle and bit
3) Insert Type	Package quantity	Notes
BIDEMICS (Brazed)	1 pc/case	JP2
Endmill	1 pc/case	CERAMATIC (Ceramic), S-MILL (Carbide)
CBN	1 pc/case	B16, B22, B23, B30, B36, B40, B52, B5K, B6K
PCD, Diamond coating	1 pc/case	PD 1, PD2, UC1
CTPW insert for cut-off	5 pcs/case	CTPW series
STICK DUO Solid carbide bar	1 pc/case	SHFS, SHFB, SBFS, SBFB, SBB, SBG, SBT, SSP
All others	10 pcs/case	

*Packaging may vary depending on the product size.

For more information, please contact your nearest distributor or our sales office.

New Product Information		A 1 ~ 60
2019-2020 NEW PRODUCTS		
New Era in Aerospace Machining BIDEMICS	A2 ~ 17	Tool Materials / Selection Guide B 1 ~ 14
New SiAlON Grade for Machining Heat Resistant Super Alloys SX3	A18 ~ 19	BIDEMICS, PCD, CBN and Ceramics C 1 ~ 18
Solid Ceramic Endmill CERAMATIC Lineup Expansion	A20 ~ 24	Micro-grain Carbide, PVD/ CVD-coated Carbide D 1 ~ 8
PVD coated carbide grade for stainless steels Super Tough Coat "ST4"	A25 ~ 35	Insert Item List E 1 ~ 52
Solid Carbide Endmill S-MILL Line up Expansion	A36 ~ 39	General Turning Toolholders F 1 ~ 34
Unique swiss tooling / Front turning insert for large DOC The Front Max	A40 ~ 44	Unique Swiss Tooling G 1 ~ 104
Internal coolant type tool holders SPLASH Series Lineup expansion	A45 ~ 59	Grooving / Side Turning H 1 ~ 48
		Threading I 1 ~ 24
		Shaper J 1 ~ 8
		ID Tooling K 1 ~ 38
		Application Introduction L 1 ~ 36
		Endmills M 1 ~ 14
		Milling Cutters N 1 ~ 18
		Information O 1 ~ 32
		Index P 1 ~ 10

NEW

New Era in Aerospace Machining **BIDEMICS**

WATCH ON
YouTube



New Products

Tool Materials / Selection Guide

BIDEMICS, PCD, CBN and Ceramics
Micrograin Carbide, PVD/Coated Carbide

Insert Item List

General Turning Toolholders

Unique Swiss Tooling

Grooving / Side Turning

Threading

Shaper

ID Tooling

Application Introduction

Endmills

Rotating Tools

Information

Index



NTK's BIDEMICS is the latest revolutionary insert material to hit the HRSA material machining industry since the release of Whisker ceramics. BIDEMICS is a patented material with unique physical characteristics that are above and beyond current whisker grades used on HRSA material applications. The word is spreading through the HRSA industry and around the world about the results achieved when using BIDEMICS.

JX1/JX3

NEW

Semi-finishing & Finishing / Rough no scale



- Up to 480 m/min speed capability
- Much longer tool life at Whisker ceramics' speed range
- Better wear resistance and notching resistance than Whisker ceramics
- Superior surface finish vs. Whisker ceramics
- Newly added JX3 provides toughness to BIDEMICS family

JP2

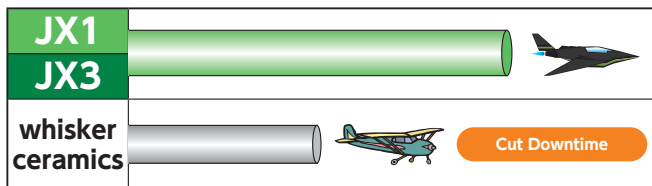
Finishing




- 10 to 15x speed capability vs. carbide
- Better wear resistance and notching resistance than CBNs
- Superior surface finish to Carbide or CBN
- Strong brazing technology

Increase Productivity vs. Whisker ceramics

① Significantly extended tool life at same speed




② Double speed capability

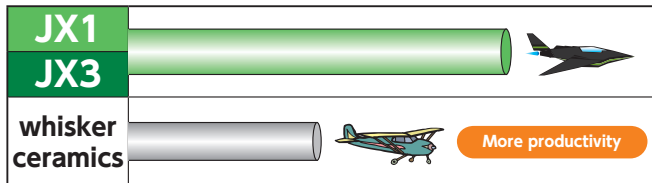

Increase Productivity vs. Carbides

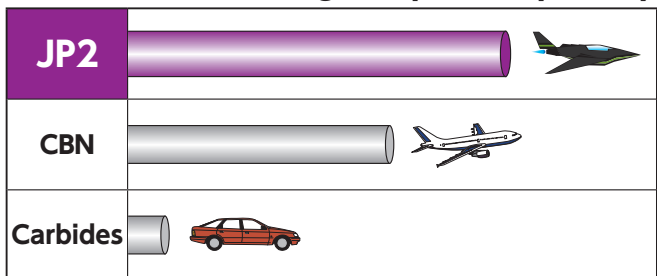① 10 to 15 times higher speed capability



Application : JX1 & JX3


JX1

- Higher speed, more productivity than ceramics.
- Suitable for turning in high rigid situation (External/ endface tuening) Turning in using more toughness insert like RNGN type
- Offering excellent notch wear resistance

JX3

- Turning at the corner part, Grooving.
- Chipping occurred when use JX1 grade
- Turning in low rigidity situation

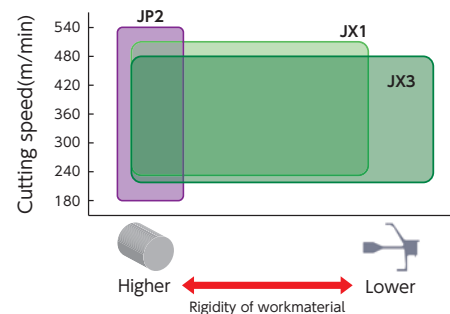Grade



Grade	Workmaterial	Tooling	Applications	Cutting speed (m/min)	Feed (mm/rev)	D.O.C (mm)	DRY	WET
JX1 JX3	Heat resistant alloy	Turning	Rough no scale	180- 480	0.15-0.30	1.00-2.50		●
			Semi-finish	180- 480	0.10-0.25	0.50-2.00		●
JP2	Heat resistant alloy	Turning	Finish	180- 520	0.10-0.25	0.20-1.00		●

1 Higher Speeds, More Productivity

JX1/JX3's superior physical properties compared to Whisker ceramic enable you to increase speeds; potentially as much as 2X Whisker ceramic speeds; increasing productivity and potentially offsetting the need for additional equipment to meet increasing demands.

Chips break easily at higher cutting speeds vs the typically continuous chips of HRSA materials. The result is more efficient chip removal.

480 m/min	Competitor's Whisker	JX1
1st pass after 0.50 min		
2nd pass after 1.00 min	Impossible	



2 Longer tool life

JX1/JX3's combination of High Hardness, Superior Thermal Conductivity and Improved Strength compared to Whisker ceramics results in significantly longer tool life when applied at typical Whisker ceramic speeds, feeds, and depth of cut.

330 m/min	Competitor's Whisker	JX1
1st pass after 0.75 min		
2nd pass after 1.50 min		

3 Works well on wide range of High Temperature Alloys


BIDEMICS has success on
Inconel 718
Inconel 625

- 718 Plus
 - Rene41
 - Rene88
 - Rene104
 - Waspaloy
- etc.

4 Superior surface finish

	JP2	CBN	Carbide	
Machined surface				
Roughness				
	Ra	0.64 μm	1.18 μm	2.75 μm
	Rz	3.36 μm	5.56 μm	9.64 μm
Cutting speed	240 m/min	←	35 m/min	
Feed	0.15 mm/rev	←	←	
Cycle time	3.3 min	←	14.7 min	
Removed chip	48 cc	←	←	

5 Speed up grooving operations



VGW style Grooving inserts are now available

JP2's outstanding Wear Resistance and Notching Resistance results in work piece surface finishes consistently superior to either CBN or Carbide

Machining HRSA Materials with BIDE MICS and Ceramics

Solutions for the Aerospace & Energy Industries

BIDE MICS - Game Changer

- 480m/min Speed Capability
- Double tool life at whisker's speed range

JX1



■ Features


- Up to 480m/min speed capability
- Much longer tool life at Whisker ceramics' speed range
- Superior surface finish vs. Whisker ceramics

■ Work Materials

- Inco 718 • 718 Plus
- Powdered metal
- Inco 625 • Rene

→C2

JP2



■ Features

- 10 to 15x speed capability vs. carbide
- Better wear resistance and notching resistance than CBNs
- Superior surface finish to Carbide or CBN

■ Work Materials

- Inco 718 • 718 Plus
- Powdered metal • Inco 625 • Rene

→C2

SX7

■ Features

- Can run at same cutting condition as whisker ceramics
- Best grade for high-speed milling

■ Work Materials

- Inco 718 • Inco 625
- Waspaloy • Udimet 720

→C15



SX3


■ Features

- Excellent wear resistance and toughness. Wide range of HRSA machining applications: Roughing with scale - semi finishing turning.
- Able to machine even the newest generation of HRSA work materials (like Rene) as well as most common HRSA materials; such as Inconel 718.

■ Work Materials


- Inco 718 • 718 Plus
- Powdered metal • Inco 625
- Rene

→C14




SiAlON - Workhorse

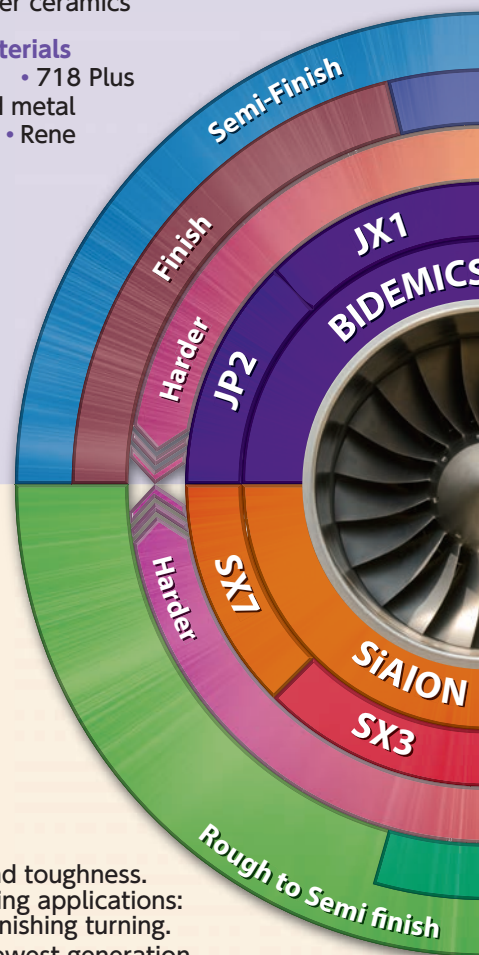- Durable for scale to semi-finish machining




WATCH ON
YouTube

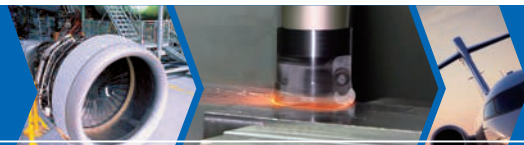

Application Guidance →L4
Milling Guidance →N4

Turning Guidance →L6
Grooving Guidance →A17

JX3



Features

- Added toughness in BIDE MICS
- Same speed capability as JX1

Work Materials

- Inco 718 • 718 Plus • Powdered metal
- Inco 625 • Rene

→C2

WA5/WA1



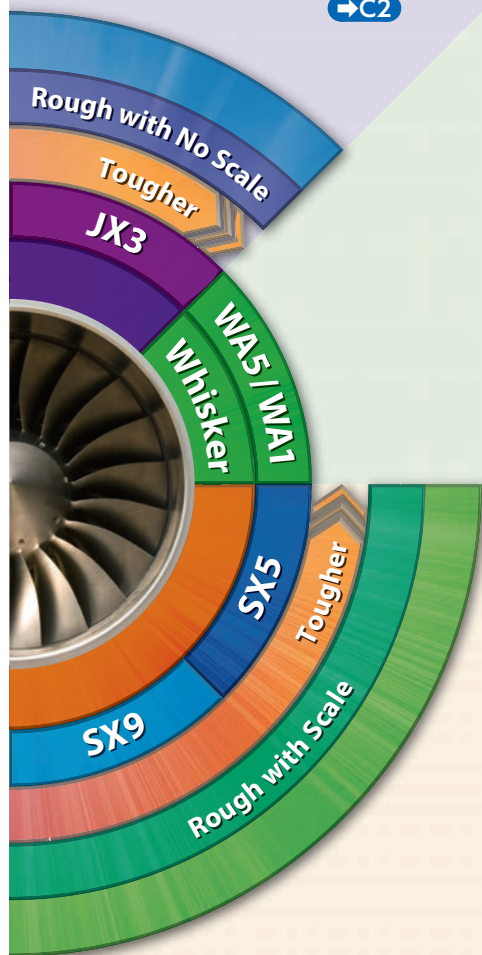
Features

- Better flank wear resistance compared to SiALON ceramics
- Better notching resistance compared to competitor's whisker ceramics

Work Materials

- Inco 718 • Inco 625

→C16



Whisker - Versatile Player

- Productivity and reliability

SX5



Features

- Best grade for scale and interruptions
- Best grade for machining high-cobalt alloys

Work Materials

- Waspaloy • Udimet 720
- 718 Plus • Rene 41

※ Production by order.

SX9

Features

- Extreme toughness makes higher feed and heavier DOC machining possible
- Best grade for machining Inco 718 with scale

→C15

Work Materials

- Inco 718 • Inco 706
- Inco 713 • Rene



New Products

Tool Materials / Selection Guide

Micrograin Carbide, BIDE MICS, PCD, CBN and Ceramics

Micrograin Carbide, PVD/Coated Carbide

Insert Item List

General Turning Toolholders

Unique Swiss Tooling

Grooving / Side Turning

Threading

Shaper

ID Tooling

Application Introduction

Endmills

Rotating Tools

Information

Index

Guidelines for Machining HRSA Materials

New Products

Tool Materials / Selection Guide

BIDEMICS, PCD, CBN and Ceramics

Micrograin Grade, PVD/Coated Grade

Insert Item List

General Turning Toolholders

Unique Swiss tooling

Grooving / Side Turning

Threading

Shaper

ID Tooling

Application Introduction

Endmills

Rotating Tools

Information


Index

Insert Grade

Category	Grade	Attributes	Applications						
			Scale	No scale	Profiling	Finishing	Grooving	Grooving	Endmilling
BIDEMICS	JX1	Special grade with higher speed and longer tool life potential		●	●	●	●		
	JP2	Special grade for finish turning				●			
	JX3	Added toughness in BIDEMICS		●	●	●	●		
Whisker	WA1	General versatile grade for turning		●	●		●		
SiALON	SX3	Best balance of toughness and hardness	●	●	●		●	●	
	SX5	Best grade for Waspaloy with scale	●				●		
	SX7	Versatile grade for turning and milling	●	●	●		●	●	
	SX9	Best grade for scale of Inco718	●	●	●			●	●


● 1st Choice ● 2nd Choice

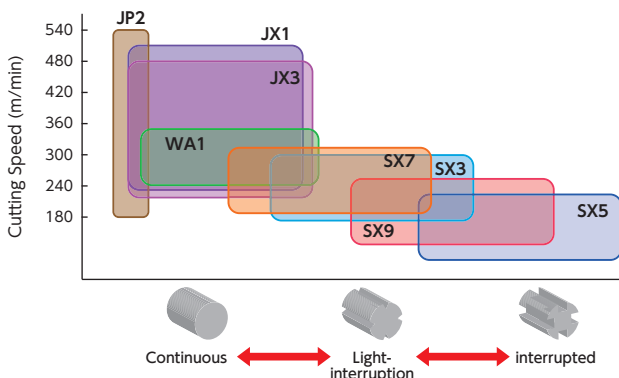Grade Map



	Grade	Rough with Scale	Rough	Semi-Finishing	Finishing
BIDEMICS	JP2			■	■
	JX1		■	■	■
	JX3		■	■	■
Whisker	WA1		■	■	■
SiALON	SX7		■	■	■
	SX3		■	■	■
	SX9		■	■	■
	SX5		■	■	■

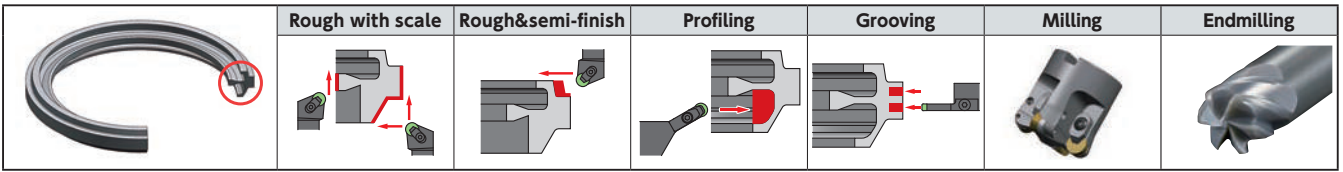Applications



Applications

Application	Grade	Work material	Cutting speed (m/min)					Feed (mm/rev)					Depth of cut (mm)					Coolant
			180	240	300	360	420	480	0.1	0.2	0.3	0.4	0.5	0.5	1.0	1.5	2.0	
Rough with Scale 	SX5	Waspaloy	200(180-240)					0.3(0.2-0.35)					2.0(1.0-5.0)					WET
	SX9	Inco718	200(180-240)					0.3(0.2-0.35)					2.0(1.0-5.0)					
	SX3	Overall	240(180-270)					0.2(0.1-0.22)					2.0(1.0-5.0)					
Rough no Scale 	JX1 JX3	Overall	210-390(180-480)					0.2(0.13-0.28)					1.7(1.0-2.5)					WET
	SX9 SX3 SX7	Overall	210(180-270)					0.2(0.15-0.3)					2.0(1.0-2.5)					
	WA1	Overall	240(180-300)					0.2(0.12-0.25)					1.7(1.0-2.5)					
	JX1 JX3	Overall	210-450(180-480)					0.2(0.1-0.25)					1.5(1.0-2.0)					
Profiling & Semi-Finish 	SX3 SX7	Overall	240(180-270)					0.2(0.12-0.25)					1.5(1.0-2.0)					WET
	WA1	Overall	240(180-330)					0.2(0.1-0.25)					1.5(1.0-2.0)					
	JP2	Overall	210-480(180-510)					0.1(0.05-0.18)					0.25(0.13-0.76)					
Grooving 	JX1 JX3	Overall	360(180-480)					0.07(0.05-0.1)					<div style="background-color: orange; padding: 5px; border: 1px solid black;"> When using SX7/SX3/SX5, increase feed rates 100% vs. Whisker Ceramics </div>					WET
	SX5	Waspaloy	210(180-240)					0.15(0.07-0.17)										
	SX3 SX7	Overall	230(180-270)					1.1(0.07-0.15)										
	WA1	Overall	240(180-330)					0.07(0.05-0.1)										

Application	Grade	Work material	Cutting speed (m/min)					Feed (mm/t)					Depth of cut (mm)					Coolant
			450	600	750	900	1000	1200	0.05	0.07	0.1	0.12	0.15	0.5	1.0	1.5	2.0	
Milling 	SX3 SX7	Overall	810(600-1200)					0.1(0.07-0.12)					1.7(1.0-2.5)					DRY
	SX9	Overall	750(450-1000)					0.12(0.1-0.15)					2.0(1.0-2.5)					
Endmilling 	SX9	Overall	600(300-1000)					0.02-0.03										DRY

Insert Item List

● : 1st Choice ● : 2nd Choice

Steel	P									
Stainless Steel	M									
Cast Iron	K					●	●	●	●	●
Non-Ferrous Material	N									
Heat Resistant Alloy	S					●	●	●	●	●
Hardened Material	H								●	●

RCGX	P/N	Dimension(mm)		Stock							
		IC	T	BIDEMICS		SiALON ceramics			Whisker ceramics		
				JX1	JX3	SX7	SX3	SX9	WA1	WA5	
	RCGX 060400 T00520	6.35	4.76							●	●
	060400 T00820	6.35	4.76	●	●					●	
	060700 T00520	6.35	7.94							●	
	090700 E004	9.525	7.94	●	●						
	090700 T00520	9.525	7.94				●		●	●	
	090700 T01020	9.525	7.94							●	
	090700 T00820	9.525	7.94	●	●						●
	0908 TNB	9.525	7.86						●	●	
	120700 E004	9.525	7.94	●	●						
	120700 T00520	12.70	7.94				●		●	●	
	120700 T00820	12.70	7.94	●	●					●	●
	120700 T01020	12.70	7.94							●	
	120700 Z01520	12.70	7.94							●	
1208 TNB	12.70	7.86						●			

● Toolholder → L19-21

RPGX	P/N	Dimension(mm)		Stock							
		IC	T	BIDEMICS		SiALON ceramics			Whisker ceramics		
				JX1	JX3	SX7	SX3	SX9	WA1	WA5	
	RPGX 060400 T00520	6.35	4.76							●	
	090700 E004	6.35	7.94	●	●					●	
	090700 T00520	9.525	7.94				●		●	●	
	090700 T00820	9.525	7.94	●	●	●					●
	0908 TNB	9.525	7.86						●		
	120700 E004	9.525	7.94	●	●						
	120700 T00520	12.70	7.94				●		●	●	
	120700 T01020	12.70	7.94							●	
	120700 T00820	12.70	7.94	●	●	●				●	●
	1208 TNB	12.70	7.86						●		

● Toolholder → L19-21


RCGY	P/N	Dimension(mm)		Stock							
		IC	T	BIDEMICS		SiALON ceramics			Whisker ceramics		
				JX1	JX3	SX7	SX3	SX9	WA1	WA5	
	RCGY 090603 TNB	6.35	4.76							●	
	120603 TNB	6.35	7.94							●	

● Toolholder → L22



RNGN	P/N	Dimension(mm)		Stock							
		IC	T	BIDEMICS		SiALON ceramics			Whisker ceramics		
				JX1	JX3	SX7	SX3	SX9	WA1	WA5	
	RNGN 120400 T00520	12.70	4.76				●			●	
	120400 T00820	12.70	4.76								●
	120400 T00525	12.70	4.76						●	●	
	120400 T01020	12.70	4.76						●	●	
	120400 T02025	12.70	4.76						●		
	120700 E002	12.70	7.94						●		
	120700 E004	12.70	7.94	●	●	●	●				
	120700 T00520	12.70	7.94				●		●	●	
	120700 T00525	12.70	7.94						●	●	
	120700 T00820	12.70	7.94	●	●	●					●
	120700 T01020	12.70	7.94							●	
	120700 Z01520	12.70	7.94							●	
	150700 T00520	15.875	7.94						●		
	150700 T00525	15.875	7.94						●	●	
	150700 T00820	15.875	7.94								●
	190700 T00520	19.05	7.94						●		
	190700 T00525	19.05	7.94						●		
	190700 T00820	19.05	7.94							●	●
	190700 T01020	19.05	7.94							●	
	250700 T00520	25.4	7.94						●	●	
250700 T00820	25.4	7.94							●	●	

● Toolholder → L23




● : 1st Choice ● : 2nd Choice

RPGN	P/N	Dimension(mm)		Stock								
		IC	T	BIDEMICS			SiAlON ceramics			Whisker ceramics		
				JX1	JX3	JP2	SX7	SX3	SX9	WA1	WA5	
	RPGN 060200 T00520	6.35	2.38								●	
	090300 T00520	9.525	3.18								●	
	120400 E004	12.70	4.76				●					
	120400 EX0004	12.70	4.76							●		
	120400 T00520	12.70	4.76								●	
	120400 T00525	12.70	4.76								●	
	120400 T00820	12.70	4.76				●					
	120400 T01020	12.70	4.76								●	

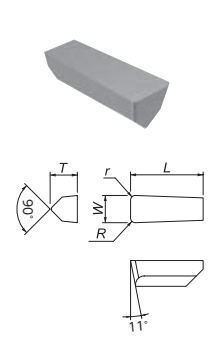● Toolholder → N8

VGW	P/N	Dimension(mm)				Stock							
		W	R	T	L	BIDEMICS			SiAlON ceramics			Whisker ceramics	
						JX1	JX3	JP2	SX7	SX3	SX9	WA1	WA5
	VGW 4125-1 E004	3.18	0.4	4.75	12.7	●	●						
	4125-2 E004	3.18	0.8	4.75	12.7	●	●						
	4125-2 EX0001	3.18	0.8	4.75	12.7							●	●
	4156-1 E004	3.96	0.4	4.75	12.7	●	●						
	4156-2 E004	3.96	0.8	4.75	12.7	●	●						
	4156-2 EX0001	3.96	0.8	4.75	12.7							●	●
	4187-1 E004	4.75	0.4	4.75	12.7	●	●						
	4187-2 E004	4.75	0.8	4.75	12.7	●	●						
	4187-2 EX0001	4.75	0.8	4.75	12.7							●	●
	6250-1 E004	6.35	0.4	6.35	19.05	●	●						
6250-2 E004	6.35	0.8	6.35	19.05	●	●							
6250-2 EX001	6.35	0.8	6.35	19.05							●	●	
6250-3 E004	6.35	1.2	6.35	19.05	●	●							
8375-2 EX0001	9.525	0.8	8.56	25.4							●	●	
	VGW 4125-R E004	3.18	1.59	4.75	12.7	●	●						
	4125-R EX0001	3.18	1.59	4.75	12.7						●	●	
	4156-R E004	3.96	1.98	4.75	12.7	●	●						
	4156-R EX0001	3.96	1.98	4.75	12.7						●	●	
	4187-R E004	4.75	2.38	4.75	12.7	●	●						
	4187-R EX0001	4.75	2.38	4.75	12.7						●	●	
	6250-R EX0001	6.35	3.18	6.35	19.05						●	●	
	8375-R EX0001	9.525	4.76	8.56	25.4						●	●	

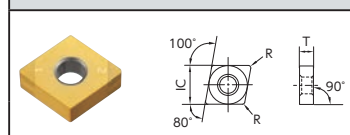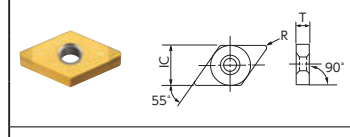● Toolholder → A11-13

BIDEMICS : JP2	P/N	Dimension (mm)		Corner radius	Edge prep.	Stock							
		IC	T			BIDEMICS			SiAlON ceramics			Whisker ceramics	
						JX1	JX3	JP2	SX7	SX3	SX9	WA1	WA5
	CNGA 120404 BQ	12.70	4.76	0.4	T00520			●					
	120408 BQ	12.70	4.76	0.8	T00520			●					
	120412 BQ	12.70	4.76	1.2	T00520			●					
	DNGA 150404 BQ	12.70	4.76	0.4	T00520			●					
	150408 BQ	12.70	4.76	0.8	T00520			●					
	150412 BQ	12.70	4.76	1.2	T00520			●					
	VNGA 160404 BQ	9.525	4.76	0.4	T00520			●					
	160408 BQ	9.525	4.76	0.8	T00520			●					
	160412 BQ	9.525	4.76	1.2	T00520			●					

※ NOTE : JP2 : 1pc/Case

● Toolholder → F8-11 · 12-15 · 26-27, G40-41, K34-35

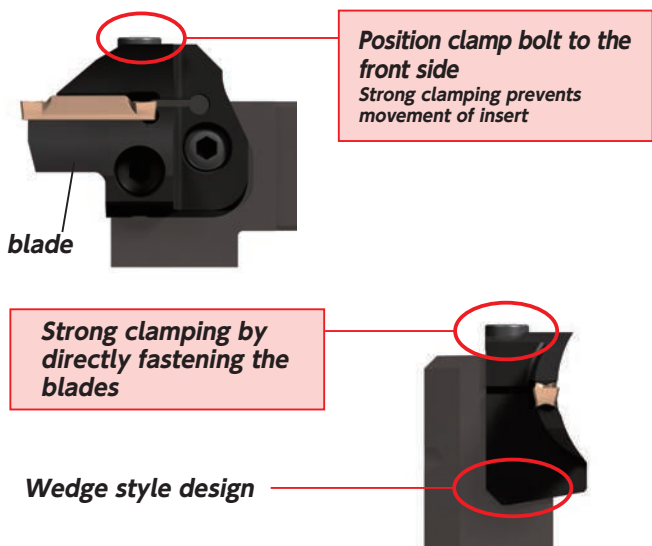
New Products
Tool Materials / Selection Guide
PCD, Micrograin Carbide, PVD Coated Carbide, TiN and Ceramics
Insert Item List
General Turning Toolholders
Unique Swiss Tooling
Grooving / Side Turning
Threading
Shaper
ID Tooling
Application Introduction
Endmills
Rotating Tools
Information
Index

New Modular Tooling


Available in 3 different styles



Most rigid blade system



Tool rigidity comparison

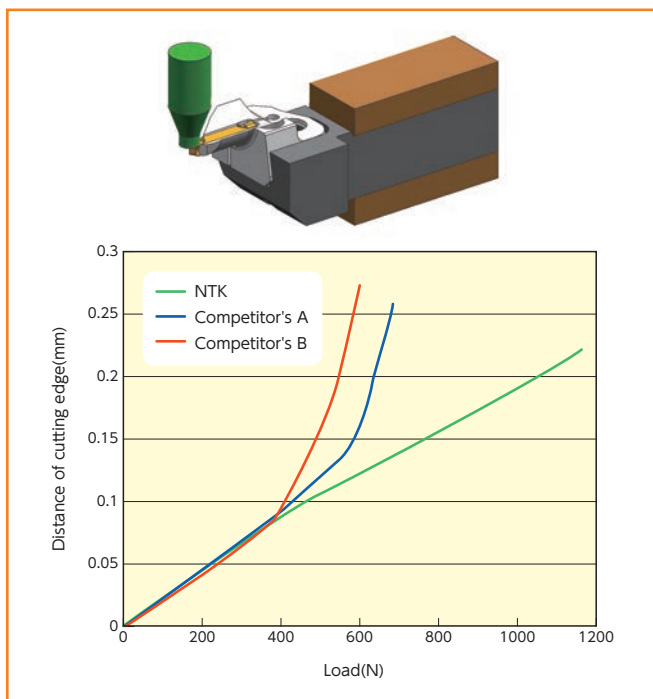

→ A14-15



→ A12-13


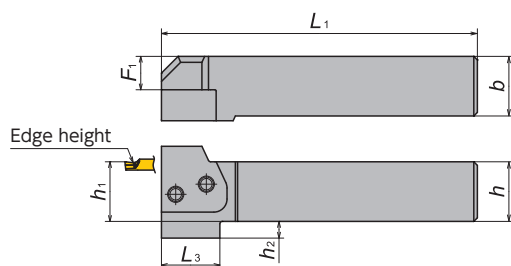


→ H40

Modular Holder Body

GTWP-H

Straight style toolholder





Right-Hand style shown

Toolholder	Stock		Dimensions(mm)							Parts	
	R	L	<i>h</i>	<i>b</i>	<i>h</i> ₁	<i>L</i> ₁	<i>F</i> ₁	<i>h</i> ₂	<i>L</i> ₃	Screw	Wrench
GTWP [®] / ₁ 2020-H	●	●	20.0	20.0	20.0	107.5	9	8	28.5	FSI28-6.0×18	LW-4
2525-H	●	●	25.0	25.0	25.0	132.5	14	7	24.5	FSI28-6.0×18	LW-4
3232-H	●	●	32.0	32.0	32.0	152.5	21	—	—	FSI28-6.0×18	LW-4

GKWP-H

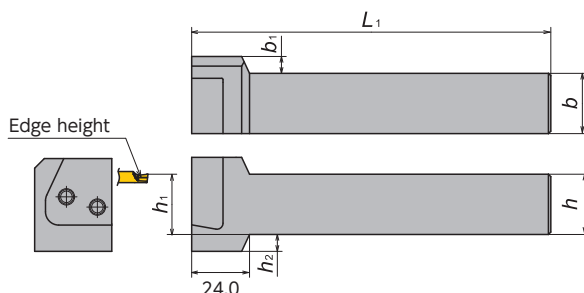L-style toolholder




Right-Hand style shown
* Use opposite hand blade

Toolholder	Stock		Dimensions(mm)						Parts	
	R	L	<i>h</i>	<i>b</i>	<i>h</i> ₁	<i>L</i> ₁	<i>b</i> ₁	<i>h</i> ₂	Screw	Wrench
GKWP [®] / ₁ 2020-H	●	●	20.0	20.0	20.0	124	12	8	FSI28-6.0×18	LW-4
2525-H	●	●	25.0	25.0	25.0	149	7	7	FSI28-6.0×18	LW-4
3232-H	●	●	32.0	32.0	32.0	169	—	—	FSI28-6.0×18	LW-4


VGW..Series - Blades

GBVR

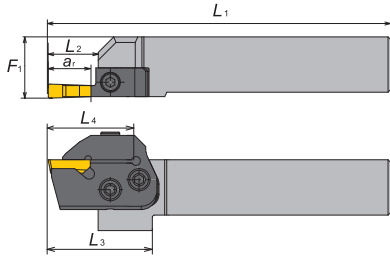For GTWP-H



For GKWP-H

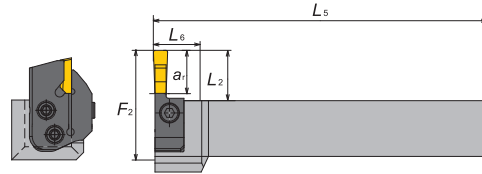

● Right hand


Hand	Blade number	Stock	Holder	Insert	Dimensions(mm)								
					L ₁	L ₂	L ₃	L ₄	L ₅	L ₆	F ₁	F ₂	a _r
Right	GBVR-VGW4-3T09	●	GTWPR2020-H	VGW4125	118.7	11.2	39.7	34.1	124.3	24.3	22.3	31.2	9.5
			GKWPL2020-H	VGW4156	118.7	11.2	39.7	34.1	124.7	24.7	22.7	31.2	9.5
			GTWPR2525-H	VGW4125	143.7	11.2	35.7	34.1	149.3	24.3	27.3	36.2	9.5
			GKWPL2525-H	VGW4156	143.7	11.2	35.7	34.1	149.7	24.7	27.7	36.2	9.5
			GTWPR3232-H	VGW4125	163.7	11.2	—	34.1	169.3	24.3	34.3	43.2	9.5
	GKWPL3232-H	VGW4156	163.7	11.2	—	34.1	169.7	24.7	34.7	43.2	9.5		
	GBVR-VGW4-4T14	●	GTWPR2020-H	VGW4156	125.0	17.5	46.0	40.5	124.4	24.4	22.4	37.5	14.2
			GKWPL2020-H	VGW4187	125.0	17.5	46.0	40.5	124.8	24.8	22.8	37.5	14.2
			GTWPR2525-H	VGW4156	150.0	17.5	42.0	40.5	149.4	24.4	27.4	42.5	14.2
			GKWPL2525-H	VGW4187	150.0	17.5	42.0	40.5	149.8	24.8	27.8	42.5	14.2
			GTWPR3232-H	VGW4156	170.0	17.5	—	40.5	169.4	24.4	34.4	49.5	14.2
	GKWPL3232-H	VGW4187	170.0	17.5	—	40.5	169.8	24.8	34.8	49.5	14.2		
	GBVR-VGW6-6T14	●	GTWPR2020-H	VGW6218	125.0	17.5	46.0	40.5	124.8	24.8	22.8	37.5	14.2
			GKWPL2020-H	VGW6250	125.0	17.5	46.0	40.5	125.2	25.2	23.2	37.5	14.2
			GTWPR2525-H	VGW6218	150.0	17.5	42.0	40.5	149.8	24.8	27.8	42.5	14.2
			GKWPL2525-H	VGW6250	150.0	17.5	42.0	40.5	150.2	25.2	28.2	42.5	14.2
			GTWPR3232-H	VGW6218	170.0	17.5	—	40.5	169.8	24.8	34.8	49.5	14.2
	GKWPL3232-H	VGW6250	170.0	17.5	—	40.5	170.2	25.2	35.2	49.5	14.2		
	GBVR-VGW6-6T19	●	GTWPR2020-H	VGW6250	130.1	22.6	51.1	45.6	124.7	24.7	22.7	42.6	19.0
			GKWPL2020-H	VGW6281	130.1	22.6	51.1	45.6	125.1	25.1	23.1	42.6	19.0
GTWPR2525-H			VGW6250	155.1	22.6	47.1	45.6	149.7	24.7	27.7	47.6	19.0	
GKWPL2525-H			VGW6281	155.1	22.6	47.1	45.6	150.1	25.1	28.1	47.6	19.0	
GTWPR3232-H			VGW6250	175.1	22.6	—	45.6	169.7	24.7	34.7	54.6	19.0	
GKWPL3232-H	VGW6281	175.1	22.6	—	45.6	170.1	25.1	35.1	54.6	19.0			
GBVR-VGW8-8T19	●	GTWPR2020-H	VGW8312	135.2	27.7	56.2	50.7	125.5	25.5	23.5	47.7	19.0	
		GKWPL2020-H	VGW8344	135.2	27.7	56.2	50.7	125.9	25.9	23.9	47.7	19.0	
		GTWPR2525-H	VGW8312	160.2	27.7	52.2	50.7	150.5	25.5	28.5	52.7	19.0	
		GKWPL2525-H	VGW8344	160.2	27.7	52.2	50.7	150.9	25.9	28.9	52.7	19.0	
		GTWPR3232-H	VGW8312	180.2	27.7	—	50.7	170.5	25.5	35.5	59.7	19.0	
GKWPL3232-H	VGW8344	180.2	27.7	—	50.7	170.9	25.9	35.9	59.7	19.0			
GBVR-VGW8-8T28	●	GTWPR2020-H	VGW8344	137.7	30.2	58.7	53.2	125.3	25.3	23.3	50.2	28.5	
		GKWPL2020-H	VGW8375	137.7	30.2	58.7	53.2	125.8	25.8	23.8	50.2	28.5	
		GTWPR2525-H	VGW8344	162.7	30.2	54.7	53.2	150.3	25.3	28.3	55.2	28.5	
		GKWPL2525-H	VGW8375	162.7	30.2	54.7	53.2	150.8	25.8	28.8	55.2	28.5	
		GTWPR3232-H	VGW8344	182.7	30.2	—	53.2	170.3	25.3	35.3	62.2	28.5	
GKWPL3232-H	VGW8375	182.7	30.2	—	53.2	170.8	25.8	35.8	62.2	28.5			

Note : All dimensions shown are obtained when blade is set in the holder.


VGW..Series - Blades

GBVL

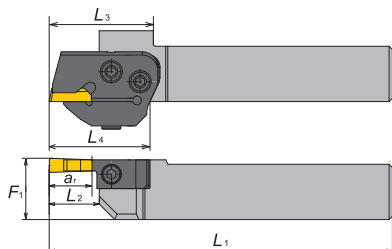For GTWP-H



For GKWP-H

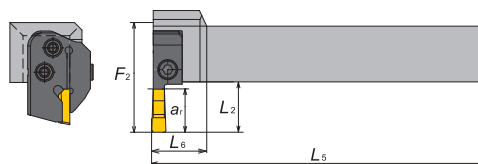

● Left hand


Hand	Blade number	Stock	Holder	Insert	Dimensions(mm)								
					L ₁	L ₂	L ₃	L ₄	L ₅	L ₆	F ₁	F ₂	a _r
Left	GBVL-VGW4-3T09	●	GTWPL2020-H	VGW4125	118.7	11.2	39.7	34.1	124.3	24.3	22.3	31.2	9.5
			GKWPR2020-H	VGW4156	118.7	11.2	39.7	34.1	124.7	24.7	22.7	31.2	9.5
			GTWPL2525-H	VGW4125	143.7	11.2	35.7	34.1	149.3	24.3	27.3	36.2	9.5
			GKWPR2525-H	VGW4156	143.7	11.2	35.7	34.1	149.7	24.7	27.7	36.2	9.5
			GTWPL3232-H	VGW4125	163.7	11.2	—	34.1	169.3	24.3	34.3	43.2	9.5
	GKWPR3232-H	VGW4156	163.7	11.2	—	34.1	169.7	24.7	34.7	43.2	9.5		
	GBVL-VGW4-4T14	●	GTWPL2020-H	VGW4156	125.0	17.5	46.0	40.5	124.4	24.4	22.4	37.5	14.2
			GKWPR2020-H	VGW4187	125.0	17.5	46.0	40.5	124.8	24.8	22.8	37.5	14.2
			GTWPL2525-H	VGW4156	150.0	17.5	42.0	40.5	149.4	24.4	27.4	42.5	14.2
			GKWPR2525-H	VGW4187	150.0	17.5	42.0	40.5	149.8	24.8	27.8	42.5	14.2
			GTWPL3232-H	VGW4156	170.0	17.5	—	40.5	169.4	24.4	34.4	49.5	14.2
	GKWPR3232-H	VGW4187	170.0	17.5	—	40.5	169.8	24.8	34.8	49.5	14.2		
	GBVL-VGW6-6T14	●	GTWPL2020-H	VGW6218	125.0	17.5	46.0	40.5	124.8	24.8	22.8	37.5	14.2
			GKWPR2020-H	VGW6250	125.0	17.5	46.0	40.5	125.2	25.2	23.2	37.5	14.2
			GTWPL2525-H	VGW6218	150.0	17.5	42.0	40.5	149.8	24.8	27.8	42.5	14.2
			GKWPR2525-H	VGW6250	150.0	17.5	42.0	40.5	150.2	25.2	28.2	42.5	14.2
			GTWPL3232-H	VGW6218	170.0	17.5	—	40.5	169.8	24.8	34.8	49.5	14.2
	GKWPR3232-H	VGW6250	170.0	17.5	—	40.5	170.2	25.2	35.2	49.5	14.2		
	GBVL-VGW6-6T19	●	GTWPL2020-H	VGW6250	130.1	22.6	51.1	45.6	124.7	24.7	22.7	42.6	19.0
			GKWPR2020-H	VGW6281	130.1	22.6	51.1	45.6	125.1	25.1	23.1	42.6	19.0
GTWPL2525-H			VGW6250	155.1	22.6	47.1	45.6	149.7	24.7	27.1	47.6	19.0	
GKWPR2525-H			VGW6281	155.1	22.6	47.1	45.6	150.1	25.1	28.1	47.6	19.0	
GTWPL3232-H			VGW6250	175.1	22.6	—	45.6	169.7	24.7	34.7	54.6	19.0	
GKWPR3232-H	VGW6281	175.1	22.6	—	45.6	170.1	25.1	35.1	54.6	19.0			
GBVL-VGW8-8T19		GTWPL2020-H	VGW8312	135.2	27.7	56.2	50.7	125.5	25.5	23.5	47.7	19.0	
		GKWPR2020-H	VGW8344	135.2	27.7	56.2	50.7	125.9	25.9	23.9	47.7	19.0	
		GTWPL2525-H	VGW8312	160.2	27.7	52.2	50.7	150.5	25.5	28.5	52.7	19.0	
		GKWPR2525-H	VGW8344	160.2	27.7	52.2	50.7	150.9	25.9	28.9	52.7	19.0	
		GTWPL3232-H	VGW8312	180.2	27.7	—	50.7	170.5	25.5	35.5	59.7	19.0	
GKWPR3232-H	VGW8344	180.2	27.7	—	50.7	170.9	25.9	35.9	59.7	19.0			
GBVL-VGW8-8T28	●	GTWPL2020-H	VGW8344	137.7	30.2	58.7	53.2	125.3	25.3	23.3	50.2	28.5	
		GKWPR2020-H	VGW8375	137.7	30.2	58.7	53.2	125.8	25.8	23.8	50.2	28.5	
		GTWPL2525-H	VGW8344	162.7	30.2	54.7	53.2	150.3	25.3	23.3	55.2	28.5	
		GKWPR2525-H	VGW8375	162.7	30.2	54.7	53.2	150.8	25.8	28.8	55.2	28.5	
		GTWPL3232-H	VGW8344	182.7	30.2	—	53.2	170.3	25.3	35.3	62.2	28.5	
GKWPR3232-H	VGW8375	182.7	30.2	—	53.2	170.8	25.8	35.8	62.2	28.5			

Note : All dimensions shown are obtained when blade is set in the holder.


RCGX/RPGX..Series - Blades

GBRR

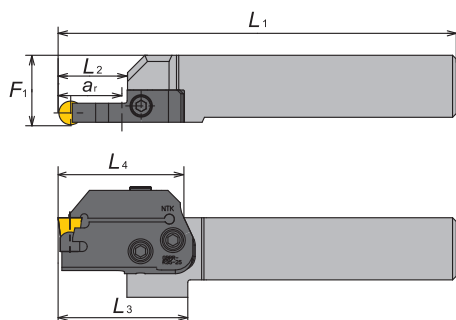For GTWP-H



For GKWP-H

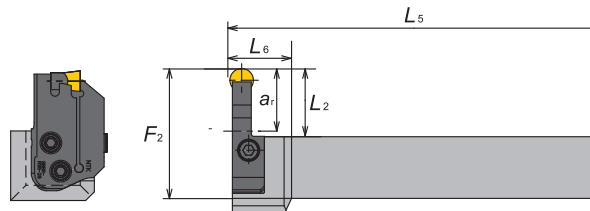

● Right hand


Hand	Blade number	Stock	Holder	Insert	Dimensions(mm)								
					L ₁	L ₂	L ₃	L ₄	L ₅	L ₆	F ₁	F ₂	a _r
Right	GBRR-R23-19	●	GTWPR2020-H	RCGX0604	130.1	22.6	51.1	45.6	125.0	25.0	23.0	42.6	19.0
			GKWPL2020-H	RPGX0604	130.1	22.6	51.1	45.6	125.0	25.0	23.0	42.6	19.0
			GTWPR2525-H	RCGX0604	155.1	22.6	47.1	50.7	150.0	25.0	28.0	47.6	19.0
			GKWPL2525-H	RPGX0604	155.1	22.6	47.1	50.7	150.0	25.0	28.0	47.6	19.0
			GTWPR3232-H	RCGX0604	175.1	22.6	—	53.2	170.0	25.0	35.0	54.6	19.0
			GKWPL3232-H	RPGX0604	175.1	22.6	—	53.2	170.0	25.0	35.0	54.6	19.0
	GBRR-R35-25	●	GTWPR2020-H	RCGX0907(08)	135.2	27.7	56.2	45.6	125.0	25.0	23.0	47.7	25.4
			GKWPL2020-H	RPGX0907(08)	135.2	27.7	56.2	45.6	125.0	25.0	23.0	47.7	25.4
			GTWPR2525-H	RCGX0907(08)	160.2	27.7	52.2	50.7	150.0	25.0	28.0	52.7	25.4
			GKWPL2525-H	RPGX0907(08)	160.2	27.7	52.2	50.7	150.0	25.0	28.0	52.7	25.4
			GTWPR3232-H	RCGX0907(08)	180.2	27.7	—	53.2	170.0	25.0	35.0	59.7	25.4
			GKWPL3232-H	RPGX0907(08)	180.2	27.7	—	53.2	170.0	25.0	35.0	59.7	25.4
	GBRR-R45-28	●	GTWPR2020-H	RCGX1207(08)	137.7	30.2	58.7	45.6	125.0	25.0	23.0	50.2	28.5
			GKWPL2020-H	RPGX1207(08)	137.7	30.2	58.7	45.6	125.0	25.0	23.0	50.2	28.5
			GTWPR2525-H	RCGX1207(08)	162.7	30.2	54.7	50.7	150.0	25.0	28.0	55.2	28.5
			GKWPL2525-H	RPGX1207(08)	162.7	30.2	54.7	50.7	150.0	25.0	28.0	55.2	28.5
			GTWPR3232-H	RCGX1207(08)	182.7	30.2	—	53.2	170.0	25.0	35.0	62.2	28.5
			GKWPL3232-H	RPGX1207(08)	182.7	30.2	—	53.2	170.0	25.0	35.0	62.2	28.5

Note : All dimensions shown are obtained when blade is set in the holder.


RCGX/RPGX..Series - Blades

GBRL

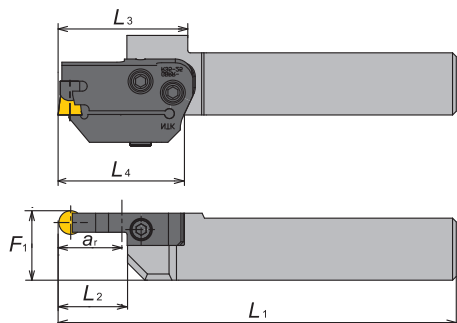For GTWP-H



For GKWP-H

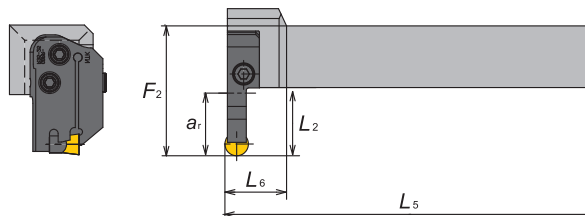

● Left hand

Hand	Blade number	Stock	Holder	Insert	Dimensions(mm)								
					L ₁	L ₂	L ₃	L ₄	L ₅	L ₆	F ₁	F ₂	a _r
Left	GBRL-R23-19	●	GTWPL2020-H	RCGX0604	130.1	22.6	51.1	45.6	125.0	25.0	23.0	42.6	19.0
			GKWPR2020-H	RPGX0604	130.1	22.6	51.1	45.6	125.0	25.0	23.0	42.6	19.0
			GTWPL2525-H	RCGX0604	155.1	22.6	47.1	50.7	150.0	25.0	28.0	47.6	19.0
			GKWPR2525-H	RPGX0604	155.1	22.6	47.1	50.7	150.0	25.0	28.0	47.6	19.0
			GTWPL3232-H	RCGX0604	175.1	22.6	—	53.2	170.0	25.0	35.0	54.6	19.0
			GKWPR3232-H	RPGX0604	175.1	22.6	—	53.2	170.0	25.0	35.0	54.6	19.0
	GBRL-R35-25	●	GTWPL2020-H	RCGX0907(08)	135.2	27.7	56.2	45.6	125.0	25.0	23.0	47.7	25.4
			GKWPR2020-H	RPGX0907(08)	135.2	27.7	56.2	45.6	125.0	25.0	23.0	47.7	25.4
			GTWPL2525-H	RCGX0907(08)	160.2	27.7	52.2	50.7	150.0	25.0	28.0	52.7	25.4
			GKWPR2525-H	RPGX0907(08)	160.2	27.7	52.2	50.7	150.0	25.0	28.0	52.7	25.4
			GTWPL3232-H	RCGX0907(08)	180.2	27.7	—	53.2	170.0	25.0	35.0	59.7	25.4
			GKWPR3232-H	RPGX0907(08)	180.2	27.7	—	53.2	170.0	25.0	35.0	59.7	25.4
	GBRL-R45-28	●	GTWPL2020-H	RCGX1207(08)	137.7	30.2	58.7	45.6	125.0	25.0	23.0	50.2	28.5
			GKWPR2020-H	RPGX1207(08)	137.7	30.2	58.7	45.6	125.0	25.0	23.0	50.2	28.5
			GTWPL2525-H	RCGX1207(08)	162.7	30.2	54.7	50.7	150.0	25.0	28.0	55.2	28.5
			GKWPR2525-H	RPGX1207(08)	162.7	30.2	54.7	50.7	150.0	25.0	28.0	55.2	28.5
			GTWPL3232-H	RCGX1207(08)	182.7	30.2	—	53.2	170.0	25.0	35.0	62.2	28.5
			GKWPR3232-H	RPGX1207(08)	182.7	30.2	—	53.2	170.0	25.0	35.0	62.2	28.5

Note : All dimensions shown are obtained when blade is set in the holder.

Case study

● BIDEMICS

JX1 4 times longer tool life

Turbine disc (Rene104 rough/semi-finish)
RNGN120700T00820,
 $v_c=210\text{m/min}$, $f=0.18\text{mm/rev}$, $a_p=1.00\text{mm}$, Wet

	Rene104	Competitor's whisker ceramic	JX1
Cutting speed (m/min)	210	210	←
Tool life (pass)	1	1	4

- Rene 104 is a difficult material to cut.
- JX1 cut 4 times longer tool life than whisker ceramics.

JX1 1.7 times higher speed

Turbine disc (Inconel718 rough/semi-finish)
RPGX120700T00820,
 $v_c=210\text{m/min}$, $f=0.16\text{mm/rev}$, $a_p \sim 1.50\text{mm}$, Wet

	Competitor's whisker ceramic	JX1
Cutting speed (m/min)	210	350
Chip removal (cc/min)	50	84
Cycle time (min)	15	9

- JX1 cut 1.7 times faster than Competitor's Whisker and kept good edge.
- Reducing cycle time dramatically.

JX3

Turbine disc (Inconel718)

Grade	Competitor's whisker ceramic	JX3
Insert Shape	RPGX120700	←
Cutting speed (m/min)	210	350
Feed (mm/rev)	0.15	←
D.O.C (mm)	1.5	←
	WET	←

NTK : JX3 82 cc/min JX3

Competitor's whisker ceramic 48 cc/min

JX3

Turbine disc (Inconel718)

Grade	Competitor's whisker ceramic	JX3
Insert Shape	RPGX120700	←
Cutting speed (m/min)	210	360
Feed (mm/rev)	0.15	←
D.O.C (mm)	1.8	←
	WET	←

NTK : JX3 100 cc/min JX3

Competitor's whisker ceramic 60 cc/min

JP2 12 times higher productivity

Turbine disc (Inconel718 finishing)
CNGA120408,
 $v_c=240\text{m/min}$, $f=0.08\text{mm/rev}$, $a_p=0.25\text{mm}$, Wet

	Inco718	Competitor's coated carbide	JP2
Cutting speed (m/min)	20	20	←
Chip removal per minutes (cc/min)	0.4	0.4	4.8
Tool life (pass)	1	1	1

- JP2 cut 12 times faster than carbide insert, reducing cycle time dramatically

JP2 4 times higher productivity

Turbine disc (Inconel718 no scale, semi-finishing)
CNGA120408,
 $v_c=180\text{m/min}$, $f=0.10\text{mm/rev}$, $a_p=0.4\text{mm}$, Wet

	Inco718	Competitor's coated carbide	JP2
Cutting speed (m/min)	45	45	180
Chip removal per minutes (cc/min)	1.8	1.8	7.2
Tool life (pass)	1	1	4

- JP2 cut 4 times faster than carbide insert, reducing cycle time dramatically

● SiAlON ceramics

Turning(semi-finishing) : Turbine disc ● Inconel718

	current tool	NTK
Grade	Whisker ceramic	SX7
Insert Shape	RPGX120700	←
Cutting speed (m/min)	240	←
Feed (mm/rev)	0.15	←
D.O.C (mm)	1.50	←
Coolant	WET	←
Tool life (min)	7.0	←

Competitor's whisker ceramic **SX7**

● Whisker ceramics

Turbine disc

Inconel718

	External turning	Grooving	Ramping
	WA1	WA1	WA1
Cutting speed (m/min)	300	300	300
Feed (mm/rev)	0.15	0.1	0.06
D.O.C (mm)	3 - 4	-	2 - 3
Coolant	WET	WET	WET
Tool life (min)	20	20	20

Whisker ceramics WA1 achieved stable machining.

Guideline for grooving HRSA materials

BIDEMICS / Ceramic grooving inserts provide high speed capability to your process. Whisker ceramic is the most versatile option in this category. NTK also offers BIDEMICS and SiAlON grades for more productivity and stability.

	JX1	JX3	SX3	SX7	SX5	WA1/WA5
Speed	●			●	●	●
Feed			●		●	
Versatility	●		●	●		●
Toughness			●		●	
	Can run at up to 480 m/min. Double the speed of whisker		Double the feed of whisker		Best for Scale and interruption	Versatile grade

● : 1st choice ● : 2nd choice

Application	Grade	Work material	Cutting speed (m/min)						Feed (mm/rev)					Depth of cut (mm)					Coolant	
			180	240	300	360	420	480	0.1	0.2	0.3	0.4	0.5	0.5	1.0	1.5	2.0	2.5		
	JX1 JX3	Overall	360(180-480)						0.07(0.05-0.1)										WET 	
	SX5	Waspaloy	210(180-240)						0.15(0.07-0.17)											
	SX3 SX7	Overall	230(180-270)						1.1(0.07-0.15)											
	WA1	Overall	240(180-330)						0.07(0.05-0.1)											
				<div style="border: 1px solid orange; padding: 5px; display: inline-block;"> When using SX7/SX5, increase feed rates 100% vs. Whisker Ceramics </div>																

When applying JX1 / JX3, increase speed to over **300** m/min
 When applying SX3 / SX7 / SX5, increase feed rates **100%** vs. Whisker Ceramics

Application Information

When machining a grooved area with multiple passes, the insert radius engages a potentially work hardened area during the last remaining plunge. This programming procedure sets up the potential of corner radius chipping or notching.

Change to

The grooving insert is plunged down both outside walls thus maintaining a good finish. The remaining material can be removed by using a stronger insert shape such as a RCGX style.

NEW

New SiALON Grade for Machining HRSA materials

SX3

NTK's versatile SX3 grade has been developed to achieve a SiALON material composition with the ideal blend of excellent wear resistance and toughness to successfully machine a wide variety of HRSA materials

**Machined surface · semi-finishing
HRSA materials
(Wear resistance of SX7)**

**Forged surface HRSA materials
(Toughness of SX9 / SX5)**



WATCH ON
YouTube



Features

- **Consistent in excellent wear resistance and toughness.**
Able to machine HRSA materials widely: Rough turning with scale ~ semi-finish turning.
- **Able to machine even the newest generation of HRSA materials (like Rene material) as well as today's most common HRSA materials; such as Inconel 718.**
- **Able to machine milling with high efficiency.**


Stock list

Code	Std. Edge preparation
T00520	Chamfer 0.05mm × 20°
E004	Round honing R0.04

※Please order 10 each.

Shape	Part number		Dimensions (mm)		SiALON ceramic	
	ISO	Inch	I.C.	Thickness	SX3	Stock
	RNGN120400T00520	RNG43T0220	12.7	4.76	5997929	●
	RNGN120700T00520	RNG45T0220	12.7	7.94	5997945	●
	RNGN120700E004	RNG45E02	12.7	7.94	5997952	●
	RCGX090700T00520	RCGX35T0220	9.525	7.94	5998042	●
	RCGX120700T00520	RCGX45T0220	12.7	7.94	5998059	●
	RPGX090700T00520	RPGX35T0220	9.525	7.94	5998075	●
	RPGX120700T00520	RPGX45T0220	12.7	7.94	5998083	●

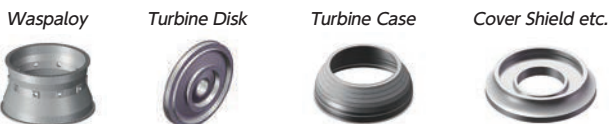Recommended machined parts



Recommended work-materials

Inconel 718 Hastelloy
Waspaloy Rene(Rene65, Rene88, Rene130 etc..)

Case study


Work material : Rene130 Rough turning (eliminating scale)

	Conventional	NTK
Grade	SiALON Ceramic	SX3
Shape	SNGN190724	←
Cutting speed (m/min)	115	←
Feed (mm/rev)	0.15	←
Coolant	WET	←
Tool life (min)	10.0	←

Competitor's SiALON Ceramic



SX3



In turning rough surface, compared to competitor's SiALON, SX3 had no fracture and good condition.


Work material : Rene130 Semi finish turning (machined surface)

	Conventional	NTK
Grade	SiALON Ceramic	SX3
Shape	RCGX120700	←
Cutting speed (m/min)	100	←
Feed (mm/rev)	0.25	←
Coolant	WET	←
Tool life (min)	10.0	←

Competitor's SiALON Ceramic



SX3



Competitor's SiALON fractured frequently, however SX3 and SX9 had good edge damage.

Solid Ceramic Endmill

CERAMATIC Lineup Expansion

New Products

Tool Materials / Selection Guide

BIDEMCS, PCD, CBN and Ceramics

Micrograin Carbide, PVD/Coated Carbide

Insert Item List

General Turning Toolholders

Unique Swiss tooling

Grooving / Side Turning

Threading

Shaper

ID Tooling

Application Introduction

Endmills

Rotating Tools

Information

Index



CERAMATIC Extremely high speed machining for HRSA materials and cast iron.



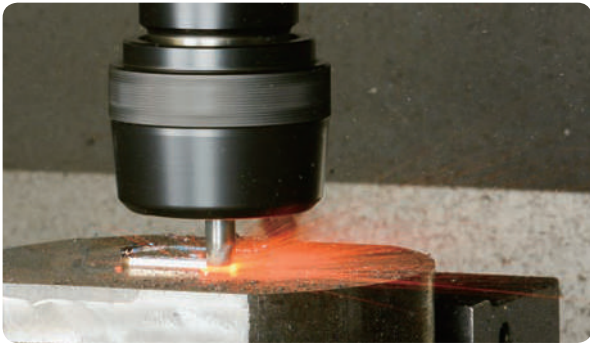
Features

- Extremely high speed machining for HRSA materials with our durable SiAlON grade "SX9"
- More than 15 times higher productivity than a Carbide endmill
- 4, 6 and 8 flutes are available
- Unique patent pending design provides toughness to the edge

WATCH ON
YouTube





RCE for HRSA materials →A22



● Ceramic specialist's design

Helix angle

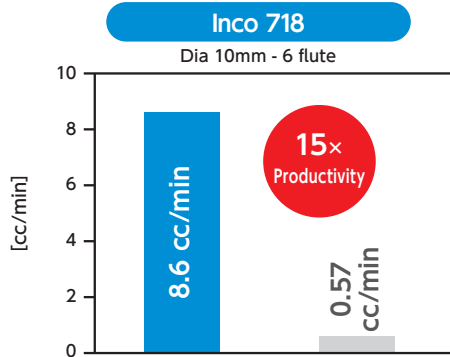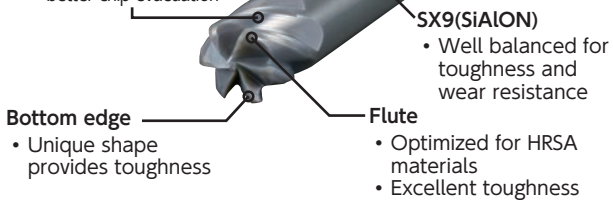- Designed for the purpose of:
 - 4-flute: toughness
 - 6-flute: less tool pressure and better chip evacuation





	SX9	Carbide
Cutting Speed (m/min)	600	40
Feed (mm/t)	0.03	←
DOC (mm)	3.0	←

RCS for Cast iron / HRSA materials →A23



Helix angle

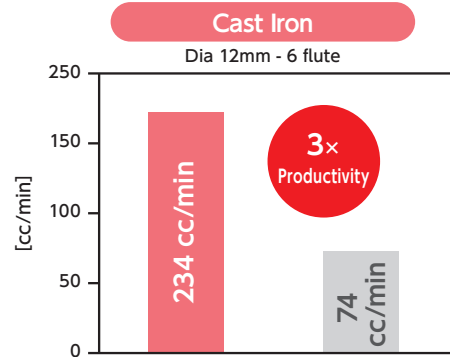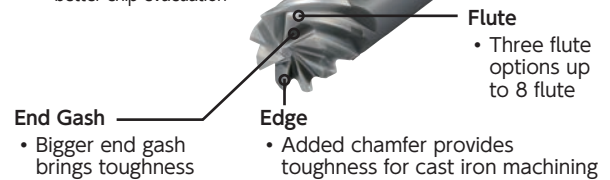- Designed for the purpose of:
 - 4-flute: toughness
 - 6/8-flute: less tool pressure and better chip evacuation



	SX9	Carbide
Cutting Speed (m/min)	700	110
Feed (mm/t)	0.05	←
DOC (mm)	3.5	7.0

4-flute



6-flute



8-flute



RCE for HRSA Materials

RCE-H4 (4-flute with Neck)

○ No center cutting edge



Slotting



Pocketing



Ramping



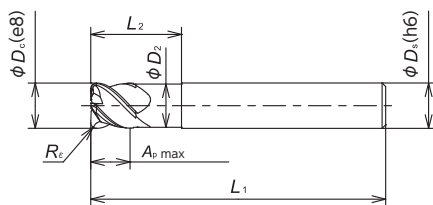
Z=4



35°



1.5°



Tolerances

$\phi D_c / \phi D_s$	e8	h6
8mm, 10mm, 3/8"	-0.024/-0.047	+0/-0.009
12mm, 1/2"	-0.032/-0.059	+0/-0.011

Heat Resistant Alloy S ● : 1st Choice ● : 2nd choice

Item Number	Grade	Flute	ϕD_c		ϕD_s		ϕD_2		R_e		$A_p \text{ max}$		L_1		L_2	
			(mm)	(Inch)	(mm)	(Inch)	(mm)	(Inch)	(mm)	(Inch)	(mm)	(Inch)	(mm)	(Inch)	(mm)	(Inch)
RCEM 080H4R100S	●	4	8.0	—	8.0	—	7.6	—	1.0	—	6.0	—	60	—	16	—
100H4R125S	●		10.0	—	10.0	—	9.6	—	1.25	—	7.5	—	65	—	20	—
120H4R150S	●		12.0	—	12.0	—	11.6	—	1.5	—	9.0	—	70	—	24	—
RCEI 375H4R047S	●	4	9.525	3/8	9.525	3/8	9.125	.359	1.19	.047	7.14	9/32	63.5	2.5	19.05	3/4
500H4R068S	●		12.7	1/2	12.7	1/2	12.3	.484	1.73	.068	9.525	3/8	69.9	2.75	25.4	1

RCE-J6 (6-flute)

○ No center cutting edge



Face Milling



Side Milling



Profiling



Ramping



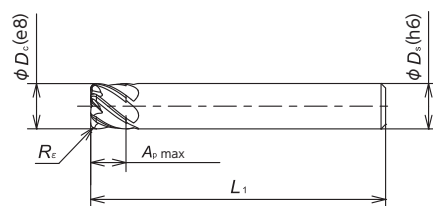
Z=6



40°



1.5°



Tolerances

$\phi D_c / \phi D_s$	e8	h6
8mm, 10mm, 3/8"	-0.024/-0.047	+0/-0.009
12mm, 1/2"	-0.032/-0.059	+0/-0.011


Heat Resistant Alloy S ● : 1st Choice ● : 2nd choice

Item Number	Grade	Flute	ϕD_c		ϕD_s		ϕD_2		R_e		$A_p \text{ max}$		L_1		L_2	
			(mm)	(Inch)	(mm)	(Inch)	(mm)	(Inch)	(mm)	(Inch)	(mm)	(Inch)	(mm)	(Inch)	(mm)	(Inch)
RCEM 080J6R100S	●	6	8.0	—	8.0	—	—	—	1.0	—	6	—	60	—	—	—
100J6R125S	●		10.0	—	10.0	—	—	—	1.25	—	7.5	—	65	—	—	—
120J6R150S	●		12.0	—	12.0	—	—	—	1.5	—	9	—	70	—	—	—
RCEI 375J6R047S	●	6	9.525	3/8	9.525	3/8	—	—	1.19	.047	7.14	9/32	63.5	2.5	—	—
500J6R068S	●		12.7	1/2	12.7	1/2	—	—	1.73	.068	9.525	3/8	69.9	2.75	—	—


RCS for Cast Iron / HRSA Materials

RCS-H4


○ No center cutting edge




Slotting




Pocketing




Ramping




Z=4



35°



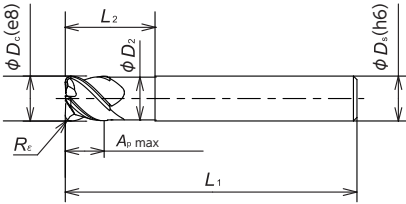1.5°




Tolerances

$\phi D_c / \phi D_s$	e8	h6
12mm, 16mm, 1/2", 5/8"	-0.032/-0.059	+0/-0.011


Item Number	Grade	Flute	ϕD_c		ϕD_s		ϕD_2		R_e		$A_p \text{ max}$		L_1		L_2	
			(mm)	(Inch)	(mm)	(Inch)	(mm)	(Inch)	(mm)	(Inch)	(mm)	(Inch)	(mm)	(Inch)	(mm)	(Inch)
RCSM 120H4R150S 160H4R200S	●	4	12.0	—	12.0	—	11.6	—	1.5	—	9.0	—	70	—	24	—
			16.0	—	16.0	—	15.5	—	2.0	—	12.0	—	75	—	32	—
RCSI 500H4R068S 625H4R078S	●	4	12.7	1/2	12.7	1/2	12.3	.484	1.73	.068	9.525	3/8	69.85	2.75	25.4	1
			15.875	5/8	15.875	5/8	15.375	.609	1.98	.078	11.91	.469	76.2	3	31.75	1.25

RCS-J6 / RCS-J8


○ No center cutting edge




Face Milling




Side Milling




Profiling




Ramping




Z=6





Z=8



40°



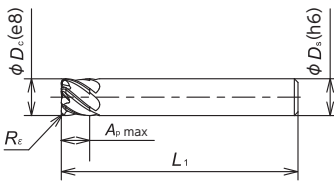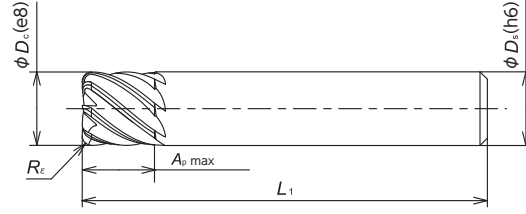1.5°














Tolerances















$\phi D_c / \phi D_s$	e8	h6
12mm, 16mm, 1/2", 5/8"	-0.032/-0.059	+0/-0.011
20mm, 3/4"	-0.040/-0.073	+0/-0.013

Item Number	Grade	Flute	ϕD_c		ϕD_s		ϕD_2		R_e		$A_p \text{ max}$		L_1		L_2	
			(mm)	(Inch)	(mm)	(Inch)	(mm)	(Inch)	(mm)	(Inch)	(mm)	(Inch)	(mm)	(Inch)	(mm)	(Inch)
RCSM 120J6R150S 160J6R200S	●	6	12.0	—	12.0	—	—	—	1.5	—	9.0	—	70	—	—	—
			16.0	—	16.0	—	—	—	2.0	—	12.0	—	75	—	—	—
RCSI 500J6R068S 625J6R078S	●	6	12.7	1/2	12.7	1/2	—	—	1.73	.068	9.525	3/8	69.85	2.75	—	—
			15.875	5/8	15.875	5/8	—	—	1.98	.078	11.91	.469	76.2	3	—	—
RCSM 200J8R250S RCSI 750J8R094S	●	8	20.0	—	20.0	—	—	—	2.5	—	15.0	—	110	—	—	—
			19.05	3/4	19.05	3/4	—	—	2.38	.094	14.29	.562	107.95	4.25	—	—

● Recommend Cutting Conditions for HRSA material

Application	Grade	ϕD_c	Flute	Cutting Speed (m/min)			Feed (mm/t)	Depth of cut a_p (mm)	Width of cut a_e (mm)	Coolant
				150	600	1000				
Face Milling 	SX9	3/8"	4/6/8	150	600	1000	1.4	—	DRY 	
		1/2"								
		5/8"								
		3/4"								
		8mm								
		10mm								
		12mm								
		16mm								
		20mm								
		2.9								
Side Milling 	SX9	3/8"	4/6/8	150	600	1000	4.8	0.9	DRY 	
		1/2"								
		5/8"								
		3/4"								
		8mm								
		10mm								
		12mm								
		16mm								
		20mm								
		9.5								
Slotting 	SX9	3/8"	4	150	600	1000	2.4	—	DRY 	
		1/2"								
		5/8"								
		8mm								
		10mm								
		12mm								
		16mm								
		2.0								
		2.5								
		3.0								
Threading 	SX9	3/8"	6	150	600	1000	1.4	—	DRY 	
		1/2"								
		5/8"								
		8mm								
		10mm								
		12mm								
		16mm								
		2.4								
		1.2								
		1.5								
Shaper 	SX9	3/4"	8	150	600	1000	2.9	—	DRY 	
		16mm								
		3.0								
		3.0								

● Recommended cutting conditions for Cast Iron

Application	Grade	ϕD_c	Flute	Cutting Speed (m/min)			Feed (mm/t)	Depth of cut a_p (mm)	Width of cut a_e (mm)	Coolant
				150	600	1000				
Face Milling 	SX9	1/2"	4/6/8	150	600	1000	2.4	—	DRY 	
		5/8"								
		3/4"								
		12mm								
		16mm								
		20mm								
Side Milling 	SX9	1/2"	4/6/8	150	600	1000	9.5	2.1	DRY 	
		5/8"								
		3/4"								
		12mm								
		16mm								
		20mm								
Slotting 	SX9	1/2"	4/6/8	150	600	1000	2.4	—	DRY 	
		5/8"								
		3/4"								
		12mm								
		16mm								
		20mm								
Endmills 	SX9	1/2"	4/6/8	150	600	1000	11.9	2.6	DRY 	
		5/8"								
		3/4"								
		12mm								
		16mm								
		20mm								
Rotating Tools 	SX9	1/2"	4/6/8	150	600	1000	4.0	—	DRY 	
		5/8"								
		3/4"								
		12mm								
		16mm								
		20mm								
Information 	SX9	1/2"	4/6/8	150	600	1000	4.8	—	DRY 	
		5/8"								
		3/4"								
		12mm								
		16mm								
		20mm								
Application Introduction 	SX9	1/2"	4/6/8	150	600	1000	5.0	—	DRY 	
		5/8"								
		3/4"								
		12mm								
		16mm								
		20mm								

For Maximum Productivity

- A continuous cut is recommended. An interrupted cut may cause chipping or breakage.
- When using a Hydraulic or Shrink chuck, blow air to the arbor body, DON'T blow air to the endmill itself.
- A Minimum speed of 300m/min is required. (Don't run at lower speed.)
- A 1.5 degree ramping angle is recommended. Run at 50% lower feed rate when ramping cut.

When cutting HRSA materials


- Continue to machine even if you see BUE, removing BUE may cause chipping or breakage to the edge.
- High speed machining work hardens the material. For this reason, leave at least 0.3mm of material for a finishing process.

ST4

S U P E R T O U G H C O A T

For Stainless Steel

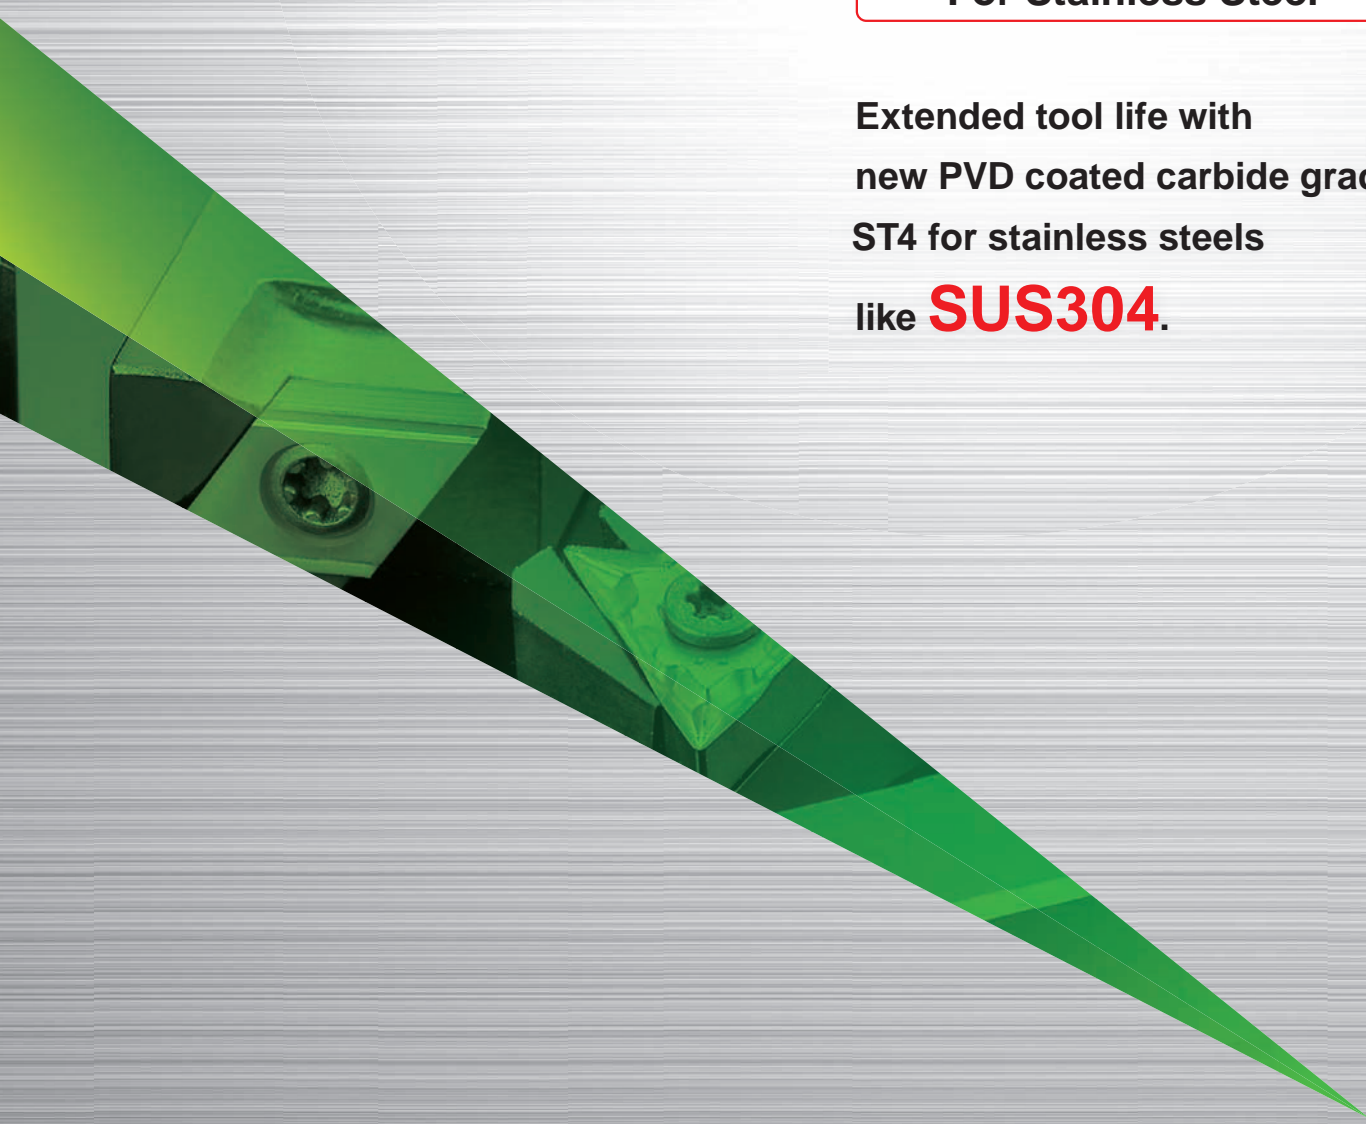Extended tool life with
new PVD coated carbide grade.
ST4 for stainless steels
like **SUS304**.



- [New Products](#)
- [Tool Materials / Selection Guide](#)
- [Micrograin Carbide, BIDEEMCS, PCD, CBN and Ceramics](#)
- [Micrograin Carbide, PVD/Coated/Carbide](#)
- [Insert Item List](#)
- [General Turning Toolholders](#)
- [Unique Swiss Tooling](#)
- [Grooving / Side Turning](#)
- [Threading](#)
- [Shaper](#)
- [ID Tooling](#)
- [Application Introduction](#)
- [Endmills](#)
- [Rotating Tools](#)
- [Information](#)
- [Index](#)



Stable and consistent performance when machining stainless steel

Low tool life, and unstable chip evacuation are factors preventing stable machining of stainless steel.

The New PVD coated carbide grade ST4 solves the issues related to machining stainless steel.



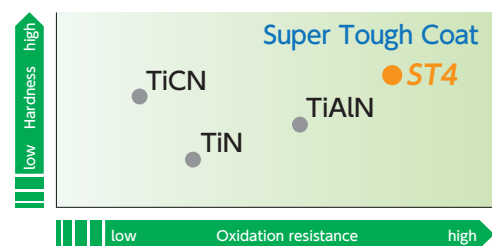
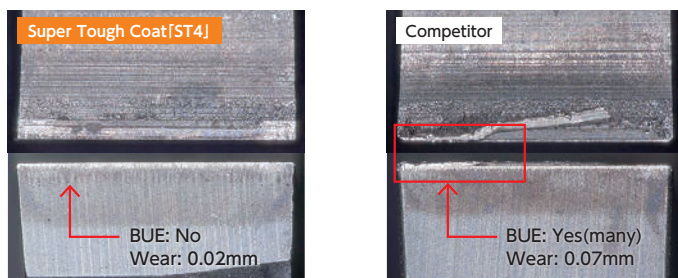
Higher hardness and oxidation resistance

NTK's unique coating technology creates a high-aluminum composition.

Extends tool life and allows high-speed machining of stainless steel.

NTK vs. competitor (cut off)

Workmaterial : SUS304 ($\phi 11$) $V_c=80\text{m/min}$ $f=0.03\text{mm}$ after 200pcs cut-off





Stable machining, excellent surface finish \Rightarrow Extended tool life

NTK new PVD coated carbide grade ST4 improved bonding force and surface smoothness.


It prevents BUE trouble from stainless steel machining, and achieved stable cutting.

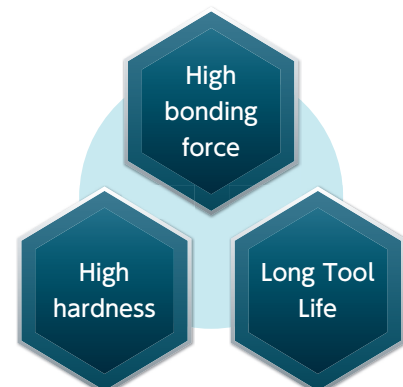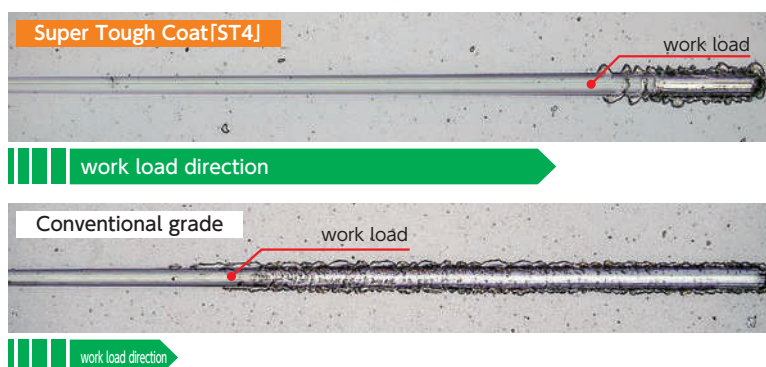Measurement (Scratch test on coating layer)



Super Tough Coat **ST4** × Chipbreaker for stainless steel

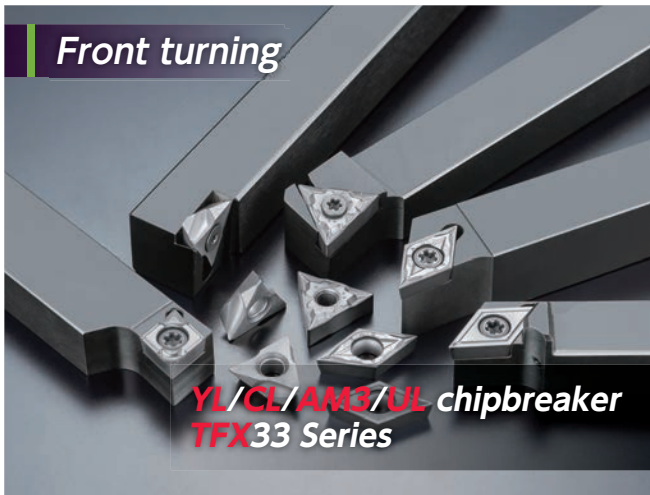NTK's ST4 grade combined with unique chipbreakers meet the demands of your machining.



- New Products
- Tool Materials / Selection Guide
- BIDEMCS, PCD, Micrograin Carbide, PVD/CVD-coated Carbide, CBN and Ceramics
- Insert Item List
- General Turning Toolholders
- Unique Swiss Tooling
- Grooving / Side Turning
- Threading
- Shaper
- ID Tooling
- Application Introduction
- Endmills
- Rotating Tools
- Information
- Index

Front turning YL • CL • AM3 • UL chipbreaker

Shape	Item number	Corner R	Stock	Dimensions (mm)	
				I.C.	Thickness
	CCGT 09T301M YL	0.08	●	9.525	3.97
	09T302M YL	0.18	●		
	09T304M YL	0.38	●		
	09T308M YL	0.78	●		
	DCGT 11T301M YL	0.08	●	9.525	3.97
	11T302M YL	0.18	●		
	11T304M YL	0.38	●		
	11T308M YL	0.78	●		
	VCGT 110301M YL	0.08	●	6.35	3.18
	110302M YL	0.18	●		
	110304M YL	0.38	●		
	VBGT 160402FN YL	0.2	●	9.525	4.76
	160404FN YL	0.4	●		
	160408FN YL	0.8	●		
	CCGT 060201M CL	0.08	●	6.35	2.38
	060202M CL	0.18	●		
	09T301M CL	0.08	●		
	09T302M CL	0.18	●		
	09T304M CL	0.38	●		
	DCGT 070201M CL	0.08	●	6.35	2.38
	070202M CL	0.18	●		
	070204M CL	0.38	●		
	11T301M CL	0.08	●		
	11T302M CL	0.18	●		
	VCGT 110301M CL	0.08	●	6.35	3.18
	110302M CL	0.18	●		
	110304M CL	0.38	●		
	CCGT 060201M FN AM3	0.08	●	6.35	2.38
	060202M FN AM3	0.18	●		
	060204M FN AM3	0.38	●		
	09T301M FN AM3	0.08	●		
	09T302M FN AM3	0.18	●		
	DCGT 070201M FN AM3	0.08	●	6.35	2.38
	070202M FN AM3	0.18	●		
	070204M FN AM3	0.38	●		
	11T301M FN AM3	0.08	●		
	11T302M FN AM3	0.18	●		
	VCGT 110301M FN AM3	0.08	●	6.35	3.18
	110302M FN AM3	0.18	●		
	110304M FN AM3	0.38	●		
	VPGT 110301M FN AM3	0.08	●	6.35	3.18
	110302M FN AM3	0.18	●		
	TNGG 160401M FN UL	0.08	●	9.525	4.76
	160402M FN UL	0.18	●		
	160404M FN UL	0.38	●		
	160408M FN UL	0.78	●		


Features

Name	Chipbreaker Geometry		Features
YL		※DCGT11T302MYL	<ul style="list-style-type: none"> Great combination of sharpness and toughness Covers extremely wide range Excellent chip control
CL		※DCGT11T302M	<ul style="list-style-type: none"> Sharpest molded chipbreaker Excellent chip control Less tool pressure
AM3		※DCGT11T302	<ul style="list-style-type: none"> All purpose chipbreaker Sharp edge with toughness
UL		※TNGG160401MFN	<ul style="list-style-type: none"> Negative insert with a positive insert's chipbreaker Reduced burrs Improves microfinish Superb advantage in cost per corner over positive inserts


Chipbreaker Geometry

Toolholder	CCGT Series	DCGT Series	VCGT Series	VPGT Series	TNGG Series
General catalogue	G23~G24	G24~G27	G28~G31	G32~G33	G38~G39
2018 SS catalogue	D22~D23	D24~D27	D28~D31	D32~D33	D36~D37

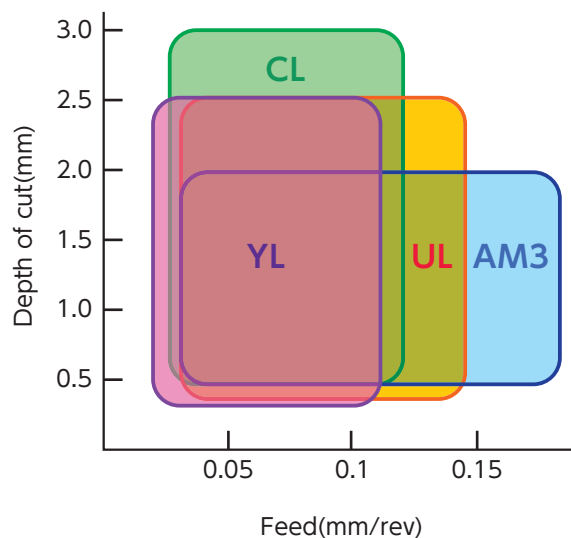Chip Control Range



Front turning TFX Series



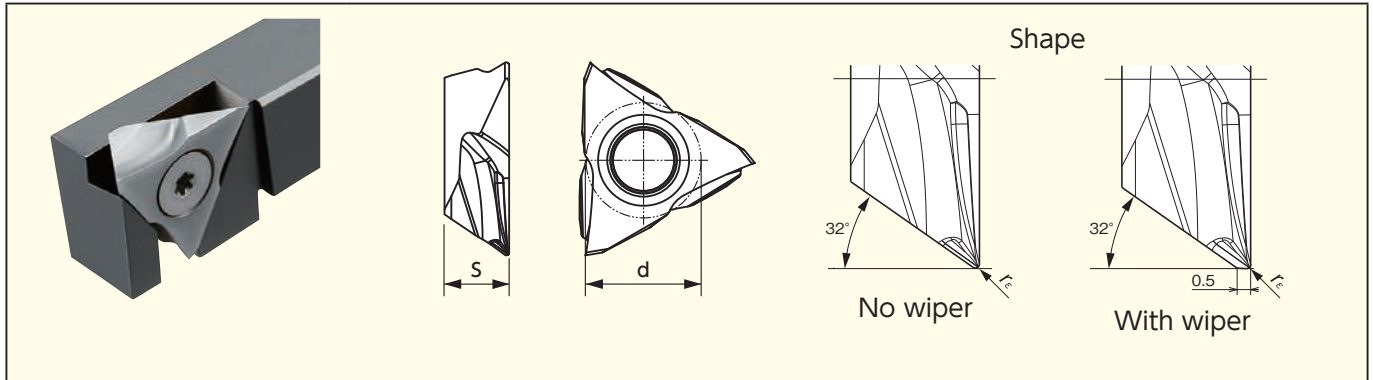


Wiper	Item number	r_ϵ (mm)	Stock ST4	Max. DOC (mm)	Dimensions (mm)		Toolholder
					d	s	General catalogue
No	TFX 3301MR	0.08	●	5.0	9.525	4.76	G34
	3302MR	0.18	●				
	3304MR	0.38	●				
Yes	TFX 3301MRW	0.08	●	5.0	9.525	4.76	G34
	3302MRW	0.18	●				
	3304MRW	0.38	●				

Features

Specially designed sharp chipbreaker provides 1 pass turning up to 5.0mm.

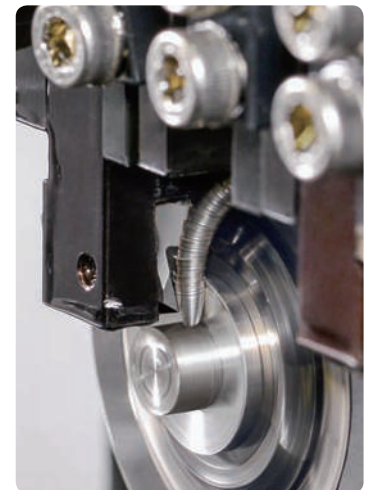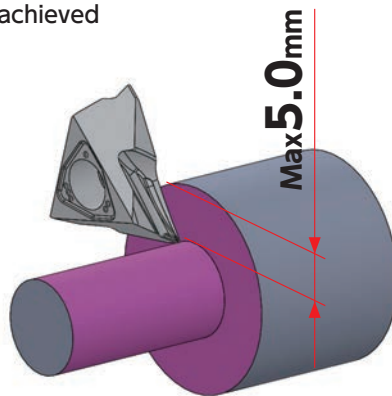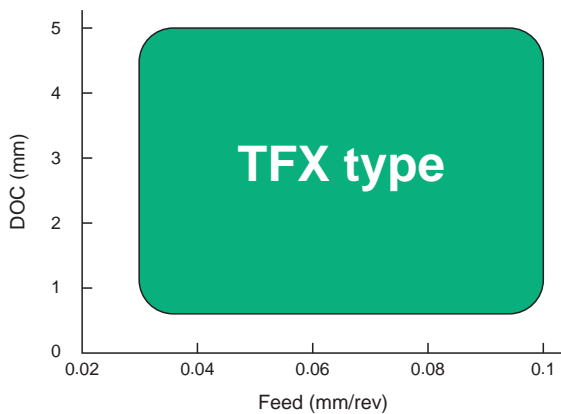Reduce cutting force with high DOC turning, and achieved excellent chipcontrol with good surface finish.




DOC 5.0mm


Workmaterial : SUS304 Cutting condition : $V_c=80\text{m/min}$ $f=0.03\text{mm/rev}$ WET

NTK The Front Max

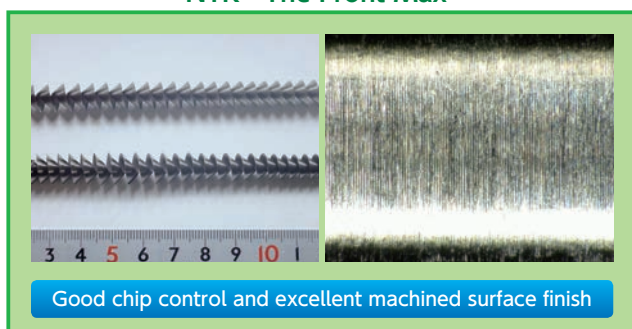Competitor's chipbreaker designed for high DOC turning



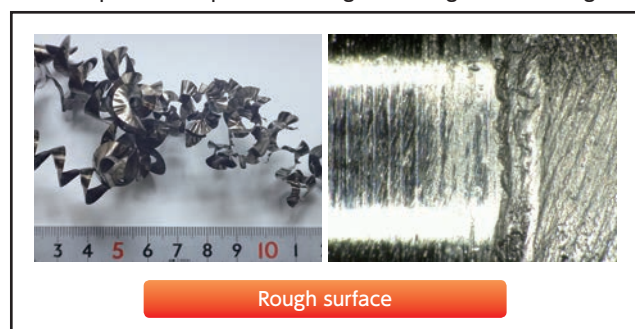Good chip control and excellent machined surface finish






Rough surface

Back turning TBP/TBPA-BM Series


TBP-BM Series

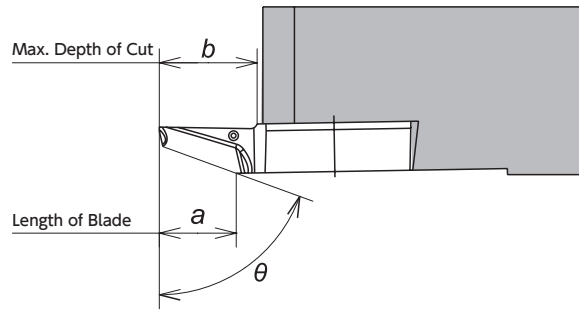TBPA-BM Series




Item number	r_ϵ (mm)	Length of Blade a (mm)	Max. Depth of Cut b (mm)	Cutting edge angle θ	Stock ST4	Toolholder	
						General catalogue	2018 SS catalogue
TBP 72FR05-BM	0.05	3.5	5.3	72°	●	G52 ~ G53	E12 ~ E13
72FR10M-BM	0.08	3.5	5.3	72°	●		
72FR20M-BM	0.18	3.5	5.3	72°	●		
TBPA 70FR05-BM	0.05	5.5	6.5	70°	●	G54 ~ G55	E14
70FR10M-BM	0.08	5.5	6.5	70°	●		
70FR20M-BM	0.18	5.5	6.5	70°	●		

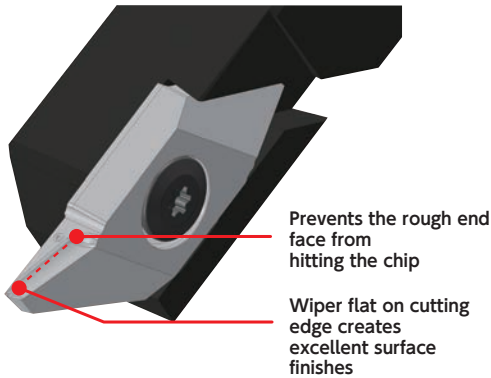Features



BM chipbreaker	Competitor's tool
Good chip control	Unstable chip control
Cutting condition: $V_c=80\text{m/min}$ WET Material: SUS304 $\phi 16$ Holder: TBPR12 Insert: TM4 TBP72FR10M-BM	

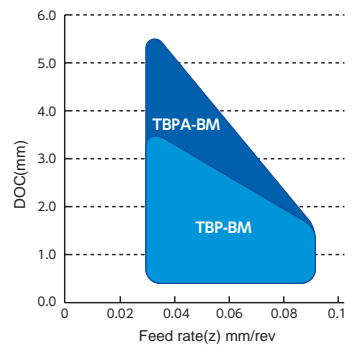Chip control range




Superior Surface Finish

1 Pass	BM chipbreaker		Competitor's tool	
	End face	OD	End face	OD

Cutting condition: $V_c=80\text{m/min}$ $f(x)=0.02\text{mm/rev}$ $f(z)=0.08\text{mm/rev}$ $a_p=3.0\text{mm}$ WET
Material: SUS304 $\phi 16$ Holder: TBPR12 Insert: TM4 TBP72FR10M-BM

Grooving GTMH32-GX Series

side turning capability
 Details
 Front rake angle: 17degree
 Side rake angle :14 degree



Groove width: ~ 1.0



Groove width : 1.5 ~



Item number	Dimension(mm)					Stock
	W	r _ε	L	Max Depth Grooving (mm)	Max Depth Side turning (mm)	ST4
GTMH32 033RGX	0.33	0.05	0.6	0.25	—	●
043RGX	0.43	0.05	1.2	0.9	—	●
050RGX	0.50	0.05	1.2	0.9	—	●
053RGX	0.53	0.05	1.2	0.9	—	●
075RGX	0.75	0.05	2.0	1.6	0.75	●
095RGX	0.95	0.05	2.0	1.6	1.5	●
100RGX	1.0	0.05	2.0	1.6	1.5	●
100RGX01	1.0	0.1	2.0	1.6	1.5	●
GTMH32 150RGX	1.5	0.05	3.0	2.7	2.0	●
150RGX01	1.5	0.1	3.0	2.7	2.0	●
150RGX02	1.5	0.2	3.0	2.7	2.0	●
200RGX	2.0	0.05	3.0	2.7	2.0	●
200RGX01	2.0	0.1	3.0	2.7	2.0	●
200RGX02	2.0	0.2	3.0	2.7	2.0	●
300RGX	3.0	0.05	3.0	2.7	2.0	●
300RGX02	3.0	0.2	3.0	2.7	2.0	●

Features

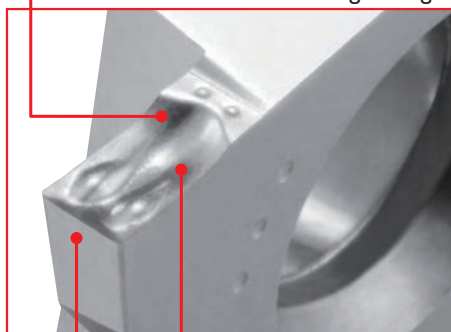


Typical Grooving Problems

- Chips remain at the bottom of groove
- Bird's nest of chips

Center bump and dent design improve chip control

Help chip curl & control.
 Excellent surface finish when grooving.



Improve chip control when side turning.

Chip control performance at side turning improved (MAX. ap- 2.0mm)



Outer periphery polishing offers excellent surface finish

Toolholder



Toolholder	
General catalogue	2018 SS catalogue
H18 ~ H21	H8 ~ H11

Cut off CTP/CTPA-CX Series

CTP-TH Series (Max. Cut-off Dia. ~ ϕ 12)



CTPA-TH Series (Max. Cut-off Dia. ~ ϕ 16)



Type	Hand	Shape	Item number	Max. Cut-off Dia. (mm) ϕ D	Dimension(mm)				Stock
					w	A	θ	r_ϵ	
CTP Series	R		CTP 10FR-CX	12.0	1.0	0.32	16°	0.05	●
			13FR-CX	12.0	1.3	0.40	16°	0.05	●
			15FR-CX	12.0	1.5	0.46	16°	0.05	●
			CTP 10FRN-CX	12.0	1.0	—	0°	0.05	●
			13FRN-CX	12.0	1.3	—	0°	0.05	●
			15FRN-CX	12.0	1.5	—	0°	0.05	●
		CTP 15FRN02-CX	12.0	1.3	—	0°	0.2	●	
		15FRN02-CX	12.0	1.5	—	0°	0.2	●	
	L		CTP 10FLK-CX	11.0	1.0	0.32	16°	0.05	●
			13FLK-CX	11.0	1.3	0.40	16°	0.05	●
			15FLK-CX	11.0	1.5	0.46	16°	0.05	●
			CTP 10FLN-CX	12.0	1.0	—	0°	0.05	●
			13FLN-CX	12.0	1.3	—	0°	0.05	●
			15FLN-CX	12.0	1.5	—	0°	0.05	●
	CTP 15FLN02-CX	12.0	1.5	—	0°	0.2	●		
CTPA Series	R		CTPA 15FR-CX	16.0	1.5	0.46	16°	0.05	●
			CTPA 15FRN-CX	16.0	1.5	—	0°	0.05	●
	L		CTPA 15FLK-CX	14.5	1.5	0.46	16°	0.05	●
			CTPA 15FLN-CX	16.0	1.5	—	0°	0.05	●

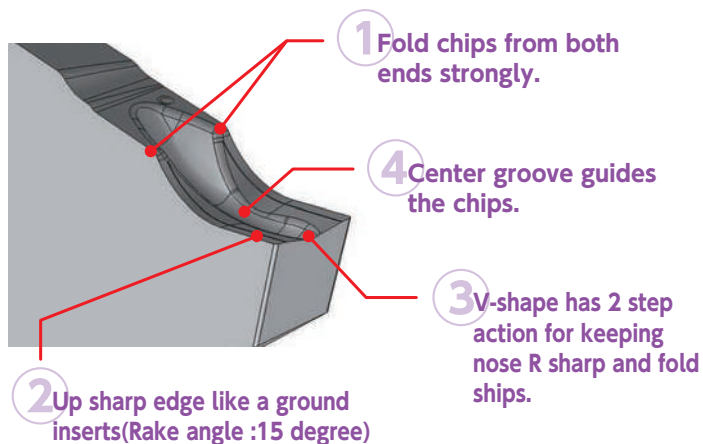
※Max. Cut-off Dia. indicates the cutting diameter of the insert when the top of the cutting edge is located on center

Features

Folds chip strongly from both ends and achieves superior machined surface finish.



Excellent chip control





Toolholder


Catalogue	CTP Series	CTPA Series
General catalogue	G74 ~ G75	G80 ~ G81
2018 SS catalogue	F10 ~ F11	F16 ~ F17

Cut-off CTP/CTPA-TH Series (Tough edge type)

CTP-TH Series
(Max. Cut-off Dia. ~φ12)



CTPA-TH Series
(Max. Cut-off Dia. ~φ16)




Type	Hand	Shape	Item number	Max. Cut-off Dia. (mm) φD	Dimension(mm)				Stock
					W	A	θ	r _ε	
CTP Series	R		CTP 10FR-TH	12.0	1.0	0.32	16°	0.05	●
			15FR-TH	12.0	1.5	0.46	16°	0.05	●
			20FR-TH	12.0	2.0	0.61	16°	0.05	●
			CTP 10FRN-TH	12.0	1.0	—	0°	0.05	●
			15FRN-TH	12.0	1.5	—	0°	0.05	●
			20FRN-TH	12.0	2.0	—	0°	0.05	●
	L		CTP 10FLK-TH	11.0	1.0	0.32	16°	0.05	●
			15FLK-TH	11.0	1.5	0.46	16°	0.05	●
			20FLK-TH	11.0	2.0	0.61	16°	0.05	●
			CTP 10FLN-TH	12.0	1.0	—	0°	0.05	●
			15FLN-TH	12.0	1.5	—	0°	0.05	●
			20FLN-TH	12.0	2.0	—	0°	0.05	●
CTPA Series	R		CTPA 15FR-TH	16.0	1.5	0.46	16°	0.05	●
			20FR-TH	16.0	2.0	0.61	16°	0.05	●
			CTPA 15FRN-TH	16.0	1.5	—	0°	0.05	●
			20FRN-TH	16.0	2.0	—	0°	0.05	●
	L		CTPA 15FLK-TH	14.5	1.5	0.46	16°	0.05	●
			20FLK-TH	14.5	2.0	0.61	16°	0.05	●
			CTPA 15FLN-TH	16.0	1.5	—	0°	0.05	●
			20FLN-TH	16.0	2.0	—	0°	0.05	●

※Max. Cut-off Dia. indicates the cutting diameter of the insert when the top of the cutting edge is located on center

Features

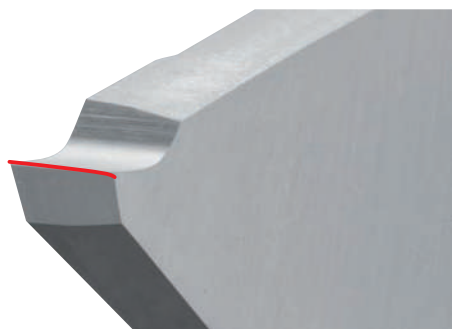-TH achieves superior fracture resistance
Long tool life on stainless steel cut-off operation



Case study	CTP-TH type	Competitor's tool
Material: SUS304 φ11 Cutting condition: Vc=80m/min f=0.03mm/rev Tools: Insert: CTP-TH Series 2.0mm width Holder: CTPR12		
	200pcs. machined	100pcs. machined

Toolholder

Catalogue	CTP Series	CTPA Series
General catalogue	G74 ~ G75	G80 ~ G81
2018 SS catalogue	F10 ~ F11	F16 ~ F17

ID turning F05 • F1 • FG chipbreaker

Shape	Number	Corner R	Stock	Dimensions (mm)	
				I.C.	Thickness
	TCGH 060101FR F05	0.1	●	3.97	1.59
	060102FR F05	0.2	●		
	060104FR F05	0.4	●		
	TPGH 090201FR F1	0.1	●	5.58	2.38
	090202FR F1	0.2	●		
	090204FR F1	0.4	●		
	090208FR F1	0.8	●		
	110302FR F1	0.2	●		
	110304FR F1	0.4	●		
	110308FR F1	0.8	●		
	TPGH 090202R FG	0.2	●	5.56	2.38
	090204R FG	0.4	●		
	110302R FG	0.2	●		
	110304R FG	0.4	●		
	MBL 005FR F1	0.05	●	3.60	2.38
	015FR F1	0.15	●		
	ERGH 30101FR F1	0.1	●	3.97	1.59
	30102FR F1	0.2	●		
	30104FR F1	0.4	●		
	CPGH 040101FR F1	0.1	●	4.76	1.59
	040102FR F1	0.2	●		
	040104FR F1	0.4	●		
	060202FR F1	0.2	●		
	060204FR F1	0.4	●		
	CCGT 060201FR F1	0.1	●	6.35	2.38
	060202FR F1	0.2	●		
	060204FR F1	0.4	●		
	09T302FR F1	0.2	●		
	09T304FR F1	0.4	●		
	09T304FR F1	0.4	●		

Toolholder


Catalogue	TCGH Series	TPGH Series	MBL Series	ERGH Series	CPGH Series	CCGT Series
General catalogue	K30 ~ K31	K30 ~ K31	K24 ~ K25	K26 ~ K27	K28 ~ K29	K28
2018 SS catalogue	K36 ~ K37	K36 ~ K37	K30 ~ K31	K32 ~ K33	K34 ~ D35	K34

Features

Combination of the F-chipbreakers delivers the best performance

All Mogul Bars are coolant through

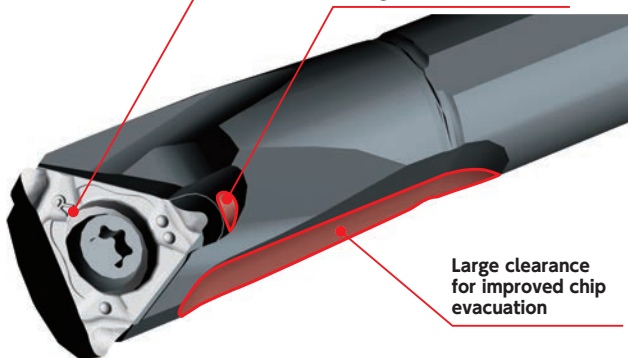Large clearance for improved chip evacuation



Features

- F type chipbreaker allow chips to evacuate backward.
- Combination of the F-chipbreakers and Mogul Bar delivers the best performance.


	DOC (mm)	Feed(mm/rev)	
		0.05	0.1
FG chipbreaker <ul style="list-style-type: none"> • Best for finishing • Works for small DOC (ap-0.5mm) • High rake angle 	0.1		
	0.3		
F1 • F05 chipbreaker <ul style="list-style-type: none"> • Covers wide range of conditions • Ground chipbreaker 	0.5		
	Note: Right-hand inserts with FG and F1 chipbreakers should be used with right-hand holders Material : SCM435 Holder : S10K-STUPR11D12-OH Insert : TPGH110304 Series Cutting condition : $V_c = 80\text{m/min}$ Bore diameter : $\phi 12$ External coolant Depth of cut : 20mm		

Typical inserts

F05, F1, FG chipbreakers




Direct flow chips forward. Then packed chips damage and break cutting edge.



Direct chips backwards and eliminate chipping on inserts.

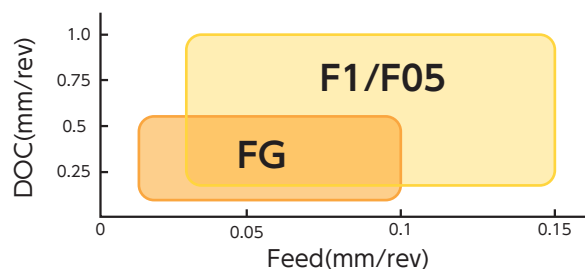Chip control range



Recommended Cutting Condition (Grooving, Cut-off)

GTMH32-GX Series

Width (mm)	Feed (mm/rev)				Cutting speed (mm/min)		
	Grooving		Side turning		SUS303	SUS304	SUS440C
	Range	SUS304	Range	SUS304			
0.33 ~ 0.53	0.01 ~ 0.03	0.02	No capability	No capability	60 100 150	50 70 100	30 60 80
0.75 ~ 1.0	0.02 ~ 0.05	0.03	0.015 ~ 0.04	0.02			
1.5 ~ 2.0	0.02 ~ 0.08	0.04	0.015 ~ 0.06	0.03			
3.0	0.03 ~ 0.10	0.05	0.025 ~ 0.08	0.04			

CTP/CTPA-CX Series

Width (mm)	Feed (mm/rev)		Cutting speed (mm/min)		
	Range	SUS304	SUS303	SUS304	SUS440C
1.0	0.02 ~ 0.04	0.02	60 100 150	50 70 100	30 60 80
1.3	0.02 ~ 0.05	0.03			
1.5	0.02 ~ 0.06	0.03			

CTP/CTPA-TH Series

Width (mm)	Feed (mm/rev)		Cutting speed (mm/min)		
	Range	SUS304	SUS303	SUS304	SUS440C
1.0	0.02 ~ 0.05	0.03	60 100 150	50 70 100	30 60 80
1.5	0.02 ~ 0.06	0.04			
2.0	0.02 ~ 0.07	0.04			

S-MILL Line up Expansion

New Products

Tool Materials / Selection Guide

BIDEMCS, PCD, CBN and Ceramics

Micrograin Carbide, PVD/Coated Carbide

Insert Item List

General Turning Toolholders

Unique Swiss tooling

Grooving / Side Turning

Threading

Shaper

ID Tooling

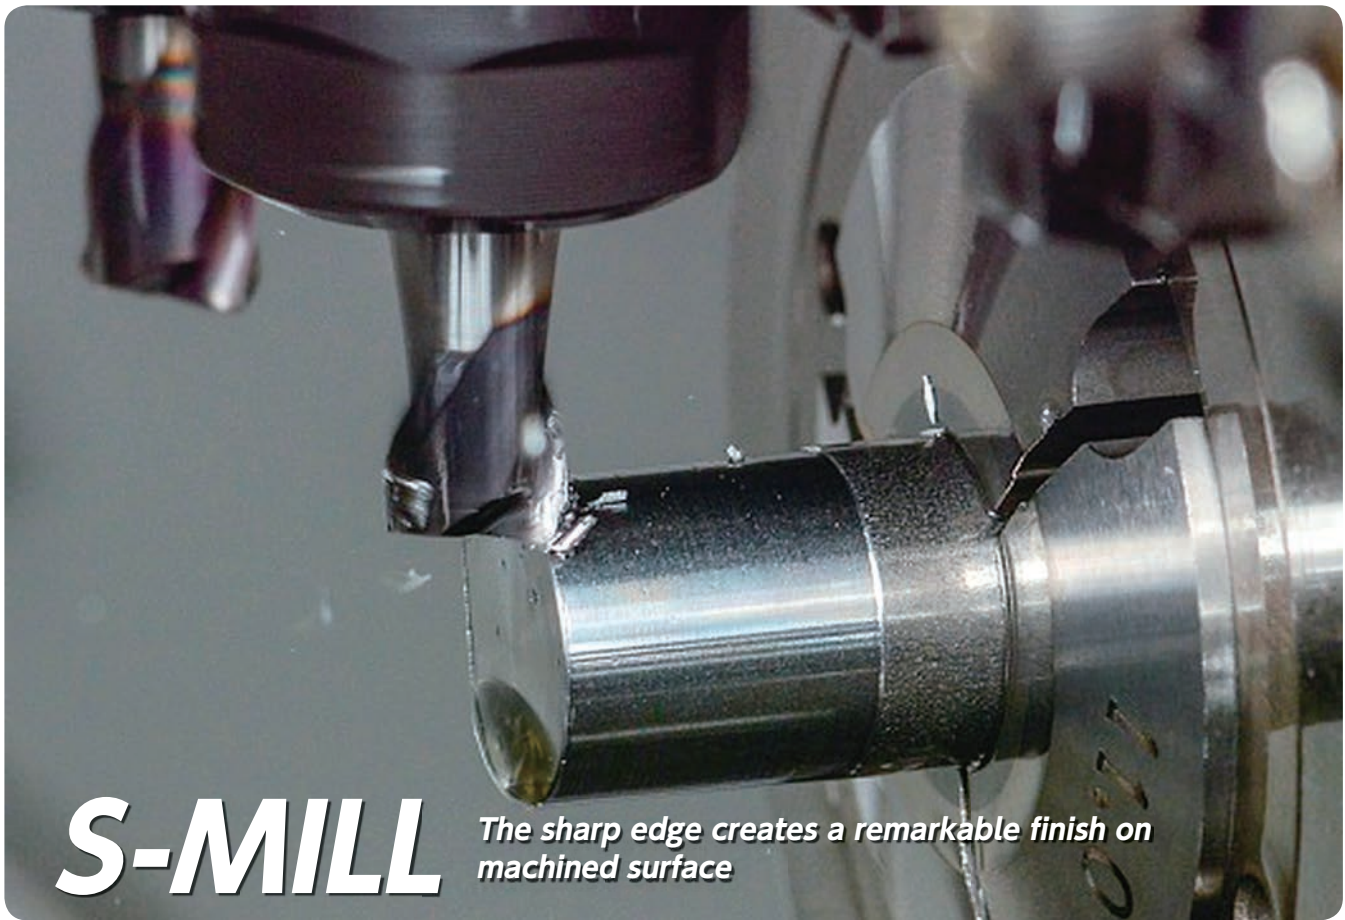
Application Introduction

Endmills

Rotating Tools

Information

Index



S-MILL

The sharp edge creates a remarkable finish on machined surface



- Excellent surface finish
- Reduce cutting force
- Provide stable machining

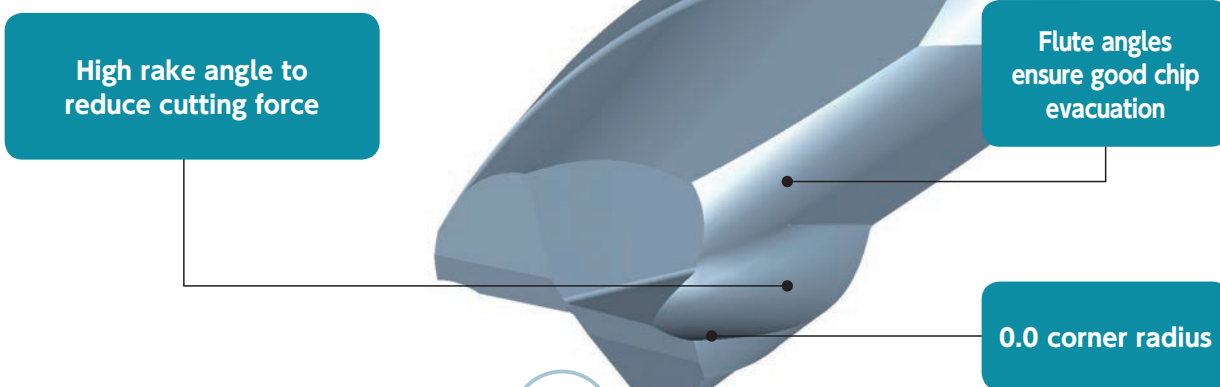
- Line up Expansion
φ8.0 and φ10.0 with φ7.0 shank Dia.

NEW




Features

1 The sharp edge creates a remarkable finish on machined surface.



2 Designed for swiss type lathe

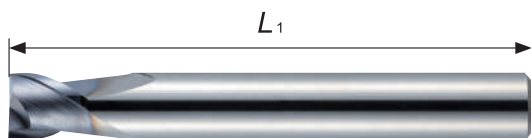





- $\phi 3.0 / \phi 4.0 = 40.0\text{mm}$
- $\phi 5.0 / \phi 6.0 = 45.0\text{mm}$
- $\phi 7.0 / \phi 8.0 / \phi 10.0 = 50.0\text{mm}$



3 2, 3, 4 flutes cover a variety of applications. (2 flutes available in $\phi 2\text{mm}$)



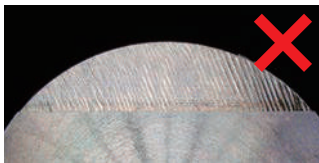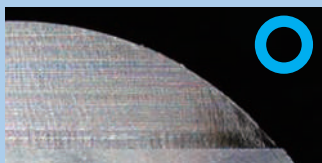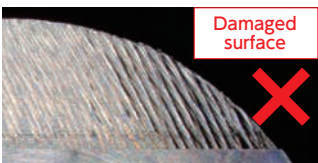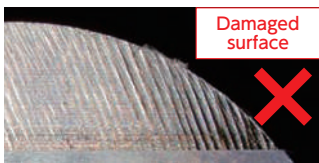Comparison of machined surfaces

	NTK (S-MILL)	Competitor A	Competitor B
Side face			
Magnified (side face)			
	Excellent surface finish	Rough surface finish	
Tool : $\phi 6.0$ 2 flutes Work material : SUS304 ($\phi 16.0$) Cutting condition : $a_p=3.0\text{mm}$ $a_e=1.2\text{mm}$ $S=3,000\text{rpm}$ $F=300\text{mm/min}$			

Stock list

RWEM Series



Z=2



Z=3



Z=4




35°



Side Milling



Slotting



Profiling

Figure. 1


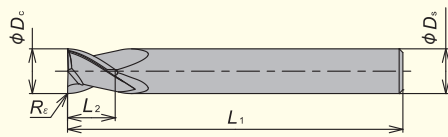


Figure. 2

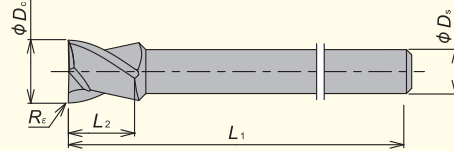

Tolerance: mm

ϕD_c	Tolerance
2, 3, 5	+0 / -0.025
4, 6, 7	+0 / -0.03
8, 10	+0 / -0.035

Material Group

P: Steel	M: Stainless steel	K: Cast iron	N: Nonferrous metal	S: Heat resistant alloy	H: Hardened material
⊙	⊙				

⊙ : 1st Choice

2 flutes

Shape	Flute	Item Number	Grade	Cutting dia. ϕD_c (mm)	Shank dia. ϕD_s (mm)	Length L_1 (mm)	Cutting edge length L_2 (mm)	Corner radius R_c (mm)
			AC3					
Figure. 1	2	RWEM 020H2R00S04	●	2.0	4.0	40.0	2.0	0.0
		030H2R00S04	●	3.0	4.0	40.0	3.0	
		040H2R00S04	●	4.0	4.0	40.0	4.0	
		050H2R00S06	●	5.0	6.0	45.0	5.0	
		060H2R00S06	●	6.0	6.0	45.0	6.0	
		070H2R00S08	●	7.0	8.0	50.0	6.0	
		080H2R00S08	●	8.0	8.0	50.0	6.0	
Figure. 2	2	NEW RWEM 080H2R00S07	●	8.0	7.0	50.0	6.0	0.0
		NEW 100H2R00S07	●	10.0	7.0	50.0	6.0	

3 flutes

Shape	Flute	Item Number	Grade	Cutting dia. ϕD_c (mm)	Shank dia. ϕD_s (mm)	Length L_1 (mm)	Cutting edge length L_2 (mm)	Corner radius R_c (mm)
			AC3					
Figure. 1	3	RWEM 030H3R00S04	●	3.0	4.0	40.0	3.0	0.0
		040H3R00S04	●	4.0	4.0	40.0	4.0	
		050H3R00S06	●	5.0	6.0	45.0	5.0	
		060H3R00S06	●	6.0	6.0	45.0	6.0	
		070H3R00S08	●	7.0	8.0	50.0	6.0	
		080H3R00S08	●	8.0	8.0	50.0	6.0	
		100H3R00S10	●	10.0	10.0	50.0	6.0	
Figure. 2	3	NEW RWEM 080H3R00S07	●	8.0	7.0	50.0	6.0	0.0
		NEW 100H3R00S07	●	10.0	7.0	50.0	6.0	

4 flutes

Shape	Flute	Item Number	Grade	Cutting dia. ϕD_c (mm)	Shank dia. ϕD_s (mm)	Length L_1 (mm)	Cutting edge length L_2 (mm)	Corner radius R_c (mm)
			AC3					
Figure. 1	4	RWEM 030H4R00S04	●	3.0	4.0	40.0	3.0	0.0
		040H4R00S04	●	4.0	4.0	40.0	4.0	
		050H4R00S06	●	5.0	6.0	45.0	5.0	
		060H4R00S06	●	6.0	6.0	45.0	6.0	
		070H4R00S08	●	7.0	8.0	50.0	6.0	
		080H4R00S08	●	8.0	8.0	50.0	6.0	
		100H4R00S10	●	10.0	10.0	50.0	6.0	
Figure. 2	4	NEW RWEM 080H4R00S07	●	8.0	7.0	50.0	6.0	0.0
		NEW 100H4R00S07	●	10.0	7.0	50.0	6.0	

Field result

SUS416F(D-cut) ϕ 6mm-2 flutes	
Work material : SUS416F	
rev/min : 3,200	
Feed(mm /rev) : 140	
DOC (mm) : 0.6	
Coolant : WET	
NTK : S-MILL	12,000 pcs/corner+α
Competitor's solid endmill	10,000 pcs/corner
<p>As the competitor's endmill reached the end of its tool life with bad surface finish. NTK's S-MILL maintained quality surface finish through out its longer tool life.</p>	

S45C(Hexagon machining ϕ 10 \Rightarrow ϕ 8mm AF) ϕ 6mm-2 flutes	
Work material : S45C	
rev/min : 2,600	
Feed(mm /rev) : 480	
DOC(mm) : 1.0	
Coolant : WET	
NTK : S-MILL	70 pcs/corner+α
Competitor's solid endmill	50 pcs/corner
<p>The S-Mill's sharpness reduced the occurrence of burrs and increased tool life; clear improvements over the competitor's tool. The sharp cutting edge also produces noticeably less sound than the current tooling.</p>	

Recommended Cutting Condition

Flute	Cutting diameter ϕD_c (mm)	Carbon steel S45C		Alloy steel SCM435		Stainless steel SUS304		 $a_e = \phi D_c \times 0.2$		 $a_e = \phi D_c \times 0.5$		 $a_e = \phi D_c \times 0.75$		 $a_e = \phi D_c \times 0.9$		 $a_e = \phi D_c$	
		RPM (min ⁻¹)	Feed (mm/min)	RPM (min ⁻¹)	Feed (mm/min)	RPM (min ⁻¹)	Feed (mm/min)	a_p (mm)	a_e (mm)	a_p (mm)	a_e (mm)	a_p (mm)	a_e (mm)	a_p (mm)	a_e (mm)	a_p (mm)	a_e (mm)
		2 flutes	2.0	6,000	100	6,000	100	6,000	90	≤ 2.0	0.4	≤ 0.8	1.0	≤ 0.6	1.5	≤ 0.5	1.8
3.0	6,000		210	6,000	240	6,000	180	≤ 3.0	0.6	≤ 1.2	1.5	≤ 0.9	2.3	≤ 0.7	2.7	≤ 0.6	
4.0	6,000		320	5,600	300	5,200	240	≤ 4.0	0.8	≤ 1.6	2.0	≤ 1.2	3.0	≤ 1.0	3.6	≤ 0.8	
5.0	5,000		370	4,500	330	4,100	260	≤ 5.0	1.0	≤ 2.0	2.5	≤ 1.5	3.8	≤ 1.2	4.5	≤ 1.0	
6.0	4,200		380	3,700	340	3,400	270	≤ 6.0	1.2	≤ 2.4	3.0	≤ 1.8	4.5	≤ 1.5	5.4	≤ 1.2	
7.0	3,600		370	3,200	330	3,000	270	≤ 6.0	1.4	≤ 2.8	3.5	≤ 2.1	5.3	≤ 1.7	6.3	≤ 1.4	
8.0	3,200		360	2,800	320	2,600	250	≤ 6.0	1.6	≤ 3.2	4.0	≤ 2.4	6.0	≤ 2.0	7.2	≤ 1.6	
3 flutes	10.0	2,500	320	2,200	280	2,100	230	≤ 6.0	2.0	≤ 4.0	5.0	≤ 3.0	7.5	≤ 2.5	9.0	≤ 2.0	
	3.0	6,000	250	6,000	250	6,000	220	≤ 3.0	0.6	≤ 1.2	1.5	≤ 0.9	2.3	≤ 0.7	2.7	≤ 0.6	
	4.0	6,000	390	5,600	360	5,200	290	≤ 4.0	0.8	≤ 1.6	2.0	≤ 1.2	3.0	≤ 1.0	3.6	≤ 0.8	
	5.0	5,000	440	4,500	400	4,100	310	≤ 5.0	1.0	≤ 2.0	2.5	≤ 1.5	3.8	≤ 1.2	4.5	≤ 1.0	
	6.0	4,200	460	3,700	410	3,400	330	≤ 6.0	1.2	≤ 2.4	3.0	≤ 1.8	4.5	≤ 1.5	5.4	≤ 1.2	
	7.0	3,600	450	3,200	400	3,000	320	≤ 6.0	1.4	≤ 2.8	3.5	≤ 2.1	5.3	≤ 1.7	6.3	≤ 1.4	
	8.0	3,200	430	2,800	380	2,600	310	≤ 6.0	1.6	≤ 3.2	4.0	≤ 2.4	6.0	≤ 2.0	7.2	≤ 1.6	
4 flutes	10.0	2,500	380	2,200	330	2,100	280	≤ 6.0	2.0	≤ 4.0	5.0	≤ 3.0	7.5	≤ 2.5	9.0	≤ 2.0	
	3.0	6,000	290	6,000	290	6,000	250	≤ 3.0	0.6	≤ 1.2	1.5	≤ 0.9	2.3	≤ 0.7	2.7	≤ 0.6	
	4.0	6,000	450	5,500	410	5,200	340	≤ 4.0	0.8	≤ 1.6	2.0	≤ 1.2	3.0	≤ 1.0	3.6	≤ 0.8	
	5.0	5,000	520	4,500	460	4,100	370	≤ 5.0	1.0	≤ 2.0	2.5	≤ 1.5	3.8	≤ 1.2	4.5	≤ 1.0	
	6.0	4,200	540	3,700	480	3,400	380	≤ 6.0	1.2	≤ 2.4	3.0	≤ 1.8	4.5	≤ 1.5	5.4	≤ 1.2	
	7.0	3,600	520	3,200	460	3,000	380	≤ 6.0	1.4	≤ 2.8	3.5	≤ 2.1	5.3	≤ 1.7	6.3	≤ 1.4	
	8.0	3,200	500	2,800	440	2,600	360	≤ 6.0	1.6	≤ 3.2	4.0	≤ 2.4	6.0	≤ 2.0	7.2	≤ 1.6	

• Cutting conditions (machine, work material...) affect surface finish and burr generation.
If cutting performance is not good with above cutting conditions, please adjust speed and feed by same %.

Unique swiss tooling / Front turning insert for large DOC

The Front Max

New Products

Tool Materials / Selection Guide

BIDEMCS, PCD, CBN and Ceramics
Micrograin Carbide, PVD/Coated Carbide

Insert Item List

General Turning Toolholders

Unique Swiss tooling

Grooving / Side Turning

Threading

Shaper

ID Tooling

Application Introduction

Endmills

Rotating Tools

Information

Index



The Front Max

*NEW style front turning insert for swiss type lathe.
Specially designed chipbreaker provides excellent
chip control and sharpness.*

MAX DOC

5.0mm available



TFX Series

WATCH ON
YouTube

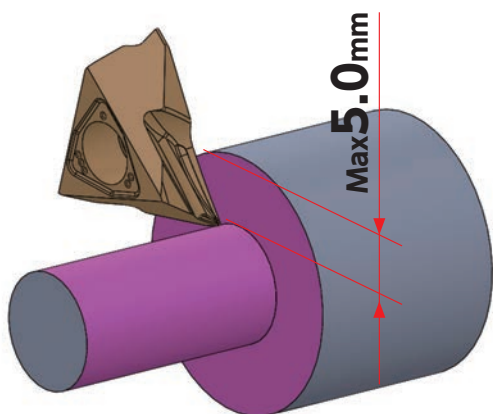


Are these common issues in your machining operation?

- It is hard to machine a large depth of cut on Swiss type lathes.
- It is difficult to control chips and dimensions.


The Front Max is the solution.

Features



- Up to 5.0mm DOC capability**
 Specially designed chipbreaker reduces cutting resistance, achieves excellent chip control and surface finish.
 Excellent chip control and surface finish.

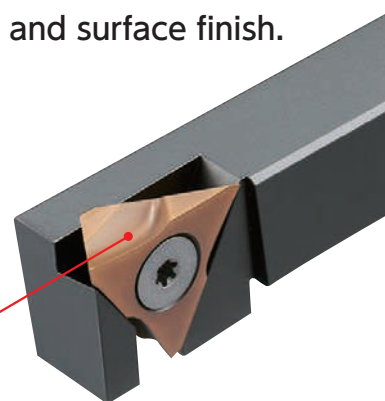Stable chip control by special chipbreaker design.




2 Rigid side clamp system



Strong clamping prevents moving insert . This provides stable turning process.


Tooling for Large DOC

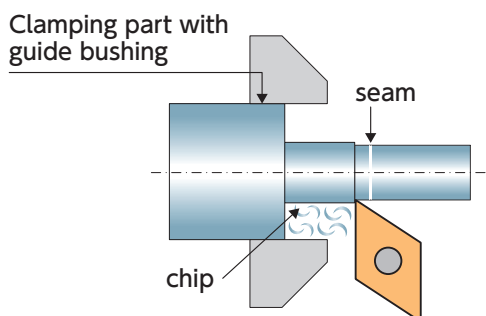Conventional tooling



- Longer cycle time with roughing and finish turning.
- Seam on surface occurs with separate turning.
- Tool wear increase by 2 passes
- Chip may go into guide-bushing.
- Need to run multi times due to guide-bushing limitation

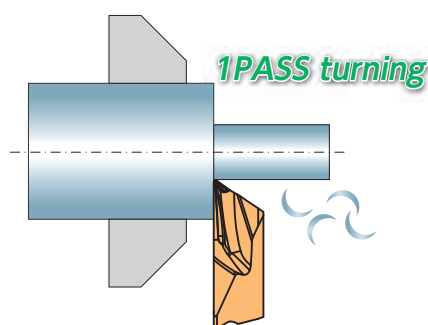
The Front Max




- Reduce cycle time
- Extend insert tool life
- Improve part quality
- Simplify machining program


Insert

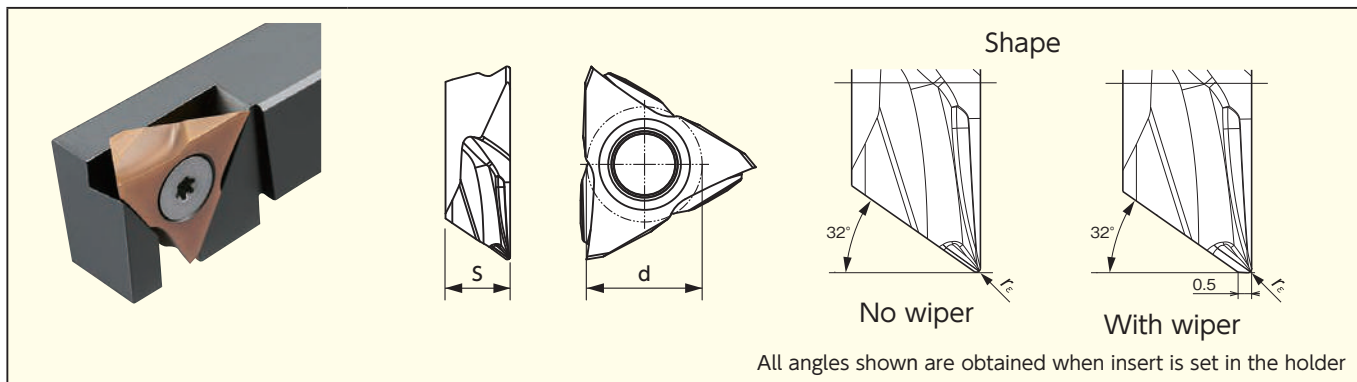
NEW TFX Series(3D molded chipbreaker)



shape	Max. DOC (mm)	Wiper	Item number	Dimension (mm)			PVD coated carbide		
				r_e	d	s	ST4	DM4	ZM3
	5.0	No	TFX 3301MR	0.08	9.525	4.76	●	●	
			3302MR	0.18	9.525	4.76	●	●	
			3304MR	0.38	9.525	4.76	●	●	
		Yes	TFX 3301MRW	0.08	9.525	4.76	●	●	
			3302MRW	0.18	9.525	4.76	●	●	
			3304MRW	0.38	9.525	4.76	●	●	

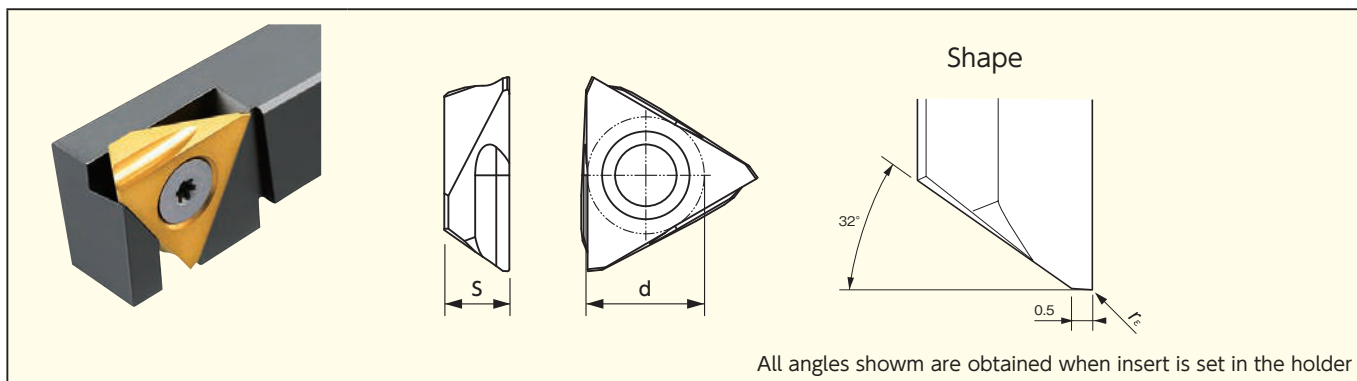TF Series(Ground chipbreaker)



shape	Max. DOC (mm)	Wiper	Item number	Dimension (mm)			PVD coated carbide		
				r_e	d	s	ST4	DM4	ZM3
	4.0	Yes	TF 3300R	0.0	9.525	4.76			●
			3305R	0.05	9.525	4.76			●
			3315R	0.15	9.525	4.76			●
			3320R	0.2	9.525	4.76			●

Toolholder

NEW TFT-OH2 Series

Coolant through (Screw accessible from both sides)

Th(Screw parts A)
1014 size : M6×1.0
1214 size : Rc1/8(PT1/8)

Taper cut capability

Item Number	Taper cut capability		
	D max	A max	T max
TFTR 1014H-OH2	20	2.5	30°
1214H-OH2	30		
1616X-OH2	40		

● Right-Hand style shown

Toolholder dimension • Spare parts

Item Number	Stock	Dimensions (mm)							Screw parts A			
		<i>h</i>	<i>b</i>	<i>L</i> ₁	<i>h</i> ₁	<i>h</i> ₂	<i>L</i> ₂	<i>L</i> ₃	Clamp screw	Wrench	Screw parts A	Screw parts B
TFTR 1014H-OH2	●	10	14	100	10	4	15	15				
1214H-OH2	●	12	14	100	12	2	15	15	LR-S-4*10PW	CLR-15S	SS0605SC	SS0505SC (Wrench : LW-2.5)
1616X-OH2	●	16	16	120	16	—	—	17.5	LR-S-4*10PW	CLR-15S	SPR1/8	

When coolant is supplied from the tool post directly to the tools, please remove screw parts [B] and set screw parts A at side and rear of toolholder. Wrench for screw parts [A] (SS0605SC) is not attached. Please use Hex wrench 3.0(LW-3) for SS0605SC, Hex wrench 5.0(LW-5) for SPR1/8.

TFT Series

(Screw accessible from both sides)

● Right-Hand style shown


Item Number	Stock	Dimensions (mm)						Parts		Taper cut capability
		<i>h</i>	<i>b</i>	<i>L</i> ₁	<i>f</i>	<i>h</i> ₁	<i>h</i> ₂	Clamp screw	Wrench	
TFTR 10	●	10	10	120	0.0	10	3			No capability for taper cut.
12	●	12	12	120	0.0	12	1			
16	●	16	16	120	0.0	16	—			
20	●	20	20	120	0.0	20	—			

Cutting performance


DOC 5.0mm Work material : SUS304 Cutting condition : Vc=80m/min f=0.03mm/rev WET

NTK The Front Max

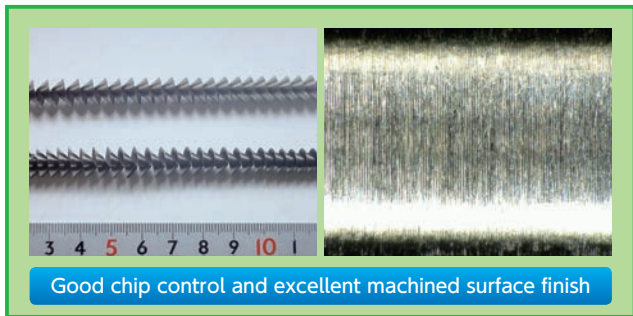Competitor's chipbreaker designed for high DOC turning



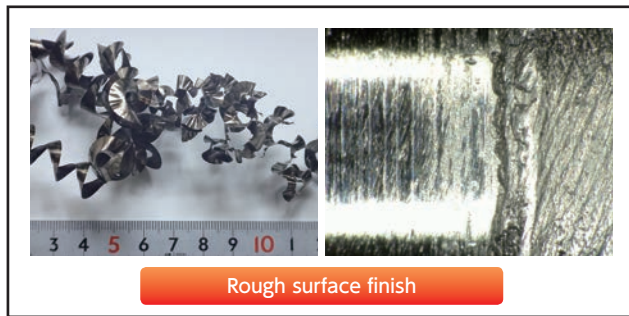
Good chip control and excellent machined surface finish




Rough surface finish

Excellent chip control in variety of cutting conditions
Covers a wide range of Doc's and feeds.
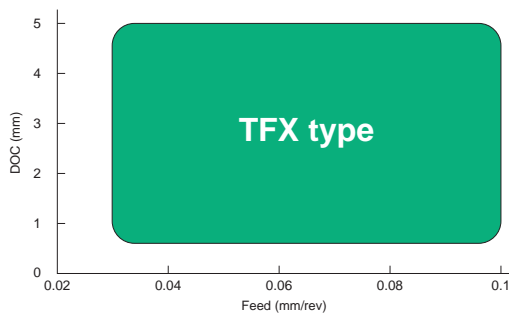
<Chip control>




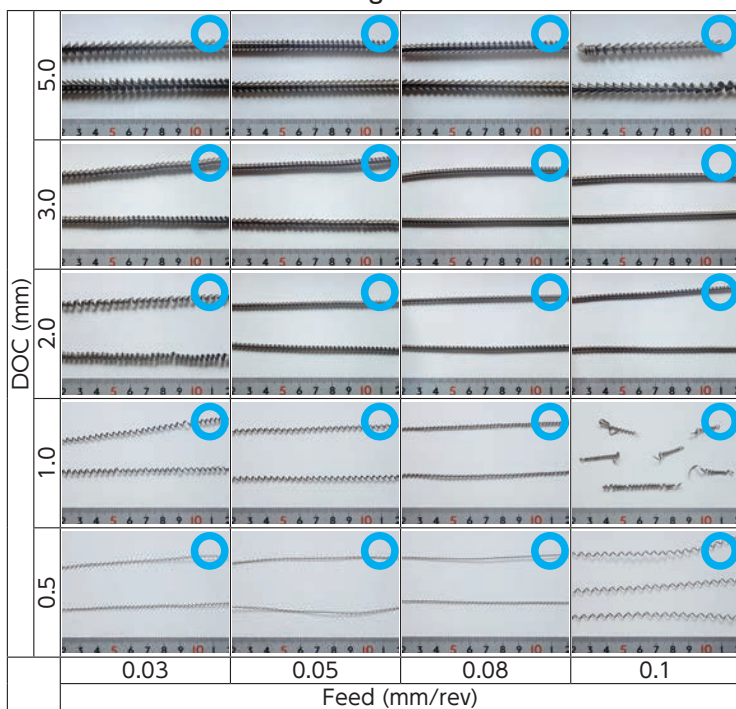Workmaterial : SUS304 Cutting condition : Vc=80m/min WET



Available in coolant through toolholder

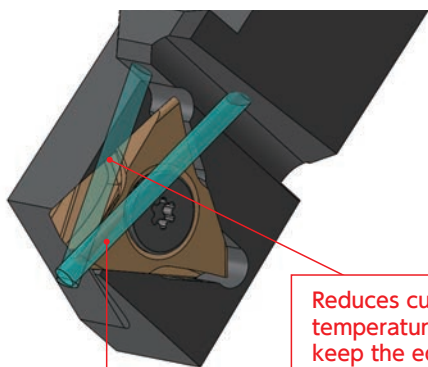- Can take 30° taper.
- Use with TFX type insert enables stable turning.




Reduces cutting tool temperature and helps keep the edge sharp

Improves part tolerance by steady coolant supply to the edge

Work material : SUS304

	The Front Max	Competitor
Cutting speed(m/min)	80	110
Feed(mm/rev)	0.03	0.01
DOC(mm/rev)	5.0	←
Coolant	Wet	←



Insert item number:
DM4 TFX3302MR

The Front Max 180pcs./corner

Competitor 50pcs./corner

• NTK Front Max provided 5.0mm DOC with higher feed and got 3 times longer tool life.

NEW

Internal coolant type tool holders

SPLASH Series Lineup expansion

NTK

New Products

Tool Materials / Selection Guide

Micrograin Carbide, BIDEWCS, PCD, CBN and Ceramics

Insert Item List

General Turning Toolholders

Unique Swiss Tooling

Grooving / Side Turning

Threading

Shaper

ID Tooling

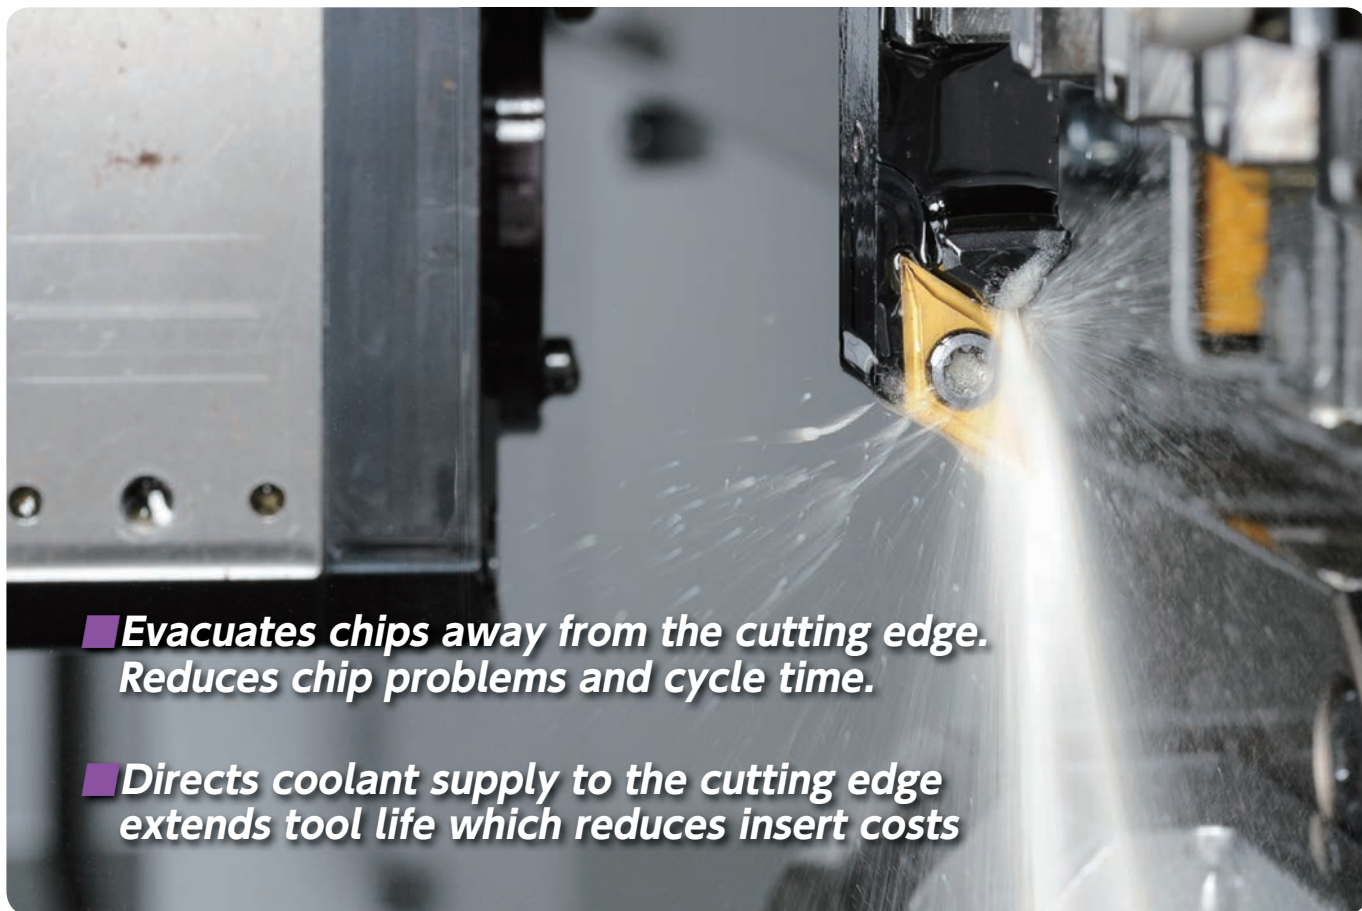
Application Introduction

Endmills

Rotating Tools

Information

Index



■ **Evacuates chips away from the cutting edge. Reduces chip problems and cycle time.**

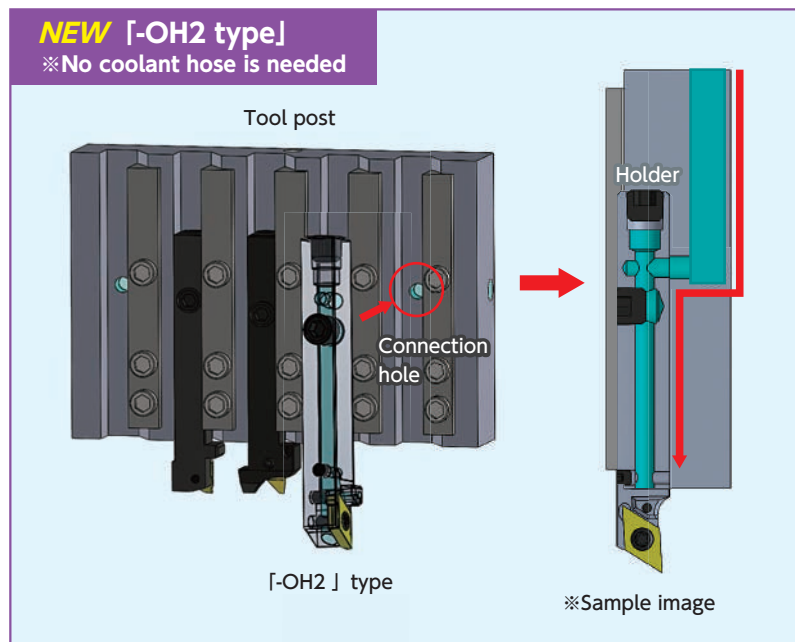
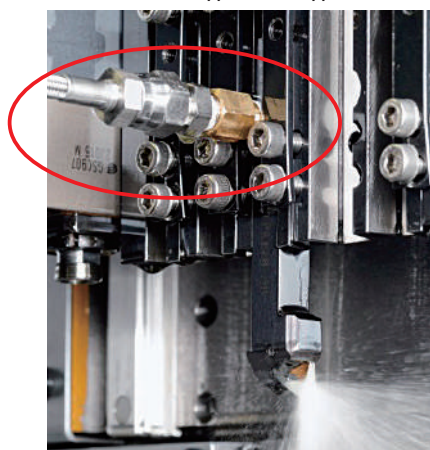
■ **Directs coolant supply to the cutting edge extends tool life which reduces insert costs**

■ **Hose free capability - OH2 - new feature added**

Coolant is supplied from the tool post directly to the tools

※ No coolant hose is needed

※Conventional type[-OH] type (hose is needed)



- **Eliminates chip entanglement on hoses**
- **Use the tool post space effectively**







➔ **Can install more SPLASH toolholders, for higher productivity**

WATCH ON
YouTube

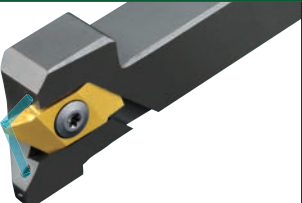

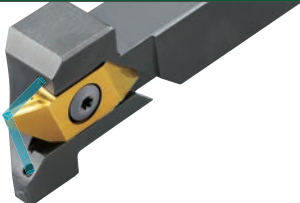


Lineup




Front turning

Inserts	CC.. Series	DC.. Series		VC.. Series		TFX33../TF33..Series
	SCLC-OH2/OH	SDJC-OH2/OH	Y-SDJC-OH2/OH	SVJC-OH	Y-SVJC-OH	TFTR-OH2
Holder						





Back turning

Inserts	TBP Series		TBPA Series
	TBP-OH2/OH	Y-TBP-OH	TBPA-OH
Holder			

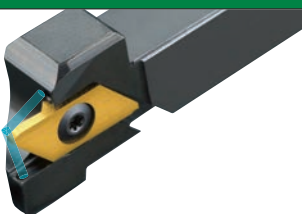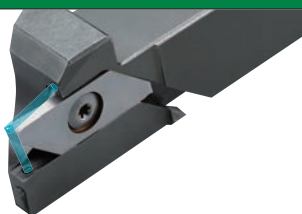
Cut off

Inserts	CTP Series	CTPA Series	CTDP Series
	CTP-OH2/OH	CTPA-OH2/OH	CTDP-OH2/OH
Holder			
MAX Bar Dia.	~φ 12	~φ 16	~φ 25.4


Grooving/ Side turning

Inserts	GTM.. Series		GTPA.. Series	
	GTT-OH2/OH	Y-GTT-OH	GTPA-OH	Y-GTPA-OH
Holder				

Threading

Inserts	TTP Series
	TTP-OH2
Holder	

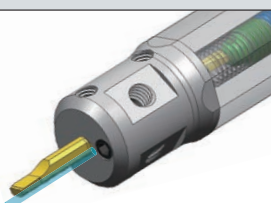ID turning - STICK DUO SPLASH-

Inserts	HY-NBH-OH Series
Holder	


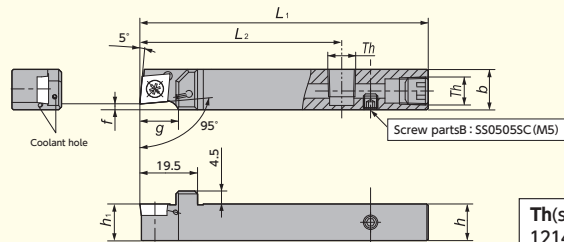
NOTE for 「-OH2」 type toolholder

- When coolant is supplied from the tool post directly to the holder: please remove set screw [B] (SS0505SC) and install both set screws [A] (for hoseconnections) on side and rear of toolholder.
- Wrench for screw part [A] (SS0605SC) is not included. Please use hex wrench3.0(LW-3) for SS0605SC, hex wrench5.0(LW-5) for SPR1/8.

Stock list

Front turning

SCLC-OH2





● R-hand shown

Fig.1

Th(screw parts [A])
1214/1616size: SPR1/8(Rc1/8)

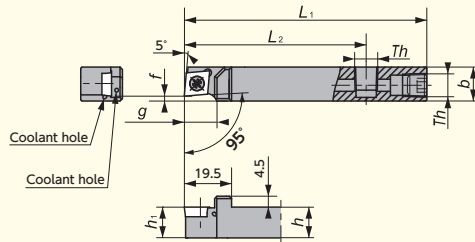SCLC-OH



● R-hand shown



Fig.2

Th(screw parts [A])
1014size: SS0605SC (M6×1.0)
1214/1616size: SPR1/8(Rc1/8)

Toolholder dimension • Spare parts

Figure	Toolholder	Stock	Dimensions (mm)						Applicable insert	Spare parts		
			<i>h</i>	<i>b</i>	<i>h</i> ₁	<i>L</i> ₁	<i>f</i>	<i>L</i> ₂		<i>g</i>	Clamp screw	Wrench
1	SCLCR 1214H09N-F02OH2	●	12	14	12	100	2.0	70	12			
	1616X09N-F02OH2	●	16	16	16	120	2.0	70	17.7			
2	SCLCR 1014F09N-F02OH	●	10	14	10	80	2.0	55	12			
	1214H09N-F02OH	●	12	14	12	100	2.0	75	12			
	1616H09N-F02OH	●	16	16	16	100	2.0	75	17.7			
		●	16	16	16	100	2.0	75	17.7			

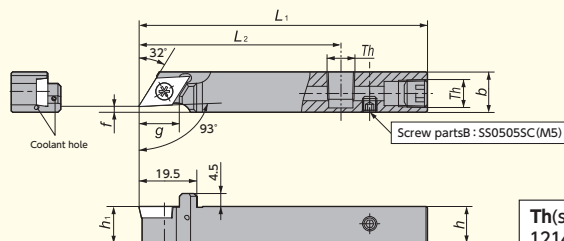SDJC-OH2





● R-hand shown

Fig.1

Th(screw parts [A])
1214/1616size: SPR1/8(Rc1/8)

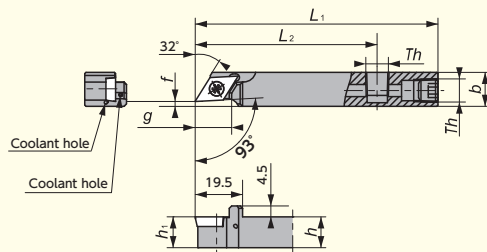SDJC-OH



● R-hand shown

Fig.2

Th(screw parts [A])
1014size: SS0605SC (M6×1.0)
1214/1616size: SPR1/8(Rc1/8)

Toolholder dimension • Spare parts

Figure	Toolholder	Stock	Dimensions (mm)						Applicable insert	Spare parts		
			<i>h</i>	<i>b</i>	<i>h</i> ₁	<i>L</i> ₁	<i>f</i>	<i>L</i> ₂		<i>g</i>	Clamp screw	Wrench
1	SDJCR 1214H11N-F02OH2	●	12	14	12	100	2.0	70	16			
	1616X11N-F02OH2	●	16	16	16	120	2.0	70	18.4			
2	SDJCR 1014F11N-F02OH	●	10	14	10	80	2.0	55	16			
	1214H11N-F02OH	●	12	14	12	100	2.0	75	16			
	1616H11N-F02OH	●	16	16	16	100	2.0	75	18.4			
		●	16	16	16	100	2.0	75	18.4			

Y-SDJC-OH2

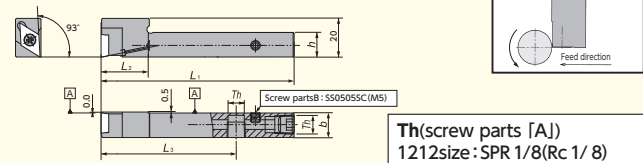


Fig.1

Th(screw parts [A])
1212size : SPR 1/8(Rc 1/8)

● R-hand shown
● Takes Right-hand or Neutral insert

Y-SDJC-OH

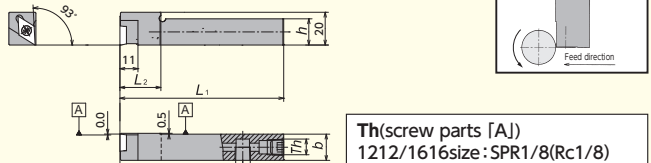


Fig.2

Th(screw parts [A])
1212/1616size : SPR1/8(Rc1/8)

● R-hand shown
● Takes Right-hand or Neutral insert

Toolholder dimension • Spare parts

Figure	Toolholder	Stock	Dimensions (mm)						Applicable insert	Spare parts	
			h	b	L ₁	f	L ₂	L ₃		Clamp screw	Wrench
1	Y-SDJCR 1212H11S-OH2	●	12	12	100	—	20	70	DC 11T3	LRIS-4*8	LLR-25S
2	Y-SDJCR 1212H11S-OH 1616H11-OH	●	12	12	100	—	20	75	DC 11T3	LRIS-4*8	LLR-25S
		●	16	16	100	—	25	75	DC 11T3	LRIS-4*8	LLR-25S

SVJC-N-OH

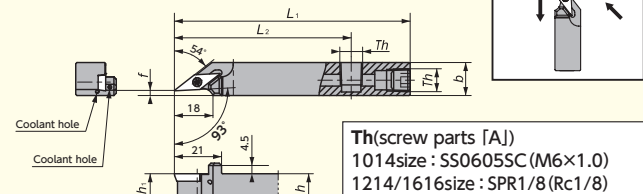


Fig.1

Th(screw parts [A])
1014size : SS0605SC (M6x1.0)
1214/1616size : SPR1/8 (Rc1/8)

● R-hand shown

Y-SVJC-OH

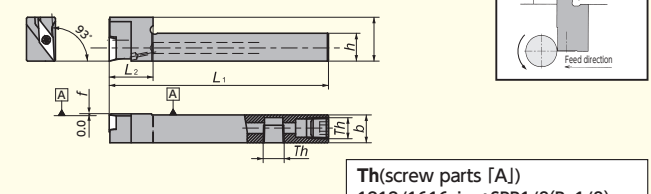


Fig.2


Th(screw parts [A])
1212/1616size : SPR1/8(Rc1/8)

Toolholder dimension • Spare parts

Figure	Toolholder	Stock	Dimensions (mm)								Applicable insert	Spare parts	
			h	b	L ₁	h ₁	f	L ₂	g	Clamp screw		Wrench	
1	SVJCR 1014F11N-F02OH	●	10	14	80	10	2.0	55	—	VC 1103	LRIS-2.5*7	CLR-15S	
	1214H11N-F02OH	●	12	14	100	12	2.0	75	—	VC 1103	LRIS-2.5*7	CLR-15S	
	1616H11N-F02OH	●	16	16	100	16	2.0	75	—	VC 1103	LRIS-2.5*7	CLR-15S	
2	Y-SVJCR 1212H11S-OH	●	12	12	100	—	0	20	—	VC 1103	LRIS-2.5*7	CLR-15S	
	1616H11S-OH	●	16	16	100	—	0	20	—	VC 1103	LRIS-2.5*7	CLR-15S	


TFT-OH2

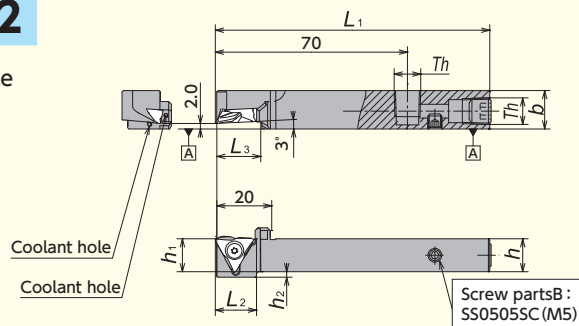Screw accessible from both sides



Th(screw parts [A])
1014size : SS0605SC (M6x1.0) 1214/1616size : SPR1/8 (Rc1/8)

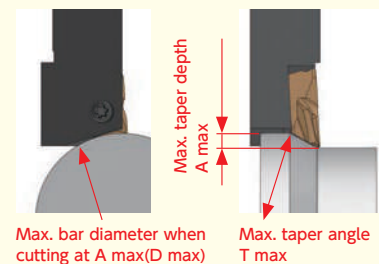Taper cut capability



Toolholder	Taper cut capability		
	D max	A max	T max
TFTR 1014H-OH2	20	2.5	30°
1214H-OH2	30		
1616X-OH2	40		

● R-hand shown

Toolholder dimension • Spare parts

Toolholder	Stock	Dimensions (mm)								Applicable insert	Spare parts	
		h	b	L ₁	h ₁	h ₂	L ₂	L ₃	Clamp screw		Wrench	
TFTR 1014H-OH2	●	10	14	100	10	4	15	15	TF / TFX	LR-S-4*10PW	CLR-15S	
1214H-OH2	●	12	14	100	12	2	15	15	TF / TFX	LR-S-4*10PW	CLR-15S	
1616X-OH2	●	16	16	120	16	—	—	17.5	TF / TFX	LR-S-4*10PW	CLR-15S	

Back turning

TBP-OH2


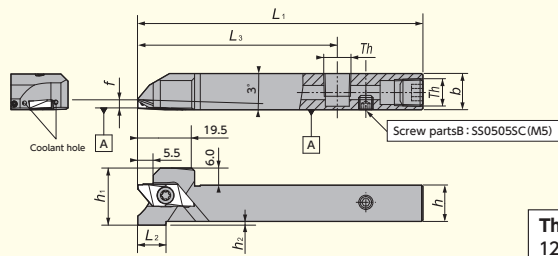


Fig.1

Th(screw parts [A])
1212/1616size: SPR1/8(Rc1/8)

●R-hand shown

TBP-OH


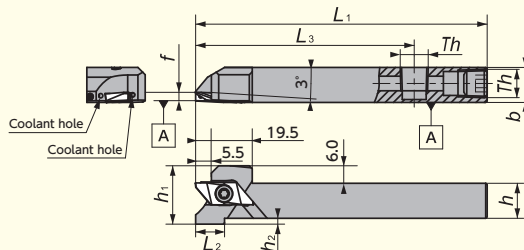


Fig.2

Th(screw parts [A])
1012size: SS0605SC (M6x1.0)
1212/1616size: SPR1/8(Rc1/8)

●R-hand shown

Toolholder dimension • Spare parts

Figure	Toolholder	Stock	Dimensions (mm)							Applicable insert	Spare parts		
			<i>h</i>	<i>b</i>	<i>h</i> ₁	<i>L</i> ₁	<i>f</i>	<i>L</i> ₂	<i>h</i> ₂		<i>L</i> ₃	Clamp screw	Wrench
1	TBPR 12H-OH2	●	12	12	12	100	3.5	10	2.0	70	TBP	LRIS-4*12PW	CLR-15S
	TBPR 16X-OH2	●	16	16	16	120	3.5	0	0	70	TBP	LRIS-4*12PW	CLR-15S
2	TBPR 1012H-OH	●	10	12	10	100	3.5	19	4	75	TBP	LRIS-4*10PW	CLR-15S
	TBPR 12H-OH	●	12	12	12	100	3.5	10	2	75	TBP	LRIS-4*12PW	CLR-15S
	TBPR 16H-OH	●	16	16	16	100	3.5	0	0	75	TBP	LRIS-4*12PW	CLR-15S

TBPA-OH


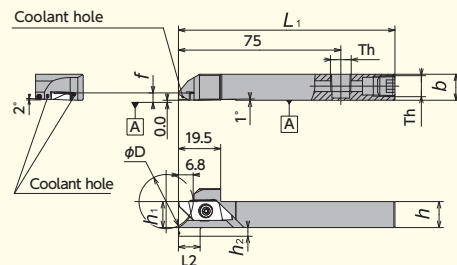


Fig.1

Th(screw parts [A])
1212/1616/2020size: SPR1/8(Rc1/8)

●R-hand shown

Y-TBP-OH

Screw accessible from both sides


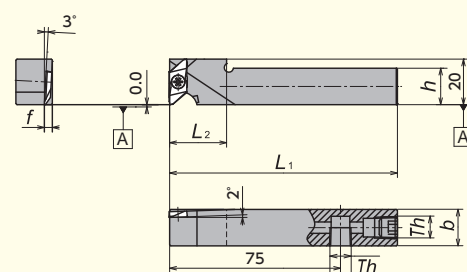


Fig.2

Th(screw parts [A])
1212/1616size: SPR1/8(Rc1/8)

●R-hand shown
●Takes Right-hand or Neutral insert



Toolholder dimension • Spare parts

Figure	Toolholder	Stock	Max. cut off Dia. (mm) ϕD	Dimensions (mm)						Applicable insert	Spare parts		
				<i>h</i>	<i>b</i>	<i>h</i> ₁	<i>L</i> ₁	<i>f</i>	<i>L</i> ₂		<i>h</i> ₂	Clamp screw	Wrench
1	TBPAR 12H-OH	●	25	12	12	12	100	3.4	10	4	TBPA	LRIS-4*12PW	CLR-15S
	TBPAR 16H-OH	●	35	16	16	16	100	3.4	10	2	TBPA	LRIS-4*12PW	CLR-15S
	TBPAR 20H-OH	●	50	20	20	20	100	3.4	0	0	TBPA	LRIS-4*12PW	CLR-15S
2	Y-TBPR 12HS-OH	●	—	12	12	—	100	3.5	20	—	TBP	LRIS-4*12PW	CLR-15S
	Y-TBPR 16H-OH	●	—	16	16	—	100	3.5	25	—	TBP	LRIS-4*12PW	CLR-15S

Cut off

※Max Dia. would be changed by insert.

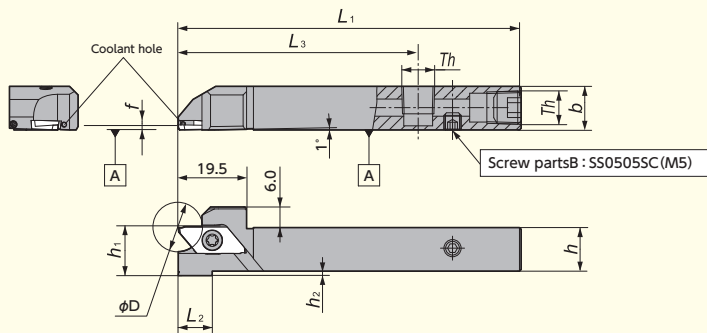CTP-OH2





Th(screw parts [A])
1212size : SPR1/8(Rc1/8)

Fig.1

L-hand coolant through holders are designed for R-hand machines

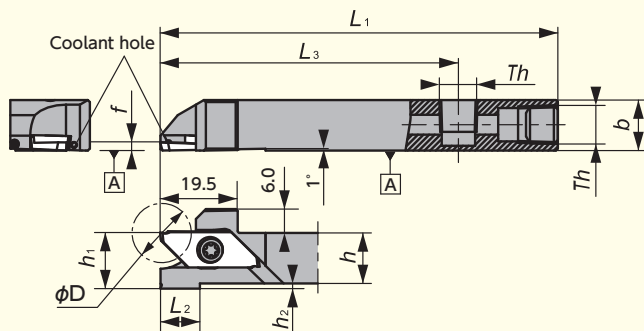CTP-OH



Th(screw parts [A])
1012size : SS0605SC (M6x1.0)
1212/1616size : SPR1/8(Rc1/8)

Fig.2



L-hand coolant through holders are designed for R-hand machines

Toolholder dimension • Spare parts

Figure	Toolholder	Stock	Max. cut off Dia. (mm) ϕD	Dimensions (mm)								Applicable insert	Spare parts	
				h	h_1	b	L_1	h_2	L_2	L_3	f		Clamp screw	Wrench
1	CTP $\frac{1}{2}$ 12H-OH2	●	12	12	12	12	100	2	10	70	1.5	CTP	LRIS-4 * 12PW	CLR-15S
	CTP $\frac{1}{2}$ 1012H-OH	●	12	10	12	12	100	4	19	75	1.5			
	12H-OH	●	12	12	12	12	100	2	10	75	1.5			
	16H-OH	●	12	16	16	16	100	0	0	75	1.5			

※Dimension is set 1.5mm width insert

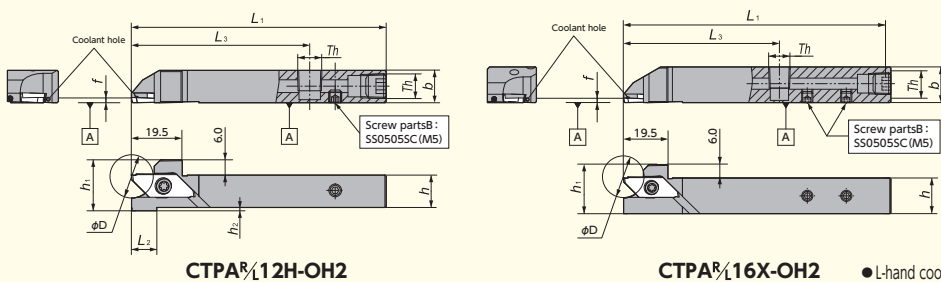CTPA-OH2



Th(screw parts [A])
1212/1616size : SPR1/8(Rc1/8)

CTPA $\frac{1}{2}$ 12H-OH2

CTPA $\frac{1}{2}$ 16X-OH2


● L-hand coolant through holders are designed for R-hand machines (Location of coolant connection parts is same with R/L hand holders.)
● Right-Hand style shown

Toolholder dimension • Spare parts

Toolholder	Stock	Max. cut off Dia. (mm) ϕD	Dimensions (mm)								Applicable insert	Spare parts	
			h	h_1	b	L_1	h_2	L_2	L_3	f		Clamp screw	Wrench
CTPA $\frac{1}{2}$ 12H-OH2	●	16	12	12	12	100	2	10	70	2.0	CTPA	LRIS-4 * 12PW	CLR-15S
16X-OH2	●	16	16	16	16	120	0	0	70	2.0			

※Dimension is set 2.0mm width insert

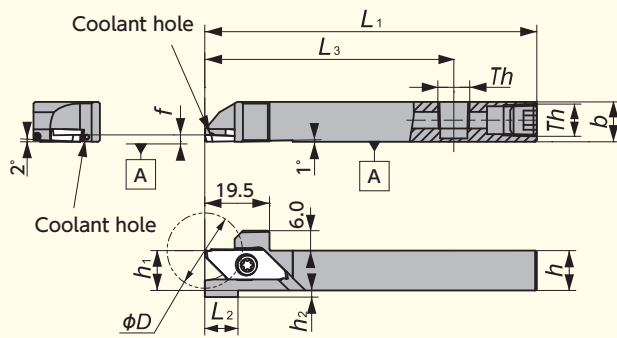CTPA-OH



Th(screw parts [A])
1212/1616size: SPR1/8(Rc1/8)

- L-hand coolant through holders are designed for R-hand machines (Location of coolant connection parts is same with R/L hand holders.)
- Right-Hand style shown

Toolholder dimension · Spare parts

Toolholder	Stock	Max. cut off Dia. (mm) ϕD	Dimensions (mm)							Applicable insert	Spare parts		
			h	h_1	b	L_1	h_2	L_2	L_3		f	Clamp screw	Wrench
CTPA ^{R/L} 12H-OH	●	16	12	12	12	100	2	10	75	2.0		LRIS-4 * 12PW	CLR-15S
16H-OH	●	16	16	16	16	100	0	0	75	2.0	CTPA	LRIS-4 * 12PW	CLR-15S

※Dimension is set 2.0mm width insert

CTDP-OH2

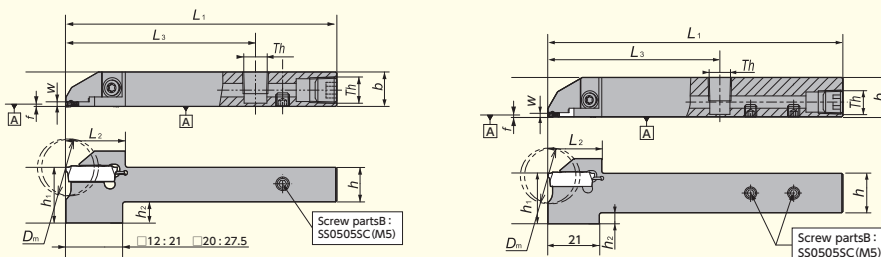


Fig.1

CTDP^{R/L} 12-20D25-OH2
CTDP^{R/L} 20-25D34A-OH2

CTDP^{R/L} 16-20D25-OH2

Th(screw parts [A])
1212/1616/2020size: SPR1/8(Rc1/8)

- R-hand shown

CTDP-OH

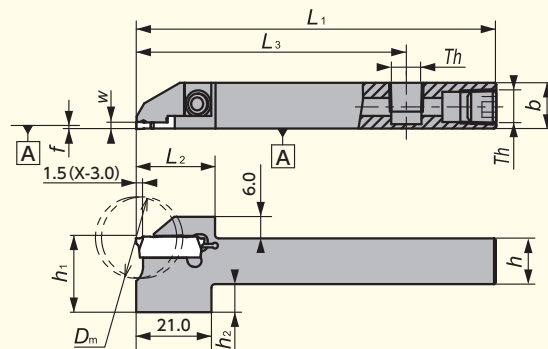


Fig.2

Th(screw parts [A])
1212/1616size: SPR1/8(Rc1/8)



- R-hand shown

Toolholder dimension · Spare parts

Figure	Toolholder	Stock	Max. cut off Dia. (mm) ϕD	Dimensions (mm)										Applicable insert	Spare parts	
				w	h	b	h_1	L_1	h_2	L_2	L_3	f	Clamp screw		Wrench	
1	CTDP ^{R/L} 12-20D25-OH2	●	25.4	2	12	12	20.5	100	8.5	22.0	70	0.15	CTDP20	LRIS-4 * 12	LLR-25S	
	16-20D25-OH2	●	25.4	2	16	16	20.5	100	4.5	22.0	70	0.15	CTDP20	LRIS-4 * 12	LLR-25S	
	20-25D34A-OH2	●	34.0	2.5	20	20	24.0	120	4.0	28.5	75	0.15	CTDP25	CS0516LSH	LW-3	
2	CTDP ^{R/L} 12-20D25-OH	●	25.4	2	12	12	20.5	100	8.5	22.0	75	0.15	CTDP20	LRIS-4 * 12	LLR-25S	
	16-20D25-OH	●	25.4	2	16	16	20.5	100	4.5	22.0	75	0.15	CTDP20	LRIS-4 * 12	LLR-25S	

Grooving / Back turning

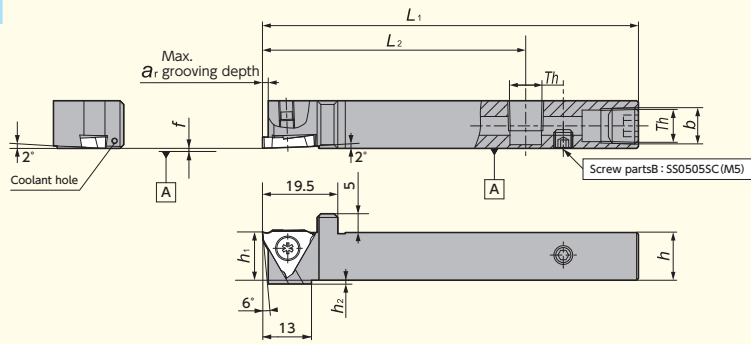GTT-OH2





Th(screw parts [A])
1212/1616size : SPR1/8(Rc1/8)

● R-hand shown

Fig.1

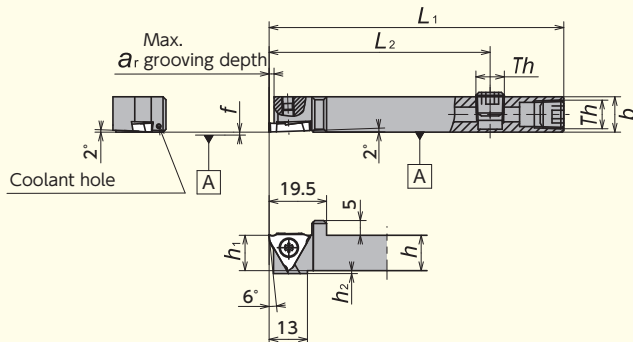GTT-OH






Th(screw parts [A])
1012size : SS0605SC (M6×1.0)
1212/1616size : SPR1/8(Rc1/8)

● R-hand shown

Fig.2



Toolholder dimension • Spare parts

Figure	Toolholder	Stock	Dimensions (mm)								Groove width* (mm) w	Applicable insert 	Spare parts	
			h	b	h ₁	L ₁	f	L ₂	a _r	h ₂			Clamp screw 	Wrench 
1	GTR 12H00-OH2	●	12	12	12	100	0	70	1.6	1	0.3~3.00	GTM ₃₂ / TBMH32	LRIS-4*10PW	CLR-15S
	16X00-OH2	●	16	16	16	120	0	70	1.6	0	0.3~3.00	GTM ₃₂ / TBMH32	LRIS-4*10PW	CLR-15S
2	GTR 1012H00-OH	●	10	12	10	100	0	70	1.6	1	0.3~3.00	GTM ₃₂ / TBMH32	LRIS-4*10PW	CLR-15S
	12H00-OH	●	12	12	12	100	0	70	1.6	1	0.3~3.00	GTM ₃₂ / TBMH32	LRIS-4*10PW	CLR-15S
	16H00-OH	●	16	16	16	100	0	70	1.6	0	0.3~3.00	GTM ₃₂ / TBMH32	LRIS-4*10PW	CLR-15S

※Dimension (ar) shows max. grooving depth. Max. grooving depth would be changed by insert.

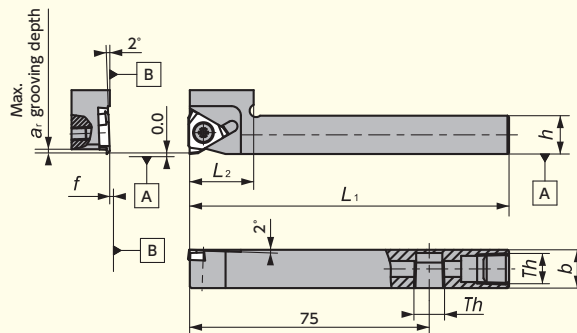Y-GTT-OH




Screw accessible from both sides



Th(screw parts [A])
1212/1616size : SPR1/8(Rc1/8)

● R-hand shown
● Takes Right-hand Insert


Toolholder dimension • Spare parts

Toolholder	Stock	Dimensions (mm)								Groove width* (mm) w	Applicable insert 	Spare parts	
		h	b	L ₁	h ₁	f	L ₂	a _r	h ₂			Clamp screw 	Wrench 
Y-GTR 12H00S-OH	●	12	12	100	-	0	20	1.6	-	0.3~3.00	GTM ₃₂ / TBMH32	LRIS-4*10PW	CLR-15S
16H00-OH	●	16	16	100	-	0	25	1.6	-	0.3~3.00	GTM ₃₂ / TBMH32	LRIS-4*10PW	CLR-15S

※Dimension (ar) shows max. grooving depth. Max. grooving depth would be changed by insert.

Grooving / Side turning

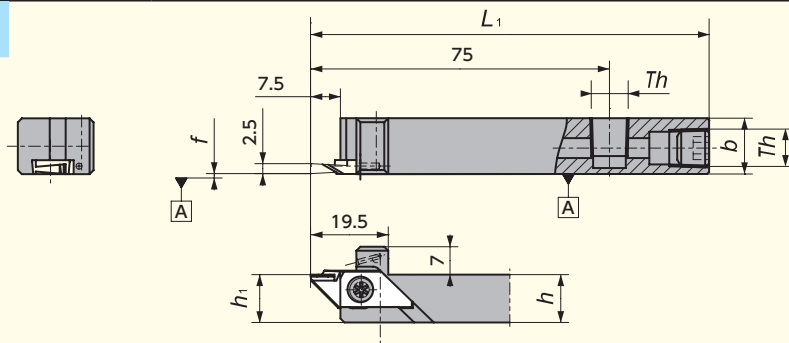GTPA-OH




Th(screw parts [A])
1214size : SPR1/8 (Rc1/8)

● R-hand shown

Toolholder dimension • Spare parts

Toolholder	Stock	Dimensions (mm)						Applicable insert	Spare parts	
		<i>h</i>	<i>b</i>	<i>L</i> ₁	<i>h</i> ₁	<i>f</i>	<i>L</i> ₂		Clamp screw	Wrench
GTPAR 1214H-OH	●	12	14	100	12	0.1	—	GTPA	LRIS-4*12PW	CLR-15S

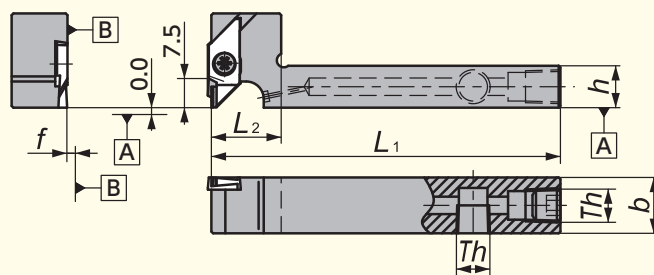Y-GTPA-OH



Th(screw parts [A])
1014size : SS0605SC (M6×1.0)
1216/1616size : SPR1/8 (Rc1/8)


● R-hand shown

Toolholder dimension • Spare parts

Toolholder	Stock	Dimensions (mm)						Applicable insert	Spare parts	
		<i>h</i>	<i>b</i>	<i>L</i> ₁	<i>h</i> ₁	<i>f</i>	<i>L</i> ₂		Clamp screw	Wrench
Y-GTPAR 1014F5S-OH	●	10	14	80	—	0.1	15	GTPA	LRIS-4*12PW	CLR-15S
1216HS-OH	●	12	16	100	—	0.1	20	GTPA	LRIS-4*12PW	CLR-15S
1616H-OH	●	16	16	100	—	0.1	25	GTPA	LRIS-4*12PW	CLR-15S

Threading

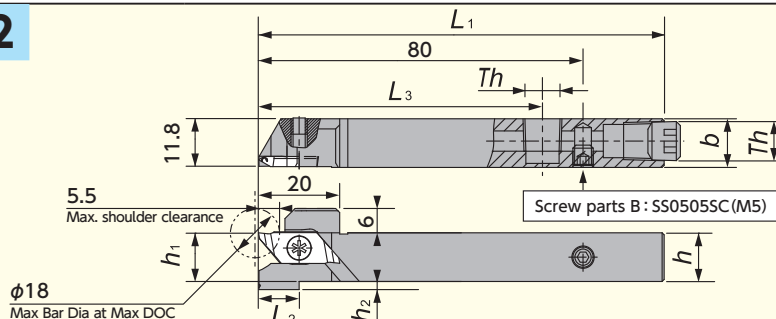TTP-OH2



Th(screw parts [A])
1212/1616size : SPR1/8 (Rc1/8)


● R-hand shown

Toolholder dimension • Spare parts

Toolholder	Stock	Dimensions (mm)							Applicable insert	Spare parts	
		<i>h</i>	<i>b</i>	<i>L</i> ₁	<i>h</i> ₁	<i>h</i> ₂	<i>L</i> ₂	<i>L</i> ₃		Clamp screw	Wrench
TTP [®] 12H-OH2	●	12	12	100	12	2	10	70	TTP	LRIS-4*12PW	CLR-15S
16X-OH2	●	16	16	120	16	0	—	70	TTP	LRIS-4*12PW	CLR-15S

STICK DUO SPLASH

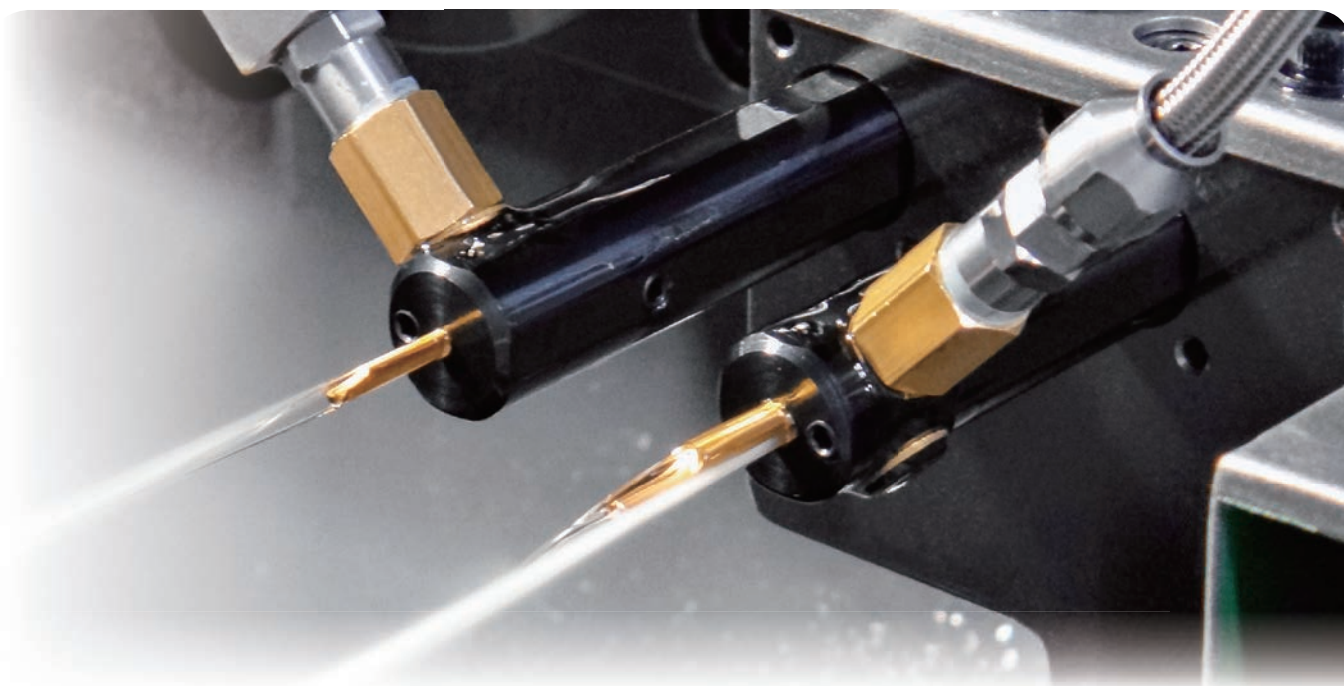Coolant through sleeves for ID Boring with Adjustable Overhang Mechanism




Features

Can choose from 2 coolant directions


Coolant towards backside of insert

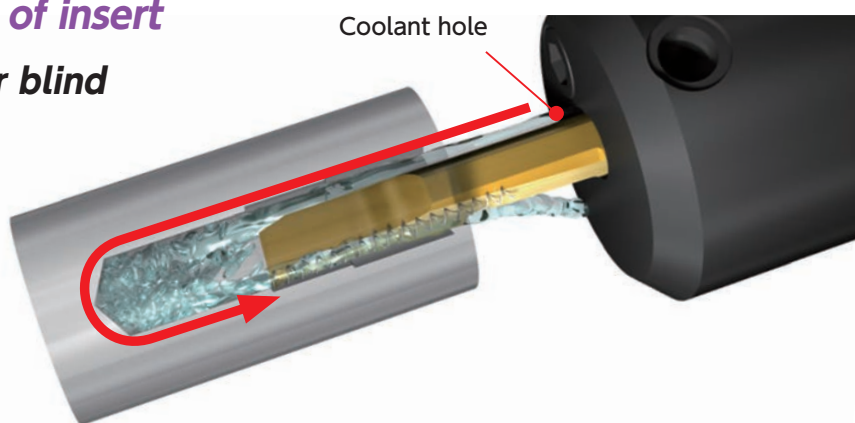- Good chip evacuation for blind hole machining




Coolant towards insert edge

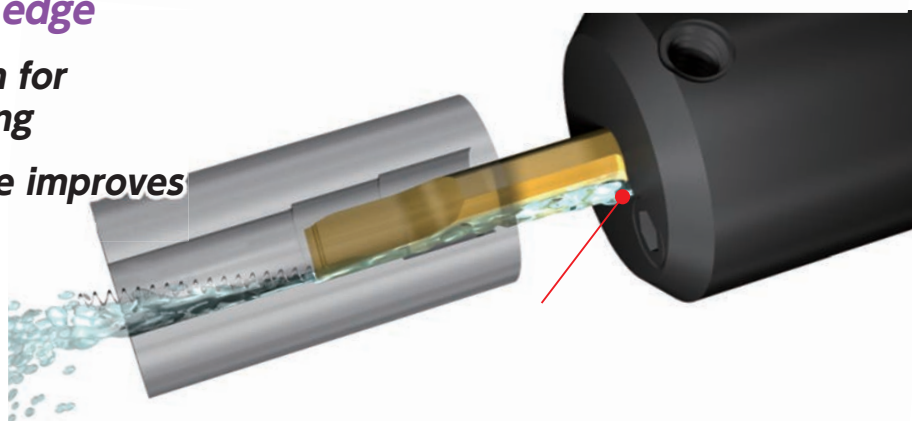- Good chip evacuation for through-hole machining
- Coolant to insert edge improves wear resistance




Structure

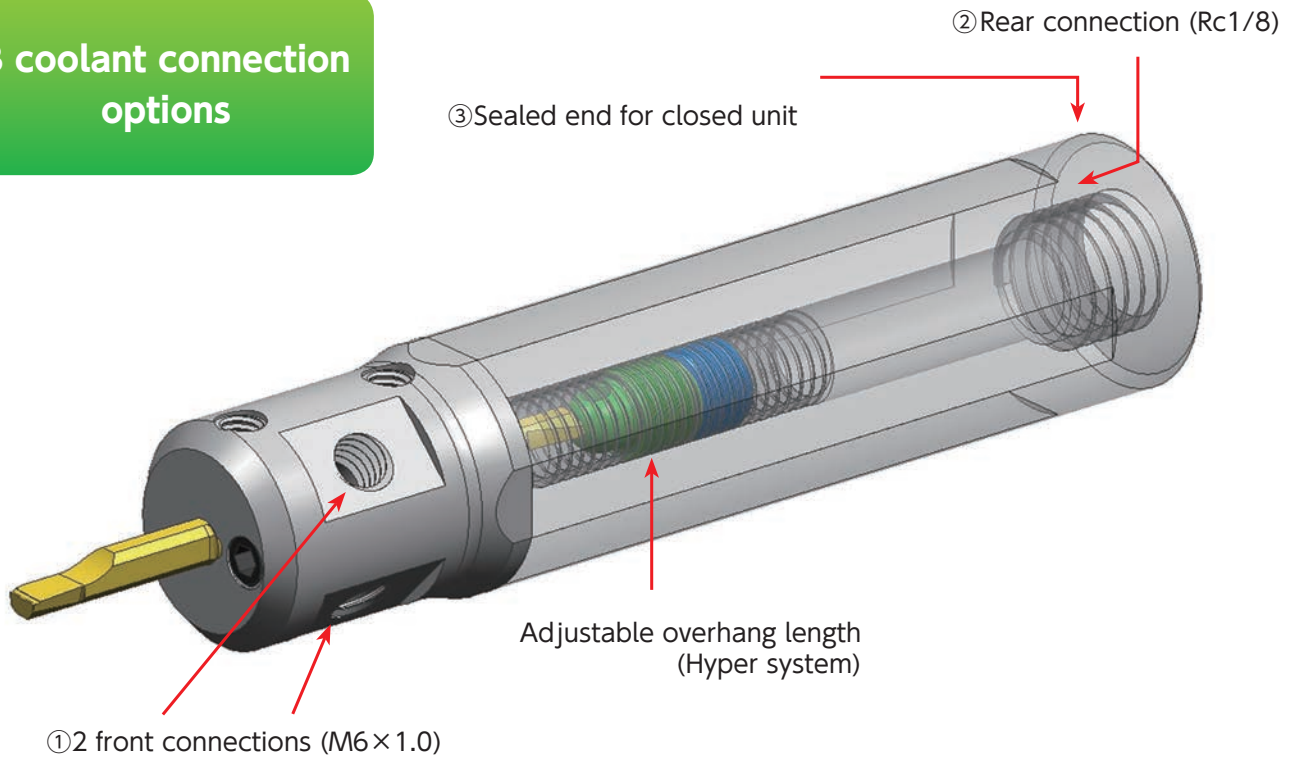3 coolant connection options



Machined work piece comparison

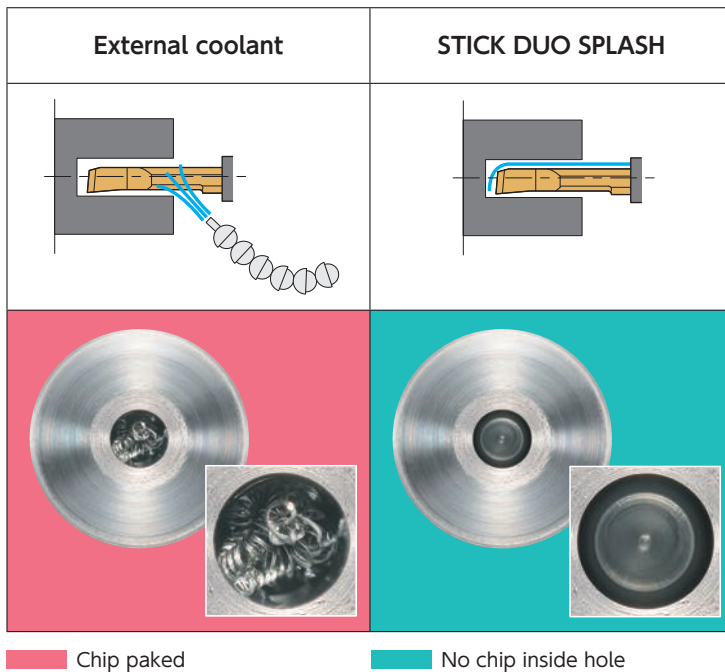


Work material : SCM435
 Insert : SHFS040R005S
 Cutting speed : $v_c=50\text{m/min}$
 DOC : $a_p=0.2$
 Feed : $f=0.02\text{mm/rev}$
 Hole depth : 15mm
 Pilot hole : $\phi 5.1 \times 28\text{L}$
 Coolant pressure : 5MPa

Picture for jointing coolant hose

Front connection example



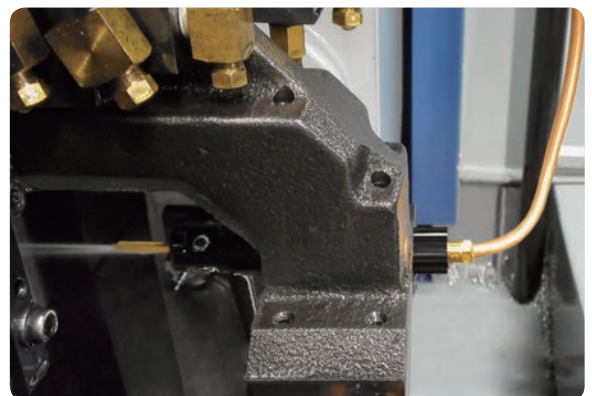Rear connection example



STICK DUO SPLASH(HY-NBH-OH Series)

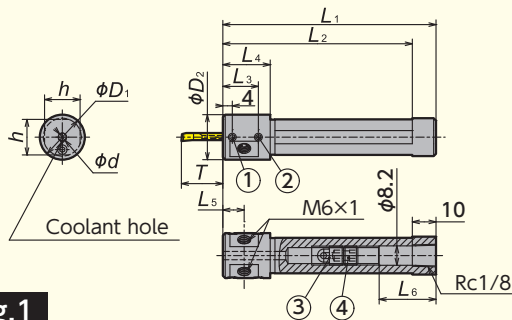


Fig.1


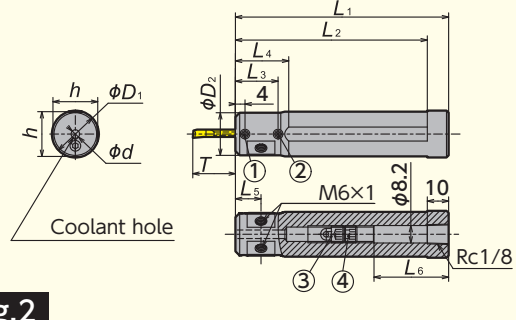


Fig.2

Shape	Code No.	Holder number	Dimensions (mm)										Overhang length of bar (mm)	
			ϕd	ϕD_1	ϕD_2	h	L_1	L_2	L_3	L_4	L_5	L_6	Min.	Max.
Fig.1	●	HY-NBH 02016G-OH	2	16	19	15	90	80	15	19	9.5	29	5	18
	●	02516G-OH	2.5	16	19	15	90	80	15	19	9.5	30	6.3	19.5
	●	03016G-OH	3	16	19	15	90	80	15	19	9.5	31	7.5	21
	●	03516G-OH	3.5	16	19	15	90	80	15	19	9.5	23	8.8	24.5
	●	04016G-OH	4	16	19	15	90	80	20	24	12	24	10	28
	●	05016G-OH	5	16	19	15	90	80	20	24	12	16	12.5	35
Fig.2	●	HY-NBH 02019J-OH	2	19.05	19.05	18	110	100	15	—	9.5	49	5	18
	●	02519J-OH	2.5	19.05	19.05	18	110	100	15	—	9.5	50	6.3	19.5
	●	03019J-OH	3	19.05	19.05	18	110	100	15	—	9.5	51	7.5	21
	●	03519J-OH	3.5	19.05	19.05	18	110	100	15	—	9.5	43	8.8	24.5
	●	04019J-OH	4	19.05	19.05	18	110	100	20	—	12	44	10	28
	●	05019J-OH	5	19.05	19.05	18	110	100	20	—	12	36	12.5	35
	●	06019J-OH	6	19.05	19.05	18	110	100	20	—	12	28.5	15	42
	●	HY-NBH 02020J-OH	2	20	20	19	110	100	15	—	9.5	49	5	18
	●	02520J-OH	2.5	20	20	19	110	100	15	—	9.5	50	6.3	19.5
	●	03020J-OH	3	20	20	19	110	100	15	—	9.5	51	7.5	21
	●	03520J-OH	3.5	20	20	19	110	100	15	—	9.5	43	8.8	24.5
	●	04020J-OH	4	20	20	19	110	100	20	—	12	44	10	28
	●	05020J-OH	5	20	20	19	110	100	20	—	12	36	12.5	35
	●	06020J-OH	6	20	20	19	110	100	20	—	12	28.5	15	42
●	HY-NBH 02022X-OH	2	22	20	21	120	110	15	25	9.5	59	5	18	
●	02522X-OH	2.5	22	20	21	120	110	15	25	9.5	60	6.3	19.5	
●	03022X-OH	3	22	20	21	120	110	15	25	9.5	61	7.5	21	
●	03522X-OH	3.5	22	20	21	120	110	15	25	9.5	53	8.8	24.5	
●	04022X-OH	4	22	20	21	120	110	20	25	12	54	10	28	
●	05022X-OH	5	22	20	21	120	110	20	25	12	46	12.5	35	
●	06022X-OH	6	22	20	21	120	110	20	25	12	28.5	15	42	
●	HY-NBH 02025.0K-OH	2	25.0	20	24	125	115	15	25	9.5	64	5	18	
●	02525.0K-OH	2.5	25.0	20	24	125	115	15	25	9.5	65	6.3	19.5	
●	03025.0K-OH	3	25.0	20	24	125	115	15	25	9.5	66	7.5	21	
●	03525.0K-OH	3.5	25.0	20	24	125	115	15	25	9.5	58	8.8	24.5	
●	04025.0K-OH	4	25.0	20	24	125	115	20	25	12	59	10	28	
●	05025.0K-OH	5	25.0	20	24	125	115	20	25	12	51	12.5	35	
●	06025.0K-OH	6	25.0	20	24	125	115	20	25	12	28.5	15	42	
●	HY-NBH 02025.4K-OH	2	25.4	20	24	125	115	15	25	9.5	64	5	18	
●	02525.4K-OH	2.5	25.4	20	24	125	115	15	25	9.5	65	6.3	19.5	
●	03025.4K-OH	3	25.4	20	24	125	115	15	25	9.5	66	7.5	21	
●	03525.4K-OH	3.5	25.4	20	24	125	115	15	25	9.5	58	8.8	24.5	
●	04025.4K-OH	4	25.4	20	24	125	115	20	25	12	59	10	28	
●	05025.4K-OH	5	25.4	20	24	125	115	20	25	12	51	12.5	35	
●	06025.4K-OH	6	25.4	20	24	125	115	20	25	12	28.5	15	42	

Dimension "T" show overhang length of STICKDUO(hyper) bar when attached to sleeve with adjustment screw ③,④.

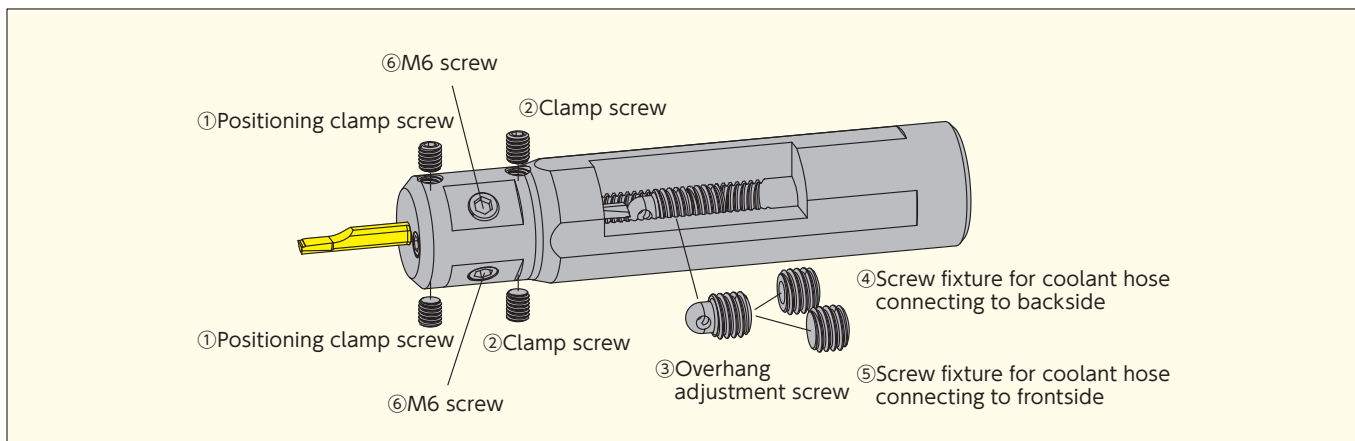Parts



Holder number	Clamp screw		Overhang adjustment			M6 screw	Wrench		
	①	②	③	④*1	⑤*2	⑥	for ①, ②	for ③, ④, ⑤	for ⑥
HY-NBH 020 ○○-OH	SS04045FS	SS0406F	SS0811R-OH	SS0806F-OH (Through hole)	SS0806F	SS06055C	LW-2	LW-4*104	LW-3
025 ○○-OH	SS04045FS	SS0406F	SS0811R-OH	SS0806F-OH (Through hole)	SS0806F	SS06055C	LW-2	LW-4*104	LW-3
030 ○○-OH	SS04045FS	SS0406F	SS0811R-OH	SS0806F-OH (Through hole)	SS0806F	SS06055C	LW-2	LW-4*104	LW-3
035 ○○-OH	SS04045FS	SS0406F	SS0811R-OH	SS0806F-OH (Through hole)	SS0806F	SS06055C	LW-2	LW-4*104	LW-3
040 ○○-OH	SS04045FS	SS0406F	SS0811R-OH	SS0806F-OH (Through hole)	SS0806F	SS06055C	LW-2	LW-4*104	LW-3
050 ○○-OH	SS04045FS	SS0406F	SS0811R-OH	SS0806F-OH (Through hole)	SS0806F	SS06055C	LW-2	LW-4*104	LW-3

※1 Select screw ④ to connect coolant hose backside

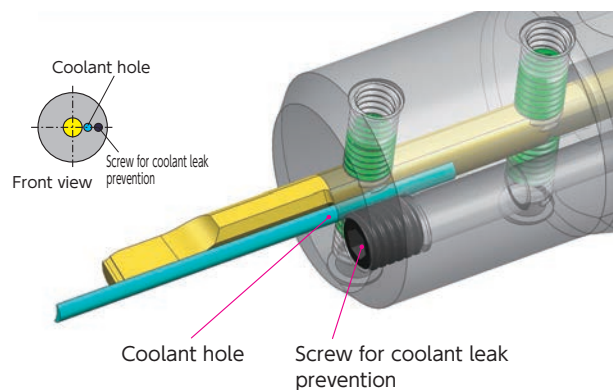
※2 Select screw ⑤ to connect coolant hose frontside

How to set bar in the sleeve when internal coolant to insert tip or to insert backside


By rotating sleeve upsidedown, you can select the coolant output position.

Coolant hole located in screw side for coolant leak prevention. See the following about the details.

① Coolant to insert edge




② Coolant to insert backside

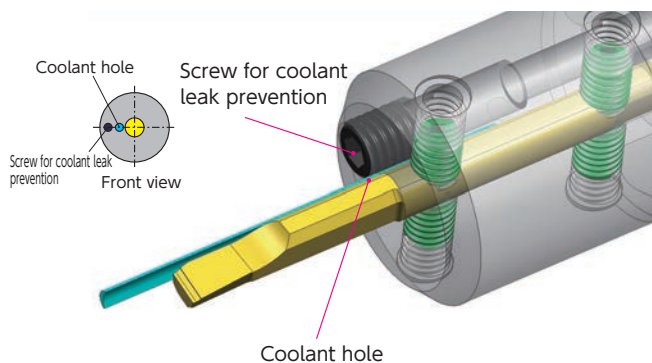

Coolant Components

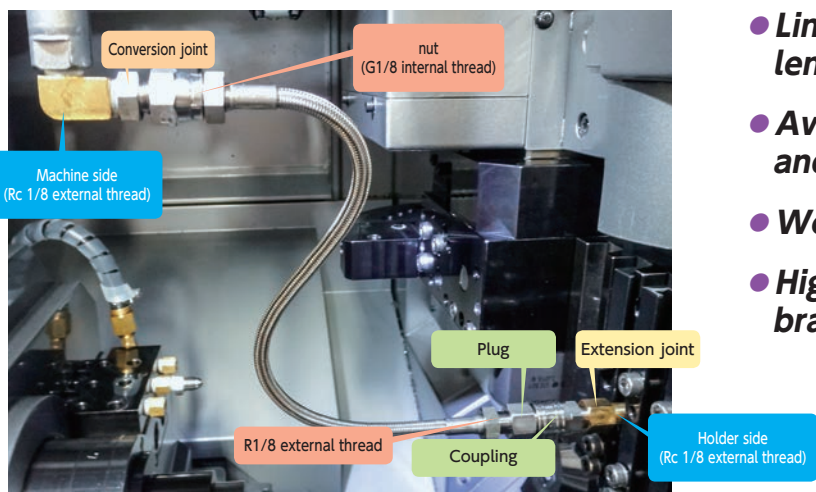Coolant hose for connecting with R1/8




Ex. of connecting ①

- Line up a wide range of coolant hose length
- Available for 2 types of coupling and conversion joint
- Working pressure MAX. 20.6 MPa
- High quality flexible stainless steel braided hose

Ex. of connecting ①

Parts	P/N
Conversion joint	JOINT-ST-R1/8
hose	HOSE-R1/8-CN-400
Plug	PLUG-RC1/8
Coupling	COUP-R1/8
Extension joint	SCJ-R1/8-RC1/8-L

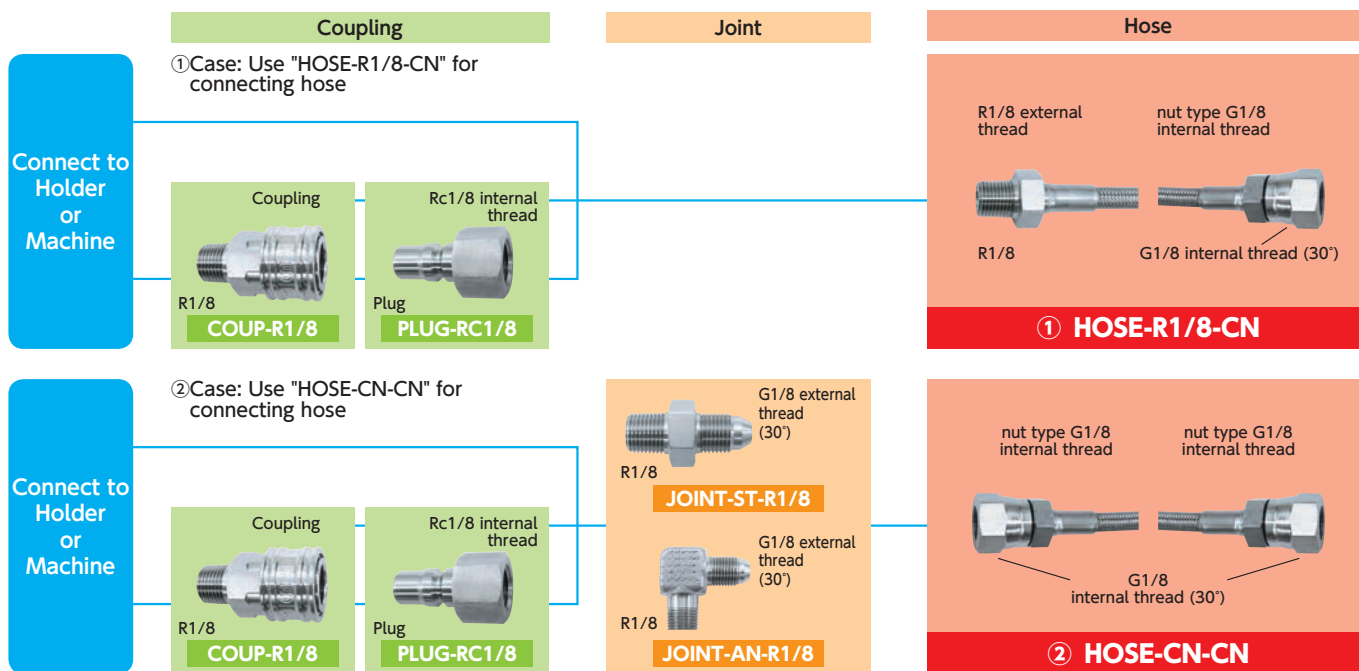Chart for connecting coolant components



Hose

Shape	P/N	Dimensions (mm)	Working pressure MAX.	Working pressure MIN.
		L		
① R1/8 External thread + nut: G1/8 internal thread	HOSE-R1/8-CN-200	200	20.6	50
	HOSE-R1/8-CN-250	250	20.6	50
	HOSE-R1/8-CN-300	300	20.6	50
	HOSE-R1/8-CN-400	400	20.6	50
	HOSE-R1/8-CN-500	500	20.6	50
	HOSE-R1/8-CN-800	800	20.6	50
② Both side: nut G1/8 internal thread	HOSE-CN-CN-200	200	20.6	50
	HOSE-CN-CN-250	250	20.6	50
	HOSE-CN-CN-300	300	20.6	50
	HOSE-CN-CN-400	400	20.6	50
	HOSE-CN-CN-500	500	20.6	50
	HOSE-CN-CN-800	800	20.6	50

R1/8 External thread
Fix by rotating hosenut G1/8 internal thread
Fix by rotating nut
(No need to rotate hose)

SPLASH Series Selection Support Sheet

Able to search the material you need by choosing the combination you wish to the support sheet.

CUTTING TOOLS



Conversion / Extension Joint

	Stock	Spare parts	Dimensions (mm)					
			T ₁	T ₂	L ₁ ※1	L ₂	B	d
	●	SCJ-M6-RC1/8-L	M6	Rc1/8 (PT1/8)	16	15	13	2.5
	●	SCJ-R1/8-M10-L	Rc1/8 (PT1/8)	M10×1	16	12	13	4.5
	●	SCJ-R1/8-RC1/8-L	Rc1/8 (PT1/8)	Rc1/8 (PT1/8)	16	15	13	4.5
	●	SCJ-R1/8-NPT1/8-L	Rc1/8 (PT1/8)	NPT1/8	16	15	13	4.5
	●	SCJ-M6-M10	M6×1	M10×1	6	15	12	2.5
	●	SCJ-M6-RC1/8	M6×1	Rc1/8 (PT1/8)	6	15	13	2.5
	●	SCJ-M6-NPT1/8	M6×1	NPT1/8	6	15	13	2.5
	●	SCJ-M8-RC1/8	M8×1	Rc1/8 (PT1/8)	6	15	13	3.5
	●	SCJ-R1/8-M10	Rc1/8 (PT1/8)	M10×1	10	15	12	4.5
	●	SCJ-R1/8-NPT1/8	Rc1/8 (PT1/8)	NPT1/8	10	15	13	4.5

※1 To prevent hitting the coolant connecting part of holder from the gang tool post, "L1" dimension length is set longer.
NPT: ANSI/ASME B.1.20-1-1983(National Taper Pipe)

Joint

G1/8 external thread (30°) R1/8
JOINT-ST-R1/8

G1/8 external thread (30°) R1/8
JOINT-AN-R1/8

Coupling

Rc1/8 internal thread Plug
PLUG-RC1/8

Coupling R1/8
COUP-R1/8

Connect to Holder or Machine

Suitable use of Coupling and Joint

- Detach Hose frequently
⇒ Coupling is suitable
- Less detach Hose
⇒ Joint is suitable

G1/8 external thread (30°) R1/8
JOINT-ST-R1/8

G1/8 external thread (30°) R1/8
JOINT-AN-R1/8

Rc1/8 internal thread Plug
PLUG-RC1/8

Coupling R1/8
COUP-R1/8

Connect to Holder or Machine

Conversion joint (nut G1/8 internal thread)

Parts	Straight style	L style
P/N	JOINT-ST-R1/8	JOINT-AN-R1/8
Working pressure MAX.	20.6	20.6
Shape		


※Screw standard will be different in both sides of straight and L style screw part.
Please use the same screw standard when connecting to hose or one touch coupler.

Coupling

Parts	Plug	Coupling
P/N	PLUG-RC1/8	COUP-R1/8
Working pressure MAX.	7.5	7.5
Shape		

MEMO

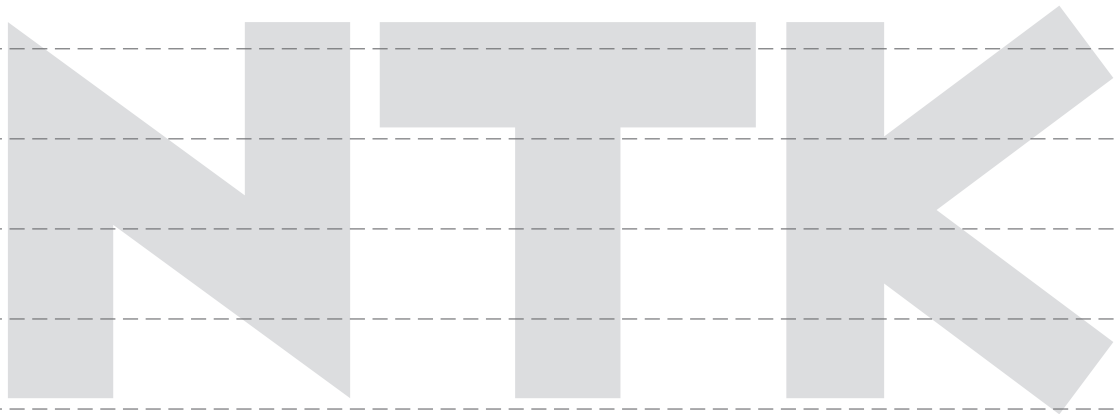New Products
Tool Materials / Selection Guide
BIDEMCS, PCD, CBN and Ceramics
Micrograin Carbide, PVD/Coated Carbide
Insert Item List
General Turning Toolholders
Unique Swiss tooling
Grooving / Side Turning
Threading
Shaper
ID Tooling
Application Introduction
Endmills
Rotating Tools
Information
Index



B



Tool Materials / Selection Guide

- Application Range of NTK Insert Grades ··· B2
- Recommended Types of Materials and Applications ··· B6
- Chipbreakers for Positive Inserts ····· B8
- Chipbreakers for Negative Inserts ····· B12

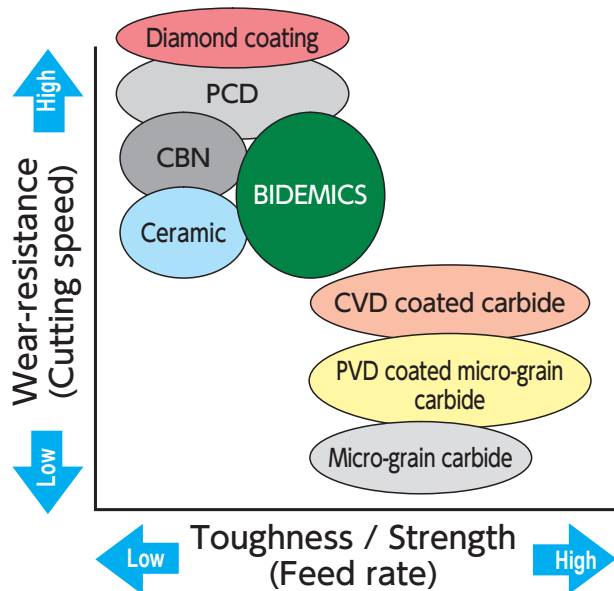
Tool Materials / Selection Guide

NTK Cutting Tools offer a wide range of tool materials, including PCD, CBN, ceramics and coated carbides, to accommodate various cutting applications.

In the SS Tool series, PCD and micro-grain ultra-hard carbides are set as the standard materials to meet the requirements of automatic and sliding head machines.

They are especially suited to micro-machining, offering excellent cutting performance and high quality surface finish.

● Material map



BIDE MICS	Highly efficient machining for Heat resistance alloy	BIDE MICS JX3, JX1, JP2
PCD	High-speed cutting of non ferrous metals	Polycrystalline diamond PCD PD1, PD2
CBN	High-speed cutting of high hardness materials and cast irons	CBN B22, B23, B30, B36, B40, B52 PVD coated Solid CBN B5K, B6K B16
Ceramic	Highly efficient cutting of high hardness materials and cast irons	Whisker grade Alumina/Titanium carbide grade WA5 WA1, HC2, HC7, ZC7, HC6 Alumina grade Silicon nitride grade HC1, HW2, SX3, SX6, SX7, SX9, SP9
CVD coated carbide	General and multi-purpose machining of steels and cast irons	CVD coated carbide CP1 ...Cast iron CP7 ...Steel
PVD coated micro-grain carbide	Precision cutting, Cutting of stainless steel and hard-to-cut materials	PVD coated micro-grain carbide ST4, TM4, ZM3, QM3, VM1, DT4, DM4
Micro-grain carbide	Cutting of nonferrous metals and non-metal materials	Micro-grain carbide KM1

Insert grade recommendation by work material type

	ISO	Ceramic / CBN	PCD	Carbide PVD coated micro-grain carbide CVD coated carbide	
P Carbon steel Alloy steel	01				Wear resistance ↑ ↓ Toughness
	10			VM1	
	20			QM3, TM4, CP7	
	30				
	40			DT4, DM4	
M Stainless steel Cast steel	01				Wear resistance ↑ ↓ Toughness
	10			VM1	
	20			ST4, QM3, TM4, ZM3	
	30				
	40			DT4, DM4	
K Cast iron Ductile cast iron	01	HC1, HW2, HC2, HC6, WA1, WA5			Wear resistance ↑ ↓ Toughness
	10	SP9, SX6, B23, B30, B52		CP1	
	20				
	30	SX9, SX6, B16			
N Aluminum alloy Nonferrous metal			PD2, PD1	KM1	
S Inconel Hastelloy Waspalloy Rene		JX3, JX1, JP2, WA1, WA5, SX7, SX3, SX9			Wear resistance ↑ ↓ Toughness
				KM1, QM3, ZM3	
H Very hard material Roll turning		HC7, HC2, B40, B22, B6K, B5K, B36, B52			Wear resistance ↑ ↓ Toughness

CrAlN coating

TiN coating

TiCN coating

TiAlN coating

Carbide w/o coating

BIDEMICS

Whisker-based ceramic

Silicon nitride-based ceramic

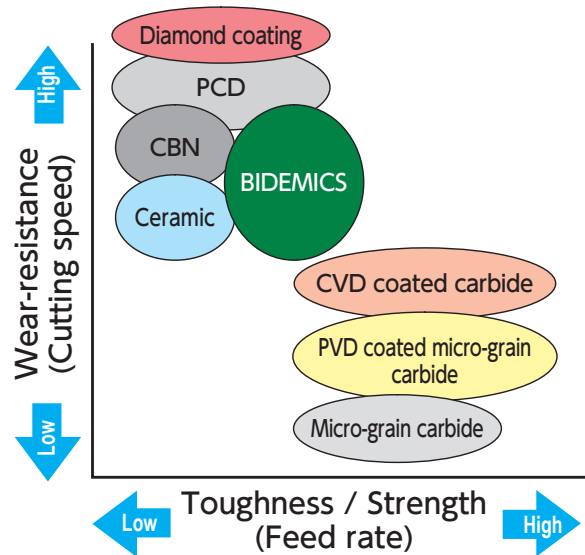
Alumina-based ceramic

CBN

PCD

NTK cutting tools offer a wide range of tool materials, including PCD, CBN, ceramics and coated carbides, to accommodate various cutting conditions.

For the SS tool series, PCD, micro-grain carbides are set as the standard materials to meet the requirements of automatic lathes specifically micro-machining, with excellent cutting performance and high quality surface finish.



BIDEMICS



Highly efficient machining for Heat resistance alloy

NTK's BIDEMICS is the latest revolutionary insert grade to hit the HRSA material machining industry since the release of Whisker ceramics.

BIDEMICS is a patented material with unique physical characteristics that are above and beyond current whisker grades used on HRSA material applications.

The word is spreading through the HRSA industry and around the world about the results achieved when using BIDEMICS.

For more information, please go to ... C2

Ceramic



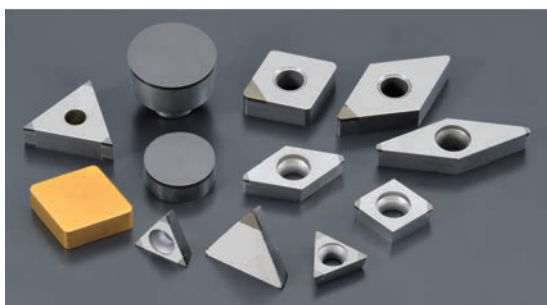
For high-efficiency cutting of hardened materials and cast irons

Ceramic tools offer high cutting speed and highly efficient machining thanks to their outstanding heat resistance and chemical stability.

A wide range of tools in various shapes, made of different types of ceramic including silicon nitride, alumina and whisker series, enables you to achieve high cutting speeds and higher productivity than carbide tools in many applications.

For more information, please go to ... C8

CBN



For high-speed cutting of hardened materials and cast irons

This material is made of CBN (Cubic Boron Nitride) as the base component and a special ceramic binder, giving a high level of hardness at both room and high temperature ranges. One of its superior features is that it causes very little chemical reaction with work piece materials.

It is mainly used for machining of materials with high hardness and high-speed cutting of cast iron.

For more information, please go to ... C6

PVD coated micro-grain carbide



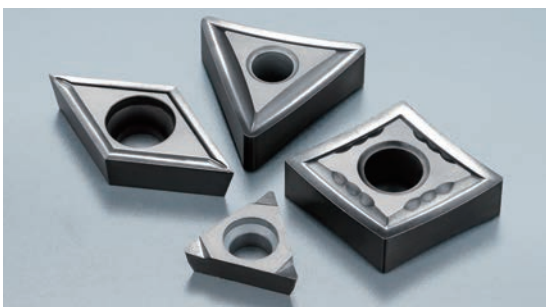
Micro-grain carbide




CVD coated carbide



New diamond coating



PCD

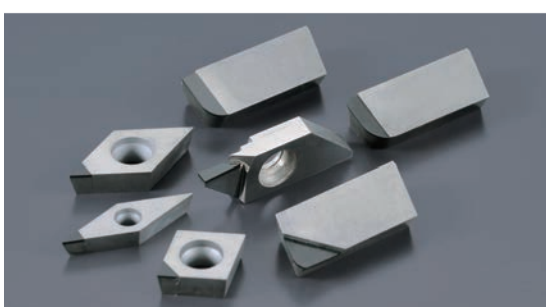

For precision cutting and general machining of hard-to-cut materials including stainless steel

The carbides in this grade has been developed by reducing the size of the WC hard grains, which are the main component of cemented carbide, to approximately 1μ . By coating such carbide by the PVD method with TiN, TiCN, or TiAlN, these materials are the most suitable for precision cutting and cutting of difficult-to-cut materials.

PVD coating on such micro grain carbide offers much improved wear resistance and thermal shock resistance.

These carbides are tougher and harder than conventional carbides, with much sharper cutting edges.

For more information, please go to ... D2

For cutting of non-ferrous metals and non-metal materials

Using non-coated micro-grain ultra-hard carbide, which provides ultra sharp cutting edges, this type of carbide usually, has a mirror-like polished surface.

This type is the most appropriate tool material for machining of non-ferrous metals and resins, where especially sharp cutting edges are required.

For more information, please go to ... D2

For general cutting of steels and cast irons

This type of carbides, suitable for cutting steel and cast iron, use carbide as the base material with coating applied by the CVD method for extra wear and heat resistance.

For more information, please go to ... D6

For Carbon and Ceramic

High purity and high hardness diamond coating are filmed minutely, so it has better wear resistance comparing to the past PCD tools.

For more information, please go to ... C4

For high-speed cutting of non-ferrous metals

As diamond is the hardest and lowest in affinity with nonferrous metals cutting material, its deposition resistance as well as wear resistance is excellent. However, as a tool material, its low toughness and characteristically low chipping resistance posed problems.

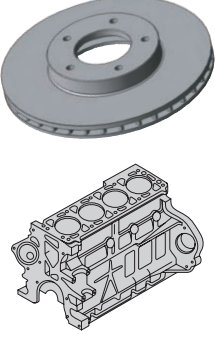





PCD is the material that solved these problems by sintering micro-grain diamond to make a polycrystalline structure without affecting the diamond-specific characteristics.


This material allows you to cut non ferrous metals at a higher speed than carbide cutting tools.

For more information, please go to ... C5

Tool Materials / Selection Guide

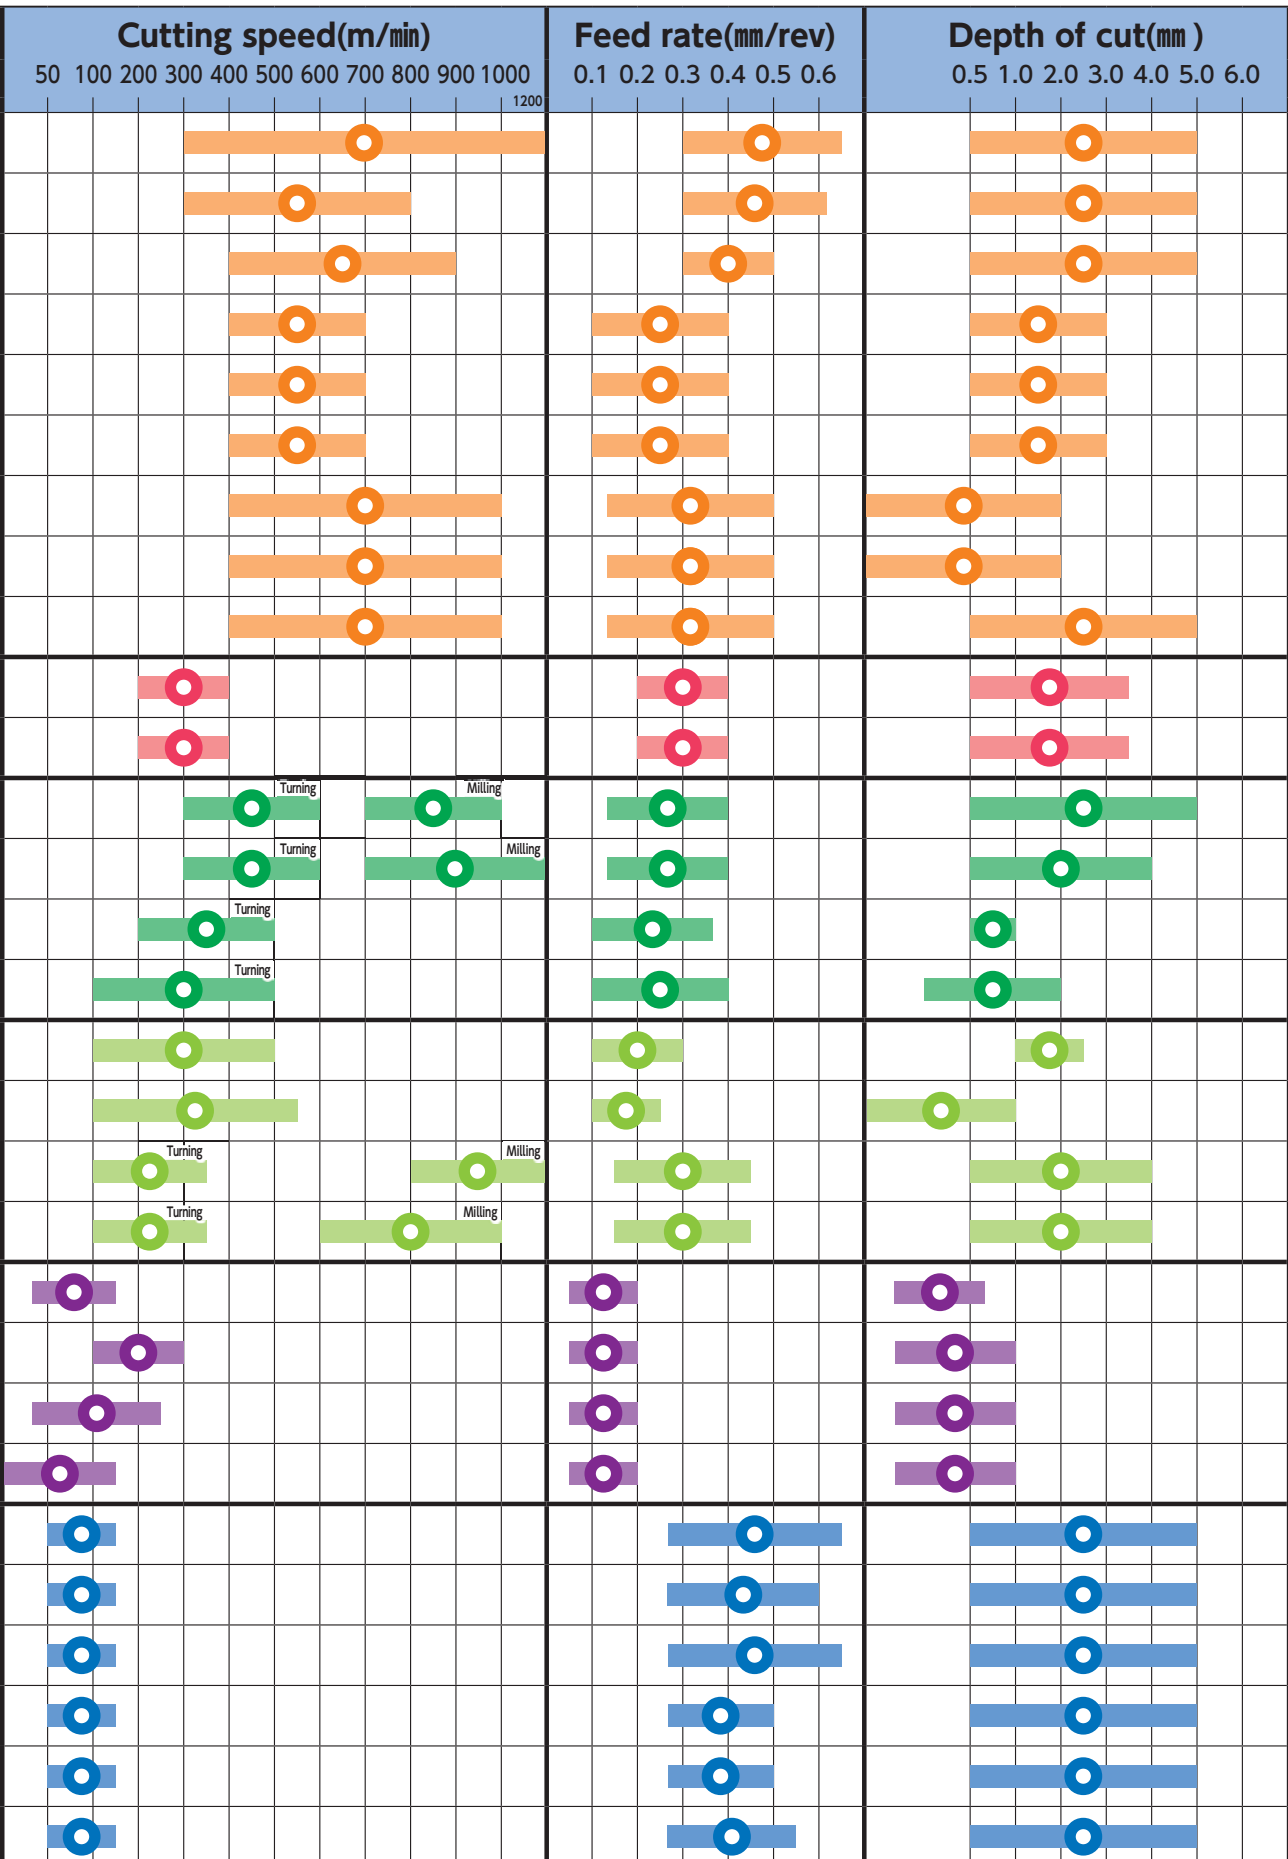














Recommended Types of Materials and Applications : BIDE MICS, Ceramic and CBN ● First Choice ○ Second Choice

Work material	Tool material	Process			Cutting oil					
		Rough-ing	Semi-finishing	Finishing	Continuous	Light interruption	Interruption	Dry	Wet	
Normal cast iron 	Ceramic	SX6	○			○		●	●	
		SX9	○				○		●	●
		SP9		○			○		●	○
		HC1/HW2			○		○		●	
		HC2/HC6			○		○		●	●
	ZBC	WA1			○		○		●	●
		B23	○				○		○	●
		B30		○			○		○	●
		B16	○				○	●		
Special cast iron 	Ceramic	HW2		○		○		●		
		HC2		○			○		●	○
Ductile cast iron 	Ceramic	SX9	○			○		●	○	
		SP9	○				○		●	○
		HC6			○		○		○	●
	ZBC	B52			○		○		○	●
Heat-resistant alloy 	BIDE MICS	JX3/JX1		○		○			●	
		JP2		○			○			●
	Ceramic	SX7/SX3/SX9	○				○		○	●
		WA1/WA5	○				○		○	●
Hardened material 	Ceramic	HC4/ZC7			○		○		●	
		ZBC	B52		○			○		●
	ZBC	B36		○			○		●	●
		B40		○				○		●
Rolls 	Ceramic	ZBC	WA1/WA5	○			○		●	○
			B22/B23/B36		○		○		●	○
	Ceramic	ZBC	HC2/HC7		○		○		●	○
			B22/B30		○		○		●	○
	Ceramic	ZBC	SX9		○		○		●	○
			B22/B52		○		○		●	○













- New Products
- Tool Materials / Selection Guide
- PCD, PCBN, PCD, CBN and Ceramics
- Micrograin Carbide, PVD/Coated/Carbide
- Insert Item List
- General Turning Toolholders
- Unique Swiss Tooling
- Grooving / Side Turning
- Threading
- Shaper
- ID Tooling
- Application Introduction
- Endmills
- Rotating Tools
- Information
- Index


Molded Chipbreakers for Positive Inserts

Name	Chipbreaker Geometry		Features	Chip Control Range
YL		 <p>※DCGT11T302 type</p>	<ul style="list-style-type: none"> ●Great combination of sharpness and toughness ●Covers extremely wide range ●Excellent chip control 	
AMX		 <p>※DCGT11T302 type</p>	<ul style="list-style-type: none"> ●Designed for very light depth of cut ●Good sharpness 	
AZ7		 <p>※DCGT11T302 type</p>	<ul style="list-style-type: none"> ●Excellent chip control at light feed and light depth of cut 	
AM3		 <p>※DCGT11T302 type</p>	<ul style="list-style-type: none"> ●All purpose chipbreaker ●Sharp edge with toughness 	
CL		 <p>※DCGT11T302 type</p>	<ul style="list-style-type: none"> ●Sharpest molded Chipbreaker ●Excellent chip control ●Less tool pressure 	

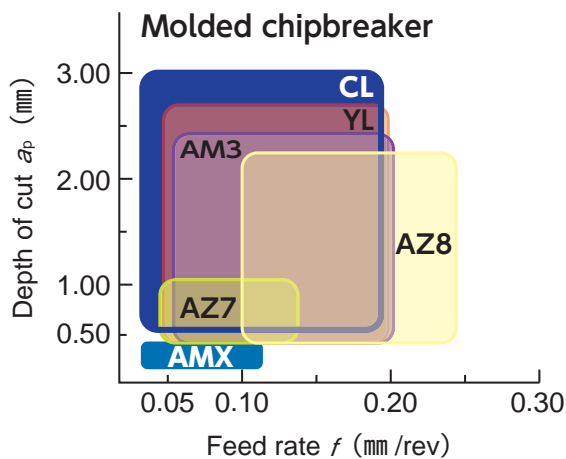
























New Products
 Tool Materials / Selection Guide
 BIDEIMCS, PCD, Micrograin Carbide, PVD/CVD-Coated Carbide
 Insert Item List
 General Turning Toolholders
 Unique Swiss Tooling
 Grooving / Side Turning
 Threading
 Shaper
 ID Tooling
 Application Introduction
 Endmills
 Rotating Tools
 Information
 Index

Molded Chipbreakers for Positive Inserts


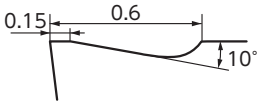


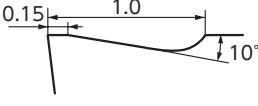





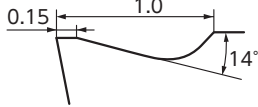


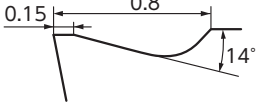



Name	Chipbreaker Geometry		Features	Chip Control Range
AZ8		 ※DCMT11T302 type	<ul style="list-style-type: none"> ●CVD-coated versatile chipbreaker with its high cutting performance 	
FG		 ※TPGH110304 type	<ul style="list-style-type: none"> ●Exclusively designed for ID boring ●Evacuates chips BACKWARD at light depth of cut ●Sharp cutting edge with high rake angle 	
AM5		 ※CPGH060202 type	<ul style="list-style-type: none"> ●Chipbreaker for boring ●Provides both good cutting performance and chip control 	




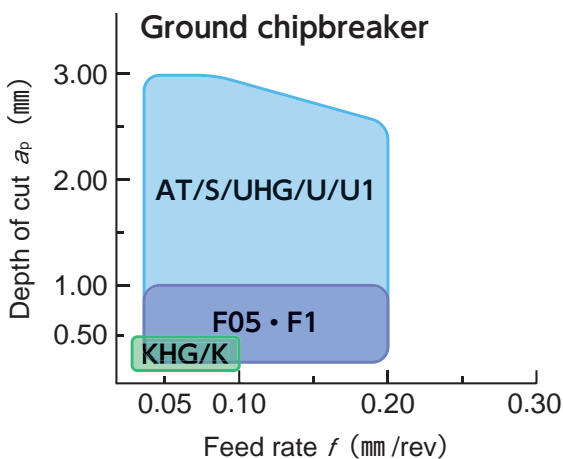Ground Chipbreakers for Positive Inserts
















Name	Chipbreaker Geometry		Features	Chip Control Range
KHG		 ※DCET11T302 type	<ul style="list-style-type: none"> ●Excellent chip control on finishing cuts ●For super high-precision machining * Precision tolerance in corner radius: ± 0.01 	
K		 ※TPGH090202 type	<ul style="list-style-type: none"> ●Superb chip control on finishing applications ●Sharp cutting edge with high rake angle 	
UHG		 ※DCET11T3008 type	<ul style="list-style-type: none"> ●Sharp cutting edge ●Covers wide cutting condition range * Precision tolerance in corner radius: ± 0.01 	
U • U1		 ※DCGT11T302 type	<ul style="list-style-type: none"> ●Sharp cutting edge prevents materials from work hardening 	
S		 ※DCGT11T302 type	<ul style="list-style-type: none"> ●Standard ground chipbreaker with wide cutting condition coverage ●Sharp cutting edge with excellent chip control 	
AT		 ※DCGT11T302 type	<ul style="list-style-type: none"> ●Excellent adhesion resistance with dimensional stability ●Best for small diameter parts and for machining low carbon steels 	
F05		 ※TPGH060102 type	<ul style="list-style-type: none"> ●Exclusively designed for ID boring ●Evacuates chips BACKWARD ●Excellent choice for blind hole machining 	
F1		 ※TPGH110302 type		


Ground Chipbreakers for Positive Inserts

Name	Chipbreaker Geometry		Features	Chip Control Range
B1		 ※TCGH060102 type	●Stable cutting when boring thanks to sharp and tough cutting edge	
B2		 ※TPGH090202 type		
B3		 ※TPGH090202 type		
A		 ※CPGH080202 type	●Tough cutting edge and good chip control ●General-purpose ID chipbreaker	
A1		 ※CPGH040102 type		
A2		 ※ERGHT30102 type	●Control chips at light feed and light depth of cut ●Sharp cutting edge due to large rake angle	

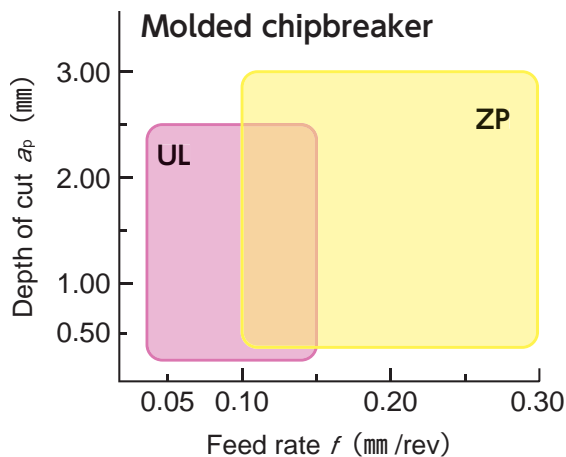














Molded Chipbreakers for Negative Inserts

Name	Chipbreaker Geometry		Features	Chip Control Range
UL		 ※TNGG160401 type	<ul style="list-style-type: none"> ● Negative insert with a positive insert's chipbreaker ● Reduced burr ● Improved microfinish ● Superb advantage in cost per corner over positive inserts 	
ZP		 ※CNMG120408 type	<ul style="list-style-type: none"> ● Double-positive rake and sharp cutting edge ● Low tool pressure even at heavy depth of cut 	
Z5		 ※CNMG120408 type	<ul style="list-style-type: none"> ● Very tough insert ● Designed for machining with heavy interruption 	
G		 ※CNMG120408 type	<ul style="list-style-type: none"> ● Tough chipbreaker for roughing with exceptional stability 	
AM1		 ※VNMG160408 type	<ul style="list-style-type: none"> ● Tough chipbreaker for roughing with exceptional stability 	




Ground Chipbreakers for Negative Inserts

Name	Chipbreaker Geometry		Features	Chip Control Range
DA		 ※TNGG160401 type	●Excellent chip control and sharp cutting edge	
D1		 ※TNEG160402 type		
U2		 ※TNGG160402 type	●Reduced burr and work hardening due to high rake design	
C		 ※TNGG160402 type	●General-purpose chipbreaker with excellent toughness and chip control	

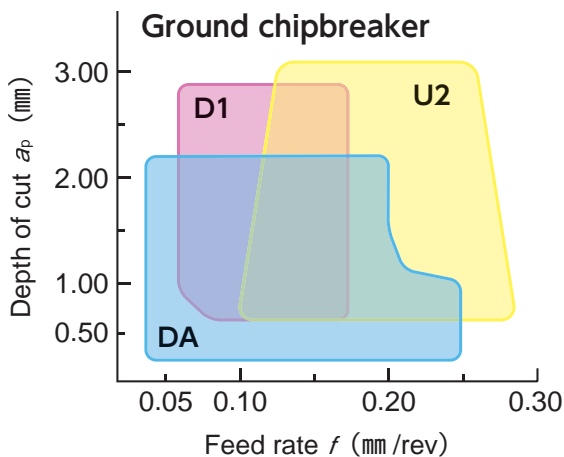


MEMO

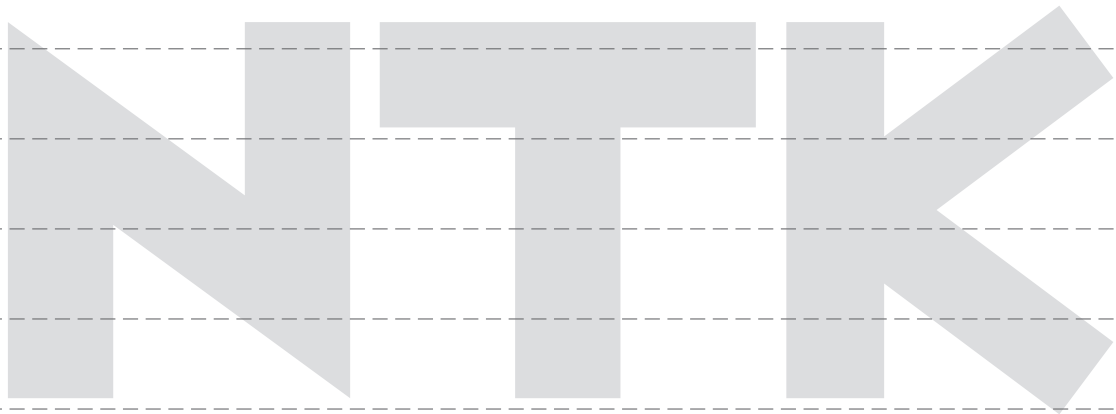New Products
Tool Materials / Selection Guide
BIDEMICS, PCD, CBN and Ceramics
Micrograin Carbide, PVD/Coated Carbide
Insert Item List
General Turning Toolholders
Unique Swiss tooling
Grooving / Side Turning
Threading
Shaper
ID Tooling
Application Introduction
Endmills
Rotating Tools
Information
Index




C

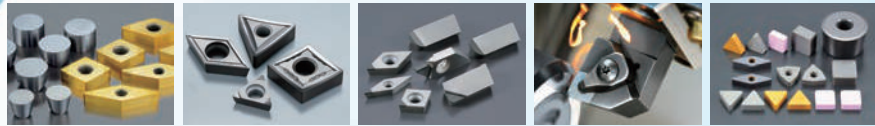

BIDEMICS, PCD, CBN and Ceramics

● BIDEMICS.....	C2
● Diamond Coating.....	C4
● PCD	C5
● CBN	C6
● Ceramics	C8
Alumina-based Ceramics.....	C10
Alumina TiC-based Ceramics.....	C12
Silicon Nitride-based Ceramics	C14
Whisker-reinforced Ceramics	C16

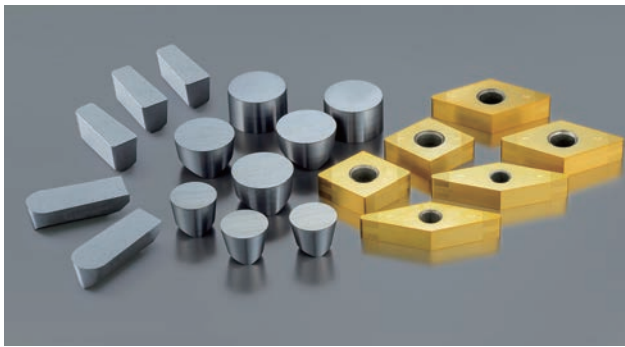BIDEMICS



NTK's BIDEMICS is the latest revolutionary insert material to hit the HRSA material machining industry since the release of Whisker ceramics. BIDEMICS is a patented material with unique physical characteristics that are above and beyond current whisker grades used on HRSA material applications. The word is spreading through the HRSA industry and around the world about the results achieved when using BIDEMICS.

JX1/JX3 NEW Semi-finishing & Finishing / Rough no scale

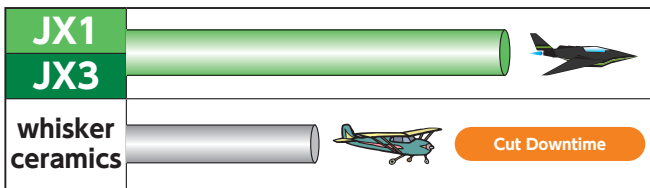
- Up to 480 m/min speed capability
- Much longer tool life at Whisker ceramics' speed range
- Better wear resistance and notching resistance than Whisker ceramics
- Superior surface finish vs. Whisker ceramics
- Newly added JX3 provides toughness to BIDEMICS family

JP2 Finishing


- 10 to 15x speed capability vs. carbide
- Better wear resistance and notching resistance than CBN
- Superior surface finish to Carbide or CBN
- Strong brazing technology

Increase Productivity vs. Whisker ceramics

① Significantly extended tool life at same speed




② Double speed capability

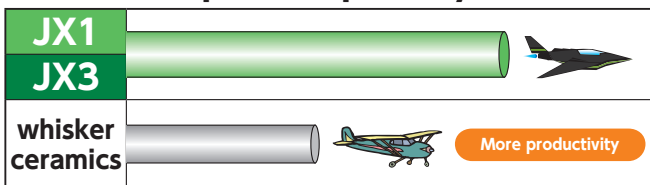

Increase Productivity vs. Carbide

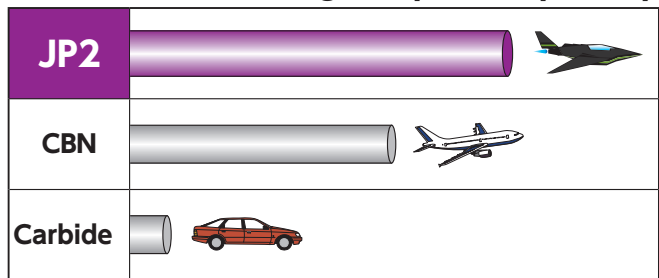① 10 to 15 times higher speed capability



Application : JX1 & JX3


JX1

- Higher speed, more productivity than ceramics.
- Suitable for turning in high rigid situation (External/ endface tuening) Turning in using more toughness insert like RNGN type
- Offering excellent notch wear resistance

JX3

- Turning at the corner part, Grooving.
- Chipping occurred when use JX1 grade
- Turning in low rigidity situation

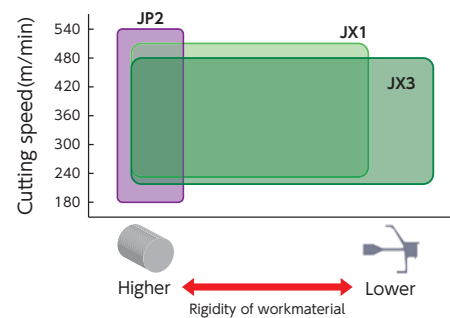Grade



Grade	Workmaterial	Tooling	Applications	Cutting speed (m/min)	Feed (mm/rev)	D.O.C (mm)	DRY	WET
JX1 JX3	Heat resistant alloy	Turning	Rough no scale	180- 480	0.15-0.30	1.00-2.50		●
			Semi-finish	180- 480	0.10-0.25	0.50-2.00		●
JP2	Heat resistant alloy	Turning	Finish	180- 520	0.10-0.25	0.20-1.00		●

1 Higher Speeds, More Productivity

JX1/JX3's superior physical properties compared to Whisker ceramic enable you to increase speeds; potentially as much as 2X Whisker ceramic speeds; increasing productivity and potentially offsetting the need for additional equipment to meet increasing demands.





Chips break easily at higher cutting speeds vs the typically continuous chips of HRSA materials. The result is more efficient chip removal.

480 m/min	Competitor's Whisker	JX1
1st pass after 0.50 min		
2nd pass after 1.00 min	Impossible	



2 Longer tool life

JX1/JX3's combination of High Hardness, Superior Thermal Conductivity and Improved Strength compared to Whisker ceramics results in significantly longer tool life when applied at typical Whisker ceramic speeds, feeds, and depth of cut.

330 m/min	Competitor's Whisker	JX1
1st pass after 0.75 min		
2nd pass after 1.50 min		


3 Works well on wide range of High Temperature Alloys

BIDEMICS has success on
Inconel 718
Inconel 625

- 718 Plus
- Rene41
- Rene88
- Rene104
- Waspaloy










etc.

5 Speed up grooving operations




VGW style Grooving inserts are now available

4 Superior surface finish

	JP2	CBN	Carbide	
				
Machined surface				
Roughness				
	Ra	0.64 μm	1.18 μm	2.75 μm
	Rz	3.36 μm	5.56 μm	9.64 μm
Cutting speed	240 m/min	←	35 m/min	
Feed	0.15 mm/rev	←	←	
Cycle time	3.3 min	←	14.7 min	
Removed chip	48 cc	←	←	

JP2's outstanding Wear Resistance and Notching Resistance results in work piece surface finishes consistently superior to either CBN or Carbide

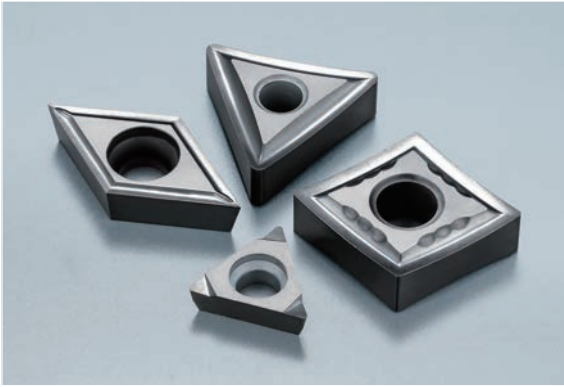New diamond coating



High purity and high hardness diamond coating are filmed minutely, so it has better wear resistance comparing to the past PCD tools.

UC1

For Carbon and Ceramic

Comparing to the past diamond coating, particle diameter is less than 1/10

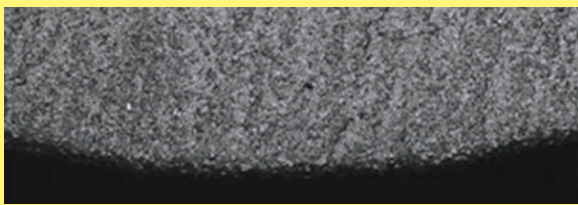
Features

- **Improve wear resistance**
High purity and high hardness diamond coating are filmed minutely, so it has better wear resistance comparing to the past PCD tools.
- **High adherence efficiency**
NTK's original carbide base material and technical surface treatment development, acquires high adherence efficiency and can reduce the cause of unusual damage by coating exfoliate and able to cut more stable and long term.
- **Improve chip control • More shape variations**
Excellent chip-control of molded chipbreakers will be able to reduce the manufacturing lines stopping time.
• It is able to deal with NTK standard chip-breaker coated by UC1 as special manufactures!
- **High cost performance**
Increasing the number of corners, it contributes to the improvement of machining cost.

Past diamond coating "UC2"



New diamond coating "UC1"




【Case study】

【Carbon Ceramic】

Application of carbon machining Carbon	
Work material : Carbon	
Cutting speed (m/min) : 300	
Feed (mm/rev) : 0.1 ~ 0.4	
Depth of cut (mm) : 1.0	
Coolant : DRY	
NTK : UC1	4 pcs/corner
Competitor's diamond coating	3 pcs/corner

- **Improve wear resistance due to the adoption of sharp standard chipbreaker, and long expectancy**
- **Maximum 6 corner negative inserts are lined-up as well.**
Contributed to cost reduction!

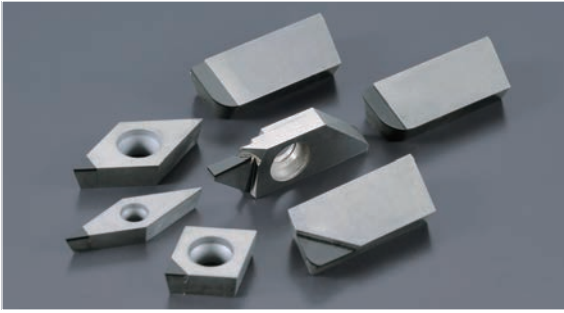
Diamond sintered body, PCD



Diamond excels in deposition resistance with its low affinity and has excellent wear resistance with high hardness. But it also has a problem with fracture resistance due to lack of toughness. PCD is the material solving that problem without losing original characteristics of diamond by sintering fine grain diamond and generating polycrystallization. It enables much higher speed machining of nonferrous metals compared to carbide.



PD1/PD2

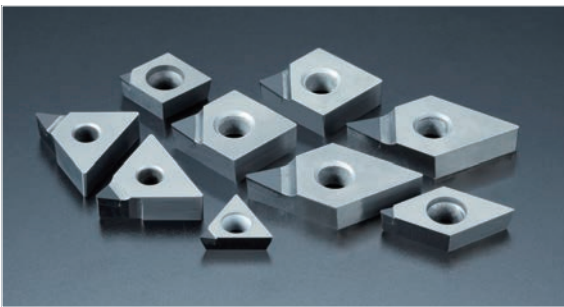For high speed machining of nonferrous metals!



Features

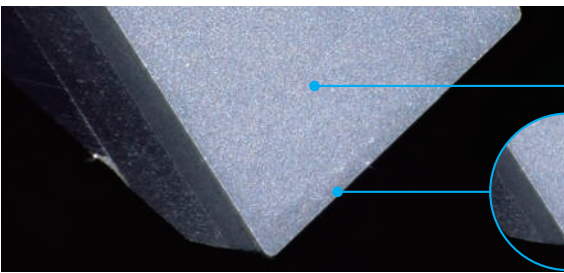- *Elevated cutting speed when compared to carbide*
- *Recommended for cutting of aluminum and copper alloys with excellent deposition resistance*
- *Incorporates a very sharp cutting edge condition*
- *Pre-grinding and cutting-off types added in addition to the current milling cutter types*



- Uses strictly selected diamond grains, the hardest of all material types
- Further improved strength by polycrystallizing dense diamond micro grains
- Excellent deposition resistance thanks to a lower affinity to nonferrous materials

- Sharp cutting edge attained
- Enables high precision and stable machining by control of potential built-up edge

Main applications for cutting: aluminum alloys, brass, copper alloys, graphite, ceramic compact, plastics

[Recommended cutting conditions]


Work material	Cutting speed (m/min)	Feed rate (mm /rev)	Cutting oil
aluminum alloy	Turning : ~ 350 Milling : ~ 4000	Turning : ~ 0.12mm /rev Milling : ~ 0.20mm /t	WET
Copper alloy	Turning : ~ 200 Milling : ~ 1000		

[Actual machining examples]

Machining of spool ● Work material : A6063		
	Conventional cutting tool	NTK
Material grade	Competitor's brazed carbide grade cutting tool	PD1
Cutting speed (m/min)	100	200
Feed rate (mm/rev)	0.02	0.06
Cutting oil	WET	←
Machining method	Grooving (5) followed by profiling of the grooves	Single stroke
Life (pcs./corner)	1,000	10,000
PD1		
Shorter cycle time due to single pass machining. PD1 produces an excellent surface finish without deposition, higher efficiency and prolonged life resulted.		

Machining of spool		
Material grade	: A6061	PD2
Cutting speed (m/min)	: 170	
Feed rate (mm/rev)	: 0.06	
Depth of cut (mm)	: 0.15	
Cutting oil	: WET	
NTK : PD2		
Competitor's PCD product		5,000 pcs./corner
PD2, excellent in wear resistance, achieved twice the life of competitor's product.		

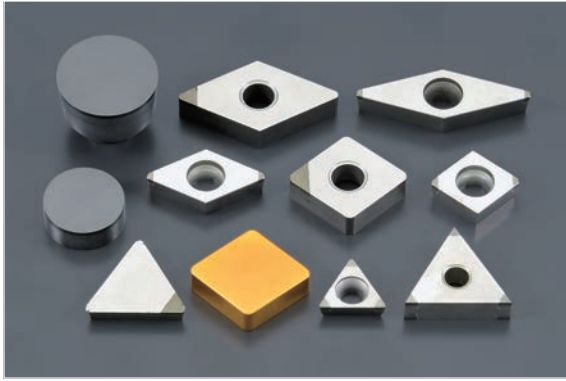High-pressure sintered compact



CBN grade inserts are composed mainly of CBN (Cubic Boron Nitride) particles with a special ceramic binder. The material has excellent cutting material properties including high hardness at normal and highly elevated temperatures, little chemical reactions with work materials, making it a material suitable for cutting tools.

CBN inserts can be used for machining of cemented materials and high speed machining of cast iron.

B16

Best for high efficiency machining of cast iron !



【Actual machining examples】

Rough cutting of disc brake

Work material : FC250	B16	
Cutting speed (m/min) = 1,000		
Feed rate (mm/rev) = 0.7		
Depth of cut (mm) = 1.0		
Cutting oil : WET		
NTK : B16	800 pcs./corner	
Competitor's CBN product	650 pcs./corner	

B16 produced tool life of 1.2 times the competitor's product.

Features

- Solid CBN with multiple corners available
- The coating allows easy checking of used cutting edges

Material grade	Main binder	CBN content	Major application
B16	TiN coating + special ceramic	82%	Roughing and finishing of normal cast iron at high speed/rolling rolls

B22

Best for machining of rolls of high hardness !



Machining of roll

Work material : High chrome cast iron	B22	
Cutting speed (m/min) = 60		
Feed rate (mm/rev) = 0.2		
Depth of cut (mm) = 2.0		
Cutting oil : WET		
NTK : B22	2 passes	
Competitor's CBN product	1 pass	

B22 produces twice the life of the competitor product.


Features

- Top layer of CBN with a carbide base offering multiple cutting edges
- High hardness due to the use of the special binder

Material grade	Main binder	CBN content	Major application
B22	TiN-base	80%	Turning of very hard rolls


EZ CUBE

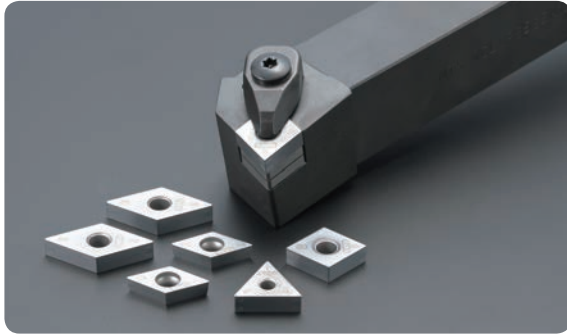CBN inserts offer high performance, low price and versatility !



Features

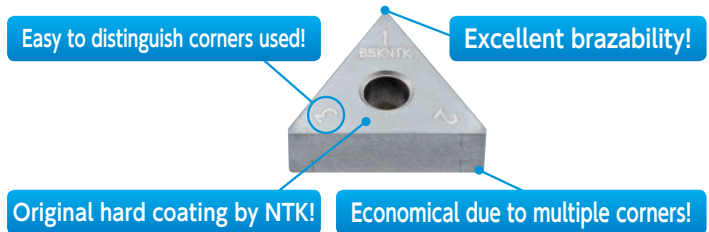- Seven grades available for different component materials
- Large range for various applications
- Multiple corners on both insert sides contributes to cost reduction



NEW CBN (Cubic Boron Nitride)

• NTK **EZCUBE** / EZ CUBE

Material grade	Main binder	CBN content	Major application
B5K *	TiC-base	50%	Continuous to semi-interrupted machining of hardened steels Finishing of ductile cast iron
B6K *	TiCN-base	65%	Semi-interrupted to interrupted machining of hardened steels
B23	Ti-base	90%	High-speed semi roughing of cast iron/sintered alloys
B30	Ti-base	95%	High-speed finishing of cast iron
B36	TiCN-base	65%	semi-interrupted to interrupted machining of hardened materials
B40	TiN-base	65%	Interrupted machining of highly hardened materials
B52	TiC-base	50%	Finishing of ductile cast iron and continuous machining of highly hardened materials

※PVD coating CBN

[Actual machining examples]

Interrupted boring of continuous-velocity universal joint

Work material: S55C (HRC62)	
Cutting speed (m/min) = 110	
Feed rate (mm/rev) = 0.14	
Depth of cut (mm) = 0.15	
Cutting oil : DRY	
NTK : B40	2,300 pcs./corner
Competitor's CBN product	1,500 pcs./corner

B40 grade inserts showed a prolonged life without chipping in the interrupted boring operation.

Arial Narrow Bolg

Work material : FCD600	
Cutting speed (m/min) = 350~400	
Feed rate (mm/rev) = 0.08	
Depth of cut (mm) = 0.2	
Cutting oil : WET	
NTK : B52	60 pcs./corner
Competitor's CBN product	30 pcs./corner

The life of B52 grade inserts was twice that of the competitor product.

Cutting of outer side of oil pump housing

Work material : FC250	
Cutting speed (m/min) = 250	
Feed rate (mm/rev) = 0.2	
Depth of cut (mm) = 2.0	
Cutting oil : WET	
NTK : B23	210 pcs./corner
Competitor's CBN product	70 pcs./corner

The life of B23 grade inserts was 3 times as long as the competitor's product.

Continuous boring on cylinder block

Work material : FC material	
Cutting speed (m/min) = 800	
Feed rate (mm/rev) = 0.3	
Depth of cut (mm) = 0.1	
Cutting oil : WET	
NTK : B30	800 pcs./corner
Competitor's CBN product	500 pcs./corner

The life of B30 grade inserts was 1.6 times as long as the competitor's product.



NTK Ceramic Tools ensure highly efficient machining with their superior high temperature hardness, heat resistance and chemical stability

NTK offers various types of ceramic tool material (silicon-nitride-base, alumina-base and whisker-base) in many different shapes to meet the respective requirements of applications for higher efficiency and at higher cutting speed.




● Alumina-based Ceramics (White ceramics)

Can be used for high-speed finishing of normal cast iron thanks to its excellent wear resistance



● Silicon nitride-based ceramics

Best for high-speed roughing of normal cast iron
Machining up to $v_c = 1,000\text{m/min}$ is possible



● Alumina TiC-based ceramics (Black ceramics)

The toughness of this type is improved by adding TiC
Can be used for semi-finishing to finishing for normal cast iron and hardened materials




● Whisker-based ceramics

Wear resistance and fracture resistance are strengthened by adding SiC whisker
First choice for machining of heat-resistant alloys and rolls made of cemented materials

■ Advantages of ceramic cutting tools①


The material retains high hardness even at elevated temperatures !!



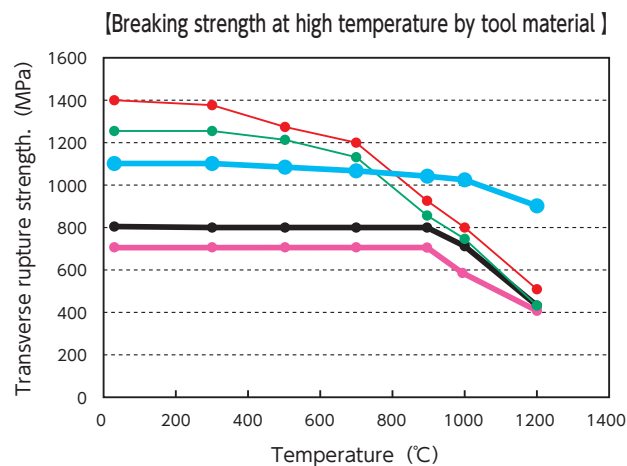
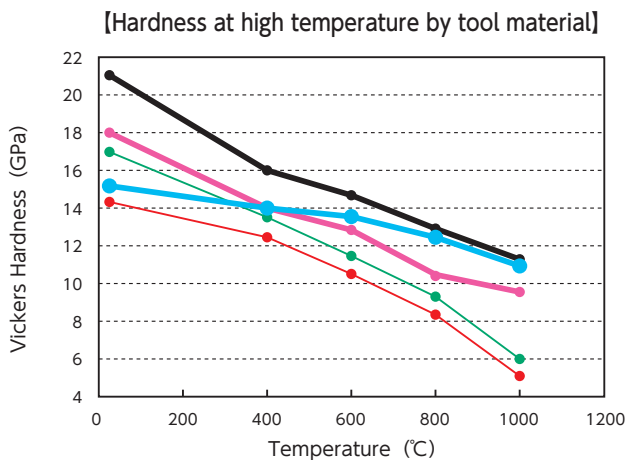
Excellent wear resistance at high cutting speed !


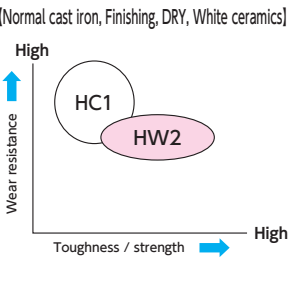


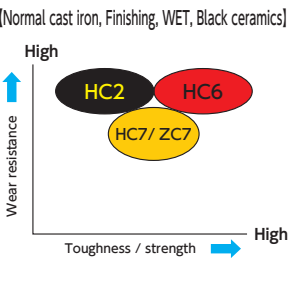


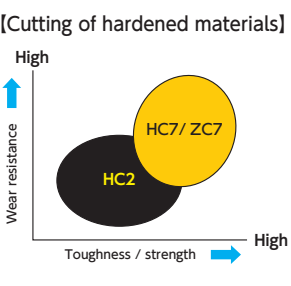


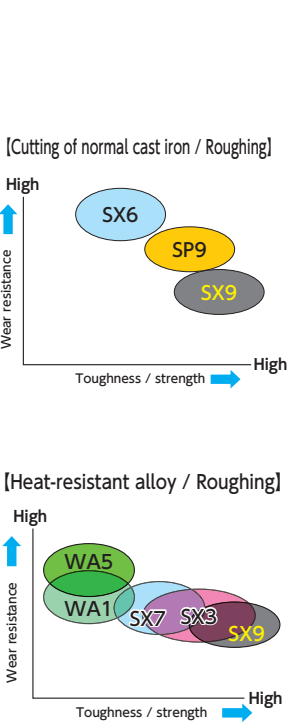






■ Advantages of ceramic cutting tools②

Material breaking strength is not greatly affected by high temperature conditions !!



Stable machining is possible in the high speed range



	Material code name / Coating	Applications / Features	Physical properties*					Applications and ceramic property map	
			Density g/cm ³	Hardness HRA	Transverse intensity MPa	Young's modulus GPa	Thermal expansion coefficient X10 ⁻⁶ /K		Therma conductivity W/m·K
White ceramics Alumina - based ceramics	HC1  Al ₂ O ₃	<ul style="list-style-type: none"> Semi-finishing to finishing and grooving of cast iron Tube Scarfing 	4.0	94.0	700	400	7.8	17	[Normal cast iron, Finishing, DRY, White ceramics] 
	HW2  Al ₂ O ₃	<ul style="list-style-type: none"> Semi-finishing to finishing of cast iron Cylinder Liner machining Excellent fracture resistance 	4.1	94.0	750	390	7.8	19	
Black ceramics Alumina + TiC-based ceramics	HC2  Al ₂ O ₃ +TiC	<ul style="list-style-type: none"> Semi-finishing to finishing of cast iron 	4.3	94.5	800	420	7.9	21	[Normal cast iron, Finishing, WET, Black ceramics] 
	HC6  TiC+Al ₂ O ₃	<ul style="list-style-type: none"> Semi-finishing to finishing of ductile cast iron Semi-finishing to finishing of cast iron with coolant 	4.7	94.0	800	450	7.6	29	
	HC7  Al ₂ O ₃ +TiC	<ul style="list-style-type: none"> Cutting of hardened materials (removal of carburized layer) ※Substitute for HC5 	4.6	95.0	1,100	420	7.9	23	[Cutting of hardened materials] 
	ZC7  Al ₂ O ₃ +TiC TiN coat	<ul style="list-style-type: none"> Recommended for cutting of hardened materials (removal of carburized layer) 	4.6	95.0	1,100	420	7.9	23	
Silicon nitride - based ceramics	SX3  SiAlON NEW	<ul style="list-style-type: none"> Rough / Semi-finish Best balance of toughness and hardness 	3.3	93.0	1,100	290	3.4	12	
	SX6  Si ₃ N ₄	<ul style="list-style-type: none"> Normal cast iron turning Normal cast iron milling Resistance to insert flank wear ※Substitute for SX1 	3.2	93.5	1,200	320	3.0	50	
	SX7  SiAlON	<ul style="list-style-type: none"> Heat resistant alloy turning Heat resistant alloy milling High wear resistance 	3.3	93.0	900	290	3.4	11	
	SX9  SiAlON	<ul style="list-style-type: none"> Heat resistant alloy turning Rough turning of normal cast iron High fracture resistance 	3.3	93.5	1,200	330	3.0	15	
	SP9  SiAlON	<ul style="list-style-type: none"> Heat resistant alloy turning Rough turning of normal cast iron ※Substitute for SP2 Special edge treatment for lower cutting forces + high precision cutting with coated inserts 	3.3	93.5	1,200	330	3.0	15	
Whisker - based ceramics	WA1  Al ₂ O ₃ +SiC	<ul style="list-style-type: none"> Heat resistant alloy turning High efficiency cutting of normal cast iron 	3.7	94.5	1,200	400	7.0	35	
	WA5  Al ₂ O ₃ +SiC	<ul style="list-style-type: none"> Heat resistant alloy turning High efficiency cutting of normal cast iron High fracture resistance 	3.8	94.5	1,200	400	7.1	35	

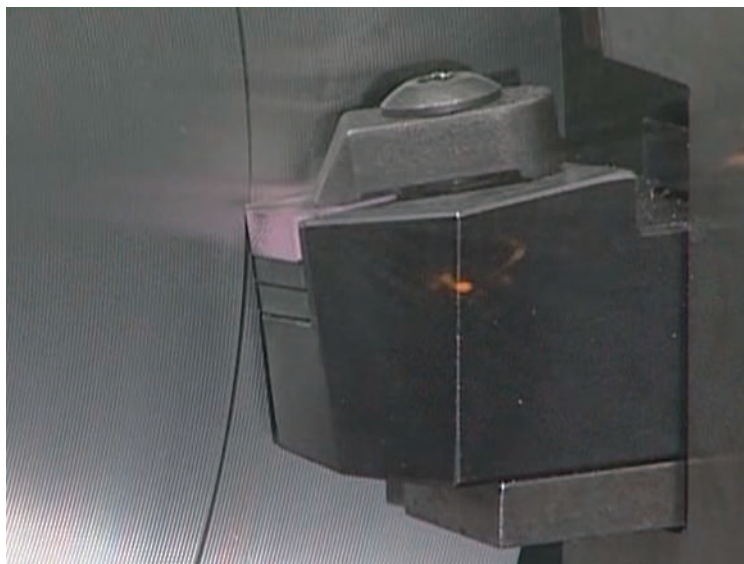
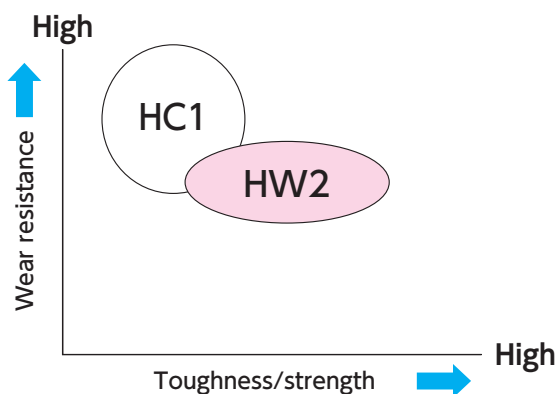
※ For coated products, the values of the base material are indicated.

Alumina-based ceramics (White ceramics)



- Characterized by high oxidation resistance as well as deposition resistance, these ceramics utilise alumina that is thermally and chemically stable. They are best suited for high-speed cutting applications where the temperature at the edges may become high.

[Normal cast iron, Finishing, Dry cutting, White ceramic]





HC1 Ideal material for high-speed finishing of cast iron !



Features

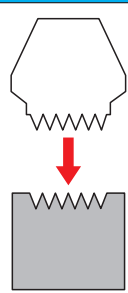- Outstanding wear resistance for high-speed cutting of cast iron, especially semi-finishing or finishing without coolant
- Most suitable for high-speed and high-temperature cutting thanks to the high heat resistance, using high-purity alumina as the main component
- Usable even for finishing of special cast iron and for tube scarfing

Pulley machining	
Work material : FC250	HC1
Cutting speed (m/min) = 500	
Feed rate (mm /rev) = 0.15→0.10→0.05	
Cutting oil : DRY	
NTK : HC1	600 pcs./corner
Competitor's black ceramic	300 pcs./corner
HC1 achieved double the tool life of the competitor product.	

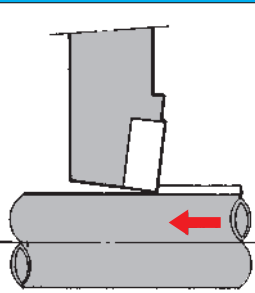Tube Scarfing	
Work material : SPHT4	HC1
Cutting speed (m/min) = 70	
Depth of cut (mm) = 3.0	
Cutting width (mm) = 5.0	
Cutting oil : DRY	
NTK : HC1	70 min./corner
Competitor's black ceramic	30 min./corner
With its outstanding wear resistance characteristic, HC1 produced double the competitors tool life.	

HW2

Highly tough alumina-based ceramic tool !




Features

- Exhibits high strength and high toughness through the addition of zirconium to high purity alumina
- Suitable for semi-interrupted finishing applications for normal cast iron and roughing and finishing of special cast iron (such as lining materials)

Brake Disc machining	
Work material : FC250	
Cutting speed (m/min) = 359	
Feed rate (mm/rev) = 0.3	
Depth of cut (mm) = 0.5	
Cutting oil : DRY	
NTK : HW2	130 pcs./corner
Competitor's black ceramic	65 pcs./corner
HW2 achieved twice the tool life of the competitor's product, due to its superior strength.	


Cylinder liner machining	
Work material : special cast iron	
Cutting speed (m/min) = 600	
Feed rate (mm/rev) = 0.32	
Depth of cut (mm) = 3.0	
Cutting oil : DRY	
NTK : HW2	70 pcs./corner
Competitor's black ceramic	30 pcs./corner
HW2 produced finished surfaces of excellent quality in addition to the life being double that of the competitor's product.	

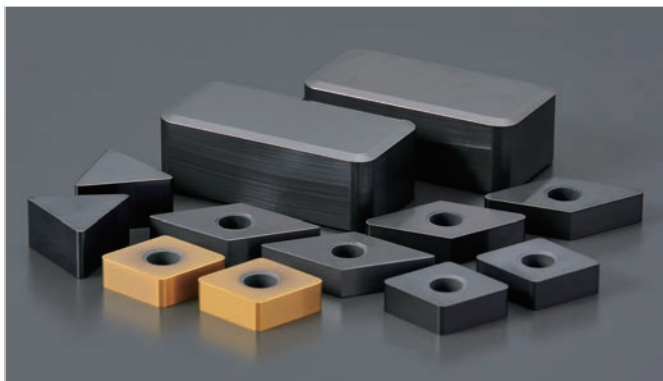Alumina TiC-based ceramics (Black ceramics)




This material group are alumina TiC-based ceramics strengthened by adding hard carbide to high-purity alumina. These tool materials exhibit excellent performance in high-speed finishing of cast iron, applications under either WET or DRY cutting, or even in partially interrupted machining, having improved hardness and strength. Excellent at finishing of hardened materials due to the high hardness and low plasticity in high temperature ranges.

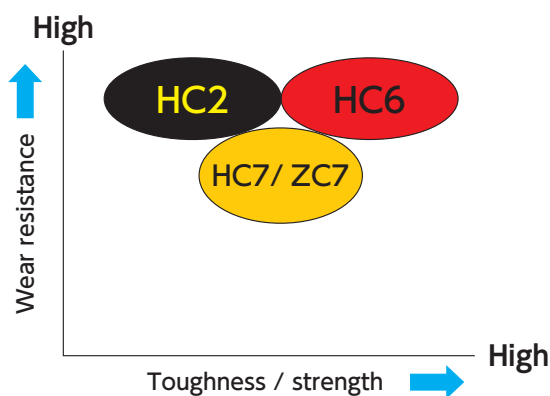
[Normal cast iron, Finishing, WET, Black ceramic]



[Machining of hardened materials]

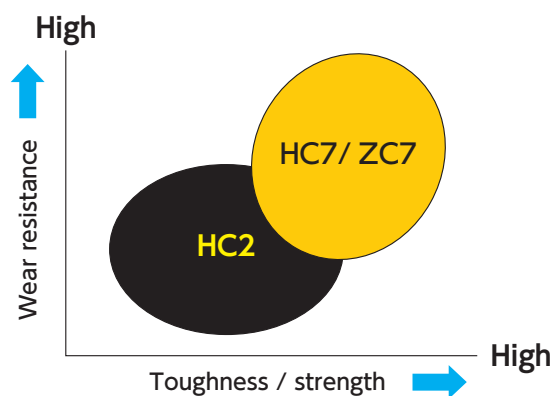

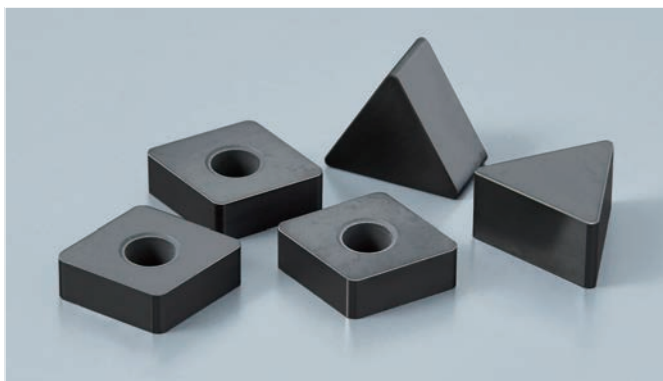HC2 The standard tool material for machining cast iron and hardened materials !



Features

- **Excellent performance in machining of cast iron and hardened materials thanks to its high hardness and low plasticity in high temperature ranges**

Machining of lining material ● Work material : FC material		
	Conventional cutting tool	NTK
Material grade	Competitor's carbide	HC2
Cutting speed (m/min)	400	600
Feed rate (mm /rev)	0.50	←
Depth of cut (mm)	0.70	←
Cutting oil	DRY	←
Life (pcs./corner)	40	110


HC2 produced 1.35 times higher machining efficiency and almost 3 times the tool life of the competitor's product.

Machining of roller bearing ● Work material : SNCM (HRC58)		
	Conventional cutting tool	NTK
Material grade	Competitor's carbide	HC2
Cutting speed (m/min)	23	112
Feed rate (mm /rev)	0.06	0.06
Cutting oil	DRY	←
Life (No. of grooves)	4	6

HC2 produced approximately twice the machining efficiency and 1.5 times longer tool life than the competitor's product.

ZC7

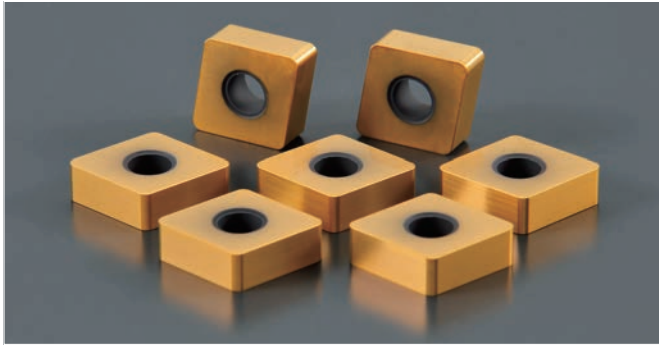For machining of hardened parts with varying levels of hardness!



Features

- Covers a wide range of hardened materials (HRC45 – 60)
- ZC7 coated with TiN provided as standard stocked product
- Inserts are available with both wiper facets and chipbreakers to further improve machining efficiency

Gear cutting	
Work material : Case carburizing steel	
Cutting speed=200m/min	
Feed rate=0.20mm/rev	
Depth of cut=0.70mm	
Cutting oil : DRY	
NTK : ZC7 (w/ 4 corners)	70 pcs./corner
Competitor's CBN (w/ 2 corners)	50 pcs./corner
ZC7 realized significant cost reduction, through longer tool life as compared with the competitor's CBN product.	

HC6

For machining of ductile cast iron!



Features


- World's first TiC-based ceramic put into practical use
- Ideal for semi-finishing and finishing of ductile cast iron at low to high-speed levels
- Also produces excellent dimension stability in machining of cast iron under WET cutting conditions

Gear cutting	● Work material : Equivalent to FCD450 + copper alloy	
	Conventional cutting tool	NTK
Material grade	Competitor's cermet	HC6
Cutting speed (m/min)	300	←
Feed rate (mm/rev)	0.05	←
Depth of cut (mm)	0.5	←
Cutting oil	WET	←
Life (pcs/corner)	20	50

HC6

HC6 produced remarkably long life, less dimensional variations and better wear resistance compared with the competitor's product.

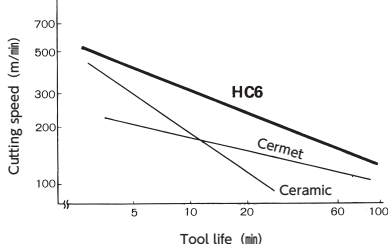■ Cutting performance : V-T curve



Cutting conditions
 Work material : FCD550(HB240 ~ 260)
 Insert : SNGN120408
 Depth of cut : 0.5mm
 Feed rate : 0.2mm/rev
 Reference life : Amount of VB wear=0.4mm

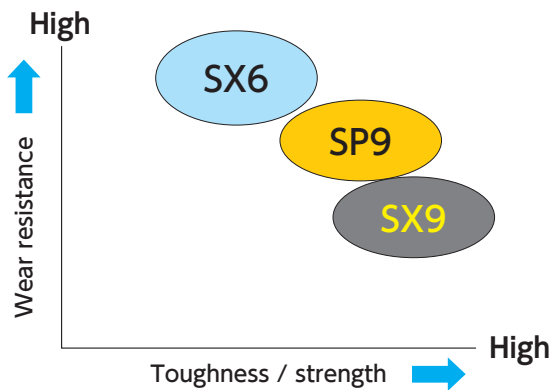
- New Products
- Tool Materials / Selection Guide
- BIDEMCS, PCD, CBN and Ceramics
- Micrograin Carbide, PVD Coated Carbide
- Insert Item List
- General Turning Toolholders
- Unique Swiss Tooling
- Grooving / Side Turning
- Threading
- Shaper
- ID Tooling
- Application Introduction
- Endmills
- Rotating Tools
- Information
- Index

Silicon nitride-based ceramics




The silicon nitride-based ceramics have approximately twice the fracture toughness of alumina-based, having high fracture resistance equal to some carbide tools. These grades allow efficient machining in high speed ranges where traditional ceramic tools were not able to perform well, including milling of cast iron and interrupted cutting in poor surface conditions.

[Normal cast iron, Roughing]



[High Temperature Alloy, Roughing]

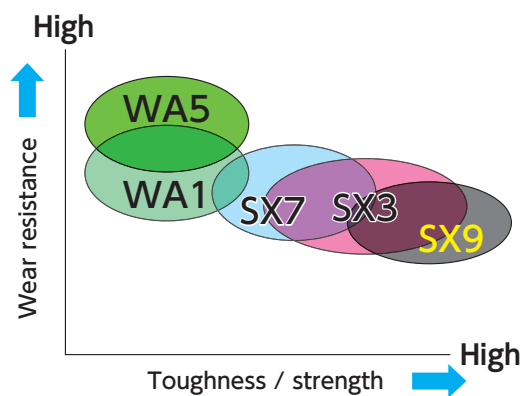

NEW SX3

Best balance of toughness and wear resistance



Rough turning (Rene130) with Scale		
Shape : SNGN190724	Competitor's SiAlON Ceramic	SX3
Cutting speed (m/min) : 115		
Feed (mm/rev) : 0.15		
Various depth of cut		
WET		
NTK : SX3		
Competitor's SiAlON		


Features

- **Excellent wear resistance and toughness.**
Wide range of HRSA machining applications: Rough turning with scale ~ semi-finish turning.
- **Able to machine even the newest generation of HRSA work materials (like Rene) as well as today's most common HRSA materials; such as Inconel 718.**
- **Able to mill with high efficiency.**

Grade	Work material	Application	Purpose	Cutting speed (m/min)	Feed (mm/rev)	Depth of cut (mm)	DRY	WET
SX3	Heat resistant alloy	Turning	Rough scale	180-270	0.15-0.3	1.0-5.0		●
			Rough no scale	180-270	0.15-0.35	1.0-2.5		●
			Semi finish / profiling	180-270	0.15-0.3	1.0-2.0		●
		Milling	-	600-1200	0.08-0.15	1.0-2.5	●	

SX7

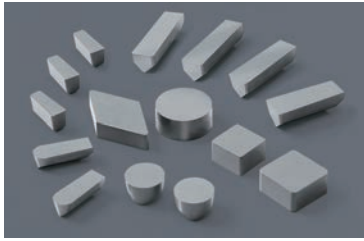Wear resistant SiAlON ceramic



Features

- Better notching resistance compared to Whisker ceramics
No need to program ramping
- Better flank wear resistance compared to other SiAlON ceramics
Superior performance vs. whisker ceramics under same conditions-even higher productivity at higher feed rates
- Excellent thermal shock resistance
High speed milling can be performed at 3000SPM or higher

Turbine case (Waspaloy semi finish)	
Shape : RPGX120700	
Cutting speed(m/min) : 240	
Feed(mm/rev) : 0.3	
Various depth of cut	
WET	
NTK : SX7	7.2 min
Competitor's Whisker ceramic	5.3 min * Broken

SX9

Best grade for roughing Inco 718 with scale



Features

- Excellent notch wear resistance
- Better flank wear resistance compared to competitor's silicon nitride ceramics
- Superior toughness compared to Whisker-reinforced ceramics
- Best thermal shock resistance
- Best grade for roughing Inco 718 with scale

Housing (Inco 718 with scale)		
	Comp. Whisker SX9	
Shape	RCGX120700 ←	
Cutting speed (m/min)	180 ←	
Feed (mm/rev)	0.13 0.2	
Depth of cut (mm)	2.5 ←	
	WET ←	
NTK : SX9	* High productivity	
Competitor's Whisker ceramic		

SX6

Premium Silicon Nitride



Features

- Excellent wear resistance in applications where notch wear appears
- Stable tool life in the applications where thermal shock resistance is required : such as WET machining or milling
- Long tool life and high productivity at high cutting speed

Brake rotor	
Gray cast iron	
Cutting speed(m/min):1,100	
Feed(mm/rev) : 0.5	
Depth of cut (mm):2.0 ~ 3.0	
WET	
NTK : SX6	75 pcs
Competitor's silicon nitride ceramic	50a pcs

SP9

High Speed machining with low cutting forces




Features

- Excellent wear-resistance and chipping resistance with CVD coated high-strength silicon nitride-based ceramic
- Achieves lower tool pressure with minimal edge preparation
- Also usable for finishing

Brake rotor	
Gray cast iron	
Cutting speed(m/min) : 550	
Feed(mm/rev) : 0.4	
DRY	
NTK : SP9	
Competitor's silicon nitride	80 pcs

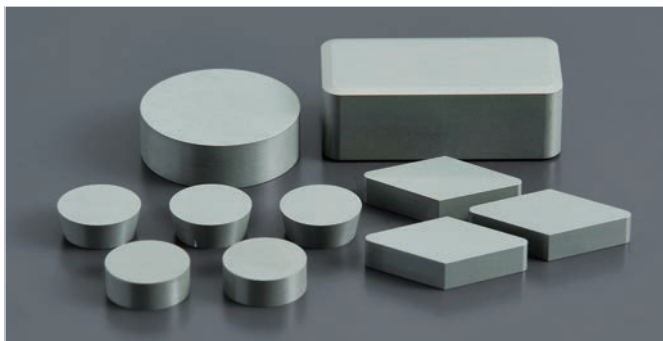
Whisker-based ceramics




This material grade realize a higher level of wear resistance, toughness and flaking resistance by adding SiC whiskers to alumina, the major component.

This grade enables high speed and high feed in cutting normal cast iron, heat-resistant alloys and hardened rolls, with its excellent thermal shock resistance.

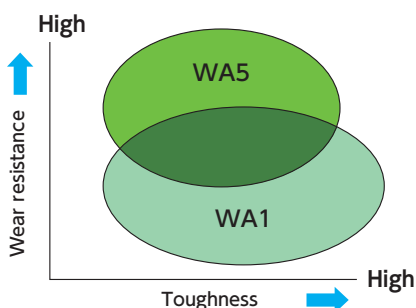
[Heat-resistant alloy]



[Photo of WA1 structure]

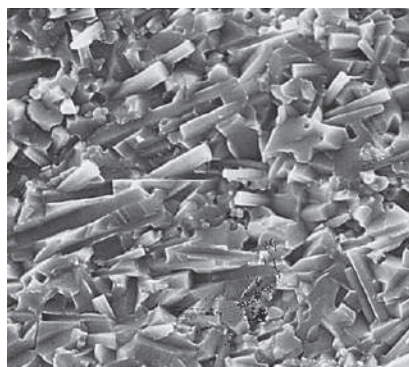

[Photo of WA5 structure]

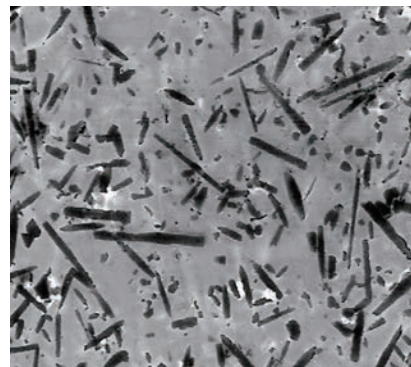

WA5

A new generation for machining of heat-resistant alloys !



Features

- **New material grade for machining of heat-resistant alloys including inconel and waspaloy**
- **Improved wear resistance and flaking resistance by optimizing the amount of whisker content**

[External profiling of heat-resistant alloy with WA5]

Machining of jet engine component ● Work material : Inconel 718		
	Conventional cutting tool	NTK
Material	Competitor's whisker-based ceramic	WA5
Cutting speed (m/min)	200	←
Feed rate (mm/rev)	0.10	←
Depth of cut (mm)	0.30	←
Cutting oil	WET	←
Life (mm/corner)	80	←
Criterion for end of life	Wear marks on the processed surface	Replacement by specified qty of work pieces

WA5

WA5 achieved stable machining compared with the competitor's product.


Machining of jet engine turbine disc ● Work material : Inconel 718		
	Conventional cutting tool	NTK
Material	Competitor's whisker-based ceramic	WA5
Cutting speed (m/min)	400	←
Feed rate (mm/rev)	0.15	←
Depth of cut (mm)	0.25 ~ 0.75	←
Cutting oil	WET	←
Life (mm/corner)	2	4

WA5

WA5 produced twice the tool life of the competitor's product.

WA1

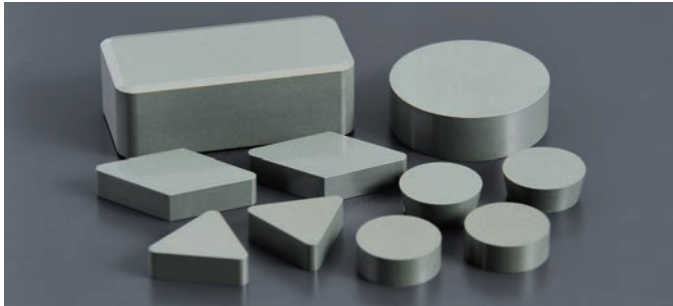Ultra high-speed machining of heat-resistant alloys and cast iron !




Features

- **Excellent thermal shock resistance enables to machine high temperature alloy with high speed** $v_c = \sim 500\text{m/min}$
- **Superior wear resistance allows high speed cutting** $v_c = \sim 1,000\text{m/min}$ on cast iron.
- **Wet machining is feasible by high thermal shock resistance**

[Actual machining example : Gas turbine material]

Case machining		● Work material : Inconel 718
	Conventional cutting tool	NTK
Material grade	Competitor's carbide end mill cutter	WA1
Holder	Solid	RPIW125E125R03
Cutting speed (m/min)	50	800
Feed rate (mm /edge)	0.14	0.10
Depth of cut (mm)	2	←
Cutting oil	WET	DRY
Life (mm /corner)	1 pass = 60 min.	1 pass = 2 min.

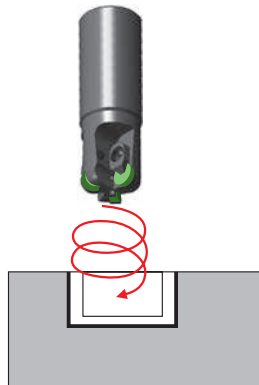WA1




WA1 gave 1.6 times better machining efficiency than the competitor's product.

[Semi-finishing of planetary gear]

Machining of planetary gear		● Work material : FCD700
	Conventional cutting tool	NTK
Material grade	Competitor's carbide	WA1
Cutting speed (m/min)	100	300
Feed rate (mm /rev)	0.4	←
Depth of cut (mm)	1.5	←
Cutting oil	DRY	←
Life (mm /corner)	45	100

WA1




WA1 produced better machining efficiency when compared to the competitor's product.

For technical data of machining heat-resistant alloys with ceramic cutting tools, please go to page L6

MEMO

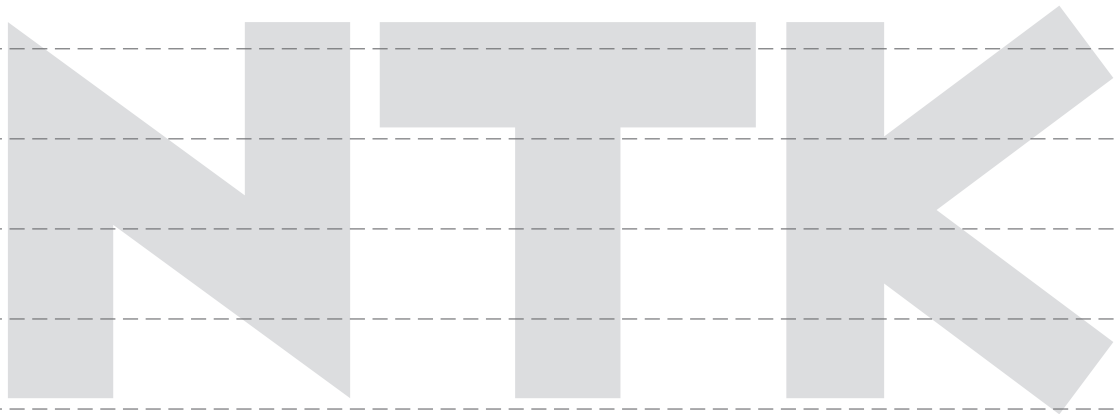New Products
Tool Materials / Selection Guide
BIDEMICS, PCD, CBN and Ceramics
Micrograin Carbide, PVD/Coated Carbide
Insert Item List
General Turning Toolholders
Unique Swiss Tooling
Grooving / Side Turning
Threading
Shaper
ID Tooling
Application Introduction
Endmills
Rotating Tools
Information
Index



D



Micro-grain Carbide, PVD / CVD-coated Carbide

- Overview D2
- PVD-coated Carbide D4
- Micro-grain Carbide D6
- CVD-coated Carbide D6
- PVD Coatings D7

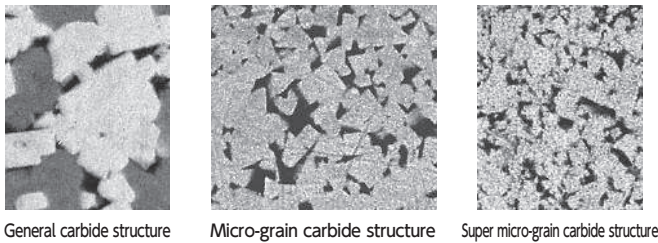
Micro-grain Carbide and PVD/CVD-coated Carbide



Excellence in precision machining and machining of hard-to-cut materials

These material grades use WC micro-grain carbide, the hard layer of which is granulated to a micro size $1\mu\text{m}$ as the substrate. Furthermore, the substrate is coated by the PVD method with TiN, TiCN, and/or TiAlN. The end results are materials that are suitable for precision machining and machining of difficult-to-cut materials. Inserts in these grades are tougher and harder than carbide and come with precision sharp cutting edges. They even have superior toughness and sharper cutting edges than ultra micro-grain carbide grades, with excellent wear resistance and thermal crack resistance.


Carbide grade



The result of intensive research and development for improving carbide grades

The NTK carbide grade series shows very stable performance under a wide range of conditions. NTK uses micro-grain carbide substrate with a balance of wear resistance and toughness.

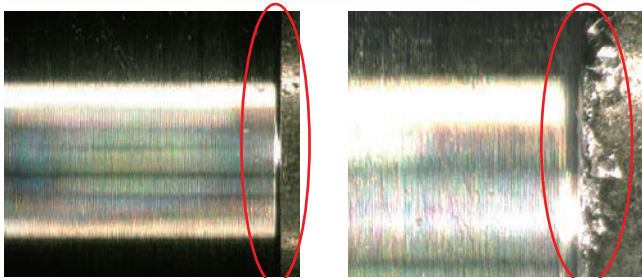Features Superior cutting performance




No burrs
Machined with NTK insert with a sharp cutting edge

Burrs
Machined with a competitor's product with a honed cutting edge

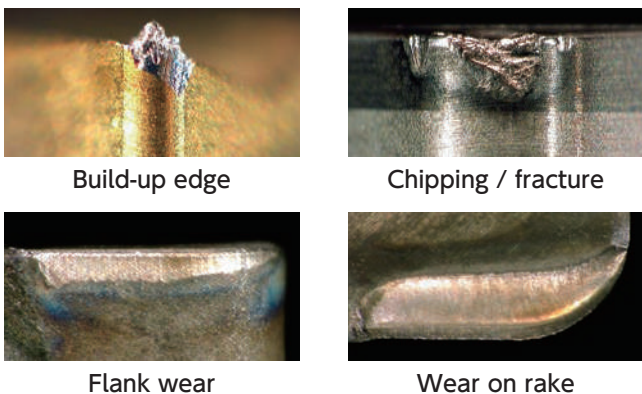Relentless pursuit of better cutting performance


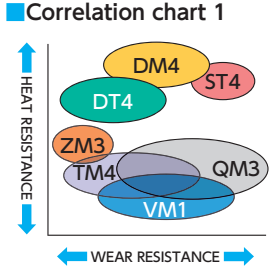
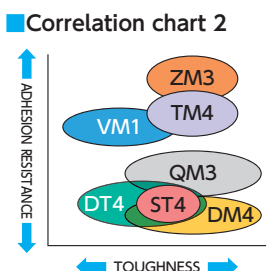
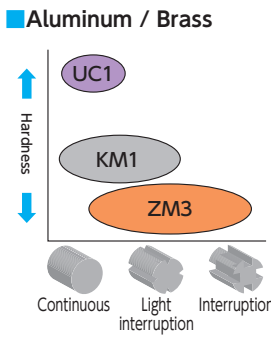











NTK takes pride in its carbide grade series. Their outstanding cutting performance is due to the grinding of ultra sharp cutting edges. Sharper cutting edges provide for better burr control, lower tool pressure, holding tighter tolerances and reducing work hardening.

Features Precise analysis on insert wear patterns



Continuous research on insert tool life

Damage to insert cutting edges varies depending on the machining process and the work material. There are various types of coatings that reduce such damage to prolong the tool life. NTK carbide series offer various coatings developed to improve their resistance characteristics including wear, fracture, adhesion and oxidation, by utilizing state of the art technology.

	Grade / Coating	Applications / Features	Physical properties*					Applications map	
			Density g/cm ³	Hardness HRA	Bending strength MPa	Young's modulus GPa	Thermal expansion coefficient X10 ⁻⁶ /K		Thermal conductivity W/m·K
PVD coated	ST4  Micro-grain carbide + Thick CrAIN coat	<ul style="list-style-type: none"> Best grade for Stainless Steel 	14.4	91.0	3000	580	5.8	63	<p>Correlation chart 1</p>  <p>Correlation chart 2</p>  <p>Aluminum / Brass</p> 
	DM4  Micro-grain carbide + Thick TiN-TiCN-TiAlN coat	<ul style="list-style-type: none"> Best oxidation resistance enable high temperature machining 	14.4	91.0	3000	580	5.8	63	
	DT4  Micro-grain carbide + Thin TiN-TiCN-TiAlN coat	<ul style="list-style-type: none"> Excellent oxidation resistance for Swiss-type lathes 	14.4	91.0	3000	580	5.8	63	
	TM4  Micro-grain carbide + Thin TiN-TiCN-TiN coat	<ul style="list-style-type: none"> Best combination of wear resistance and toughness and adhesion resistance for Swiss-type lathes 	14.4	91.0	3000	580	5.8	63	
	ZM3  Micro-grain carbide + Thick TiN coat	<ul style="list-style-type: none"> Best Adhesion resistance enables high accuracy machining 	14.4	91.0	3000	580	5.8	63	
	QM3  Micro-grain carbide + Thick TiCN coat	<ul style="list-style-type: none"> Best wear resistance enable stable machining 	14.4	91.0	3000	580	5.8	63	
	VM1  Micro-grain carbide + Thin TiCN coat	<ul style="list-style-type: none"> Best edge sharpness and good wear resistance 	14.8	92.0	2500	640	5.7	84	
	AC3  Micro-grain carbide + Thin TiACrN-TiAlN coat	<ul style="list-style-type: none"> Developed for solid carbide endmill 	14.2	91.0	3000	560	6.1	49	
	UC1  Micro-grain carbide + Diamond coat	<ul style="list-style-type: none"> Pure and hard diamond coating. 	14.8	92.0	2500	640	5.7	84	
Uncoated	KM1  Micro-grain carbide	<ul style="list-style-type: none"> Best for non-ferrous material with mirror finish 	14.8	92.0	2500	640	5.7	84	
CVD coated	CP1  Carbide + Thick film Al ₂ O ₃ -TiCN coat	<ul style="list-style-type: none"> Good balance of wear resistance and toughness for cast iron machining 	14.9	92.0	2400	640	—	—	
	CP7  Carbide + Thick film Al ₂ O ₃ -TiCN coat	<ul style="list-style-type: none"> Roughing and semi-finishing of steel 	13.8	90.1	2200	580	—	—	

*For products with coating, the values of the base material are indicated.

New Products
Tool Materials / Selection Guide
BIDEMCS, PCD, CBN and Ceramics
Micrograin Carbide, PVD/CVD-coated Carbide
Insert Item List
General Turning Toolholders
Unique Swiss tooling
Grooving / Side Turning
Threading
Shaper
ID Tooling
Application Introduction
Endmills
Rotating Tools
Information
Index

NEW ST4 Best grade for stainless steel




Features

- Best grade for SUS304 thanks to New ST coating
- Excellent adhesion and wear resistance

Best for	Optimized for	Excellent in
<ul style="list-style-type: none"> ● Stainless steels 	Conventional lathes Swiss-type lathes	Adhesion resistance

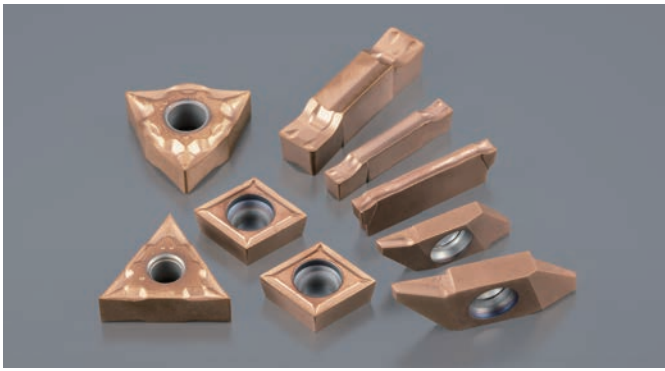DM4 Excellent oxidation resistance




Features

- Best oxidation resistance for high temperature machining
- Optimized for Conventional / Swiss-type lathes

Best for	Optimized for	Excellent in
<ul style="list-style-type: none"> ● Titanium alloys ● Stainless steels ● Alloy steels ● Carbon steels ● Heat resistant alloys 	Conventional lathes Swiss-type lathes	Oxidation Heat resistance

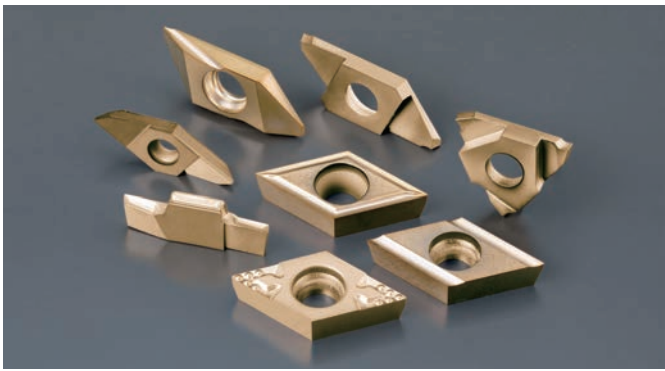DT4 Excellent heat resistance for Swiss-type lathes




Features

- Excellent oxidation resistance for Swiss-type lathes

Best for	Optimized for	Excellent in
<ul style="list-style-type: none"> ● Titanium alloys ● Stainless steels ● Alloy steels ● Carbon steels ● Heat resistant alloys 	Swiss-type lathes	Oxidation Heat resistance

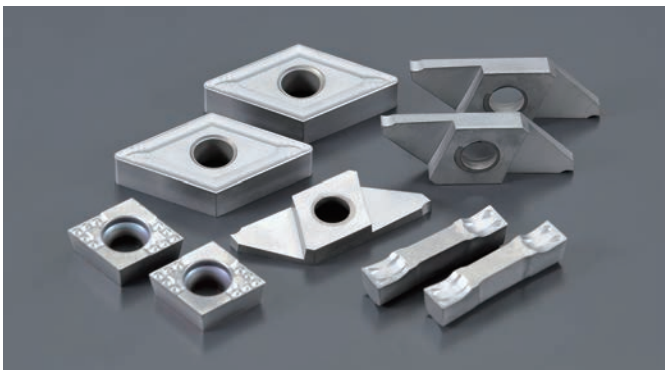QM3 Superb wear resistance and fracture resistance in interrupted cutting



Features

- Excellent toughness and wear resistance for wide speed range
- Stable interrupted machining of steel

Best for	Optimized for	Excellent in
<ul style="list-style-type: none"> ● Carbon steels ● Stainless steels ● Alloy steels ● Heat resistant alloys 	Swiss-type lathes Conventional lathes	Wear resistance

TM4

Next generation standard insert grade for Swiss-type lathes




Features

- **Excellent dimensional stability and tool life thanks to triple titanium layers with excellent adherence to insert substrate**

Best for	Optimized for	Excellent in
<ul style="list-style-type: none"> ● Carbon steels ● Stainless steels ● Alloy steels 	Swiss-type lathes	Balance

VM1

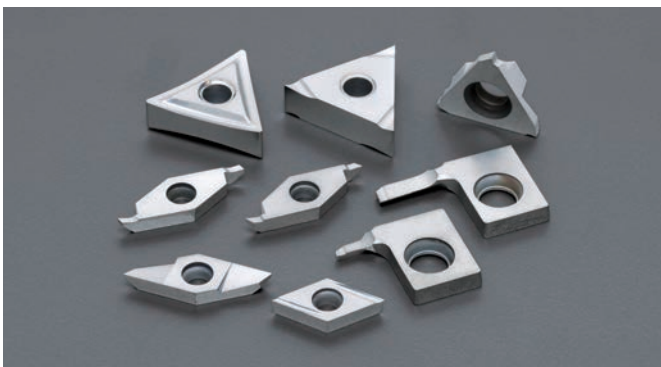High precision machining of small diameter parts




Features

- **Especially for machining free cutting steels (SUM materials)**
- **For high-precision machining with longer tool life even in the high-speed machining range**

Best for	Optimized for	Excellent in
<ul style="list-style-type: none"> ● Carbon steels ● Stainless steels ● Alloy steels 	Swiss-type lathes	Edge sharpness

ZM3

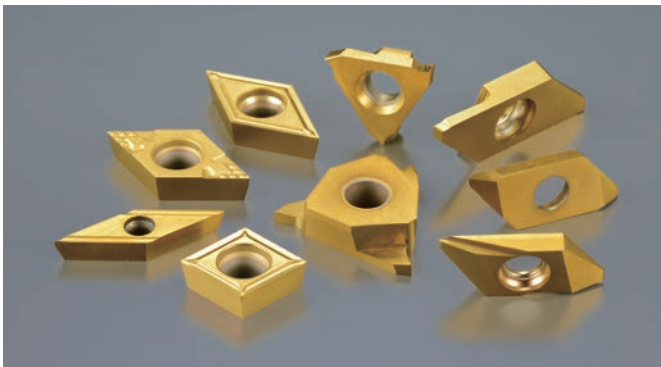The best selling grade for Swiss-type lathes



Features

- **Stabilizes machining dimensions thanks to the coating being firmly adhered to the substrate**
- **A wide range of cutting tools in various sizes available for Swiss-type lathes**

Best for	Optimized for	Excellent in
<ul style="list-style-type: none"> ● Carbon steels ● Stainless steels ● Alloy steels ● Non-ferrous materials 	Swiss-type lathes Conventional lathes	Adhesion resistance

NEW AC3

Developed for solid carbide endmill




Features

- **Newly developed for Carbide endmill**
- **Excellent sharpness and great wear resistance**

KM1

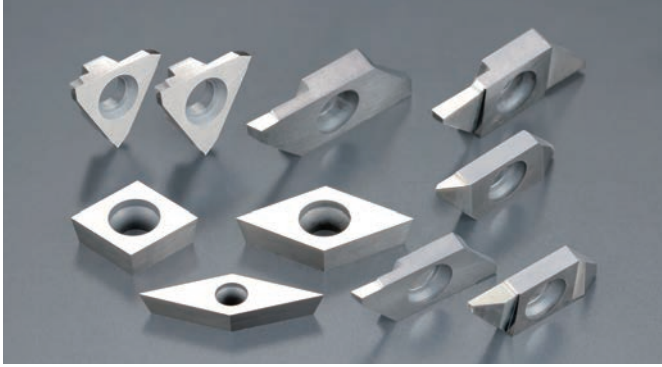
Good for non-ferrous materials like PEEK, Brass, Aluminum and Copper



Features

- *Very sharp cutting edges with uncoated Micro-grain carbide*
- *Excellent adhesion resistance because of mirror-finish*
- *A wide range of cutting tools in various types available for Swiss-type lathes*

Best for	Optimized for	Excellent in
<ul style="list-style-type: none"> • Aluminium • Plastic (PEEK) • Non-ferrous materials 	Swiss-type lathes	Edge sharpness

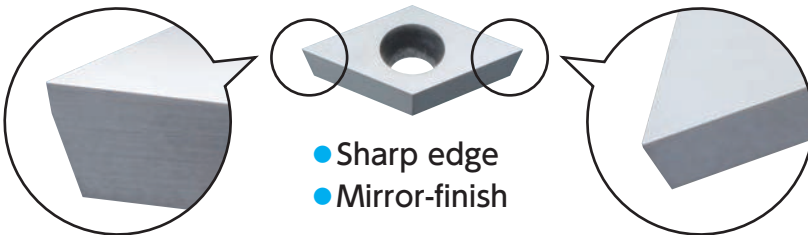

- Sharp edge
- Mirror-finish

CP1

For roughing cast iron and ductile cast iron




Features

- *High wear resistance achieved by laminating thick film TiCN layer and Al₂O₃ layer as the coating; Great for cast iron cutting even in high-speed range*
- *Excellent deposition resistance due to our original surface treatment*
- *Can also be used for machining ductile cast iron*

Best for	Optimized for	Excellent in
<ul style="list-style-type: none"> • Ductile cast iron • Gray cast iron 	Conventional lathes	Wear resistance

CP7

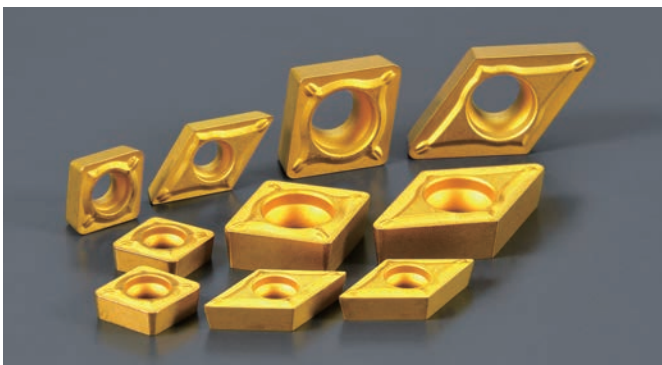For roughing at high speed in steel machining !



Features

- *High wear resistance and fracture resistance achieved by multi-layer coating of the base material by CVD method; used for a wide range of cutting conditions*
- *Recommended for high-speed machining of alloy steel and general steels*
- *Best for machining of automotive components on automatic lathes*

Best for	Optimized for	Excellent in
<ul style="list-style-type: none"> • High-speed machining of alloy steels 	Conventional lathes	Wear resistance

PVD Coatings for Turning

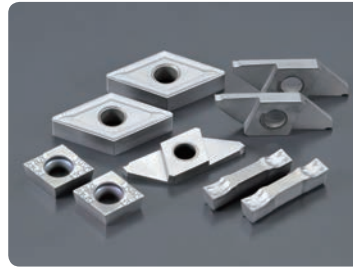
NEW ST4 ST-Coat



Best grade for Stainless Steel

- Stainless steel

QM3 Q-Coat



Best wear resistance

- Stainless steel
- Carbon steel
- Alloy steel

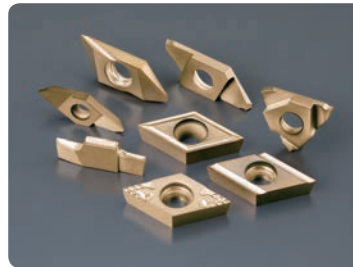
DM4 DM-Coat



Best heat resistance

- Heat resistant alloy
- Stainless steel
- Hardened material

DT4 DT-Coat



Best balance of heat resistance and sharp edges

- Titanium alloy
- Heat resistant alloy
- Stainless steel
- Hardened material

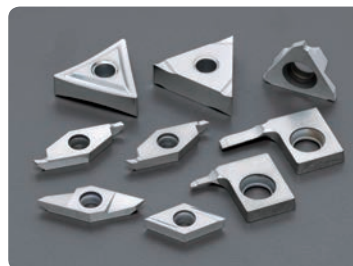
TM4 TM-Coat



Best balance of wear resistance and adhesion resistance

- For small part machining in general

VM1 V-Coat



Best edge sharpness

- Titanium alloy
- Non-ferrous material
- Stainless steel
- Plastic

ZM3 Z-Coat



Best adhesion resistance

- General purpose machining


Coating Specifications

	ST-Coat	Q-Coat	DM-Coat	DT-Coat	TM-Coat	V-Coat	Z-Coat
Thickness	Thick	Thick	Thick	Thin	Thin	Thin	Thick
Wear Resistance	○	◎	○	○	○	○	
Heat Resistance	○		◎	◎			○
Adhesion Resistance	○				○		◎
Edge Sharpness				○	○	◎	
Composition	CrAlN	TiCN	Multilayer	Multilayer	Multilayer	TiCN	TiN


◎1st choice ○2nd choice

MEMO

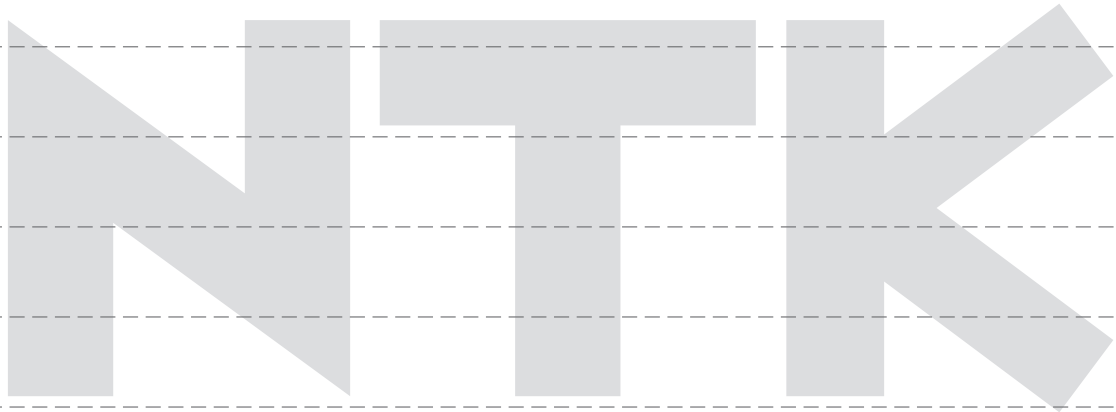New Products
Tool Materials / Selection Guide
BIDEMICS, PCD, CBN and Ceramics
Micrograin Carbide, PVD/CVD-Coated Carbide
Insert Item List
General Turning Toolholders
Unique Swiss Tooling
Grooving / Side Turning
Threading
Shaper
ID Tooling
Application Introduction
Endmills
Rotating Tools
Information
Index



E

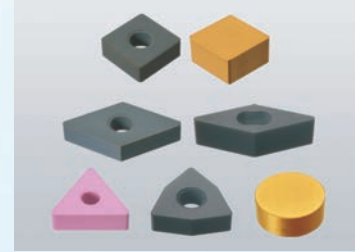

Insert Item List

- ISO / INCH Insert Nomenclature E2
- Part No. for BIDE MICS, Ceramics and CBN insert / Specifications of cutting edge treatment .. E4
- BIDE MICS • Ceramics E6
- BIDE MICS (Braze d) • CBN • PCD E20
- Carbide E36

① Code for shape

Classification	Code	Shape	Apex angle (degree)	Symbol
Regular polygons	H	Regular hexagon	120	⬡
	O	Regular octagon	135	⬢
	P	Regular pentagon	108	⬠
	S	Square	90	⬜
	T	Equilateral triangle	60	⬤
Rhomboids and equilateral unequal-angles	C	Rhomboids	80	◊
	D		55	
	E		75	
	F		50	
	M		86	
	V		35	
	W		Hexagon	
Rectangles	L	Rectangle	90	▭
Parallelograms	A	Parallelograms	85	▱
	B		82	
	K		55	
Circles	R	Circle	—	○

Note: The smaller of the apex angles is used.

③ Codes for accuracy

Code	Diameter of inscribed circle d (mm)	Thickness s (mm)	Corner height m (mm)
A*	± 0.025	± 0.025	± 0.005
F*	± 0.013		± 0.013
C*	± 0.025		± 0.025
H	± 0.013	± 0.13	± 0.013
E	± 0.025		± 0.025
G	± 0.025	± 0.025	± 0.005
J*	± 0.05 ~ ± 0.13		± 0.013
K*	± 0.05 ~ ± 0.13		± 0.025
L*	± 0.05 ~ ± 0.13	± 0.13	± 0.08 ~ ± 0.18
M	± 0.05 ~ ± 0.13		± 0.13
N	± 0.05 ~ ± 0.13	± 0.13	± 0.13 ~ ± 0.38
U	± 0.08 ~ ± 0.25		± 0.13

Notes: The asterisk (*) indicates that the accuracy range is, basically, applied to inserts equipped with a flat drag. The double asterisk (**) indicates that the accuracy range is determined by the size of the insert.


Tolerances for each insert size Except for inserts with 55, 50 or 35 degrees in apex angle

Diameter of inscribed circle d (mm)	Inscribed circle diameter tolerance d		Corner height tolerance m	
	Class J, L, K, M, N	Class U	Class M or N	Class U
6.35 9.525	± 0.05	± 0.08	± 0.08	± 0.13
12.70	± 0.08	± 0.13	± 0.13	± 0.20
15.875 19.05	± 0.10	± 0.18	± 0.15	± 0.27
25.40	± 0.13	± 0.25	± 0.18	± 0.38

The tolerances for class M inserts with 55 degrees in apex angle are as follows

Diameter of inscribed circle d (mm)	Inscribed circle diameter tolerance (mm) d	Corner height tolerance (mm) m
6.35 9.525	± 0.05	± 0.11
12.70	± 0.08	± 0.15
15.875 19.05	± 0.10	± 0.18

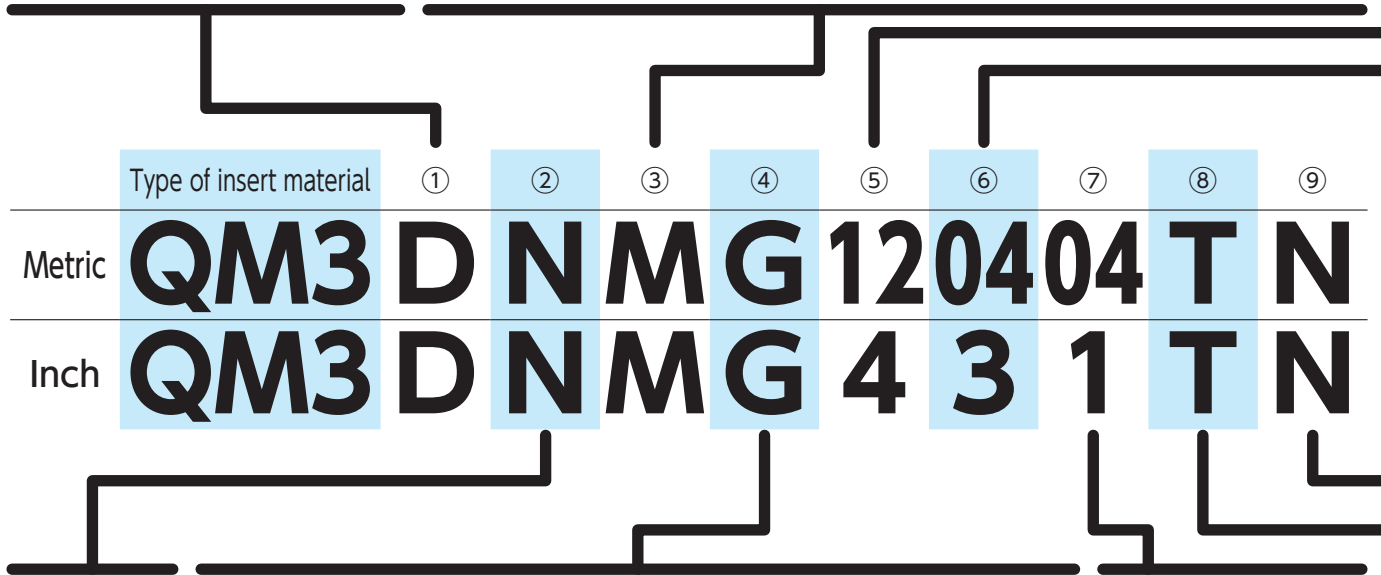Note: The accuracy range of "m" can be spread for inserts with apex angles smaller than 55 degrees.



② Codes for relief angles

Relief angle (degree)	Code
3	A
5	B
7	C
15	D
20	E
25	F
30	G
0	N
11	P
Other relief angles	O

Note: The relief angle must be that of the major cutting edge.

④ Codes for grooved holes

For normal series					
Code	Provision of holes	Shape of hole	Chipbreaker	Pattern	
N	No	—	None		
R			Single-sided		
F			Double-sided		
A	Yes	Cylindrical	None		
M			Single-sided		
G			Double-sided		
W			Partially cylindrical	None	
T			Single-sided: 40 - 60 deg	Single-sided	
Q			Double-sided: 40 - 60 deg	Double-sided	
U	Partially cylindrical	None			
B	Yes	Partially cylindrical	None		
H			Single-sided: 70 - 90 deg	Single-sided	
C			Double-sided: 70 - 90 deg	Double-sided	
J	Partially cylindrical	None			
X	—	—	—	—	

Note: Only the normal series is to be used for the metric system. Always use code X for scalene inserts. However, X must not be used for inserts of shapes not defined in the table (1) above.

⑦ Codes for corner radii


For corner R		
Corner-R nominal value (mm)	Inch system	Metric system
Sharp corner		
r _ε : 0.2	Y	02
0.4	1	04
0.8	2	08
1.2	3	12
1.6	4	16
2.0	5	20
2.4	6	24
3.2	8	32
Other radii		X
For circular inserts	0	00* M0*

Notes: "00" (double zero) is used for insert circle diameter indicated in inches. "M0" is used for insert circle diameter indicated in millimeters.

⑤ Codes for cutting edge lengths or for inscribed circle diameters ⑥ Codes for thickness

Diameter of inscribed circle d (mm)	Inch system		Metric system														
	Normal series	Small-size series	Shapes														
			H	O	P	S	T	C	D	E	F	M	V	W	R		
3.97	—	5					06			T3							
4.76	—	6					08			04							
5.56	—	7					05	09	05	06	05	07	05	09	03		
6.35	2	(8)	03	02	04	06	11	06	07	06	08	06	11	04	06		
7.94	—	0	04	03	05	07	13	08	09	08	10	07	13	05	07		
9.525	3	—	05	04	07	09	16	09	11	09	12	09	16	06	09		
12.70	4	—	07	05	09	12	22	12	15	13	16	12	22	08	12		
15.875	5	—	09	06	11	15	27	16	19	16	20	15	27	10	15		
19.05	6	—	11	07	13	19	33	19	23	19	24	19	33	13	19		
25.40	8	—	14	10	18	25	44	25	31	26	33	25	44	17	25		
31.75	0	—	18	13	23	31	54	32	38	32	41	31	54	21	31		

Thickness S (mm)	Inch system		Metric system
	Inscribed circle series		
	Normal series	Small-size series	
1.59	—	2	01
2.38	—	3	02
3.18	2	4	03
3.97	—	5	T3
4.76	3	6	04
5.56	—	—	05
6.35	4	—	06
7.94	5	—	07
9.52	6	—	09
12.70	8	—	12



⑪ Codes for chipbreaker shapes

Parallel-honing type (mm)

Code	W	θ°
A	1.0	14
B	1.5	14
C	2.2	14
D	2.8	10
E	3.5	10

⑧ Codes for major cutting edges

Without honing (Tool nose processing)	F
Angular honing	T
Round honing	E
Angular honing + round honing	S
Special honing	K
Special honing + round honing	P

⑨ Codes for left/right handed inserts

Type	Code
Right-handed	R
Left-handed	L
Not specified	N

Type N (Double-positive type) (mm)

Code	W
N1	1.5
N2	2.2

Type P (Angle type) (mm)

Code	W
P1	0.9
P2	1.25

Full-arc embossed type (mm)







Code	W
F	1.5
G	2.2
H	2.8

C **N** **G** **A** **12** **04** **12**

Part No. Designation Code for Inserts → Refer to page E2.


① Codes for major cutting edges

Cutting edge treatment : Chamfering or honing of the cutting edge in order to strengthen the edge or to adjust the cutting performance

	Code	Shape
Sharp edge	F	
Round honing	E	
Angular grinding	T	
Angular grinding + round honing	Z	
	S	
2-step chamfering + round honing	P	



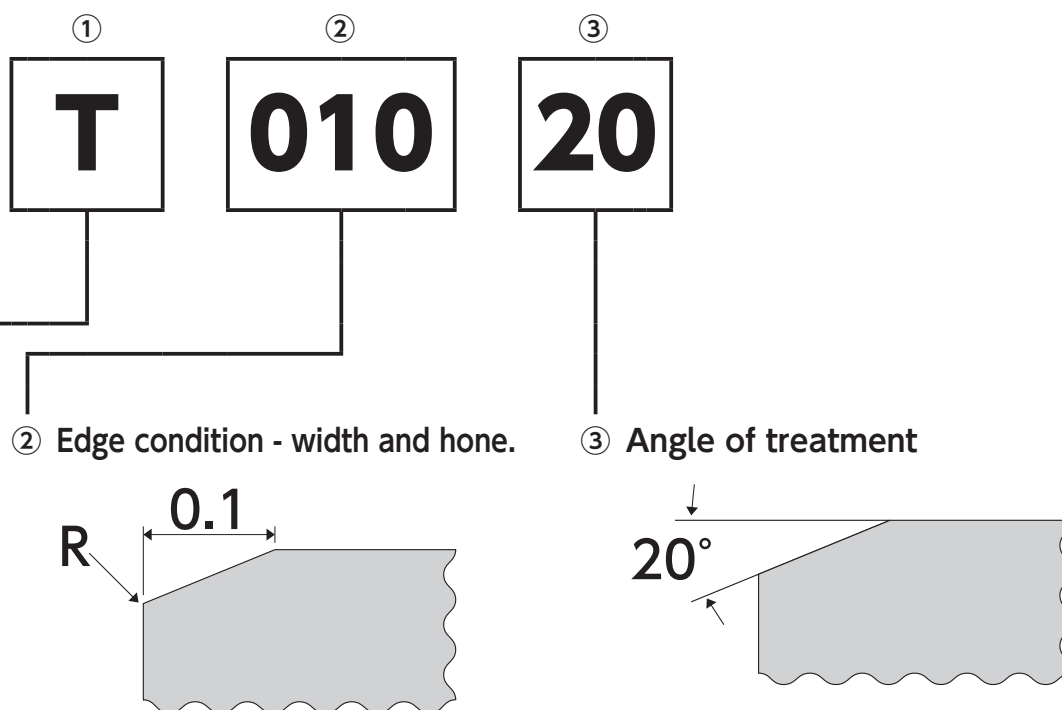- Negative type
- Positive type
- C
- D
- E
- R
- S
- T
- V
- W
- For Machining Mill rolls



Codes for cutting edges and the shapes

Code	Shape of the cutting edge
E002	Round honing with R = 0.02
E004	Round honing with R = 0.04
E007	Round honing with R = 0.07
EX0004	Round honing with R = 0.02
S01015	Chamfering 0.10 mm x 15 deg. + round honing with R = 0.04 (*R0.03)
S01020	Chamfering 0.10 mm x 20 deg. + round honing with R = 0.04 (*R0.03)
S01325	Chamfering 0.13 mm x 25 deg. + round honing with R = 0.04 (*R0.03)
S01535	Chamfering 0.15 mm x 35 deg. + round honing with R = 0.04 (*R0.03)
S02025	Chamfering 0.20 mm x 25 deg. + round honing with R = 0.04 (*R0.03)
T00320	Chamfering 0.03 mm x 20 deg.
T00520	Chamfering 0.05 mm x 20 deg.
T00525	Chamfering 0.05 mm x 25 deg.
T00820	Chamfering 0.08 mm x 20 deg.
T01015	Chamfering 0.10 mm x 15 deg.
T01020	Chamfering 0.10 mm x 20 deg.
T01025	Chamfering 0.10 mm x 25 deg.
T01515	Chamfering 0.15 mm x 15 deg.
T01520	Chamfering 0.15 mm x 20 deg.
T01525	Chamfering 0.15 mm x 25 deg.
T02020	Chamfering 0.20 mm x 20 deg.
T02025	Chamfering 0.20 mm x 25 deg.
Z01015	Chamfering 0.10 mm x 15 deg. + round honing with R = 0.02
Z01025	Chamfering 0.10 mm x 25 deg. + round honing with R = 0.02
Z01030	Chamfering 0.10 mm x 30 deg. + round honing with R = 0.02
Z01520	Chamfering 0.15 mm x 20 deg. + round honing with R = 0.02
Z02025	Chamfering 0.20 mm x 25 deg. + round honing with R = 0.02

*CBN=R0.03

Item Number	IC	T
DN_1504_	12.7	4.76
DN_1507_	12.7	7.94

<55 degree Rhombic Negative type>

Shape	ISO Item Number	Inch Item Number	R	Ceramics														For applicable holder, see pages:			
				Alumina-based							Silicon nitride-based					Whisker-based					
				BIDEMICS																	
				JX1	JX3	HC1	HW2	HC2	HC4	HC6	ZC7	SX6	SX7	SX3	SX9	SP9	WA1	WA5			
	DNGA 150404 S02025	DNGA431-SNF	0.4																	<div style="display: flex; flex-direction: column; gap: 5px;"> F13 F15 G41 K35 </div>	
	150404 T01025	431-TN	0.4					●		●	●										
	150404 Z02025	431-ZNF	0.4						●												
	150408 S02025	432-SNF	0.8					●			●										
	150408 T00520	—	0.8													●		●			
	150408 T01020	—	0.8														●				
	150408 T01025	432-TN	0.8					●		●	●										
	150408 T02020	—	0.8										●								
	150408 T02025	432-TNF	0.8													●					
	150408 Z02025	432-ZNF	0.8						●												
	150412 S02025	433-SNF	1.2								●										
	150412 T01020	—	1.2														●	●			
	150412 T01025	433-TN	1.2					●			●										
	150412 T02020	—	1.2										●								
150412 T02025	433-TNF	1.2													●						
	DNGN 150404 T01025	DNGN431-TN	0.4					●												<div style="display: flex; flex-direction: column; gap: 5px;"> F13 F15 </div>	
	150408 S02025	432-SNF	0.8								●										
	150408 T01025	432-TN	0.8							●	●										
	150408 Z02025	432-ZNF	0.8						●												
	150412 T00520	—	1.2															●			
	150412 T02025	433-TNF	1.2															●			
	DNGG 150408 Z01030 AG	DNGG432-ZNCGAG	0.8								●									<div style="display: flex; flex-direction: column; gap: 5px;"> F13 F15 G41 K35 </div>	
	150412 Z01030 AG	433-ZNCGAG	1.2								●										
	DNGX 150716 T02025	—	1.6														●			<div style="display: flex; flex-direction: column; gap: 5px;"> F13 F15 K35 </div>	

● : Standard stock ● : New standard stock ■ : Scheduled to be produced by order ★ : Standard stock (Specified)

<75 degree Rhombic Negative type>


Item Number	IC	T
EN_1307_	12.7	7.94

Shape	ISO Item Number	Inch Item Number	R	Ceramics														For applicable holder, see pages:		
				Alumina-based							Silicon nitride-based					Whisker-based				
				BIDEMICS																
				JX1	JX3	HC1	HW2	HC2	HC4	HC6	ZC7	SX6	SX7	SX3	SX9	SP9	WA1	WA5		
	ENGN 130708 T02025	ENGN452-TN	0.8					●												—
	130712 T02025	453-TN	1.2					●												

● : Standard stock ● : New standard stock ■ : Scheduled to be produced by order ★ : Standard stock (Specified)

Item Number	IC	T
SN_1204	12.7	4.76
SN_1207	12.7	7.94
SN_1507	15.875	7.94
SN_1906	19.05	6.35
SN_1907	19.05	7.94
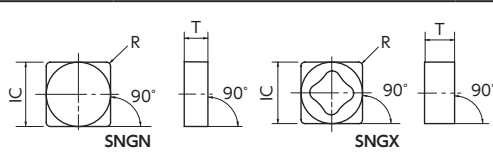
<90 degree Square Negative type>



Material	P	M	K	N	S	H
Steel	●	●	●	●	●	●
Stainless Steel	●	●	●	●	●	●
Cast Iron	●	●	●	●	●	●
Non-Ferrous Material	●	●	●	●	●	●
Heat Resistant Alloy	●	●	●	●	●	●
Hardened Material	●	●	●	●	●	●

● : 1st Choice
● : 2nd choice



Shape	ISO Item Number	Inch Item Number	R	Ceramics														For applicable holder, see pages:		
				BIDEMICS		Alumina-based							Silicon nitride-based						Whisker-based	
				JX1	JX3	HC1	HW2	HC2	HC4	HC6	ZC7	SX6	SX7	SX3	SX9	SP9	WA1		WA5	
	SNGN 120412 T01025	SNGN433-TN	1.2			●		●		●	●								●	F17 F19 F21 K36 N12 N14 N16
	120412 T02020	—	1.2											●				●		
	120412 T02025	433-TNF	1.2															●		
	120412 Z02025	433-ZNF	1.2						●											
	120416 S02025	434-SNF	1.6											●						
	120416 T00520	—	1.6															●		
	120416 T01020	—	1.6															●		
	120416 T01025	434-TN	1.6			●		●		●	●							●		
	120416 T02020	—	1.6											●						
	120416 T02025	434-TNF	1.6															●		
	120416 Z02025	434-ZNF	1.6						●											
	120420 T01025	435-TN	2					●		●										
	120420 T01020	—	2															●		
	120420 T02020	—	2											●						
	120420 T02025	435-TNF	2			●												●		
	120424 T01025	436-TN	2.4					●												
	120424 T02020	—	2.4											●						
	SNGN 120708 T02025	SNGN452-TN	0.8			●		●												
	120712 S02025	453-SNF	1.2					●												
	120712 T02025	453-TN	1.2					●												
120716 T02025	454-TN	1.6				●														
SNGN 150716 T02025	SNGN554-TN	1.6															●			
SNGN 190616 T00525	SNGN644-TNB	1.6															●			
SNGN 190724 T00525	SNGN656-TNB	2.4															●			
	SNGX 120712 T02025	—	1.2														●	F17 K36		
	120716 T02025	—	1.6														●			

● : Standard stock ● : New standard stock ■ : Scheduled to be produced by order ★ : Standard stock (Specified)

- New Products
- Tool Materials / Selection Guide
- BIDEMICS, PCD, CBN and Ceramics
- Micrograin Carbide, PVD Coated Carbide
- Insert Item List
- General Turning Toolholders
- Unique Swiss Tooling
- Grooving / Side Turning
- Threading
- Shaper
- ID Tooling
- Application Introduction
- Endmills
- Rotating Tools
- Information
- Index

Item Number	IC	T
TN_1604	9.525	4.76
TN_1607	9.525	7.94
TN_2204	12.7	4.76
TN_2207	12.7	7.94

<60 degree Triangle Negative type>

Shape	ISO Item Number	Inch Item Number	R	BIDEMICS		Ceramics										For applicable holder, see pages:				
				JX1	JX3	Alumina-based					Silicon nitride-based				Whisker-based					
						HC1	HW2	HC2	HC4	HC6	ZC7	SX6	SX7	SX3	SX9	SP9	WA1	WA5		
	TNGN 160416 T01020	—	1.6													●			F23 F25	
	160416 T01025	TNGN334-TN	1.6			●	●	●												
	160416 T02020	—	1.6										●							
	160416 T02025	334-TNF	1.6													●				
	160420 T01025	335-TN	1.6			●		●												
	160420 T02020	—	2										●							
	TNGN 160708 T02025	TNGN352-TN	0.8					●												
	160712 T02025	353-TN	1.2					●												
	TNGN 220416 T00520	—	1.6															●		
	TNGN 220716 T00520	—	1.6															●		
	TNGG 160408 Z01030 AG	TNGG332-ZNCGAG	0.8								●								F23	
	160412 Z01030 AG	333-ZNCGAG	1.2								●								F25 G39	

● : Standard stock ● : New standard stock ■ : Scheduled to be produced by order ★ : Standard stock (Specified)

- New Products
- Tool Materials / Selection Guide
- BIDEMICS, PCD, Micrograin Carbide, PVD Coated Carbide, CBN and Ceramics
- Insert Item List
- General Turning Toolholders
- Unique Swiss Tooling
- Grooving / Side Turning
- Threading
- Shaper
- ID Tooling
- Application Introduction
- Endmills
- Rotating Tools
- Information
- Index

MEMO

Handwriting practice area with dashed lines. The word "NETK" is written in large, bold, grey letters across the middle of the page.

New Products

Tool Materials / Selection Guide

BIDEMCS, PCD, CBN and Ceramics

Micrograin Carbide, PVD Coated Carbide

Insert Item List

General Turning Toolholders

Unique Swiss Tooling

Grooving / Side Turning

Threading

Shaper

ID Tooling

Application Introduction

Endmills



Rotating Tools

Information

Index

Item Number	IC	T
CN_1204_	12.7	4.76

<80 degree Rhombic Negative type>

Shape	ISO Item Number	Inch Item Number	Edge Prep.	R	Steel	P											For applicable holder, see pages:								
					Stainless Steel	M	BIDEMICS (Coated)	CBN (Brazed) (Coated)			CBN (Brazed)				Diamond Coating			PCD							
					Cast Iron	K	JP2	B16	B5K	B6K	B22	B23	B30	B36	B40	B52	UC1	PD1	PD2						
					Non-Ferrous Material	N																			
					Heat Resistant Alloy	S																			
					Hardened Material	H																			
 4 corners available	CNGA 120404 BQ	CNGA431BQ	T00520	0.4	●																				
	120408 BQ	432BQ	T00520	0.8	●																				
	120412 BQ	433BQ	T00520	1.2	●																				
 4 corners available	CNGA 120402 PQ SCD	CNGA4308PQS0415	S01015	0.2									●	●	●										
	120402 PQ SXF	4308PQS0525	S01325	0.2									●	●	●										
	120402 PQ SEH	4308PQS0635	S01535	0.2									●	●	●										
	120402 PQ TCE	4308PQT0420	T01020	0.2									●												
	120404 PQ F	431PQFNX	None	0.4									●			●									
	120404 PQ SCD	431PQS0415	S01015	0.4				●	●				●	●	●										
	120404 PQ SCE	431PQS0420	S01020	0.4								●													
	120404 PQ SXF	431PQS0525	S01325	0.4				●	●				●	●	●										
	120404 PQ SEH	431PQS0635	S01535	0.4				●	●				●	●	●										
	120404 PQ TCE	431PQT0420	T01020	0.4									●												
	120408 PQ F	432PQFNX	None	0.8									●			●									
	120408 PQ SCD	432PQS0415	S01015	0.8				●	●				●	●	●										
	120408 PQ SCE	432PQS0420	S01020	0.8									●												
	120408 PQ SXF	432PQS0525	S01325	0.8				●	●				●	●	●										
	120408 PQ SEH	432PQS0635	S01535	0.8				●	●				●	●	●										
	120408 PQ TBD	432PQT0215	T00515	0.8									●												
	120408 PQ TCE	432PQT0420	T01020	0.8									●												
	120412 PQ F	433PQFNX	None	1.2									●			●									
120412 PQ SCD	433PQS0415	S01015	1.2				●	●				●	●	●											
120412 PQ SCE	433PQS0420	S01020	1.2									●													
120412 PQ SXF	433PQS0525	S01325	1.2				●	●				●	●	●											






● : Standard stock ● : New standard stock ■ : Scheduled to be produced by order ★ : Standard stock (Specified)

F9
F11
G40
K34



Item Number	IC	T
CN_1204_	12.7	4.76

<80 degree Rhombic Negative type>


Shape	ISO Item Number	Inch Item Number	Edge Prep.	R	BIDEMICS (Coated)	CBN (Brazed) (Coated)			CBN (Brazed)					Diamond Coating		PCD	For applicable holder, see pages:
					JP2	B16	B5K	B6K	B22	B23	B30	B36	B40	B52	UC1		
 4 corners available	CNGA 120412 PQ SEH	CNGA433PQS0635	S01535	1.2			●	●									
	120412 PQ TBD	433PQT0215	T00515	1.2													
	120412 PQ TCE	433PQT0420	T01020	1.2													
	120416 PQ SCD	434PQS0415	S01015	1.6													
	120416 PQ SCE	434PQS0420	S01020	1.6						●							
	120416 PQ SXF	434PQS0525	S01325	1.6				●									
	120416 PQ SEH	434PQS0635	S01535	1.6													
	120416 PQ TCE	434PQT0420	T01020	1.6													
	120420 PQ SCD	435PQS0415	S01015	2													
	120420 PQ SCE	435PQS0420	S01020	2													
	120420 PQ SXF	435PQS0525	S01325	2													
	120420 PQ SEH	435PQS0635	S01535	2													
120420 PQ TCE	435PQT0420	T01020	2														
 one side 2 corners available	CNGA 120404 PD F	CNGA431PDFNX	None	0.4													F9
	120408 PD F	432PDFNX	None	0.8													F11
	120412 PD F	433PDFNX	None	1.2													G40
 4 corners available with wiper	CNGA 120404 PQ W SCD	CNGA431PQWS0415	S01015	0.4													K34
	120404 PQ W SEH	431PQWS0635	S01535	0.4													
	120408 PQ W SCD	432PQWS0415	S01015	0.8													
	120408 PQ W SEH	432PQWS0635	S01535	0.8													
	120412 PQ W SCD	433PQWS0415	S01015	1.2													
	120412 PQ W SEH	433PQWS0635	S01535	1.2													
 4 corners available	CNMG 120404 FN ZP	CNMG431-FN-ZP	None	0.4													
	120408 FN ZP	432-FN-ZP	None	0.8													
 1 corner available with chipbreaker (rake angle 10°)	CNMX 120404 P F		None	0.4													
	120408 P F		None	0.8													

● : Standard stock ● : New standard stock ■ : Scheduled to be produced by order ★ : Standard stock (Specified)

- New Products
- Tool Materials / Selection Guide
- BIDEMICS, PCD, CBN and Ceramics
- Micrograin Carbide, PVD Coated Carbide
- Insert Item List
- General Turning Toolholders
- Unique Swiss Tooling
- Grooving / Side Turning
- Threading
- Shaper
- ID Tooling
- Application Introduction
- Endmills
- Rotating Tools
- Information
- Index



Item Number	IC	T
DN_1504	12.7	4.76
DN_1506	12.7	6.35

<55 degree Rhombic Negative type>



Steel	P
Stainless Steel	M
Cast Iron	K
Non-Ferrous Material	N
Heat Resistant Alloy	S
Hardened Material	H

● : 1st Choice
● : 2nd choice

Shape	ISO Item Number	Inch Item Number	Edge Prep.	R	BIDEMICS (Coated)	CBN (Brazed) (Coated)			CBN (Brazed)					Diameter Coating	PCD	For applicable holder, see pages:
					JP2	B16	B5K	B6K	B22	B23	B30	B36	B40			
 4 corners available	DNGA 150404 BQ	DNGA431BQ	T00520	0.4	●											
	150408 BQ	432BQ	T00520	0.8	●											
	150412 BQ	433BQ	T00520	1.2	●											
 4 corners available	DNGA 150402 PQ SCD	DNGA4308PQS0415	S01015	0.2												
	150402 PQ SXF	4308PQS0525	S01325	0.2												
	150402 PQ SEH	4308PQS0635	S01535	0.2												
	150402 PQ TCE	4308PQT0420	T01020	0.2												
	150404 PQ F	431PQFNX	None	0.4												
	150404 PQ SCD	431PQS0415	S01015	0.4			●	●								
	150404 PQ SCE	431PQS0420	S01020	0.4												
	150404 PQ SXF	431PQS0525	S01325	0.4			●	●								
	150404 PQ SEH	431PQS0635	S01535	0.4			●	●								
	150404 PQ TCE	431PQT0420	T01020	0.4												
	150408 PQ F	432PQFNX	None	0.8												
	150408 PQ SCD	432PQS0415	S01015	0.8			●	●								
	150408 PQ SCE	432PQS0420	S01020	0.8												
	150408 PQ SXF	432PQS0525	S01325	0.8			●	●								
	150408 PQ SEH	432PQS0635	S01535	0.8			●	●								
	150408 PQ TCE	432PQT0420	T01020	0.8												
	150412 PQ F	433PQFNX	None	1.2												
	150412 PQ SCD	433PQS0415	S01015	1.2			●	●								
	150412 PQ SCE	433PQS0420	S01020	1.2												
	150412 PQ SXF	433PQS0525	S01325	1.2			●	●								
	150412 PQ SEH	433PQS0635	S01535	1.2			●	●								
	150412 PQ TCE	433PQT0420	T01020	1.2												
	150416 PQ SCD	434PQS0415	S01015	1.6			●	●								
	150416 PQ SCE	434PQS0420	S01020	1.6												
	150416 PQ SXF	434PQS0525	S01325	1.6			●	●								
	150416 PQ SEH	434PQS0635	S01535	1.6			●	●								
	150416 PQ TCE	434PQT0420	T01020	1.6												
	150420 PQ SCD	435PQS0415	S01015	2				●								
	150420 PQ SXF	435PQS0525	S01325	2				●								
	150420 PQ SEH	435PQS0635	S01535	2				●								
DNGA 150602 PQ SCD	4408PQS0415	S01015	0.2													
150604 PQ SCD	441PQS0415	S01015	0.4													
150604 PQ SXF	441PQS0525	S01325	0.4													

F13
F15
G41
K35

● : Standard stock ● : New standard stock ■ : Scheduled to be produced by order ★ : Standard stock (Specified)

BIDEMICS (Brazed) • CBN • PCD

Negative type

Positive type

◆

◇

○




□

△

▽

Item Number	IC	T
DN_1504_	12.7	4.76
DN_1506_	12.7	6.35



<55 degree Rhombic Negative type>

Shape	ISO Item Number	Inch Item Number	Edge Prep.	R	BIDEMICS (Coated)	CBN (Brazed) (Coated)			CBN (Brazed)					Diamond Coating		PCD	For applicable holder, see pages:	
					JP2	B16	B5K	B6K	B22	B23	B30	B36	B40	B52	UC1			PD1
 <p>4 corners available</p>	DNGA 150604 PQ TCE	DNGA441PQT0420	T01020	0.4														F13 F15 G41 K35
	150608 PQ SCD	442PQS0415	S01015	0.8														
	150608 PQ SXF	442PQS0525	S01325	0.8														
	150608 PQ TCE	442PQT0420	T01020	0.8														
	150612 PQ SCD	443PQS0415	S01015	1.2														
	150612 PQ SXF	443PQS0525	S01325	1.2														
	150612 PQ TCE	443PQT0420	T01020	1.2														
	150616 PQ SCD	444PQS0415	S01015	1.6														
	150616 PQ SXF	444PQS0525	S01325	1.6														
 <p>one side 2 corners available</p>	DNGA 150404 PD F	DNGA431PDFNX	None	0.4														
	150408 PD F	432PDFNX	None	0.8														
	150412 PD F	433PDFNX	None	1.2														
 <p>1 corner available with chipbreaker (rake angle 10°)</p>	DNMX 150404 P F		None	0.4														
	150408 P F		None	0.8														

● : Standard stock ● : New standard stock ■ : Scheduled to be produced by order ★ : Standard stock (Specified)

Item Number	IC	T
RN_1203_	12.7	3.18
RN_1204_	12.7	4.76


<Round Negative type>

Shape	ISO Item Number	Inch Item Number	Edge Prep.	R	BIDEMICS (Coated)	CBN (Brazed) (Coated)			CBN (Brazed)					Diamond Coating		PCD	For applicable holder, see pages:	
					JP2	B16	B5K	B6K	B22	B23	B30	B36	B40	B52	UC1			PD1
 <p>(top full-face CBN)</p>	RNGN 120400 S	RNGN430S	Z01015	—														F30 N9 L23 L30
 <p>(Solid CBN)</p>	RNMN 120300 S TN	RNMN420STN	T01025	—														—
	RNMN 120400 S TN	RNMN430STN	T01025	—														

● : Standard stock ● : New standard stock ■ : Scheduled to be produced by order ★ : Standard stock (Specified)


Item Number	IC	T
TN_1604_	9.525	4.76
TN_2204_	12.7	4.76

<60 degree Triangle Negative type>



Steel	P
Stainless Steel	M
Cast Iron	K
Non-Ferrous Material	N
Heat Resistant Alloy	S
Hardened Material	H

● : 1st Choice
● : 2nd choice


Shape	ISO Item Number	Inch Item Number	Edge Prep.	R	BIDEMICS (Coated)	CBN (Brazed) (Coated)			CBN (Brazed)					Diamond Coating		PCD	For applicable holder, see pages:
					JP2	B16	B5K	B6K	B22	B23	B30	B36	B40	B52	UC1		
 <p>6 corners available</p>	TNGA 160401 PH F	TNGA3304PHFNX	None	0.1													
	160401 PH SCD	3304PHS0415	S01015	0.1		●	●										
	160401 PH SXF	3304PH0525	S01325	0.1		●	●										
	160401 PH SEH	3304PHS0635	S01535	0.1													
	160402 PH F	3308PHFNX	None	0.2							●						
	160402 PH SCD	3308PHS0415	S01015	0.2			●	●									
	160402 PH SXF	3308PHS0525	S01325	0.2			●	●									
	160402 PH SEH	3308PHS0635	S01535	0.2			●										
	160404 PH F	331PHFNX	None	0.4													
	160404 PH SCD	331PHS0415	S01015	0.4			●	●									
	160404 PH SCE	331PHS0420	S01020	0.4							●						
	160404 PH SXF	331PHS0525	S01325	0.4			●	●									
	160404 PH SEH	331PHS0635	S01535	0.4			●	●									
	160404 PH TCE	331PHT0420	T01020	0.4								●					
	160408 PH F	332PHFNX	None	0.8													
	160408 PH SCD	332PHS0415	S01015	0.8			●	●									
	160408 PH SCE	332PHS0420	S01020	0.8								●					
	160408 PH SXF	332PHS0525	S01325	0.8			●	●									
	160408 PH SEH	332PHS0635	S01535	0.8			●	●									
	160408 PH TCE	332PHT0420	T01020	0.8									●				
	160412 PH F	333PHFNX	None	1.2													
	160412 PH SCD	333PHS0415	S01015	1.2			●	●									
	160412 PH SCE	333PHS0420	S01020	1.2									●				
	160412 PH SXF	333PHS0525	S01325	1.2			●	●									
	160412 PH SEH	333PHS0635	S01535	1.2			●	●									
	160412 PH TCE	333PHT0420	T01020	1.2										●			
	160416 PH SCD	334PHS0415	S01015	1.6			●	●									
	160416 PH SXF	334PHS0525	S01325	1.6			●	●									
	160416 PH SEH	334PHS0635	S01535	1.6			●	●									
	160416 PH TCE	334PHT0420	T01020	1.6											●		
220412 PH SCD	433PHS0415	S01015	1.2														
220412 PH SEH	433PHS0635	S01535	1.2														

● : Standard stock ● : New standard stock ■ : Scheduled to be produced by order ★ : Standard stock (Specified)

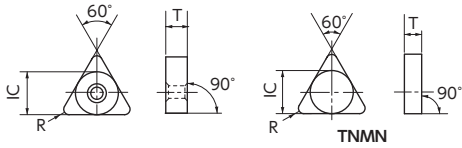F23
F25
G39





Item Number	IC	T
TN_1103_	6.35	3.18
TN_1604_	9.525	4.76

<60 degree Triangle Negative type>



Steel	P
Stainless Steel	M
Cast Iron	K
Non-Ferrous Material	N
Heat Resistant Alloy	S
Hardened Material	H

● : 1st Choice
● : 2nd choice

Shape	ISO Item Number	Inch Item Number	Edge Prep.	R	BIDEMICS (Coated)	CBN (Brazed) (Coated)			CBN (Brazed)					PCD	For applicable holder, see pages:	
					JP2	B16	B5K	B6K	B22	B23	B30	B36	B40			B52
 <p>one side 3 corners available</p>	TNGA 160402 PT F	TNGA3308PTFNX	None	0.2												
	160404 PT F	331PTFNX	None	0.4												
	160408 PT F	332PTFNX	None	0.8												
	160412 PT F	333PTFNX	None	1.2												
 <p>6 corners available</p>	TNMG 160402 FN ZP	TNMG33Y-FN-ZP	None	0.2												
	160404 FN ZP	331-FN-ZP	None	0.4												
	160408 FN ZP	332-FN-ZP	None	0.8												
 <p>1 corner available with chipbreaker (rake angle 10°)</p>	TNMX 160404 P F	TNMX331PF	None	0.4												
	160408 P F	332PF	None	0.8												
 <p>(Solid CBN)</p>	TNMN 110312 S TNC	TNMN223STNC		1.2		●										
	160408 S TN	332STN	T01025	0.8		●										
	160412 S TNC	333STN		1.2		●										
	160412 S TNF	333STNF	T02025	1.2		●										

F23
F25
G39


F23
F25

● : Standard stock ● : New standard stock ■ : Scheduled to be produced by order ★ : Standard stock (Specified)

F BIDEMICS (Brazed) • CBN • PCD
 Negative type
 Positive type
 C
 D
 R
 S
 T
 V

Item Number	IC	T
VN_1604_	9.525	4.76

<35 degree Rhombic Negative type>




Shape	ISO Item Number	Inch Item Number	Edge Prep.	R	BIDEMICS (Coated)	CBN (Brazed) (Coated)		CBN (Brazed)					Diameter Coating	PCD	For applicable holder, see pages:
						JP2	B16	B5K	B6K	B22	B23	B30			
	VNGA 160404 BQ	VNGA331BQ	T00520	0.4	●										
	160408 BQ	332BQ	T00520	0.8	●										
	160412 BQ	333BQ	T00520	1.2	●										
	VNGA 160401 PQ SCD	VNGA3304PQS0415	S01015	0.1									●		
	160401 PQ SEH	3304PQS0635	S01535	0.1									●		
	160402 PQ F	3308PQFNX	None	0.2						●					
	160402 PQ SCD	3308PQS0415	S01015	0.2		●				●	●	●			
	160402 PQ SXF	3308PQS0525	S01325	0.2		●				●	●	●			
	160402 PQ SEH	3308PQS0635	S01535	0.2		●				●	●	●			
	160402 PQ TCE	3308PQT0420	T01020	0.2						●					
	160404 PQ F	331PQFNX	None	0.4						●		●			
	160404 PQ SCD	331PQS0415	S01015	0.4			●	●			●	●	●		
	160404 PQ SXF	331PQS0525	S01325	0.4			●	●			●	●	●		
	160404 PQ SEH	331PQS0635	S01535	0.4			●	●			●	●	●		
	160404 PQ TCE	331PQT0420	T01020	0.4							●				
	160408 PQ F	332PQFNX	None	0.8							●		●		
	160408 PQ SCD	332PQS0415	S01015	0.8			●	●			●	●	●		
	160408 PQ SXF	332PQS0525	S01325	0.8			●	●			●	●	●		
	160408 PQ SEH	332PQS0635	S01535	0.8			●	●			●	●	●		
	160408 PQ TCE	332PQT0420	T01020	0.8							●				
	160412 PQ SCD	333PQS0415	S01015	1.2			●	●			●	●	●		
160412 PQ SXF	333PQS0525	S01325	1.2			●	●			●	●	●			
160412 PQ SEH	333PQS0635	S01535	1.2			●	●			●	●	●			
160412 PQ TCE	333PQT0420	T01020	1.2							●					
	VNGA 160402 PD F	VNGA3308PDFNX	None	0.2							●				
	160404 PD F	331PDFNX	None	0.4							●				
	160408 PD F	332PDFNX	None	0.8							●				
	160412 PD F	333PDFNX	None	1.2							●				

● : Standard stock ● : New standard stock ■ : Scheduled to be produced by order ★ : Standard stock (Specified)

F27






Item Number	IC	T	Relief angle
CC 0602	6.35	2.38	7°
CC 09T3	9.525	3.97	7°

<80 degree Rhombic Positive type>



Steel	P																				
Stainless Steel	M																				
Cast Iron	K																				
Non-Ferrous Material	N																				
Heat Resistant Alloy	S																				
Hardened Material	H																				

● : 1st Choice
● : 2nd choice

Shape	ISO Item Number	Inch Item Number	Edge Prep.	R	BIDEMICS (Coated)	CBN (Brazed) (Coated)			CBN (Brazed)				Diamond Coating		PCD	For applicable holder, see pages:						
					JP2	B16	B5K	B6K	B22	B23	B30	B36	B40	B52			UC1	PD1	PD2			
 <p>2 corners available</p>	CCGW 060202 PD F	CCGW21.508PDFNX	None	0.2																		
	060202 PD SCD	21.508PDS0415	S01015	0.2																		
	060202 PD SXF	21.508PDS0525	S01325	0.2																		
	060202 PD SEH	21.508PDS0635	S01535	0.2																		
	060204 PD F	21.51PDFNX	None	0.4																		
	060204 PD SCD	21.51PDS0415	S01015	0.4																		
	060204 PD SXF	21.51PDS0525	S01325	0.4																		
	060204 PD SEH	21.51PDS0635	S01535	0.4																		
	060208 PD F	21.52PDFNX	None	0.8																		
	060208 PD SCD	21.52PDS0415	S01015	0.8																		
	060208 PD SXF	21.52PDS0525	S01325	0.8																		
	060208 PD SEH	21.52PDS0635	S01535	0.8																		
	060208 PD TEE	21.52PDT0620	T01520	0.8																		
	 <p>2 corners available</p>	CCGW 09T302 PD F	CCGW32.508PDFNX	None	0.2																	
		09T302 PD SCD	32.508PDS0415	S01015	0.2																	
		09T302 PD SXF	32.508PDS0525	S01325	0.2																	
		09T302 PD SEH	32.508PDS0635	S01535	0.2																	
		09T304 PD F	32.51PDFNX	None	0.4																	
		09T304 PD SCD	32.51PDS0415	S01015	0.4																	
		09T304 PD SXF	32.51PDS0525	S01325	0.4																	
09T304 PD SEH		32.51PDS0635	S01535	0.4																		
09T308 PD F		32.52PDFNX	None	0.8																		
09T308 PD SCD		32.52PDS0415	S01015	0.8																		
09T308 PD SXF		32.52PDS0525	S01325	0.8																		
09T308 PD SEH		32.52PDS0635	S01535	0.8																		
 <p>1 corner available</p>	CCMW 09T301	—	None	0.1																		
	09T302	—	None	0.2																		
	09T304	—	None	0.4																		
	09T308	—	None	0.8																		
 <p>1 corner available with 3D chipbreaker (rake angle 10°)</p>	CCMT 060201 PB F		None	0.1																		
	060202 PB F		None	0.2																		
	060204 PB F		None	0.4																		
	09T301 PB F		None	0.1																		
	09T302 PB F		None	0.2																		
 <p>1 corner available with chipbreaker (rake angle 10°)</p>	09T304 PB F		None	0.4																		
	09T302 P F		None	0.2																		
	09T304 P F		None	0.4																		






G23
K28

G23
K28

● : Standard stock ● : New standard stock ■ : Scheduled to be produced by order ★ : Standard stock (Specified)

Item Number	IC	T	Relief angle
DC_0702_	6.35	2.38	7°
DC_11T3_	9.525	3.97	7°

<55 degree Rhombic Positive type>


Shape	ISO Item Number	Inch Item Number	Edge Prep.	R	BIDEMICS (Coated)	CBN (Brazed) (Coated)				Diamond Coating			PCD	For applicable holder, see pages:		
					JP2	B16	B5K	B6K	B22	B23	B30	B36			B40	B52
 <p>2 corners available</p>	DCGW 070202 PD F	DCGW21.508PDFNX	None	0.2												
	070202 PD SCD	21.508PDS0415	S01015	0.2												
	070202 PD SEH	21.508PDS0635	S01535	0.2												
	070204 PD F	21.51PDFNX	None	0.4												
	070204 PD SCD	21.51PDS0415	S01015	0.4												
	070204 PD SEH	21.51PDS0635	S01535	0.4												
	070208 PD F	21.52PDFNX	None	0.8												
	070208 PD SCD	21.52PDS0415	S01015	0.8												
	070208 PD SXF	21.52PDS0525	S01325	0.8												
	070208 PD SEH	21.52PDS0635	S01535	0.8												
	DCGW 11T301 PD SCD	DCGW32.504PDS0415	S01015	0.1												
	11T302 PD F	32.508PDFNX	None	0.2												
	11T302 PD SCD	32.508PDS0415	S01015	0.2												
	11T302 PD SXF	32.508PDS0525	S01325	0.2												
	11T302 PD SEH	32.508PDS0635	S01535	0.2												
	11T304 PD F	32.51PDFNX	None	0.4												
	11T304 PD SCD	32.51PDS0415	S01015	0.4												
	11T304 PD SXF	32.51PDS0525	S01325	0.4												
	11T304 PD SEH	32.51PDS0635	S01535	0.4												
	11T304 PD TCD	32.51PDT0415	T01015	0.4												
11T308 PD F	32.52PDFNX	None	0.8													
11T308 PD SCD	32.52PDS0415	S01015	0.8													
11T308 PD SXF	32.52PDS0525	S01325	0.8													
11T308 PD SEH	32.52PDS0635	S01535	0.8													
11T312 PD SCD	32.53PDS0415	S01015	1.2													
 <p>2 corners available</p>	DCMT 11T301 FN AM3	—	None	0.1												
	11T302 FN AM3	—	None	0.2												
	11T304 FN AM3	—	None	0.4												
 <p>1 corner available</p>	DCMW 11T301	—	None	0.1												
	11T302	—	None	0.2												
	11T304	—	None	0.4												
	11T308	—	None	0.8												
 <p>1 corner available with 3D chipbreaker (rake angle 10°)</p>	DCMT 070201 PB F		None	0.1												
	070202 PB F		None	0.2												
	11T301 PB F		None	0.1												
	11T302 PB F		None	0.2												
	11T304 PB F		None	0.4												
 <p>1 corner available with chipbreaker (rake angle 10°)</p>	DCMT 070201 P F		None	0.1												
	070202 P F		None	0.2												
	11T302 P F		None	0.2												
	11T304 P F		None	0.4												

● : Standard stock ● : New standard stock ■ : Scheduled to be produced by order ★ : Standard stock (Specified)

G25
G27



Item Number	IC	T	Relief angle
SP_0903_	9.525	3.18	11°
SC_09T3_	9.525	3.97	7°
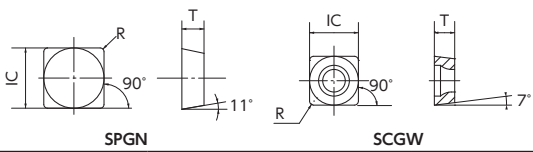
<90 degree Square Positive type>



Steel	P																			
Stainless Steel	M																			
Cast Iron	K																			
Non-Ferrous Material	N																			
Heat Resistant Alloy	S																			
Hardened Material	H																			

● : 1st Choice
● : 2nd choice


Shape	ISO Item Number	Inch Item Number	Edge Prep.	R	BIDEMICS (Coated)	CBN (Brazed) (Coated)			CBN (Brazed)					Diamond Coating		PCD	For applicable holder, see pages:				
					JP2	B16	B5K	B6K	B22	B23	B30	B36	B40	B52	UC1			PD1	PD2		
 <p>4 corners available</p>	SPGN 090304 PQ SCD	SPGN321PQS0415	S01015	0.4																	
	090304 PQ SCE	321PQS0420	S01020	0.4																	
	090304 PQ SEH	321PQS0635	S01535	0.4																	
	090304 PQ TCE	321PQT0420	T01020	0.4																	
	SPGN 090308 PQ SCD	SPGN322PQS0415	S01015	0.8																	
	090308 PQ SCE	322PQS0420	S01020	0.8																	
	090308 PQ SEH	322PQS0635	S01535	0.8																	
	090308 PQ TCE	322PQT0420	T01020	0.8																	
	SPGN 090312 PQ SCD	SPGN323PQS0415	S01015	1.2																	
	090312 PQ SCE	323PQS0420	S01020	1.2																	
	090312 PQ SEH	323PQS0635	S01535	1.2																	
	090312 PQ TCE	323PQT0420	T01020	1.2																	
	SCGW 09T304 PQ ZCD	SCGW32.51PQZ0415	Z01015	0.4																	
	09T308 PQ ZCD	32.52PQZ0415	Z01015	0.8																	

● : Standard stock ● : New standard stock ■ : Scheduled to be produced by order ★ : Standard stock (Specified)

- F
- BIDEMICS (Brazed) • CBN • PCD
- Negative type
- Positive type
- C
- D
- R
- S
- T
- V

Item Number	IC	T	Relief angle
TP_1103_	6.35	3.18	11°
TP_1603_	9.525	3.18	11°

<60 degree Triangle Positive type>


Shape	ISO Item Number	Inch Item Number	Edge Prep.	R	BIDEMICS (Coated)	CBN (Brazed) (Coated)			CBN (Brazed)					Diamond Coating	PCD	For applicable holder, see pages:
					JP2	B16	B5K	B6K	B22	B23	B30	B36	B40	B52	UC1	
 <p>3 corners available</p>	TPGN 110302 PT SCD	TPGN2208PTS0415	S01015	0.2												
	110302 PT SCE	2208PTS0420	S01020	0.2												
	110302 PT SXF	2208PTS0525	S01325	0.2												
	110302 PT SEH	2208PTS0635	S01535	0.2												
	110304 PT SCD	221PTS0415	S01015	0.4												
	110304 PT SCE	221PTS0420	S01020	0.4												
	110304 PT SXF	221PTS0525	S01325	0.4												
	110304 PT SEH	221PTS0635	S01535	0.4												
	110304 PT TCE	221PTT0420	T01020	0.4												
	110308 PT SCD	222PTS0415	S01015	0.8												
	110308 PT SCE	222PTS0420	S01020	0.8												
	110308 PT SXF	222PTS0525	S01325	0.8												
	110308 PT SEH	222PTS0635	S01535	0.8												
	110308 PT TCE	222PTT0420	T01020	0.8												
	110312 PT SCD	223PTS0415	S01015	1.2												
	110312 PT SCE	223PTS0420	S01020	1.2												
	110312 PT SXF	223PTS0525	S01325	1.2												
	110312 PT SEH	223PTS0635	S01535	1.2												
	110312 PT TCE	223PTT0420	T01020	1.2												
	TPGN 160302 PT SCD	TPGN3208PTS0415	S01015	0.2												
	160302 PT SXF	3208PTS0525	S01325	0.2												
	160302 PT SEH	3208PTS0635	S01535	0.2												
	160304 PT SCD	321PTS0415	S01015	0.4												
	160304 PT SCE	321PTS0420	S01020	0.4												
	160304 PT SXF	321PTS0525	S01325	0.4												
	160304 PT SEH	321PTS0635	S01535	0.4												
	160304 PT TCE	321PTT0420	T01020	0.4												
	160308 PT SCD	322PTS0415	S01015	0.8												
	160308 PT SCE	322PTS0420	S01020	0.8												
	160308 PT SXF	322PTS0525	S01325	0.8												
	160308 PT SEH	322PTS0635	S01535	0.8												
	160308 PT TCE	322PTT0420	T01020	0.8												
160312 PT SCD	323PTS0415	S01015	1.2													
160312 PT SCE	323PTS0420	S01020	1.2													
160312 PT SXF	323PTS0525	S01325	1.2													
160312 PT SEH	323PTS0635	S01535	1.2													
160312 PT TCE	323PTT0420	T01020	1.2													

● : Standard stock ● : New standard stock ■ : Scheduled to be produced by order ★ : Standard stock (Specified)

New Products
Tool Materials / Selection Guide
BIDEMICS, PCD
Micrograin Carbide, PVD Coated Carbide
Insert Item List
General Turning Toolholders
Unique Swiss Tooling
Grooving / Side Turning
Threading
Shaper
ID Tooling
Application Introduction
Endmills
Rotating Tools
Information
Index

Item Number	IC	T	Relief angle
TP_0902_	5.56	2.38	11°
TP_1103_	6.35	3.18	11°


<60 degree Triangle Positive type>



Steel	P																			
Stainless Steel	M																			
Cast Iron	K																			
Non-Ferrous Material	N																			
Heat Resistant Alloy	S																			
Hardened Material	H																			

● : 1st Choice
● : 2nd choice

Shape	ISO Item Number	Inch Item Number	Edge Prep.	R	BIDEMICS (Coated)	CBN (Brazed) (Coated)				CBN (Brazed)					Diamond Coating		PCD	For applicable holder, see pages:			
					JP2	B16	B5K	B6K	B22	B23	B30	B36	B40	B52	UC1	PD1			PD2		
Positive type	TPGW 090202 PT SCD	TPGD7308PTS0415	S01015	0.2																	
	090202 PT SXF	7308PTS0525	S01325	0.2																	
	090202 PT SEH	7308PTS0635	S01535	0.2																	
	090204 PT SCD	731PTS0415	S01015	0.4																	
	090204 PT SXF	731PTS0525	S01325	0.4																	
	090204 PT SEH	731PTS0635	S01535	0.4																	
	090208 PT SCD	732PTS0415	S01015	0.8																	
	090208 PT SXF	732PTS0525	S01325	0.8																	
	090208 PT SEH	732PTS0635	S01535	0.8																	
	090312 PT SCD	743PTS0415	S01015	1.2																	
	090312 PT SXF	743PTS0525	S01325	1.2																	
	090312 PT SEH	743PTS0635	S01535	1.2																	
Negative type	TPGW 110302 PT SCD	TPGW2208PTS0415	S01015	0.2																	
	110302 PT SXF	2208PTS0525	S01325	0.2																	
	110302 PT SEH	2208PTS0635	S01535	0.2																	
	110302 PT TCE	2208PTT0420	T01020	0.2																	
	110304 PT SCD	221PTS0415	S01015	0.4																	
	110304 PT SXF	221PTS0525	S01325	0.4																	
	110304 PT SEH	221PTS0635	S01535	0.4																	
	110304 PT TCE	221PTT0420	T01020	0.4																	
	110304 PT TED	221PTT0615	T01515	0.4																	
	110308 PT SCD	222PTS0415	S01015	0.8																	
	110308 PT SXF	222PTS0525	S01325	0.8																	
	110308 PT SEH	222PTS0635	S01535	0.8																	
110308 PT TCE	222PTT0420	T01020	0.8																		
110308 PT TED	222PTT0615	T01515	0.8																		
110312 PT SCD	223PTS0415	S01015	1.2																		
110312 PT SXF	223PTS0525	S01325	1.2																		
110312 PT SEH	223PTS0635	S01535	1.2																		
110312 PT TCE	223PTT0420	T01020	1.2																		
110312 PT TED	223PTT0615	T01515	1.2																		







K30
K31
K32

● : Standard stock ● : New standard stock ■ : Scheduled to be produced by order ★ : Standard stock (Specified)

Item Number	IC	T	Relief angle
TP_0902_	5.56	2.38	11°
TP_1103_	6.35	3.18	11°
TB_0601_	3.97	1.59	5°



<60 degree Triangle Positive type>

Shape	ISO Item Number	Inch Item Number	Edge Prep.	R	BIDEMICS (Coated)	CBN (Brazed) (Coated)			CBN (Brazed)					Diamond Coating	PCD	For applicable holder, see pages:
					JP2	B16	B5K	B6K	B22	B23	B30	B36	B40	B52	UC1	
 3 corners available	TPMH 110302 FR F1	TPMH22Y-FR-F1	None	0.2												● : 1st Choice ● : 2nd choice
	110304 FR F1	221-FR-F1	None	0.4												
 1 corner available with 3D chipbreaker (rake angle 10°)	TPMT 090201 PB F	—	None	0.1												K30 K31 K32
	090202 PB F	—	None	0.2												
	090204 PB F	—	None	0.4												
	110301 PB F	—	None	0.1												
	110302 PB F	—	None	0.2												
 1 corner available with chipbreaker (rake angle 10°)	TPMT 090202 P F	—	None	0.2												
	090204 P F	—	None	0.4												
	110302 P F	—	None	0.2												
	110304 P F	—	None	0.4												
 3 corners available	TBGN 060102 S SNCD	TBGN52YSSN0415	S01015	0.2												—
	060104 S SNCD	521SSN0415	S01015	0.4												
	060108 S SNCD	522SSN0415	S01015	0.8												

● : Standard stock ● : New standard stock ■ : Scheduled to be produced by order ★ : Standard stock (Specified)

Item Number	IC	T	Relief angle
VC_1103	6.35	3.18	7°
VC_1604	9.525	4.76	7°


<35 degree Rhombic Positive type>

Shape	ISO Item Number	Inch Item Number	Edge Prep.	R	BIDEMICS (Coated)	CBN (Brazed) (Coated)			CBN (Brazed)					Diamond Coating			PCD	For applicable holder, see pages:		
					JP2	B16	B5K	B6K	B22	B23	B30	B36	B40	B52	UC1	PD1			PD2	
 <p>2 corners available</p>	VCGW 110302 PD SCD	VCGW2208PDS0415	S01015	0.2																
	110302 PD SEH	2208PDS0635	S01535	0.2																
	110304 PD SCD	221PDS0415	S01015	0.4																
	110304 PD SEH	221PDS0635	S01535	0.4																
	110308 PD SCD	222PDS0415	S01015	0.8																
	110308 PD SEH	222PDS0635	S01535	0.8																
	110312 PD SCD	223PDS0415	S01015	1.2																
	110312 PD SEH	223PDS0635	S01535	1.2																
	VCGW 160402 PD SCD	VCGW3308PDS0415	S01015	0.2																
	160402 PD SEH	3308PDS0635	S01535	0.2																
	160404 PD SCD	331PDS0415	S01015	0.4																
	160404 PD SEH	331PDS0635	S01535	0.4																
	160404 PD TCE	331PDT0420	T01020	0.4																
	160408 PD SCD	332PDS0415	S01015	0.8																
	160408 PD SEH	332PDS0635	S01535	0.8																
	160408 PD TCE	332PDT0420	T01020	0.8																
160412 PD SCD	333PDS0415	S01015	1.2																	
160412 PD SEH	333PDS0635	S01535	1.2																	
160412 PD TCE	333PDT0420	T01020	1.2																	
 <p>1 corner available</p>	VCMW 110301	—	None	0.1																
	110302	—	None	0.2																
	110304	—	None	0.4																

● : Standard stock ● : New standard stock ■ : Scheduled to be produced by order ★ : Standard stock (Specified)

G29
G31
G56

<For Machining Mill Rolls>

Shape	ISO Item Number	Inch Item Number	Edge Prep.	R	BIDEMICS (Coated)	CBN (Brazed) (Coated)			CBN (Brazed)					Diamond Coating			PCD	For applicable holder, see pages:	
					JP2	B16	B5K	B6K	B22	B23	B30	B36	B40	B52	UC1	PD1			PD2
 <p>(Top full-face CBN)</p>	RBGX 16 S	—	S01015	—															
	RBGX 20 S	—	S01015	—															

● : Standard stock ● : New standard stock ■ : Scheduled to be produced by order ★ : Standard stock (Specified)

<80 degree Rhombic Negative type>

Item Number	IC	T
CN_1204	12.7	4.76

Shape	ISO Item Number	Inch Item Number	R	Carbide										Chip Control Range	For applicable holder, see pages:		
				PVD Coated						CVD Coated							
				ST4	ZM3	QM3	VM1	TM4	DT4	DM4	CP1	CP7	KM1				
				Steel	P	●	●	●	●	●	●	●	●	●	●	●	● : 1st Choice ● : 2nd choice
				Stainless Steel	M	●	●	●	●	●	●	●	●	●	●		
				Cast Iron	K	●	●	●	●	●	●	●	●	●	●		
				Non-Ferrous Material	N	●	●	●	●	●	●	●	●	●	●		
				Heat Resistant Alloy	S	●	●	●	●	●	●	●	●	●	●		
				Hardened Material	H	●	●	●	●	●	●	●	●	●	●		
	CNGG 120404 FN UL	CNGG431FNUL	0.4			●		●		●							F9 F11 G40 K34
UL	120408 FN UL	432FNUL	0.8			●		●		●							
	CNMG 120408 G	CNMG432-G	0.8										●				
G	120412 G	433-G	1.2										●				
G	120416 G	434-G	1.6										●				
	CNMG 120408 TNB Z5	432-TNB-Z5	0.8					●						●			
Z5																	
	CNGG 120404 FN ZP	CNGG431-FN-ZP	0.4			●		●						●			
ZP	120408 FN ZP	432-FN-ZP	0.8			●		●						●			

● : Standard stock ● : New standard stock ■ : Scheduled to be produced by order ★ : Standard stock (Specified)

<55 degree Rhombic Negative type>

Item Number	IC	T
DN_1504	12.7	4.76

Shape	ISO Item Number	Inch Item Number	R	Carbide										Chip Control Range	For applicable holder, see pages:	
				PVD Coated						CVD Coated						
				ST4	ZM3	QM3	VM1	TM4	DT4	DM4	CP1	CP7	KM1			
				Steel	P	●	●	●	●	●	●	●	●	●	●	● : 1st Choice ● : 2nd choice
				Stainless Steel	M	●	●	●	●	●	●	●	●	●		
				Cast Iron	K	●	●	●	●	●	●	●	●	●		
				Non-Ferrous Material	N	●	●	●	●	●	●	●	●	●		
				Heat Resistant Alloy	S	●	●	●	●	●	●	●	●	●		
				Hardened Material	H	●	●	●	●	●	●	●	●	●		
	DNMG 150404 G	DNMG431-G	0.4											●		
G	150408 G	432-G	0.8											●		
G	150412 G	433-G	1.2											●		
	DNMG 150404 TN G	DNMG431-TN-G	0.4					●								
G																
	DNMG 150408 TNB Z5	DNMG432-TNB-Z5	0.8					●						●		
Z5																
	DNGG 150404 FN ZP	DNGG431-FN-ZP	0.4			●		●						●		
ZP	150408 FN ZP	432-FN-ZP	0.8			●		●						●		

● : Standard stock ● : New standard stock ■ : Scheduled to be produced by order ★ : Standard stock (Specified)

Carbide

Negative type

Positive type

G

D

E

R

S

T

V

W

<90 degree Square Negative type>

Item Number	IC	T
SN_1204	12.7	4.76

Shape	ISO Item Number	Inch Item Number	R	Carbide								Chip Control Range	For applicable holder, see pages:			
				PVD Coated				CVD Coated								
				ST4	ZM3	QM3	VM1	TM4	DT4	DM4	CP1			CP7	KM1	
				Steel	P	●	●	●	●	●	●	●	●	●	●	● : 1st Choice ● : 2nd choice
				Stainless Steel	M	●	●	●	●	●	●	●	●	●		
				Cast Iron	K	●	●	●	●	●	●	●	●	●		
				Non-Ferrous Material	N	●	●	●	●	●	●	●	●	●		
				Heat Resistant Alloy	S	●	●	●	●	●	●	●	●	●		
				Hardened Material	H	●	●	●	●	●	●	●	●	●		
	SNMG 120408 G	SNMG432-G	0.8								●				F17 F19 K36	
	SNMG 120412 G	SNMG433-G	1.2								●					
	SNMG 120416 G	SNMG434-G	1.6								●					
	SNMG 120408 TNB Z5	SNMG432-TNB-Z5	0.8			●						●				

● : Standard stock ● : New standard stock ■ : Scheduled to be produced by order ★ : Standard stock (Specified)

<60 degree Triangle Negative type>

Item Number	IC	T
TN_1604	9.525	4.76

Shape	ISO Item Number	Inch Item Number	R	Carbide								Chip Control Range	For applicable holder, see pages:		
				PVD Coated				CVD Coated							
				ST4	ZM3	QM3	VM1	TM4	DT4	DM4	CP1			CP7	KM1
				Steel	P	●	●	●	●	●	●	●	●	●	● : 1st Choice ● : 2nd choice
				Stainless Steel	M	●	●	●	●	●	●	●	●		
				Cast Iron	K	●	●	●	●	●	●	●	●		
				Non-Ferrous Material	N	●	●	●	●	●	●	●	●		
				Heat Resistant Alloy	S	●	●	●	●	●	●	●	●		
				Hardened Material	H	●	●	●	●	●	●	●	●		
	TNMG 160408 G	TNMG332-G	0.8									●			
	160412 G	333-G	1.2									●			
	TNMG 160404 TNB Z5	331-TNB-Z5	0.4			●							●		
	160408 TNB Z5	332-TNB-Z5	0.8			●							●		
	TNGG 160402 FN ZP	TNGG33Y-FN--ZP	0.2			●	●						●		
	160404 FN ZP	331-FN--ZP	0.4			●	●						●		
	160408 FN ZP	332-FN--ZP	0.8			●	●						●		
	TNGG 160402 F ^R / _L C	TNGG33Y-F ^R / _L --C	0.2		R										F23 F25 G39
	TNEG 160402 F ^R / _L D1		0.2				●								
	160404 F ^R / _L D1		0.4				●								
	160408 F ^R / _L D1		0.8				●								
	TNGG 160401 F ^R / _L DA	TNGG331CF ^R / _L --DA	0.1		R		R								
	TNGG 160401 F ^R / _L U2	TNGG331CF ^R / _L --U2	0.1		R		R								
	160402 F ^R / _L U2	33Y-F ^R / _L --U2	0.2			●							●		
	160404 F ^R / _L U2	331-F ^R / _L --U2	0.4			●							●		
	160408 F ^R / _L U2	332-F ^R / _L --U2	0.8			●							●		
	TNGG 160401M FN UL	TNGG3304MFNUL	*0.08	●	●	●	●	●	●	●	●	●	●		
	160402M FN UL	3308MFNUL	*0.18	●	●	●	●	●	●	●	●	●	●		
	160404M FN UL	331MFNUL	*0.38	●	●	●	●	●	●	●	●	●	●		
	160408M FN UL	332MFNUL	*0.78	●	●	●	●	●	●	●	●	●	●		

*Inserts having 01M, 02M or 04M as the R code can be used for machining when the component drawing specifies that the radius is less than R=0.1, R=0.2 or R=0.4 respectively. ● : Standard stock ● : New standard stock ■ : Scheduled to be produced by order ★ : Standard stock (Specified)

<35 degree Rhombic Negative type>

Item Number	IC	T
VN_1604	9.525	4.76

Shape	ISO Item Number	Inch Item Number	R	Carbide										Chip Control Range	For applicable holder, see pages:	
				PVD Coated					CVD Coated							
				ST4	ZM3	QM3	VM1	TM4	DT4	DM4	CP1	CP7	KM1			
				Steel	P	●	●	●	●	●	●	●	●	●	●	● : 1st Choice ● : 2nd choice
				Stainless Steel	M	●	●	●	●	●	●	●	●	●		
				Cast Iron	K	●	●	●	●	●	●	●	●	●		
				Non-Ferrous Material	N	●	●	●	●	●	●	●	●	●		
				Heat Resistant Alloy	S	●	●	●	●	●	●	●	●	●		
				Hardened Material	H	●	●	●	●	●	●	●	●	●		
AM1	VNMG 160404 TNB AM1	331-TNB-AM1	0.4			●										F27
	160408 TNB AM1	332-TNB-AM1	0.8			●										
G	VNMG 160404 G	VNMG331-G	0.4									●				
	160408 G	332-G	0.8									●				
	160412 G	333-G	1.2									●				
ZP	VNMG 160402 FN ZP	VNMG331-FN-ZP	0.2			●										
	160404 FN ZP	331-FN-ZP	0.4			●										
	160408 FN ZP	332-FN-ZP	0.8			●										

● : Standard stock ● : New standard stock ■ : Scheduled to be produced by order ★ : Standard stock (Specified)

<80 degree Hexagon Negative type>

Item Number	IC	T
WN_0804	12.7	4.76

Shape	ISO Item Number	Inch Item Number	R	Carbide										Chip Control Range	For applicable holder, see pages:	
				PVD Coated					CVD Coated							
				ST4	ZM3	QM3	VM1	TM4	DT4	DM4	CP1	CP7	KM1			
				Steel	P	●	●	●	●	●	●	●	●	●	● : 1st Choice ● : 2nd choice	
				Stainless Steel	M	●	●	●	●	●	●	●	●	●		
				Cast Iron	K	●	●	●	●	●	●	●	●	●		
				Non-Ferrous Material	N	●	●	●	●	●	●	●	●	●		
				Heat Resistant Alloy	S	●	●	●	●	●	●	●	●	●		
				Hardened Material	H	●	●	●	●	●	●	●	●	●		
G	WNMG 080408 G	WNMG432-G	0.8									●				F29 K37
	080412 G	433-G	1.2									●				
Z5	WNMG 080408 TNB Z5	WNMG432-TNB-Z5	0.8			●										
	080412 TNB Z5	433-TNB-Z5	1.2			●										
ZP	WNGG 080404 FN ZP	WNGG431-FN-ZP	0.4			●	●					●				
	080408 FN ZP	432-FN-ZP	0.8			●	●					●				
UL	WNGG 080404 FN UL	WNGG431FNUL	0.4			●		●				●				
	080408 FN UL	432FNUL	0.8			●		●				●				

● : Standard stock ● : New standard stock ■ : Scheduled to be produced by order ★ : Standard stock (Specified)

<80 degree Rhombic Positive type>

Item Number	IC	T	Relief angle
CC_0602	6.35	2.38	7°
CC_09T3	9.525	3.97	7°


Shape	ISO Item Number	Inch Item Number	R	Carbide											Chip Control Range	For applicable holder, see pages:		
				PVD Coated							CVD Coated							
				ST4	ZM3	QM3	VM1	TM4	DT4	DM4	CP1	CP7	KM1					
				Steel	P	●	●	●	●	●	●	●	●	●	●	●	●	● : 1st Choice ● : 2nd choice
				Stainless Steel	M	●	●	●	●	●	●	●	●	●	●	●		
				Cast Iron	K	●	●	●	●	●	●	●	●	●	●	●	●	
				Non-Ferrous Material	N	●	●	●	●	●	●	●	●	●	●	●	●	●
				Heat Resistant Alloy	S	●	●	●	●	●	●	●	●	●	●	●	●	●
				Hardened Material	H	●	●	●	●	●	●	●	●	●	●	●	●	●
 AM3	CCGT 060200 FN AM3		0.03						●	●								
	060202 FN AM3		0.2		●		●											
	060204 FN AM3		0.4		●													
	060201M FN AM3		*0.08	●		●		●	●									
	060202M FN AM3		*0.18	●		●		●	●									
	060204M FN AM3		*0.38	●		●		●	●									
	CCGT 09T300 FN AM3		0.03					●	●	●								
	09T302 FN AM3		0.2					●	●									
	09T304 FN AM3		0.4					●	●									
	09T301M FN AM3		*0.08	●	●	●	●	●	●	●								
	09T302M FN AM3		*0.18	●	●	●	●	●	●	●								
	09T304M FN AM3		*0.38	●	●	●	●	●	●	●								
 AZ7	CCMT 060202 FN AM3		0.2									●						
	060204 FN AM3		0.4									●						
	CCMT 09T302 FN AM3		0.2									●						
	09T304 FN AM3		0.4									●						
	09T308 FN AM3		0.8									●						
	CCGT 060200 AZ7		0.03			●												
060201M AZ7		*0.08			●													
060202M AZ7		*0.18			●													
 AZ8	CCGT 09T300 AZ7		0.03		●	●	●	●	●									
	09T301M AZ7		*0.08		●	●	●	●	●									
	09T302M AZ7		*0.18		●	●	●	●	●									
	09T304M AZ7		*0.38		●	●	●	●	●									
 AZ8	CCMT 060202 ENA AZ8		0.2									●						
	060204 ENB AZ8		0.4									●						
	060208 ENB AZ8		0.8									●						
	CCMT 09T302 ENA AZ8		0.2									●						
	09T304 ENB AZ8		0.4									●						
 F1 R-hand shown	CCGT 060201 F _{R/L} F1		0.1	R		R		R										
	060202 F _{R/L} F1		0.2	R		R		R										
	060204 F _{R/L} F1		0.4	R		R		R										
	CCGT 09T302 F _{R/L} F1		0.2	R		R		R										
	09T304 F _{R/L} F1		0.4	R		R		R										
 KHG	CCET 0602005 F _{R/L} KHG		0.05				●											
	0602008 F _{R/L} KHG		0.08				●											
	0602018 F _{R/L} KHG		0.18				●											
	060202 F _{R/L} KHG		0.2				●											
	CCET 09T3005 F _{R/L} KHG		0.05				●	R										
	09T3008 F _{R/L} KHG		0.08				●	R										
	09T3018 F _{R/L} KHG		0.18				●	R										
09T302 F _{R/L} KHG		0.2				●	R											

*Inserts having 01M, 02M or 04M as the R code can be used for machining when the component drawing specifies that the radius is less than R=0.1, R=0.2 or R=0.4 respectively.

● : Standard stock ● : New standard stock ■ : Scheduled to be produced by order ★ : Standard stock (Specified)

<80 degree Rhombic Positive type>

Item Number	IC	T	Relief angle
CC_0602	6.35	2.38	7°
CC_09T3	9.525	3.97	7°



Material	P	M	K	N	S	H
Steel	●	●	●	●	●	●
Stainless Steel	●	●	●	●	●	●
Cast Iron	●	●	●	●	●	●
Non-Ferrous Material	●	●	●	●	●	●
Heat Resistant Alloy	●	●	●	●	●	●
Hardened Material	●	●	●	●	●	●

● : 1st Choice
● : 2nd choice

Shape	ISO Item Number	Inch Item Number	R	Carbide										Chip Control Range	For applicable holder, see pages:		
				PVD Coated						CVD Coated							
				ST4	ZM3	QM3	VM1	TM4	DT4	DM4	CP1	CP7	KM1				
	CCGT 060200	R/4 S	0.03	●	●	●	●	●	●	●	●						
	060201	R/4 S	0.1	●	●	●	●	●	●	●	●						
	060202	R/4 S	0.2	●	●	●	●	●	●	●	●						
	060201M	R/4 S	*0.08		R				R								
	060202M	R/4 S	*0.18		R				R								
	CCGT 09T300	R/4 S	0.03	R	●		R	R									
	09T301	R/4 S	0.1	●	R	●											
	09T302	R/4 S	0.2	R	R	●											
	09T304	R/4 S	0.4	R													
	09T301M	R/4 S	*0.08		R		R	R									
09T302M	R/4 S	*0.18		R		R	R										
09T304M	R/4 S	*0.38		R		R	R										
	CCGT 060200	R/4 U	0.03		R				R								
	060201	R/4 U	0.1	●				R									
	060202	R/4 U	0.2	●				R									
	CCGT 09T300	R/4 U1	0.03	●			R	R									
	09T301	R/4 U1	0.1	●			R	R									
	09T302	R/4 U1	0.2	●			R	R									
09T304	R/4 U1	0.4	●			R	R										
	CCGT 060201M	CL	*0.08	●	●	●	●	●	●	●	●					G23 K28	
	060202M	CL	*0.18	●	●	●	●	●	●	●	●						
	09T300	CL	0.03				●	●									
	09T301M	CL	*0.08	●	●	●	●	●	●	●	●						
	09T302M	CL	*0.18	●	●	●	●	●	●	●	●						
09T304M	CL	*0.38	●	●	●	●	●	●	●	●							
	CCGT 09T300	YL	0.03				●	●									
	09T301M	YL	0.08	●	●	●	●	●	●	●							
	09T302M	YL	0.18	●	●	●	●	●	●	●							
	09T304M	YL	0.38	●	●	●	●	●	●	●							
	09T308M	YL	0.78	●	●	●	●	●	●	●							
	CCGW 060200	FN	0.03	●													
	060201	FN	0.1	●													
	060200	H (M)	0.03									●					
	060201	H (M)	0.1									●					
	060202	H (M)	0.2									●					
	CCGW 09T300	FN	0.03	●													
	09T301	FN	0.1	●													
	09T300	H (M)	0.03									●					
	09T301	H (M)	0.1									●					
	09T302	H (M)	0.2									●					
	09T302M	P (M)	*0.18						●								
	09T30	V (M)	0.0				●										
09T301	P (M)	0.1				●											
09T302	P (M)	0.2				●											

* Inserts having 01M, 02M or 04M as the R code can be used for machining when the component drawing specifies that the radius is less than R=0.1, R=0.2 or R=0.4 respectively.
 ● : Standard stock ● : New standard stock ■ : Scheduled to be produced by order ★ : Standard stock (Specified)
 ※2 The specifications of CL chipbreaker are slightly different from the above dimensions, but it has no problem for machining.

<80 degree Rhombic Positive type>

Item Number	IC	T	Relief angle
CP_0401	4.76	1.59	11°
CP_0602	6.35	2.38	11°


Item Number	IC	T	Relief angle
CP_0802	7.94	2.38	11°
CP_0903	9.525	3.18	11°

Shape	ISO Item Number	Inch Item Number	R	Carbide										Chip Control Range	For applicable holder, see pages:			
				PVD Coated						CVD Coated								
				ST4	ZM3	QM3	VM1	TM4	DT4	DM4	CP1	CP7	KM1					
				Steel	P	●	●	●	●	●	●	●	●	●	●	●	●	● : 1st Choice ● : 2nd choice
				Stainless Steel	M	●	●	●	●	●	●	●	●	●	●	●		
				Cast Iron	K	●	●	●	●	●	●	●	●	●	●	●	●	
				Non-Ferrous Material	N	●	●	●	●	●	●	●	●	●	●	●	●	
				Heat Resistant Alloy	S	●	●	●	●	●	●	●	●	●	●	●	●	
				Hardened Material	H	●	●	●	●	●	●	●	●	●	●	●	●	
 AM5	CPGH 060202 FN AM5	CPGP83Y-FN--AM5	0.2	●				●										
	CPGH 080202 FN AM5	CPGP03Y-FN--AM5	0.2	●				●										
	CPGH 090302 FN AM5	CPGM32Y-FN--AM5	0.2	●				●										
	090304 FN AM5	321-FN--AM5	0.4	●				●										
	090308 FN AM5	322-FN--AM5	0.8	●				●										
 A · A1 L-hand shown	CPGH 040102 F _{R/L} A1	CPGP62Y-F _{R/L} --A1	0.2	L				L										
	040104 F _{R/L} A1	621-F _{R/L} --A1	0.4	L				L										
	CPGH 060202 F _{R/L} A	CPGP83Y-F _{R/L} --A	0.2	L				L										
	060204 F _{R/L} A	831-F _{R/L} --A	0.4	L				L										
	CPGH 080202 F _{R/L} A	CPGP03Y-F _{R/L} --A	0.2	L				L										
080204 F _{R/L} A	031-F _{R/L} --A	0.4	L				L											
 F1 R-hand shown	CPGH 040101 F _{R/L} F1		0.1	R				R										
	040102 F _{R/L} F1		0.2	R				R										
	040104 F _{R/L} F1		0.4	R				R										
	CPGH 060202 F _{R/L} F1		0.2	R				R										
	060204 F _{R/L} F1		0.4	R				R										
 S L-hand shown	CPGH 040101 _{R/L} S		0.1					L		L								
	040102 _{R/L} S		0.2					L		L								
	040104 _{R/L} S		0.4					L		L								
	CPGH 060202 _{R/L} S		0.2					L		L								
	060204 _{R/L} S		0.4					L		L								

● : Standard stock ● : New standard stock ■ : Scheduled to be produced by order ★ : Standard stock (Specified)

<55 degree Rhombic Positive type>








Item Number	IC	T	Relief angle
DC_0702	6.35	2.38	7°
DC_11T3	9.525	3.97	7°



Material	P	M	K	N	S	H
Steel	●	●	●	●	●	●
Stainless Steel	●	●	●	●	●	●
Cast Iron	●	●	●	●	●	●
Non-Ferrous Material	●	●	●	●	●	●
Heat Resistant Alloy	●	●	●	●	●	●
Hardened Material	●	●	●	●	●	●

● : 1st Choice
● : 2nd choice

Shape	ISO Item Number	Inch Item Number	R	Carbide										Chip Control Range	For applicable holder, see pages:	
				PVD Coated						CVD Coated						
				ST4	ZM3	QM3	VM1	TM4	DT4	DM4	CP1	CP7	KM1			
	DCGT 070200 FN AM3		0.03	●	●	●	●	●	●	●	●	●	●	●		
	070201 FN AM3		0.1	●	●	●	●	●	●	●	●	●	●	●	●	
	070202 FN AM3		0.2	●	●	●	●	●	●	●	●	●	●	●	●	
	070204 FN AM3		0.4	●	●	●	●	●	●	●	●	●	●	●	●	
	070201M FN AM3		*0.08	●	●	●	●	●	●	●	●	●	●	●	●	
	070202M FN AM3		*0.18	●	●	●	●	●	●	●	●	●	●	●	●	
	070204M FN AM3		*0.38	●	●	●	●	●	●	●	●	●	●	●	●	
	DCGT 11T300 FN AM3		0.03	●	●	●	●	●	●	●	●	●	●	●	●	
	11T302 FN AM3		0.2	●	●	●	●	●	●	●	●	●	●	●	●	
	11T304 FN AM3		0.4	●	●	●	●	●	●	●	●	●	●	●	●	
	11T301M FN AM3		*0.08	●	●	●	●	●	●	●	●	●	●	●	●	
	11T302M FN AM3		*0.18	●	●	●	●	●	●	●	●	●	●	●	●	
11T304M FN AM3		*0.38	●	●	●	●	●	●	●	●	●	●	●	●		
DCMT 070202 FN AM3		0.2									●					
070204 FN AM3		0.4									●					
DCMT 11T302 FN AM3		0.2									●					
11T304 FN AM3		0.4									●					
11T308 FN AM3		0.8									●					
	DCGT 070201M AMX		*0.08				●	●	●	●						
	070202M AMX		*0.18				●	●	●	●						
	070204M AMX		*0.38				●	●	●	●						
	DCGT 11T301M AMX		*0.08				●	●	●	●						
	11T302M AMX		*0.18				●	●	●	●						
	11T304M AMX		*0.38				●	●	●	●						
	DCGT 070200 AZ7		0.03		●											
	070201M AZ7		*0.08		●											
	070202M AZ7		*0.18		●											
	DCGT 11T300 AZ7		0.03		●			●	●							
	11T301M AZ7		*0.08		●			●	●							
	11T302M AZ7		*0.18		●			●	●							
	11T304M AZ7		*0.38		●			●	●							
11T308 AZ7		0.8		●			●	●								
	DCMT 070202 ENA AZ8		0.2								●					
	070204 ENB AZ8		0.4								●					
	070208 ENB AZ8		0.8								●					
	DCMT 11T302 ENA AZ8		0.2								●					
	11T304 ENB AZ8		0.4								●					
	11T308 ENB AZ8		0.8								●					
	DCET 11T301M R/4 AT		*0.08					R								
	11T302M R/4 AT		*0.18					R								
	DCET 0702005 R/4 KHG		0.05				●									
	0702008 R/4 KHG		0.08				●									
	0702018 R/4 KHG		0.18				●									
	070202 R/4 KHG		0.2				●									
	DCET 11T3005 R/4 KHG		0.05				●	R								
	11T3008 R/4 KHG		0.08				●	R								
	11T3018 R/4 KHG		0.18				●	R								
11T302 R/4 KHG		0.2				●	R									
	DCET 0702008 R/4 UHG		0.08					R								
	DCET 11T3008 R/4 UHG		0.08					R								



G25
G27

*Inserts having 01M, 02M or 04M as the R code can be used for machining when the component drawing specifies that the radius is less than R=0.1, R=0.2 or R=0.4 respectively.

● : Standard stock ● : New standard stock ■ : Scheduled to be produced by order ★ : Standard stock (Specified)

<55 degree Rhombic Positive type>

Item Number	IC	T	Relief angle
DC_0702	6.35	2.38	7°
DC_11T3	9.525	3.97	7°


Shape	ISO Item Number	Inch Item Number	R	Carbide											Chip Control Range	For applicable holder, see pages:		
				PVD Coated						CVD Coated								
				ST4	ZM3	QM3	VM1	TM4	DT4	DM4	CP1	CP7	KM1					
				Steel	P	●	●	●	●	●	●	●	●	●	●	●	●	● : 1st Choice ● : 2nd choice
				Stainless Steel	M	●	●	●	●	●	●	●	●	●	●	●		
				Cast Iron	K	●	●	●	●	●	●	●	●	●	●	●		
				Non-Ferrous Material	N	●	●	●	●	●	●	●	●	●	●	●		
				Heat Resistant Alloy	S	●	●	●	●	●	●	●	●	●	●	●		
				Hardened Material	H	●	●	●	●	●	●	●	●	●	●	●		
 S R-hand shown	DCGT 070200	R/4 S		0.03	●													
	070201	R/4 S		0.1	●													
	070202	R/4 S		0.2	●													
	070204	R/4 S		0.4														
	070201M	R/4 S		*0.08		R				R								
	070202M	R/4 S		*0.18		R				R								
	DCGT 11T300	R/4 S		0.03	R		●	R	R									
	11T301	R/4 S		0.1	R	R	●											
	11T302	R/4 S		0.2	R	R	●											
	11T304	R/4 S		0.4		R												
 U · U1 R-hand shown	DCGT 070200	R/4 U		0.03	R		R											
	070201	R/4 U		0.1	R		R											
	070202	R/4 U		0.2	●		R											
	DCGT 11T300	R/4 U1		0.03	●		R	R	R									
	11T301	R/4 U1		0.1	●		R	R	R									
	11T302	R/4 U1		0.2	●		R	R	R									
 without chipbreaker	DCGW 070200	FN		0.03	●												G25 G27	
	070201	FN		0.1	●													
	070200	H M		0.03														
	070201	H M		0.1														
	070202	H M		0.2														
	07020	V M		0.0			●											
	DCGW 11T300	FN		0.03	●													
	11T301	FN		0.1	●													
	11T300	H M		0.03														
	11T301	H M		0.1														
 CL ※2	DCGT 070201M	CL		*0.08	●	●		●	●	●								
	070202M	CL		*0.18	●	●		●	●	●								
	070204M	CL		*0.38	●	●		●	●	●								
	DCGT 11T301M	CL		*0.08	●	●		●	●	●								
	11T302M	CL		*0.18	●	●		●	●	●								
	11T304M	CL		*0.38	●	●		●	●	●								
 YL	DCGT 070201M	YL		0.08		●					●							
	070202M	YL		0.18		●					●							
	070204M	YL		0.38		●					●							
	DCGT 11T300	YL		0.03							●	●						
	11T301M	YL		0.08	●	●		●	●	●								
	11T302M	YL		0.18	●	●		●	●	●								
	11T304M	YL		0.38	●	●		●	●	●								
	11T308M	YL		0.78	●	●		●	●	●								

* Inserts having 01M, 02M or 04M as the R code can be used for machining when the component drawing specifies that the radius is less than R=0.1, R=0.2 or R=0.4 respectively.
 ※2 The specifications of CL chipbreaker are slightly different from the above dimensions, but it has no problem for machining.

● : Standard stock ● : New standard stock ■ : Scheduled to be produced by order ★ : Standard stock (Specified)










Item Number	IC	T	Relief angle
TFD_07	6.35	2.38	7°
TFD_11	9.525	3.97	7°

<TFD with Wiper edge>




Steel	P	●	●	●	●	●	●	●	●	●	●	●
Stainless Steel	M	●	●	●	●	●	●	●	●	●	●	●
Cast Iron	K	●	●	●	●	●	●	●	●	●	●	●
Non-Ferrous Material	N	●	●	●	●	●	●	●	●	●	●	●
Heat Resistant Alloy	S	●	●	●	●	●	●	●	●	●	●	●
Hardened Material	H	●	●	●	●	●	●	●	●	●	●	●

● : 1st Choice
● : 2nd choice

Shape	ISO Item Number	Inch Item Number	R	Carbide										Chip Control Range	For applicable holder, see pages:	
				PVD Coated							CVD Coated					
				ST4	ZM3	QM3	VM1	TM4	DT4	DM4	CP1	CP7	KM1			
 AM3	TFD 11 FR 05 AM3	DCGT32.502AM3-WP	0.05			R				R	R					
	11 FR 15 AM3	32.506AM3-WP	0.15			R				R	R					
 S ※ R-hand shown	TFD 07 FR 05	DCGT21.502 ^{1/2} S-WP	0.05	●		R	R									
	07 FR 15	21.506 ^{1/2} S-WP	0.15	●		R										
	TFD 11 FR 05	DCGT32.502RS-WP	0.05		R	R	R									
	11 FR 15	32.506RS-WP	0.15		R	R										
 U · U1 ※ R-hand shown	TFD 07 FR 05 U	DCGT21.502RU-WP	0.05		R	R	R									G25 G27
	07 FR 15 U	21.506RU-WP	0.15		R	R										
	TFD 11 FR 05 U1	DCGT32.502RU1-WP	0.05		R	R	R									
	11 FR 15 U1	32.506RU1-WP	0.15		R	R										
 without chipbreaker	TFD 07 FR 05 H 	DCGW21.502RH-WP	0.05											R		
	TFD 11 FR 05 H 	DCGW32.502RH-WP	0.05											R		






● : Standard stock ● : New standard stock ■ : Scheduled to be produced by order ★ : Standard stock (Specified)



*Note: NTK WP style inserts have a wiper facet design. The insert has a 0.3mm flat on the cutting edge when the insert is set into the toolholder. The flat on the cutting edge ensures a superior surface when feed rates are increased. WP style inserts can be used in toolholders: SDJC, Y-SDJC, CH-SDUCL and DS-SDUL.

<75 degree Rhombic Positive type>

Item Number	IC	T	Relief angle
ER_T301	3.97	1.59	9°



Shape	ISO Item Number	Inch Item Number	R	Carbide										Chip Control Range	For applicable holder, see pages:																																																																																				
				PVD Coated					CVD Coated																																																																																										
				ST4	ZM3	QM3	VM1	TM4	DT4	DM4	CP1	CP7	KM1																																																																																						
 <table border="1"> <tr><td>Steel</td><td>P</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td></tr> <tr><td>Stainless Steel</td><td>M</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td></tr> <tr><td>Cast Iron</td><td>K</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td></tr> <tr><td>Non-Ferrous Material</td><td>N</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td></tr> <tr><td>Heat Resistant Alloy</td><td>S</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td></tr> <tr><td>Hardened Material</td><td>H</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td></tr> </table>				Steel	P	●	●	●	●	●	●	●	●	●	●	●	●	Stainless Steel	M	●	●	●	●	●	●	●	●	●	●	●	●	Cast Iron	K	●	●	●	●	●	●	●	●	●	●	●	●	Non-Ferrous Material	N	●	●	●	●	●	●	●	●	●	●	●	●	Heat Resistant Alloy	S	●	●	●	●	●	●	●	●	●	●	●	●	Hardened Material	H	●	●	●	●	●	●	●	●	●	●	●	●	<p>● : 1st Choice ● : 2nd choice</p>											
Steel	P	●	●	●	●	●	●	●	●	●	●	●	●																																																																																						
Stainless Steel	M	●	●	●	●	●	●	●	●	●	●	●	●																																																																																						
Cast Iron	K	●	●	●	●	●	●	●	●	●	●	●	●																																																																																						
Non-Ferrous Material	N	●	●	●	●	●	●	●	●	●	●	●	●																																																																																						
Heat Resistant Alloy	S	●	●	●	●	●	●	●	●	●	●	●	●																																																																																						
Hardened Material	H	●	●	●	●	●	●	●	●	●	●	●	●																																																																																						
	ERGH T30102 F^R/_L A2	ERGP52Y-F^R/_L--A2	0.2		●		■	●									K27																																																																																		
R-hand shown	T30104 F^R/_L A2	521-F^R/_L--A2	0.4	L				●																																																																																											
	ERGH T30101 F^R/_L F1	—	0.1	R		R		R																																																																																											
R-hand shown	T30102 F^R/_L F1	—	0.2	R		R		R																																																																																											
	T30104 F^R/_L F1	—	0.4	R		R		R																																																																																											

※For F05, F1 and FG chipbreaker, right-hand inserts fit to right-hand toolholder.

● : Standard stock ● : New standard stock ■ : Scheduled to be produced by order ★ : Standard stock (Specified)

<90 degree Square Positive type>

Item Number	IC	T	Relief angle
SD_0602	6.35	2.38	15°

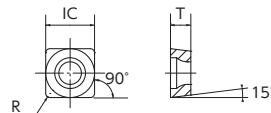
Shape	ISO Item Number	Inch Item Number	R	Carbide										Chip Control Range	For applicable holder, see pages:																																																																																				
				PVD Coated					CVD Coated																																																																																										
				ST4	ZM3	QM3	VM1	TM4	DT4	DM4	CP1	CP7	KM1																																																																																						
 <table border="1"> <tr><td>Steel</td><td>P</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td></tr> <tr><td>Stainless Steel</td><td>M</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td></tr> <tr><td>Cast Iron</td><td>K</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td></tr> <tr><td>Non-Ferrous Material</td><td>N</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td></tr> <tr><td>Heat Resistant Alloy</td><td>S</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td></tr> <tr><td>Hardened Material</td><td>H</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td></tr> </table>				Steel	P	●	●	●	●	●	●	●	●	●	●	●	●	Stainless Steel	M	●	●	●	●	●	●	●	●	●	●	●	●	Cast Iron	K	●	●	●	●	●	●	●	●	●	●	●	●	Non-Ferrous Material	N	●	●	●	●	●	●	●	●	●	●	●	●	Heat Resistant Alloy	S	●	●	●	●	●	●	●	●	●	●	●	●	Hardened Material	H	●	●	●	●	●	●	●	●	●	●	●	●	<p>● : 1st Choice ● : 2nd choice</p>											
Steel	P	●	●	●	●	●	●	●	●	●	●	●	●																																																																																						
Stainless Steel	M	●	●	●	●	●	●	●	●	●	●	●	●																																																																																						
Cast Iron	K	●	●	●	●	●	●	●	●	●	●	●	●																																																																																						
Non-Ferrous Material	N	●	●	●	●	●	●	●	●	●	●	●	●																																																																																						
Heat Resistant Alloy	S	●	●	●	●	●	●	●	●	●	●	●	●																																																																																						
Hardened Material	H	●	●	●	●	●	●	●	●	●	●	●	●																																																																																						
	SDEW 060202 FN		0.2		●																																																																																														

● : Standard stock ● : New standard stock ■ : Scheduled to be produced by order ★ : Standard stock (Specified)

<60 degree Triangle Positive type>













Item Number	IC	T	Relief angle
TC_0601	3.97	1.59	7°
TC_06T1	3.97	1.98	7°

Item Number	IC	T	Relief angle
TC_0902	5.56	2.38	7°
TC_1102	6.35	2.38	7°



Material	P	M	K	N	S	H
Steel	●	●	●	●	●	●
Stainless Steel	●	●	●	●	●	●
Cast Iron	●	●	●	●	●	●
Non-Ferrous Material	●	●	●	●	●	●
Heat Resistant Alloy	●	●	●	●	●	●
Hardened Material	●	●	●	●	●	●

● : 1st Choice
● : 2nd choice













Shape	ISO Item Number	Inch Item Number	R	Carbide										Chip Control Range	For applicable holder, see pages:			
				PVD Coated						CVD Coated								
				ST4	ZM3	QM3	VM1	TM4	DT4	DM4	CP1	CP7	KM1					
 K L-hand shown	TCGH 060102 F _{R/L} K		0.2															
	060104 F _{R/L} K		0.4															
 B1 L-hand shown	TCGH 060102 F _{R/L} B1	TCGP52Y-F _{R/L} -B1	0.2		L				L								K30 K31 K32	
	060104 F _{R/L} B1	521-F _{R/L} -B1	0.4		L				L									
 F05 ※ R-hand shown	TCGH 060101 F _{R/L} F05	TCGP521CF _{R/L} -F05	0.1	R		R			R							 		
	060102 F _{R/L} F05	52Y-F _{R/L} -F05	0.2	R	●	R	■	●										
	060104 F _{R/L} F05	521-F _{R/L} -F05	0.4	R	R	R	■	R										
 S R-hand shown	TCGT 090201 R _L S		0.1		R		●											
	090202 R _L S		0.2		R													
	TCGT 110201 R _L S		0.1		R		●											
 U R-hand shown	TCGT 090201 R _L U		0.1		R												G36	
	090202 R _L U		0.2		R													
 without chipbreaker	TCGW 06T108 FN		0.8		●													
	TCGW 090200 FN		0.03		●													
	090201 FN		0.1		●													
	TCGW 110200 FN		0.03		●													
	110201 FN		0.1		●													

※For F05 chipbreaker, right-hand inserts fit to right-hand toolholder.

● : Standard stock ● : New standard stock ■ : Scheduled to be produced by order ★ : Standard stock (Specified)

<60 degree Triangle Positive type>

Item Number	IC	T	Relief angle
TP_0802	4.76	2.38	11°
TP_0902	5.56	2.38	11°
TP_1103	6.35	3.18	11°

Shape	ISO Item Number	Inch Item Number	R	Carbide										Chip Control Range	For applicable holder, see pages:			
				PVD Coated						CVD Coated								
				ST4	ZM3	QM3	VM1	TM4	DT4	DM4	CP1	CP7	KM1					
				Steel	P	●	●	●	●	●	●	●	●	●	●	●	● : 1st Choice ● : 2nd choice	
				Stainless Steel	M	●	●	●	●	●	●	●	●	●	●			
				Cast Iron	K	●	●	●	●	●	●	●	●	●	●	●		
				Non-Ferrous Material	N	●	●	●	●	●	●	●	●	●	●	●	●	
				Heat Resistant Alloy	S	●	●	●	●	●	●	●	●	●	●	●	●	
				Hardened Material	H	●	●	●	●	●	●	●	●	●	●	●	●	
 <p>B2 · B3 L-hand shown</p>	TPGH 090202 F _{R/L} B2	TPGP73Y-F _{R/L} --B2	0.2		L				L									
	090204 F _{R/L} B2	731-F _{R/L} --B2	0.4		L				L									
	090208 F _{R/L} B2	732-F _{R/L} --B2	0.8		L				L									
	TPGH 080202 F _{R/L} B3	TPGP63Y-F _{R/L} --B3	0.2		L				L									
	080204 F _{R/L} B3	631-F _{R/L} --B3	0.4		L				L									
 <p>K L-hand shown</p>	TPGH 090202 F _{R/L} K		0.2						L							K30 K31 K32		
	090204 F _{R/L} K		0.4						L									
	090208 F _{R/L} K		0.8						L									
 <p>F1 ※ R-hand shown</p>	TPGH 080202 F _{R/L} F1	TPGP63Y-F _{R/L} --F1	0.2		R			R	R						 			
	080204 F _{R/L} F1	631-F _{R/L} --F1	0.4		R			R	R									
	TPGH 090201 F _{R/L} F1	TPGP731CF _{R/L} --F1	0.1	R		R			R									
	090202 F _{R/L} F1	73Y-F _{R/L} --F1	0.2	R	R	R			R	R								
	090204 F _{R/L} F1	731-F _{R/L} --F1	0.4	R	R	R			R	R								
	090208 F _{R/L} F1	732-F _{R/L} --F1	0.8	R	R	R			R	R								
	TPGH 110302 F _{R/L} F1	TPGH22Y-F _{R/L} --F1	0.2	R	R	R			R	R								
110304 F _{R/L} F1	221-F _{R/L} --F1	0.4	R	R	R			R	R									
	110308 F _{R/L} F1	222-F _{R/L} --F1	0.8	R	R	R			R									
 <p>FG ※ R-hand shown</p>	TPGH 090202 _{R/L} FG		0.2	R				R						 				
	090204 _{R/L} FG		0.4	R				R										
	TPGH 110302 _{R/L} FG		0.2	R				R										
	110304 _{R/L} FG		0.4	R				R										


※For F1 and FG chipbreaker, right-hand inserts fit to right-hand toolholder.

● : Standard stock ● : New standard stock ■ : Scheduled to be produced by order ★ : Standard stock (Specified)

New Products
Tool Materials / Selection Guide
BIDEMCS, PCD, Micrograin Carbide, PVD Coated Carbide, CBN and Ceramics
Insert Item List
General Turning Toolholders
Unique Swiss Tooling
Grooving / Side Turning
Threading
Shaper
ID Tooling
Application Introduction
Endmills
Rotating Tools
Information
Index





Item Number	IC	T	Relief angle
TFT_09	5.56	2.38	7°
TFT_11	6.35	2.38	7°

<TFT with Wiper edge>





Steel	P	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Stainless Steel	M	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Cast Iron	K	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Non-Ferrous Material	N	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Heat Resistant Alloy	S	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Hardened Material	H	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

● : 1st Choice
● : 2nd choice

Shape	ISO Item Number	Inch Item Number	R	Carbide										Chip Control Range	For applicable holder, see pages:			
				PVD Coated							CVD Coated							
				ST4	ZM3	QM3	VM1	TM4	DT4	DM4	CP1	CP7	KM1					
 <p>S ※ R-hand shown</p>	TFT 09 FR 05	TCGT7302RS-WP	0.05	●														G36
	09 FR 15	7306RS-WP	0.15	●														
	TFT 11 FR 05	TCGT21.502RS-WP	0.05	●														
	11 FR 15	21.506RS-WP	0.15	●														
	TFT 09 FL 05	TCGT7302LS-WP	0.05	●														
	09 FL 15	7306LS-WP	0.15	●														
 <p>U · U1 ※ R-hand shown</p>	TFT 09 FR 05 U	TCGT7302RU-WP	0.05	●													G36	
	09 FR 15 U	7306RU-WP	0.15	●														
	TFT 11 FR 05 U1	TCGT21.502RU1-WP	0.05	●														
	11 FR 15 U1	21.506RU1-WP	0.15	●														

● : Standard stock ● : New standard stock ■ : Scheduled to be produced by order ★ : Standard stock (Specified)



*Note: NTK WP style inserts have a wiper facet design. The insert has a 0.3mm flat on the cutting edge when the insert is set into the toolholder. The flat on the cutting edge ensures a superior surface when feed rates are increased. WP style inserts can be used in toolholders: STAC

<35 degree Rhombic Positive type>

Item Number	IC	T	Relief angle
VB_1604	9.525	4.76	5°

Item Number	IC	T	Relief angle
VC_1103	6.35	3.18	7°
VC_1303	7.94	3.18	7°

Shape	ISO Item Number	Inch Item Number	R	Carbide										Chip Control Range	For applicable holder, see pages:								
				PVD Coated						CVD Coated													
				ST4	ZM3	QM3	VM1	TM4	DT4	DM4	CP1	CP7	KM1										
				Steel Stainless Steel Cast Iron Non-Ferrous Material Heat Resistant Alloy Hardened Material	P M K N S H	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	● : 1st Choice ● : 2nd choice		
	VBGT 160402 FN YL		0.2	●						●													
	160404 FN YL		0.4	●						●													
	160408 FN YL		0.8	●						●													
	VCET 1103008 R/2 UHG		0.08						R														
	VCGT 110300 AZ7		0.03		●	●																G29	
	110301M AZ7		*0.08		●	●																G31	
	110302M AZ7		*0.18		●	●																G56	
	110304M AZ7		*0.38		●	●																	
	VCGT 110300 FN AM3		0.03					●		●													
	110301 FN AM3		0.1		●	●																	
	110302 FN AM3		0.2		●	●																	
	110301M FN AM3		*0.08	●		●	●	●	●														
	110302M FN AM3		*0.18	●		●	●	●	●														
	110304M FN AM3		*0.38	●		●	●	●	●														
	VCMT 110302 FN AM3		0.2									●											
	110304 FN AM3		0.4									●											
	VCGT 130300 F R/2 2M		0.03										●									G29	
	130301 F R/2 2M		0.1										●									G62	
	VCGT 110300 R/2 U		0.03		R		R																
	110301 R/2 U		0.1		R		R																
	110302 R/2 U		0.2		R		R																
	110301M R/2 U		*0.08										R										
	110302M R/2 U		*0.18										R										
	VCGW 110300 H M		0.03																●			G29	
	110301 H M		0.1																●			G31	
	110302 H M		0.2																●			G56	

*Inserts having 01M, 02M or 04M as the R code can be used for machining when the component drawing specifies that the radius is less than R=0.1, R=0.2 or R=0.4 respectively.


● : Standard stock ● : New standard stock ■ : Scheduled to be produced by order ★ : Standard stock (Specified)

<TFV with Wiper edge>

Item Number	IC	T	Relief angle
TFV_11	6.35	3.18	7°

Shape	ISO Item Number	Inch Item Number	R	Carbide										Chip Control Range	For applicable holder, see pages:		
				PVD Coated						CVD Coated							
				ST4	ZM3	QM3	VM1	TM4	DT4	DM4	CP1	CP7	KM1				
				Steel	P	●	●	●	●	●	●	●	●	●	●	●	● : 1st Choice ● : 2nd choice
				Stainless Steel	M	●	●	●	●	●	●	●	●	●	●		
				Cast Iron	K	●	●	●	●	●	●	●	●	●	●		
				Non-Ferrous Material	N	●	●	●	●	●	●	●	●	●	●		
				Heat Resistant Alloy	S	●	●	●	●	●	●	●	●	●	●		
				Hardened Material	H	●	●	●	●	●	●	●	●	●	●		
 U	TFV 11 FR 05 U	VCGT2202RU-WP	0.05	●	●												
	11 FR 10 U	2204RU-WP	0.10	●	●												
 Small flat on edge	TFV 11 FR 05 SX	VCGT2202RSX-WP	0.05	●	●												
	11 FR 10 SX	2204RSX-WP	0.10	●	●												


● : Standard stock ● : New standard stock ■ : Scheduled to be produced by order ★ : Standard stock (Specified)



*Note: NTK WP style inserts have a wiper facet design. The insert has a 0.2mm flat on the cutting edge when the insert is set into the toolholder. The flat on the cutting edge ensures a superior surface when feed rates are increased. WP style inserts can be used in toolholders: SVJC

MEMO

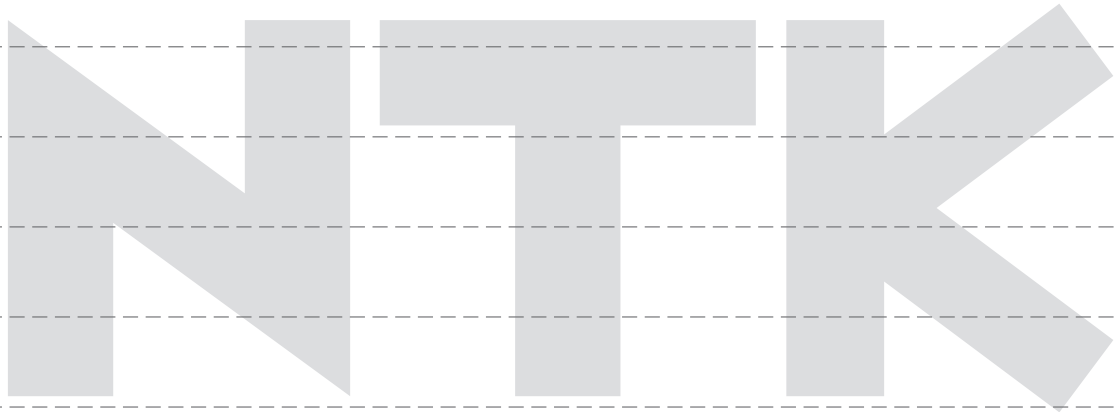New Products
Tool Materials / Selection Guide
BIDEMCS, PCD, CBN and Ceramics
Micrograin Carbide, PVD/Coated Carbide
Insert Item List
General Turning Toolholders
Unique Swiss Tooling
Grooving / Side Turning
Threading
Shaper
ID Tooling
Application Introduction
Endmills
Rotating Tools
Information
Index



F



General Turning Toolholders

- Selection Guide F2
- Holder Identification System F4
- For CN.. Inserts F8
- For DN.. Inserts F12
- For SN.. Inserts F16
- For TN.. Inserts F22
- For VN.. Inserts F26
- For WN.. Inserts F28
- For RN.. Inserts F30
- For CDH.. Inserts F31
- For RCGX/RPGX.. Inserts F32
- For RCGY.. Inserts F33

Selection Guide







Lead Angle/ Insert shape		75° / CN□□	95° / CN□□	95° / WN□□	75° / CN□□	75° / TN□□	75° / SN□□
Tooling							
Perfect for Ceramic or CBN insert	Double clamp W Series		WCLN type ...F8	WWLM type ...F28 WWLN-2 type ...F28	WCBN type ...F10		
	Clamp-on T Series		TCLN type ...F8		TCBN type ...F10		
	Dimple clamp H Series		HCLN type ...F8				
	Clamp-on C Series	CCKN type ...F10	C31 type /CCLN type ...F8		CCBN type ...F10	C23 type ...F24	C11 type ...F18 C16 type ...F18
For insert in General	Lever lock P Series		PCLN type ...F8				PSBN type ...F18

Lead Angle/ Insert shape		107° 30' / DN	117° 30' / VN□□	Round R □□□		45° / SN□□	75° / SN□□
Tooling							
Perfect for Ceramic or CBN insert	Double clamp W Series	WDHN type ...F14	WVPN type ...F26			WSDN type ...F16	
	Clamp-on T Series					TSDN type ...F16	
	Dimple clamp H Series	HDHN type ...F14	HVPN type ...F26			HSDN type ...F16	
	Clamp-on C Series			C54 type /CRDN type ...F30	C55 type /CRGN type ...F30	C14 type /CSDN type ...F16	C15 type ...F20
For insert in General	Lever lock P Series					PSDN type ...F16	





























60° / SN□□	60° / TN□□	85° / SN□□	91° / TN□□	93° / DN□□	93° / VN□□
			WTGN type ...F22	WDJN type ...F12	WVJN type ...F26
			TTGN type ...F22		
				HDJN type ...F12	HVJN type ...F26
C13 type ...F18	C24 type ...F24	CSHN type ...F18	C21 type ...F22 C22 type ...F22	CDJN type ...F12	
				PDJN type ...F12	

85° / SN□□	45° / SN□□	91° / TN□□	72° 30' / VN□□	62° 30' / DN□□
	WSSN type ...F16	WTFN type ...F24	WVVN type ...F26	WDNN type ...F14
	TSSN type ...F16	TTFN type ...F24		
	HSSN type ...F16		HVVN type ...F26	HDNN type ...F14
C17 type ...F20	C12 type /CSSN type ...F16	C25 type ...F24		

Holder Identification System






C : Clamp-on type (C type)	 T : Triangle	R : Right hand L : Left hand N : Neutral (Common for R and L)	Shank height indicated in "mm"	Shank width indicated in "mm"	Any ID symbol or number
P : Lever-lock type (P type)	 S : Square				
S : Screw-on type (S type)	 C : 80° rhombic				
W : Double-clamp type (Multi Clamp Toolholders)	 D : 55° rhombic				
T : Clamp-on type (Multi Clamp Toolholders)	 V : 35° rhombic				
H : Dimple-clamp type (Multi Clamp Toolholders)	 R : Round				
Clamping System	Insert shape	Hand of tool	Shank Size (Height)	Shank Size (Width)	Other ID data

C C L N R 25 25 M 12


Approach Angle						Insert Relief Angle	Length of toolholder (mm)	Insert size (cutting edge length)
							F: 80 H: 100 K: 125 L: 140 M: 150 N: 160 P: 170 Q: 180 R: 200 S: 250	     
								
								
		X : Special cutting edge						

• The dimensions and specifications may be changed due to design improvement without notice.

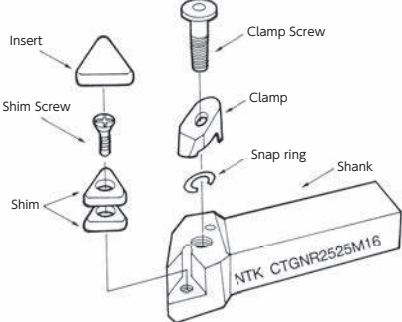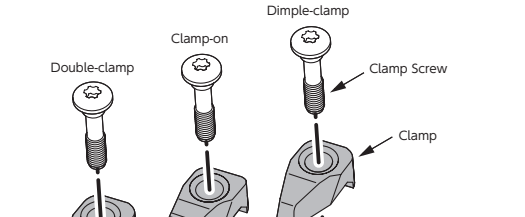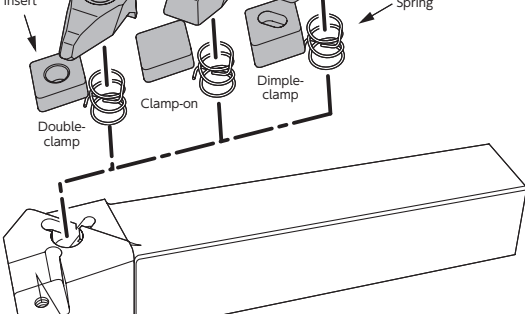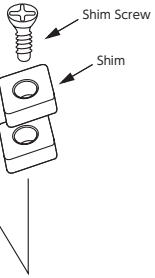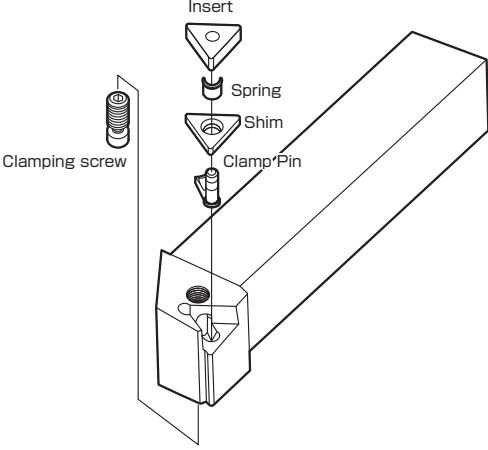Structures and Features of NTK Toolholders for General Turning

Series	Structure	Features
C type : Clamp-on		<ul style="list-style-type: none"> ● Secures the insert with high clamping force ● Excellent in indexing accuracy ● Suitable for heavy-duty applications including interrupted cut machining ● Clamping system for ceramic cutting tools
W type : Double-clamp		<ul style="list-style-type: none"> ● Shim screw clamping methods can be utilized by a simple clamp shim ● Best for ceramic tools, with stronger and more accurate clamping with the improved clamp system
T type : Clamp-on		<ul style="list-style-type: none"> ● Prevents insert breakage by optimizing the clamping force ● Allows for highly accurate machining with highly repeatable accuracy
H type : Dimple-clamp		<ul style="list-style-type: none"> ● Inserts can be easily changed as clamping is possible from the front and back of the tool
P type : Lever lock		<ul style="list-style-type: none"> ● General-purpose toolholder ● Allows for smooth chip control without fouling any clamping mechanism ● For inserts of all material grades however not recommended for ceramics

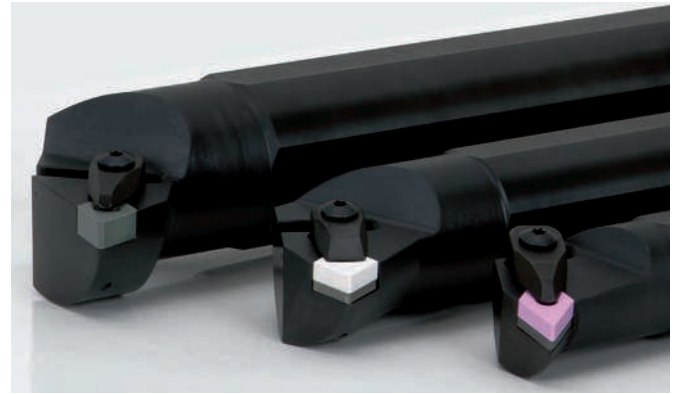Multi-Clamp Toolholders



Measurement result of clamping force by sheet.

Even and rigid clamping!!

	NTK's double clamp	Competitor's double clamp
Opposite side of cutting edge	Side	Side
Cutting edge side	Bottom	Bottom

(Tightening Torque 7.5Nm. Red part is clamped well.)

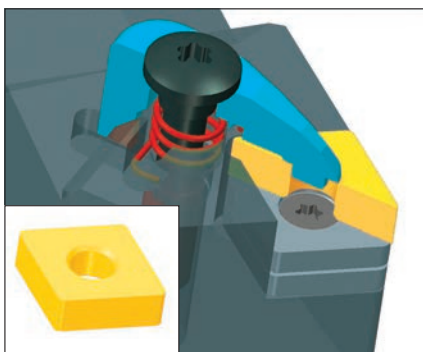
Features

- Three clamping configurations available with one toolholder just by changing a clamp
- Clamp screw also accessible from bottom of the toolholder Dramatically improved accessibility when using toolholder up-side down


Clamp for various style of inserts available

Three types of inserts can be set by only changing the clamp.


Double-clamp type



Dimple-clamp type

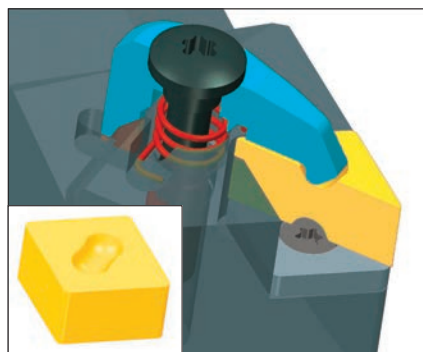

Clamp-on type

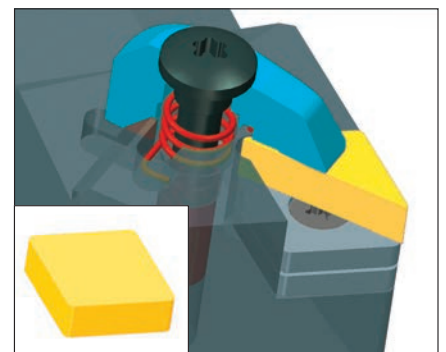


Instructions

- ▶ Recommended tightening torque for setting insert is 7.5Nm when using Wrench LLR-T20 and 5.0Nm when using LLR-T15. Excessive or insufficient tightening may result in inadequate clamping.
- ▶ Change the clamp and remove one shim when using dimple insert as the thickness of compatible dimple insert is 7.94mm.


▼ Follow the instructions below to put on a clamp.

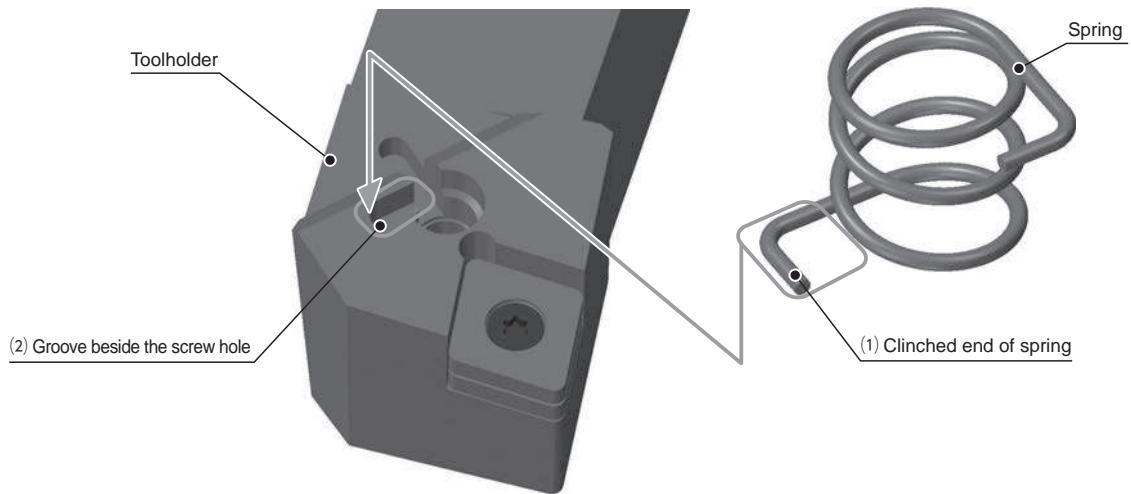1. Put the clinched end (1) of spring to the groove beside the screw hole (2).



2. To put the clamp on the toolholder, Put the pin (3) of the clamp into the groove (4) provided on the toolholder. Make sure that the screw hole (1) of the clamp and spring hole (2) on the toolholder are matched.

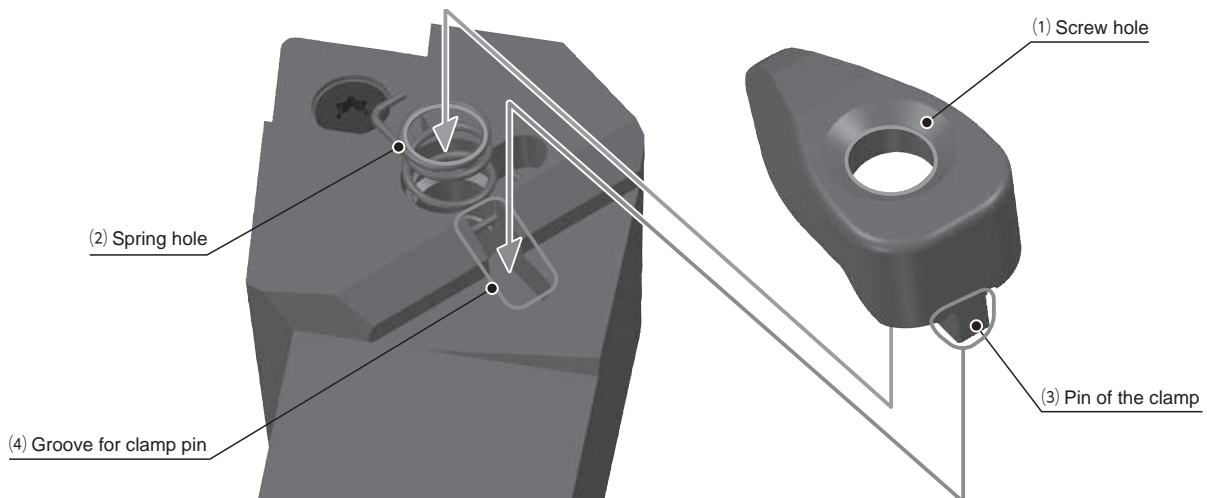Caution : Confirm the clinching end of spring is in the groove 5 provided on underside of the clamp.



3. Finish up by tightening the screw.

CN.. Inserts

C31/CCLN

Clamp-on


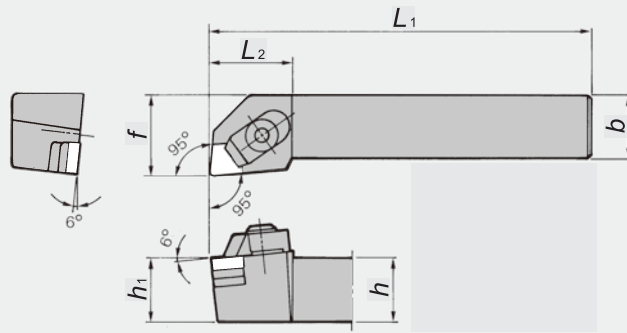


Figure-1

● Right-hand shown.

PCLN-N

Lever lock
Able to tighten both sides


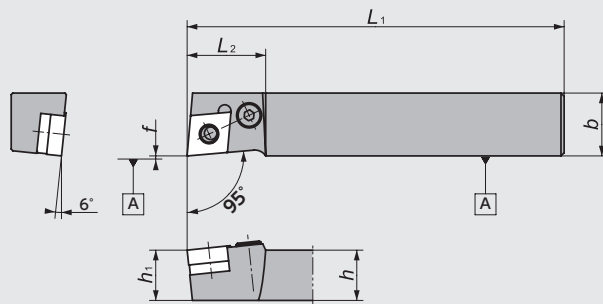


Figure-2

● Right-hand shown.

PCLN

Lever lock
Able to tighten both sides


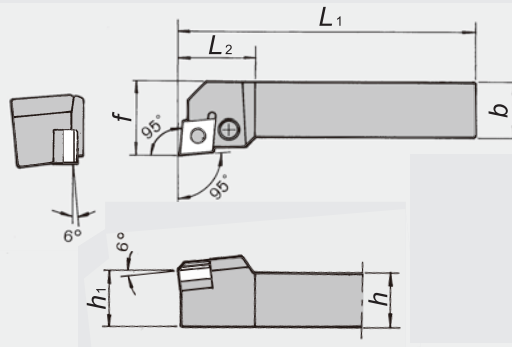


Figure-3

● Right-hand shown.

Multi-clamp holder

TCLN

Clamp-on

WCLN

Double-Clamp

HCLN

Dimple-Clamp


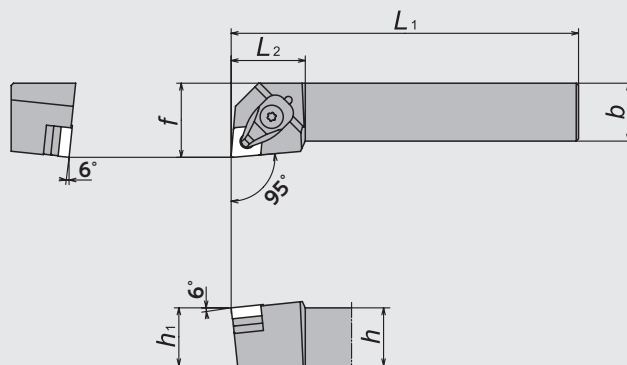


Figure-4

● Right-hand shown.

■ Dimensions of toolholders and spare parts

Figure	Code No.		Item Number	Stock		Dimensions (mm)						Clamp	Shim	Clamp Screw	Shim Screw	Wrench (for Clamp Screw)	Snap ring
	R	L		R	L	h	b	L ₁	h ₁	f	L ₂						
1		5538293	C31^RL-33	●		19	19	140	19	25	32	CC08M* (CC08W)	ACN422	BS0829W	M3 * 12	LW-4	SR08
			-34			25	19	160	25	25	32			BS0835W			
	5538301	5538319	-44	●	●	25	25	160	25	32	32						
	5601422	5601430	-45	●	●	32	25	160	32	32	32						
	5700315	5700299	CCLN^RL3225P12	●	●	32	25	170	32	32	32						
2	5259056		PCLN^RL1620X43N	●		16	20	120	16	0.0	25	—	LSC42	Clamp Pin LCL4	Clamp Screw LCS4CA	LW-3	Spring LSP4
3	5321997	5322003	PCLN^RL2020K43	●	●	20	20	125	20	25	28	—	LSC42	Clamp Pin LCL4	Clamp Screw LCS4	LW-3	Spring LSP4
	5322011	5322029	2525M43	●	●	25	25	150	25	32	28						







※CC08W clamp incorporates a hard carbide facing to eliminate excessive wear from the chip flow.
※For other shank sizes, please contact us for more information.

■ Dimensions of toolholders and spare parts / Multi-clamp holder

Figure	Code No.		Item Number	Stock		Dimensions (mm)						Clamp	Shim	Clamp Screw	Shim Screw	Wrench (for Clamp Screw)	Wrench (for Shim Screw)	Spring	
	R	L		R	L	h	b	L ₁	h ₁	f	L ₂								
4	5701610	5701628	TCLN^RL2525M12	●	●	25	25	150	25	32	32	TC6CN Clamp-on	ACN423	AOS-6 *30W* screw-able from both ends	FSS15- 3.0 * 12	LLR-T20	LLR-T10	ASGL6-D	
	5701131	5701636	3225P12	●	●	32	25	170	32	32	32								
			3232P12			32	32	170	32	39	32								
	5682570	5682588	WCLN^RL2525M12	●	●	25	25	150	25	32	32								DC6CN Double- Clamp
	5682604	5682612	3225P12	●	●	32	25	170	32	32	32								
			3232P12			32	32	170	32	39	32								
	5701149	5701156	HCLN^RL2525M12	●	●	25	25	150	25	32	32								
	5701875	5701883	3225P12	●	●	32	25	170	32	32	32								
		3232P12			32	32	170	32	39	32									

※AOS-6*30WH is an option for hexagonal hole type screw.

■ Applicable inserts

Figure	Item Number	Insert	Listed on pages
1	C31^RL...* CCLN^RL12*	CN□N1204 (1207)	 E7
2	PCLN^RL...43N	CN□A1204 CN□G1204	 E6 • 20 • 21 • 36
3	PCLN^RL...43	CN□A1204 CN□G1204	 E6 • 20 • 21 • 36
4	TCKLN^RL...12*	CN□N1204 (1207)	 E7
	WCLN^RL...12*	CN□A1204 (1207) CN□G1204 (1207)	 E6 • 20 • 21 • 36
	HCLN^RL...12	CN□X1207	 E7

Multi-clampholder
Just changing the clamps enables the holder to clamp pin type, flat or dimple style inserts.

※A holder having the dimension "h" of 25 or greater comes with two shim seats. An insert "7.94-mm thick" can be also mounted by removing one of the shim seats.

CN.. Inserts

CCBN

Clamp-on


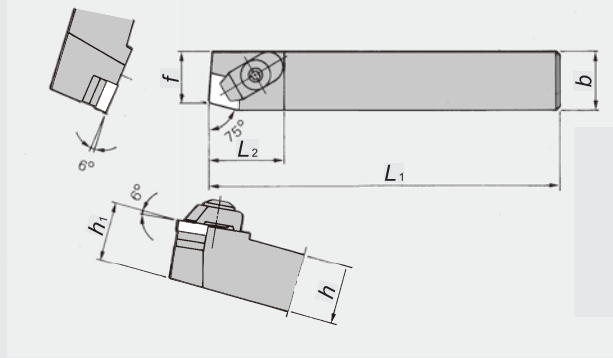


Figure-1

● Right-hand shown.

CCKN

Clamp-on


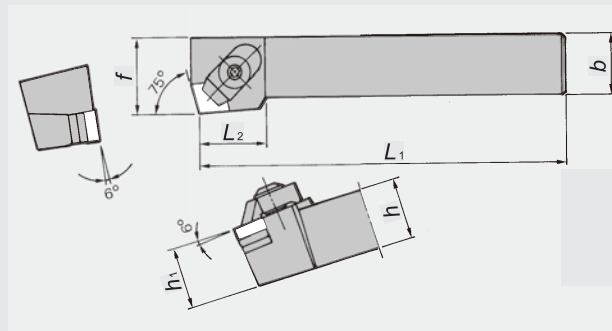


Figure-2

● Right-hand shown.

Multi-clamp holder

TCCBN

Clamp-on

WCCBN

Double-Clamp


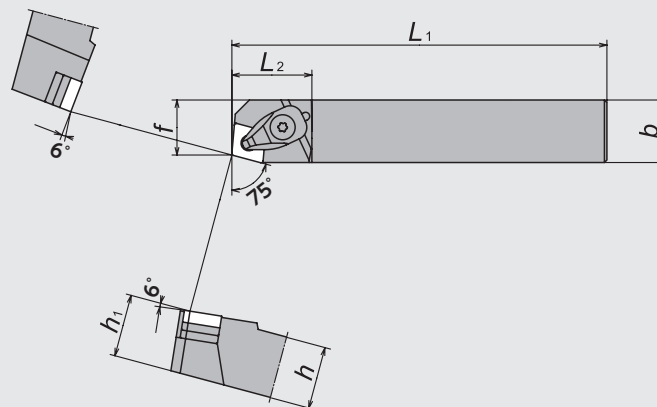












Figure-3












● Right-hand shown.

■ Dimensions of toolholders and spare parts

Figure	Code No.		Item Number	Stock		Dimensions (mm)						Clamp	Shim	Clamp Screw	Shim Screw	Wrench (for Clamp Screw)	Snap ring
	R	L		R	L	h	b	L ₁	h ₁	f	L ₂						
1	5830617		CCBN[®] L2525M12	●		25	25	150	25	22	32			BS0835W	M3 * 12	LW-4	SR08
2	5613690		CCKN[®] L2525M12	●		25	25	150	25	32	30			BS0835W	M3 * 12	LW-4	SR08





※CC08W clamp incorporates a hard carbide facing to eliminate excessive wear from the chip flow.
 ※For other shank sizes, please contact us for more information.

■ Dimensions of toolholders and spare parts / Multi-clamp holder

Figure	Code No.		Item Number	Stock		Dimensions (mm)						Clamp	Shim	Clamp Screw	Shim Screw	Wrench (for Clamp Screw)	Wrench (for Shim Screw)	Spring
	R	L		R	L	h	b	L ₁	h ₁	f	L ₂							
3	5701644	5701651	TCBN[®] L2525M12	●	●	25	25	150	25	22	32			AOS-6 * 30W* screw-able from both ends	FSS15-3.0 * 12	LLR-T20	LLR-T10	ASGL6-D
			3225P12			32	25	170	32	22	32							
			3232P12			32	32	170	32	29	32							
	5682620	5682638	WCBN[®] L2525M12	●	●	25	25	150	25	22	32							
			3225P12			32	25	170	32	22	32							
			3232P12			32	32	170	32	29	32							

※AOS-6*30WH is an option for hexagonal hole type screw.

■ Applicable inserts

Figure	Item Number	Insert	Listed on pages
1	CCBN[®] L2525M12	CN□N1204 (1207) 	E7
2	CCKN[®] L2525M12	CN□N1204 (1207) 	E7
3	TCBN[®] L...12	CN□N1204 (1207) 	E7
	WCBN[®] L...12	CN□A1204 (1207) CN□G1204 (1207) 	E6 • 20 • 21 • 36

Multi-clampholder

Just changing the clamps enables the holder to clamp pin type, flat or dimple style inserts.

※A holder having the dimension "h" of 25 or greater comes with two shim seats. An insert "7.94-mm thick" can be also mounted by removing one of the shim seats.

DN.. Inserts

CDJN

Clamp-on


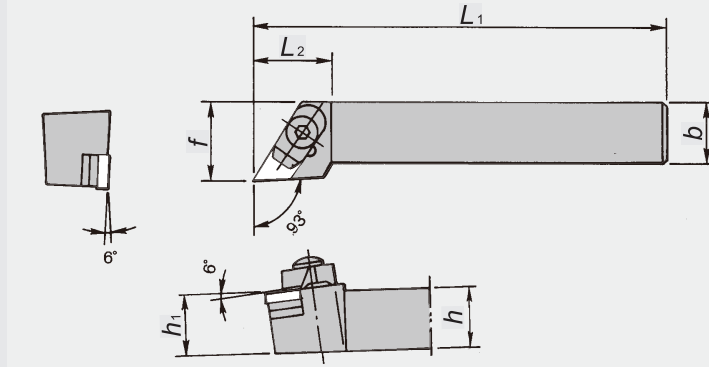


Figure-1

● Right-hand shown.

PDJN-N

Lever lock

Able to tighten both sides


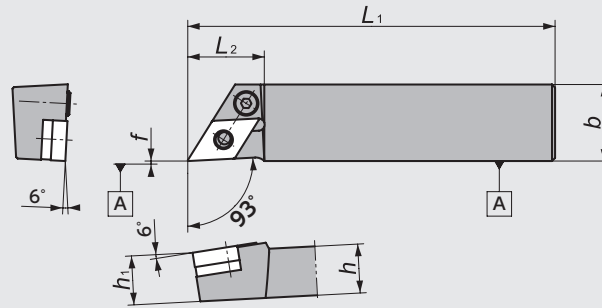


Figure-2

● Right-hand shown.

PDJN

Lever lock

Able to tighten both sides


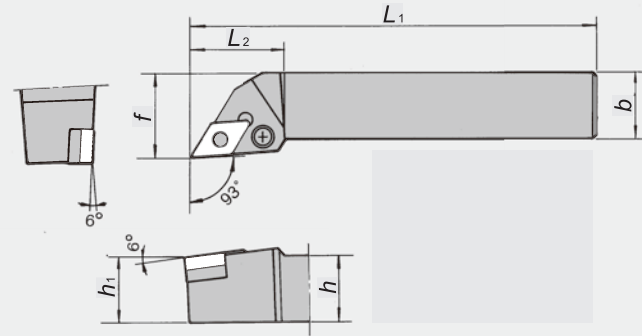


Figure-3

● Right-hand shown.

Multi-clamp holder

WDJN

Double-Clamp

HDJN

Dimple-Clamp


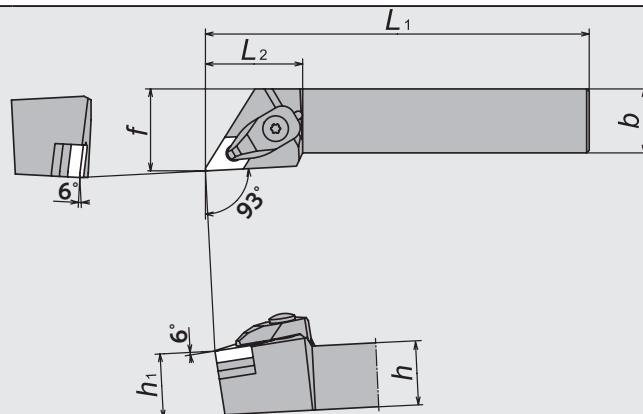


Figure-4

● Right-hand shown.

■ Dimensions of toolholders and spare parts

Figure	Code No.		Item Number	Stock		Dimensions (mm)						Clamp	Shim	Clamp Screw	Shim Screw	Wrench (for Clamp Screw)	Snap ring
	R	L		R	L	h	b	L ₁	h ₁	f	L ₂						
1			CDJN [®] 2525M15			25	25	150	25	32	32		ADN422	BS0835W	M3 * 12	LW-4	SR08
			3225P15			32	25	170	32	32	32						
2	5259072		PDJN [®] 1625X43N	●		16	25	120	16	0.0	25	—	LSD42	Clamp Pin	Clamp Screw	LW-3	Spring
3	5322037	5322045	PDJN [®] 2020K43	●	●	20	20	125	20	25	32	—	LSD42	Clamp Pin	Clamp Screw	LW-3	Spring
	5682463		2525M43	●		25	25	150	25	32	32						

※CC08W clamp incorporates a hard carbide facing to eliminate excessive wear from the chip flow.
 ※For other shank sizes, please contact us for more information.

■ Dimensions of toolholders and spare parts / Multi-clamp holder

Figure	Code No.		Item Number	Stock		Dimensions (mm)						Clamp	Shim	Clamp Screw	Shim Screw	Wrench (for Clamp Screw)	Wrench (for Shim Screw)	Spring	
	R	L		R	L	h	b	L ₁	h ₁	f	L ₂								
4	5682729	5682737	WDJN [®] 2525M15	●	●	25	25	150	25	32	38		ADN423	AOS-6 * 30W [®]	FSS15-3.0 * 12	LLR-T20	LLR-T10	ASGL6-D	
	5682745	5682752	3225P15	●	●	32	25	170	32	32	38								
			3232P15			32	32	170	32	32	38								
		5701263	5701271	HDJN [®] 2525M15	●	●	25	25	150	25	32	38		ADN423	AOS-6 * 30W [®]	FSS15-3.0 * 12	LLR-T20	LLR-T10	ASGL6-D
		5701289	5701297	3225P15	●	●	32	25	170	32	32	38							
				3232P15			32	32	170	32	39	38							

※AOS-6*30WH is an option for hexagonal hole type screw.

■ Applicable inserts

Figure	Item Number	Insert	Listed on pages
1	CDJN [®] ...15*	DN□N1504 (1507)	E8
2	PDJN [®] ...43N	DN□A1504	E8 • 22 • 23 • 36
		DN□G1504	
3	PDJN [®] ...43	DN□A1504 DN□G1504	E8 • 22 • 23 • 36
4	WDJN [®] ...15*	DN□A1504 (1507)	E8 • 22 • 23 • 36
		DN□G1504 (1507)	
	HDJN [®] ...15	DN□X1507	E8

※A holder having the dimension "h" of 25 or greater comes with two shim seats. An insert "7.94-mm thick" can be also mounted by removing one of the shim seats.

Multi-clampholder

Just changing the clamps enables the holder to clamp pin type, flat or dimple style inserts.

DN.. Inserts

Multi-clamp holder

WDHN

Double-Clamp

HDHN

Dimple-Clamp

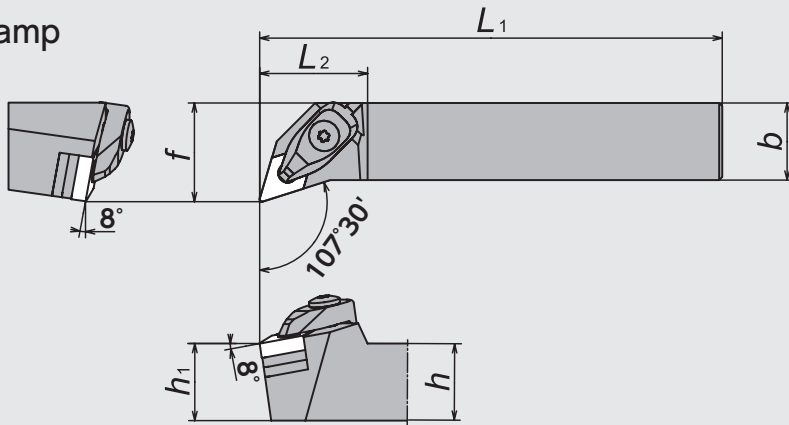


Figure-1

● Right-hand shown.

WDNN

Double-Clamp

HDNN

Dimple-Clamp

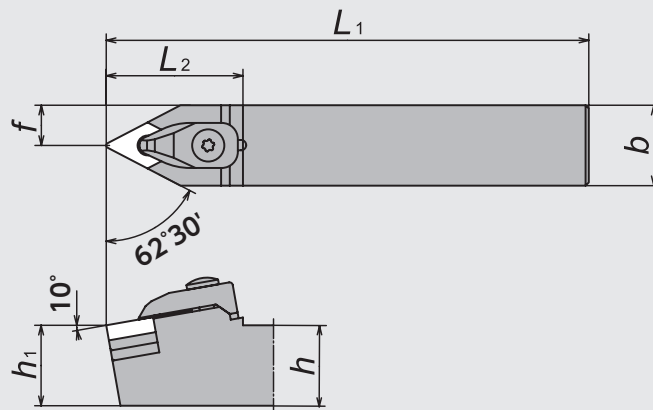






Figure-2

■ Dimensions of toolholders and spare parts / Multi-clamp holder

Figure	Code No.		Item Number	Stock		Dimensions (mm)						Clamp	Shim	Clamp Screw	Shim Screw	Wrench (for Clamp Screw)	Wrench (for Shim Screw)	Snap ring
	R	L		R	L	h	b	L ₁	h ₁	f	L ₂							
1	5682778	5682786	WDHN _L 2525M15	●	●	25	25	150	25	32	35	DC6DN Double- Clamp	ADN423	AOS-6 *30W*	FSS15- 3.0*12	LLR-T20	LLR-T10	ASGL6-D
			3225P15			32	25	170	32	32	35							
			3232P15			32	32	170	32	39	35							
	5701313	5701321	HDHN _L 2525M15	●	●	25	25	150	25	32	35	HC6DN Dimple- Clamp						
		3225P15			32	25	170	32	32	35								
		3232P15			32	32	170	32	39	35								
2	5682760		WDNNN 2525M15	●		25	25	150	25	12.5	42.5	DC6DN Double- Clamp	ADN423	AOS-6 *30W* screw-able from both ends	FSS15- 3.0*12	LLR-T20	LLR-T10	ASGL6-D
			3225P15			32	25	170	32	12.5	42.5							
			3232P15			32	32	170	32	16.0	42.5							
	5701305		HDNNN 2525M15	●		25	25	150	25	12.5	42.5	HC6DN Dimple- Clamp						
		3225P15			32	25	170	32	12.5	42.5								
		3232P15			32	32	170	32	16	42.5								

*AOS-6*30WH is an option for hexagonal hole type screw.

■ Applicable inserts

Figure	Item Number	Insert	Image	Listed on pages
1	WDHN _L ...15*	DN□A1504 (1507)		E8 • 22 • 23 • 36
	HDHN _L ...15	DN□X1507		E8
2	WDNNN ...15*	DN□A1504 (1507)		E8 • 22 • 23 • 36
	HDNNN ...15	DN□X1507		E8

Multi-clampholder

Just changing the clamps enables the holder to clamp pin type, flat or dimple style inserts.

*A holder having the dimension "h" of 25 or greater comes with two shim seats. An insert "7.94-mm thick" can be also mounted by removing one of the shim seats.

SN.. Inserts

C14/CSDN

Clamp-on


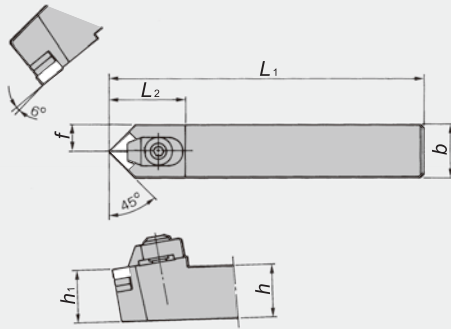


Figure-1



C12/CSSN

Clamp-on


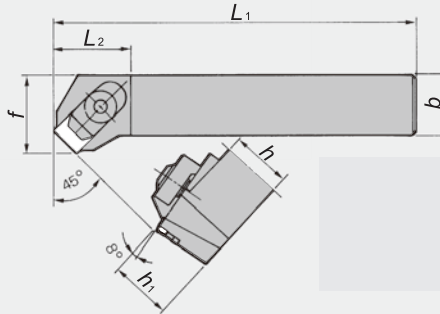


Figure-2



● Right-hand shown.

PSDN

Lever lock


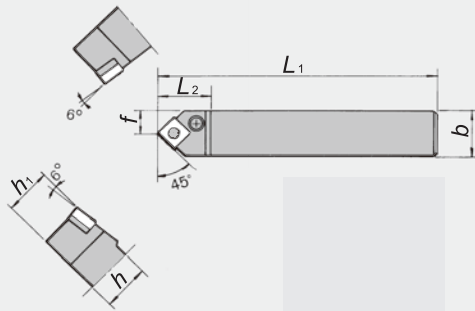



Figure-3



Multi-clamp holder

TSDN

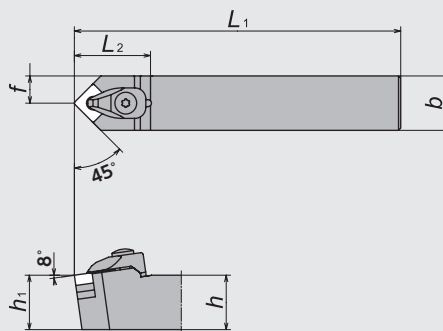Clamp-on




WSDN

Double-Clamp

HSDN

Dimple-Clamp

Figure-4



TSSN

Clamp-on



WSSN

Double-Clamp

HSSN

Dimple-Clamp

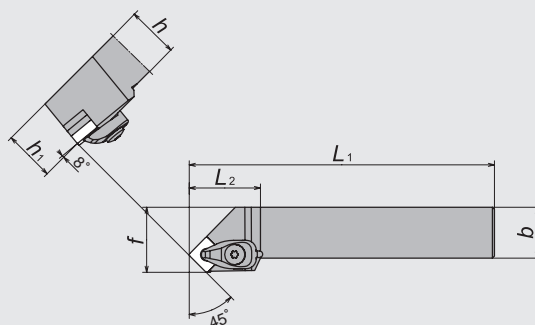Figure-5



● Right-hand shown.

Dimensions of toolholders and spare parts

Figure	Code No.		Item Number	Stock		Dimensions (mm)						Clamp	Shim	Clamp Screw	Shim Screw	Wrench (for Clamp Screw)	Snap ring
	R	L		R	L	h	b	L ₁	h ₁	f	L ₂						
1	5538327		C14M-33	●		19	19	140	19	9.5	35	CC08M* (CC08W)	ASN423	BS0829W	M3 * 12	LW-4	SR08
	5538335		-34	●		25	19	160	25	9.5	35			BS0835W			
	5538343		-44	●		25	25	160	25	12.5	35						
	5638036		-45	●		32	25	160	32	12.5	35						
	5700349		CSDNN2525M12	●		25	25	150	25	12.5	35						
2	5538178	5538186	C12^R/_L-33	●	●	19	19	140	19	27	28	CC08MS* (CC08WS)	ASN423	BS0829W	M3 * 12	LW-4	SR08
	5538194	5538202	-44	●	●	25	25	160	25	35	31	CC08M* (CC08W)		BS0835W			
	5620869	5637277	-45	●	●	32	25	160	32	35	31						
		5700448	CSSN^R/_L2525M12	●		25	25	150	25	32	31						
		5857172	3225P12	●		32	25	170	32	32	31						
3	5523451		PSDNN2020K43	●		20	20	125	20	10	30	—	LSS42	Clamp Pin	Clamp Screw	LW-3	Spring
	5764006		2525M43	●		25	25	150	25	12.5	30			LCL4	LCS4		LSP4

※CC08W clamp incorporates a hard carbide facing to eliminate excessive wear from the chip flow.
 ※For other shank sizes, please contact us for more information.

Dimensions of toolholders and spare parts / Multi-clamp holder

Figure	Code No.		Item Number	Stock		Dimensions (mm)						Clamp	Shim	Clamp Screw	Shim Screw	Wrench (for Clamp Screw)	Wrench (for Shim Screw)	Spring	
	R	L		R	L	h	b	L ₁	h ₁	f	L ₂								
4	5701784		TSDNN2525M12	●		25	25	150	25	12.5	35	TC6CN Clamp-on	ASN423	AOS-6 *30W* screw-able from both ends	FSS15-3.0*12	LLR-T20	LLR-T10	ASGL6-D	
	5701792		3225P12	●		32	25	170	32	12.5	35								
			3232P12			32	32	170	32	16	35								
	5682935		WSDNN2525M12	●		25	25	150	25	12.5	35	DC6CN Double-Clamp							
	5682943		3225P12	●		32	25	170	32	12.5	35								
			3232P12			32	32	170	32	16.0	35								
	5701503		HSDNN2525M12	●		25	25	150	25	12.5	35								
5701511		3225P12	●		32	25	170	32	12.5	35	HC6SN Dimple-Clamp								
		3232P12			32	32	170	32	16	35									
5	5701768	5701776	TSSN^R/_L2525M12	●	●	25	25	150	25	32	35	TC6CN Clamp-on	ASN423	AOS-6 *30W* screw-able from both ends	FSS15-3.0*12	LLR-T20	LLR-T10	ASGL6-D	
			3225P12			32	25	170	32	32	35								
			3232P12			32	32	170	32	39	35								
	5682901		5682919	WSSN^R/_L2525M12	●	●	25	25	150	25	32	35							DC6CN Double-Clamp
			3225P12			32	25	170	32	32	35								
			3232P12			32	32	170	32	39	35								
	5701487		5701495	HSSN^R/_L2525M12	●	●	25	25	150	25	32	35							
		3225P12			32	25	170	32	32	35									
		3232P12			32	32	170	32	39	35									

※AOS-6*30WH is an option for hexagonal hole type screw.

Applicable inserts

Figure	Item Number	Insert	Listed on pages
1	C14M-...* CSDNN-...12*	SN□N1204 (1207)	E10~11 • 24 • 37
2	C12^R/_L-...* CSSN^R/_L-...12*	SN□A1204 (1207)	E10~11 • 24 • 37
3	PSDNN-...43	SN□G1204	E10~11 • 24 • 37

Multi-Clamp holder
 Just changing the clamps enables the holder to clamp pin type, flat or dimple style inserts.



Figure	Item Number	Insert	Listed on pages
4	TSDNN-...12*	SN□N1204 (1207)	E10~11 • 24 • 37
	WSDNN-...12*	SN□A1204 (1207) SN□G1204 (1207)	E10~11 • 24 • 37
	HSDNN-...12	SN□X1207	E11
5	TSDNN-...12*	SN□N1204 (1207)	E10~11 • 24 • 37
	WSDNN-...12*	SN□A1204 (1207) SN□G1204 (1207)	E10~11 • 24 • 37
	HSDNN-...12	SN□X1207	E11

※A holder having the dimension "h" of 25 or greater comes with two shim seats. An insert "7.94-mm thick" can be also mounted by removing one of the shim seats.

SN.. Inserts

C13

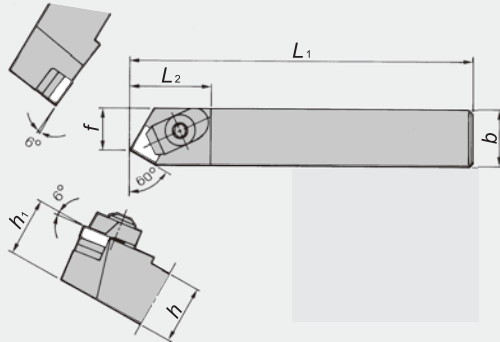Clamp-on





● Right-hand shown.

Figure-1

C11

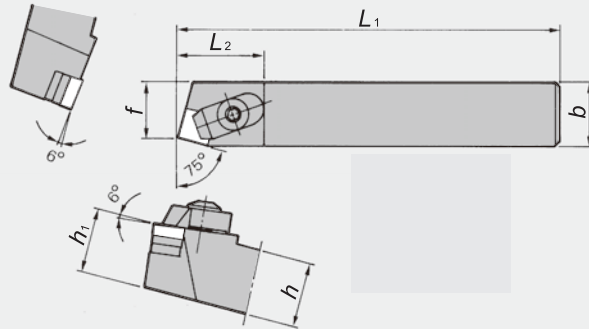Clamp-on





● Right-hand shown.

Figure-2

C16

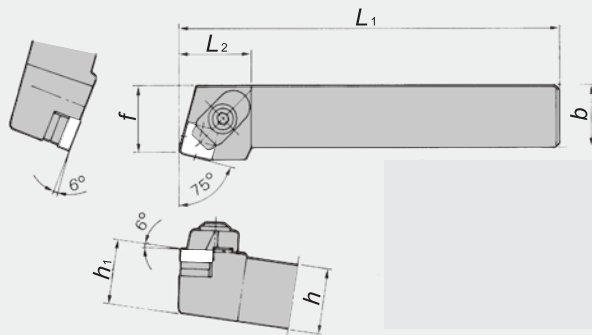Clamp-on





● Right-hand shown.

Figure-3

CSHN

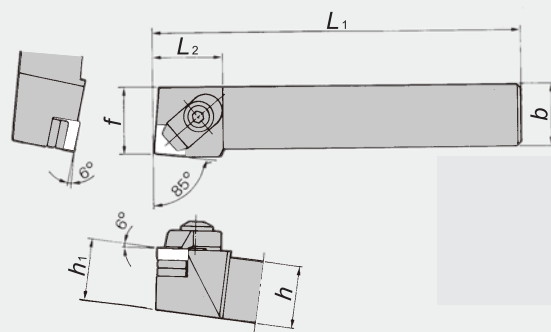Clamp-on





● Right-hand shown.

Figure-4

PSBN

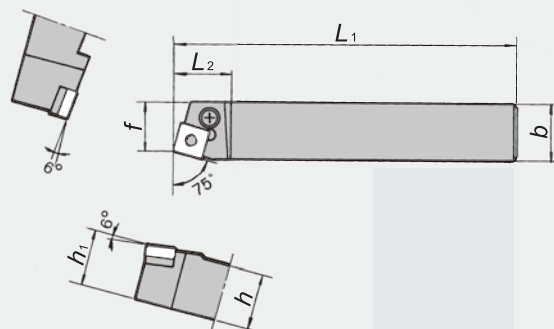Lever lock









● Right-hand shown.

Figure-5



New Products
Tool Materials / Selection Guide
BIDEMCS, PCD, CBN and Ceramics
Micrograin Carbide, PVD/Coated Carbide
Insert Item List
General Turning Toolholders
Unique Swiss Tooling
Grooving / Side Turning
Threading
Shaper
ID Tooling
Application Introduction
Endmills
Rotating Tools
Information
Index

■ Dimensions of toolholders and spare parts

Figure	Code No.		Item Number	Stock		Dimensions (mm)							Clamp	Shim	Clamp Screw	Shim Screw	Wrench (for Clamp Screw)	Snap ring
	R	L		R	L	h	b	L ₁	h ₁	f	L ₂							
1	5538244	5538251	C13^R┘-33	●	●	19	19	140	19	12.5	35	CC08M* (CC08W)	ASN423	BS0829W	M3 * 12	LW-4	SR08	
	5538269		-34	●		25	19	160	25	12.5	35			BS0835W				
	5538277	5538285	-44	●	●	25	25	160	25	18.5	35							
	5684816	5802863	-45	●	●	32	25	160	32	18.5	35							
2	5538608	5538616	C11^R┘-33	●	●	19	19	140	19	15.5	34	CC08M* (CC08W)	ASN423	BS0829W	M3 * 12	LW-4	SR08	
	5538624		-34	●		25	19	160	25	15.5	34			BS0835W				
	5538632	5538640	-44	●	●	25	25	160	25	21.5	34							
	5778170	5710876	-45	●	●	32	25	160	32	21.5	34							
3	5538350	5538368	C16^R┘-33	●	●	19	19	140	19	22	32	CC08MS* (CC08WS)	ASN423	BS0829W	M3 * 12	LW-4	SR08	
	5538376	5538384	-44	●	●	25	25	160	25	25	25			BS0835W				
	5684824	5746862	-45	●	●	32	25	160	32	25	25							
4	5692488	5692470	CSHN^R┘2525M12	●	●	25	25	150	25	27	30	CC08M* (CC08W)	ASN423	BS0835W	M3 * 12	LW-4	SR08	
5	5934518	5934492	PSBN^R┘2020K43	●	●	20	20	125	20	17	28	—	LSS42	Clamp Pin	Clamp Screw	LW-3	Spring	
																		
																		

※CC08W clamp incorporates a hard carbide facing to eliminate excessive wear from the chip flow.
 ※For other shank sizes, please contact us for more information.

■ Applicable inserts

Figure	Item Number	Insert	Listed on pages
1	C13...*	SN□N1204 (1207) 	E10 ~ 11 • 24 • 37
2	C11...*		
3	C16...*		
4	CSHN...12*		
5	PSBN...43	SN□A1204 SN□G1204 	E10 ~ 11 • 24 • 37

※A holder having the dimension "h" of 25 or greater comes with two shim seats. An insert "7.94-mm thick" can be also mounted by removing one of the shim seats.

SN.. Inserts

C15

Clamp-on


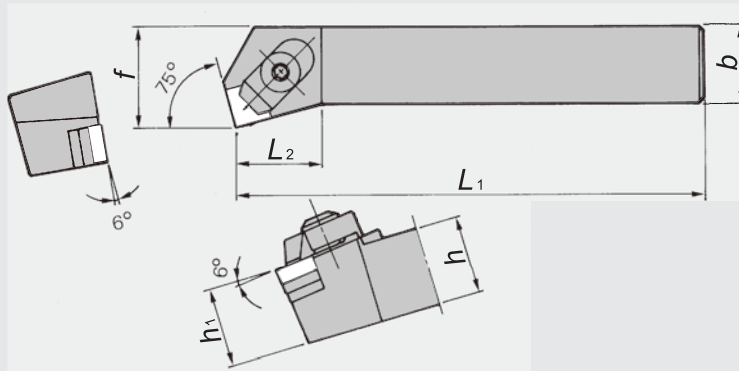


Figure-1

● Right-hand shown.

C17

Clamp-on


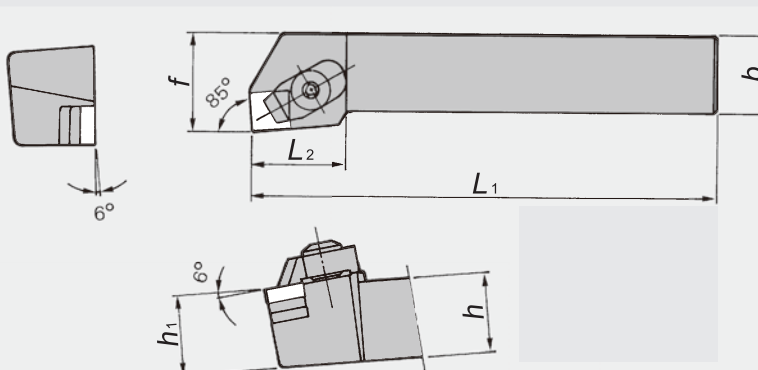


Figure-2


● Right-hand shown.

■ Dimensions of toolholders and spare parts

Figure	Code No.		Item Number	Stock		Dimensions (mm)						Clamp	Shim	Clamp Screw	Shim Screw	Wrench (for Clamp Screw)	Snap ring
	R	L		R	L	h	b	L ₁	h ₁	f	L ₂						
1	5566070	5538210	C15^RL-33	●	●	19	19	140	19	25	29	CC08M* (CC08W)	ASN423	BS0829W	M3 * 12	LW-4	SR08
		5538228	-34		●	25	19	160	25	25	29			BS0835W			
	5538236	5576863	-44	●	●	25	25	160	25	31	28						
	5802848	5759865	-45	●	●	32	25	160	32	31	28						
2	5538145		C17^RL-33	●		19	19	140	19	24	30	CC08M* (CC08W)	ASN423	BS0829W	M3 * 12	LW-4	SR08
	5538152	5538160	-44	●	●	25	25	160	25	30	30			BS0835W			
	5755400	5743281	-45	●	●	32	25	160	32	30	30						

※CC08W clamp incorporates a hard carbide facing to eliminate excessive wear from the chip flow.
 ※For other shank sizes, please contact us for more information.

■ Applicable inserts

Figure	Item Number	Insert	Image	Listed on pages
1	C15...*	SN□N1204 (1207)		E10 ~ 11 • 24 • 37
2	C17...*			

※A holder having the dimension "h" of 25 or greater comes with two shim seats. An insert "7.94-mm thick" can be also mounted by removing one of the shim seats.

TN.. Inserts

C21

Clamp-on


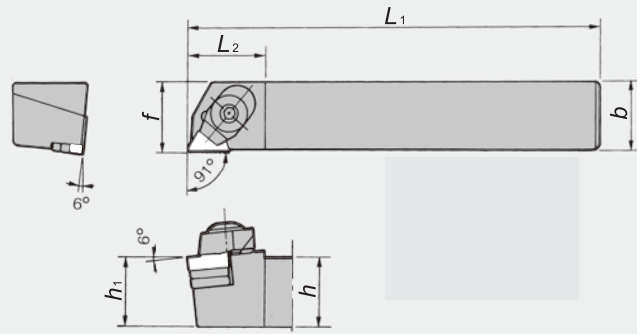


Figure-1

● Right-hand shown.

C22

Clamp-on


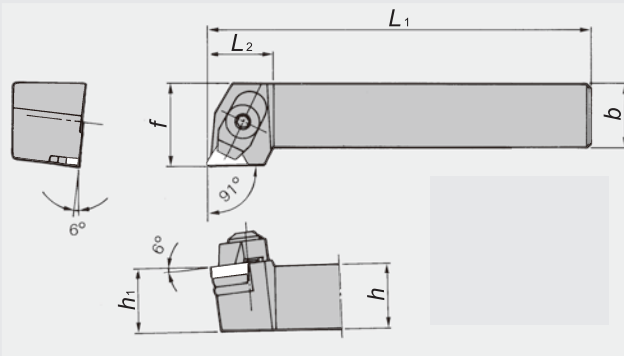


Figure-2

● Right-hand shown.

PTLN

Lever lock


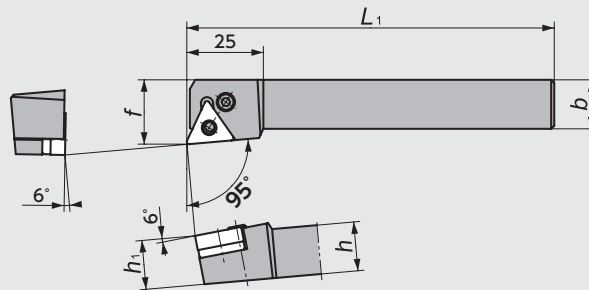




Figure-3

● Right-hand shown.

Multi-clamp holder

TTGN

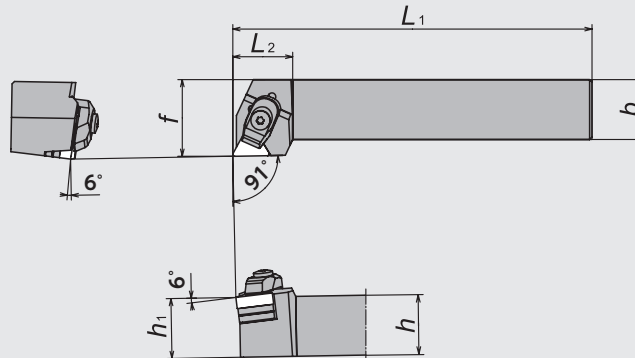Clamp-on



WTGN

Double-Clamp

Figure-4

● Right-hand shown.

■ Dimensions of toolholders and spare parts

Figure	Code No.		Item Number	Stock		Dimensions (mm)						Clamp	Shim	Clamp Screw	Shim Screw	Wrench (for Clamp Screw)	Snap ring
	R	L		R	L	h	b	L ₁	h ₁	f	L ₂						
1	5538426		C21^RL-33	●		19	19	140	19	19	28	CC08MS* (CC08WS)	ATN323	BS0829W	M3 * 12	LW-4	SR08
		5538434	-34		●	25	19	160	25	19	28			BS0835W			
	5538442	5538459	-44	●	●	25	25	160	25	25	28						
	5760558	5650411	-45	●	●	32	25	160	32	25	28						
2	5538467	5538475	C22^RL-33	●	●	19	19	140	19	25	25	CC08MS* (CC08WS)	ATN323	BS0829W	M3 * 12	LW-4	SR08
	5538483		-34	●		25	19	160	25	25	25			BS0835W			
	5538491	5538509	-44	●	●	25	25	160	25	30	25						
	5695630	5692231	-45	●	●	32	25	160	32	30	25						
3	5552336	5552344	PTLN^RL2020L33	●	●	20	20	140	20	25	25	—	LST317	Clamp Pin	Clamp Screw	LW-2.5	Spring
														LCL3	LCS3		LSP3

※CC08W clamp incorporates a hard carbide facing to eliminate excessive wear from the chip flow.
 ※For other shank sizes, please contact us for more information.

■ Dimensions of toolholder and spare parts / Multi-clamp holder

Figure	Code No.		Item Number	Stock		Dimensions (mm)						Clamp	Shim	Clamp Screw	Shim Screw	Wrench (for Clamp Screw)	Wrench (for Shim Screw)	Snap ring	
	R	L		R	L	h	b	L ₁	h ₁	f	L ₂								
4	5701826	5701834	TTGN^RL2525M16	●	●	25	25	150	25	32	25	TC5TN Clamp-on	ATN 323	AOS-5 * 26W* screw-able from both ends	FSS15- 3.0 * 12	LLR-T15	LLR-T10	ASGL5-D	
			3225P16			32	25	170	32	32	25								
			3232P16			32	32	170	32	39	25								
		5682976	5682984	WTGN^RL2525M16	●	●	25	25	150	25	32	25							DC5TN Double- Clamp
			3225P16			32	25	170	32	32	25								
			3232P16			32	32	170	32	39	25								

AOS-5*26WH is an option for hexagonal hole type screw.

■ Applicable inserts

Figure	Item Number	Insert	Listed on pages
1	C21...*	TN□N1604 (1607)	E12~13 • 25~26 • 37
2	C22...*		
3	PTLN...33	TN□A1604 TN□G1604	E12~13 • 25~26 • 37
4	TTGN^RL...16*	TN□N1604 (1607)	E12~13 • 25~26 • 37
	WTGN^RL...16*	TN□A1604 (1607)	E12~13 • 25~26 • 37

※A holder having the dimension "h" of 25 or greater comes with two shim seats. An insert "7.94-mm thick" can be also mounted by removing one of the shim seats.

Multi-clampholder

Just changing the clamps enables the holder to clamp pin type, flat or dimple style inserts.

TN.. Inserts

C23

Clamp-on


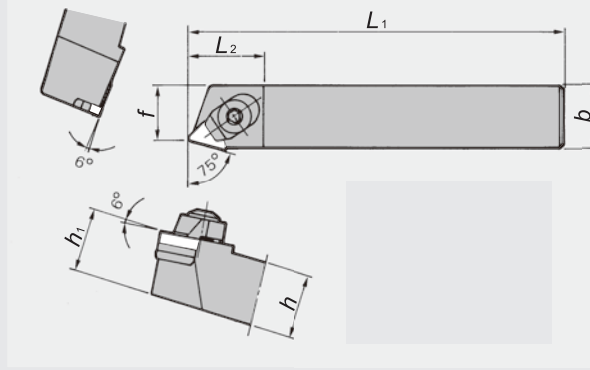


Figure-1

● Right-hand shown.

C24

Clamp-on


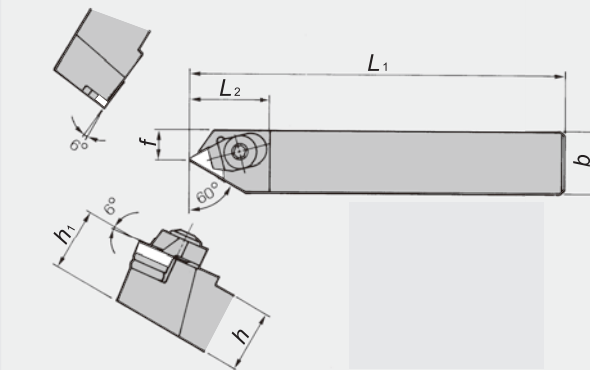


Figure-2

● Right-hand shown.

C25

Clamp-on


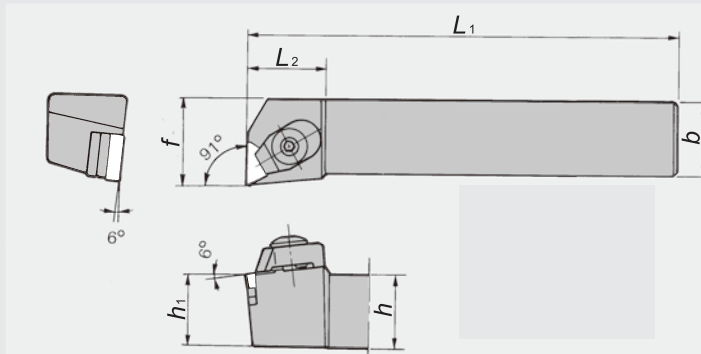


Figure-3

● Right-hand shown.

Multi-clamp holder

TTFN

Clamp-on

WTFN

Double-Clamp


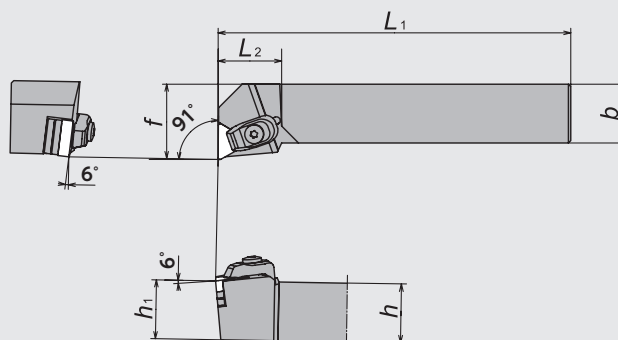


Figure-4

● Right-hand shown.

■ Dimensions of toolholders and spare parts

Figure	Code No.		Item Number	Stock		Dimensions (mm)						Clamp	Shim	Clamp Screw	Shim Screw	Wrench (for Clamp Screw)	Snap ring
	R	L		R	L	h	b	L ₁	h ₁	f	L ₂						
1	5538541		C23^RL-33	●		19	19	140	19	14.5	30			BS0829W	M3 * 12		SR08
	5576939	5538558	-44	●	●	25	25	160	25	20.5	30			BS0835W			
2	5538517		C24^RL-34	●		25	19	160	25	10.5	32			BS0829W	M3 * 12		SR08
	5538525	5538533	-44	●	●	25	25	160	25	16.5	32			BS0835W			
3	5538566	5538574	C25^RL-33	●	●	19	19	140	19	25	25			BS0829W	M3 * 12		SR08
	5576954		-34	●		25	19	160	25	25	25			BS0835W			
	5538582	5538590	-44	●	●	25	25	160	25	30	28						
	5720875		-45	●		32	25	160	32	30	28						

※CC08W clamp incorporates a hard carbide facing to eliminate excessive wear from the chip flow.
 ※For other shank sizes, please contact us for more information.

■ Dimensions of toolholders and spare parts / Multi-clamp holder

Figure	Code No.		Item Number	Stock		Dimensions (mm)						Clamp	Shim	Clamp Screw	Shim Screw	Wrench (for Clamp Screw)	Wrench (for Shim Screw)	Snap ring	
	R	L		R	L	h	b	L ₁	h ₁	f	L ₂								
4	5701859	5701867	TTFN^RL-2525M16	●	●	25	25	150	25	32	27								
			3225P16			32	25	170	32	32	27								
			3232P16			32	32	170	32	39	27								
		5682992	5683008	WTFN^RL-2525M16	●	●	25	25	150	25	32	27							
			3225P16			32	25	170	32	32	27								
			3232P16			32	32	170	32	39	27								

AOS-5*26WH is an option for hexagonal hole type screw.

■ Applicable inserts

Figure	Item Number	Insert	Listed on pages
1	C23...	TN□N1604(1607)	 E12~13 • 25~26 • 37
2	C24...		
3	C25...	TN□N1604(1607)	 E12~13 • 25~26 • 37
4	TTFN^RL-...-16	TN□N1604(1607)	 E12~13 • 25~26 • 37
	WTFN^RL-...-16	TN□A1604(1607)	 E12~13 • 25~26 • 37

Multi-clampholder

Just changing the clamps enables the holder to clamp pin type, flat or dimple style inserts.

※A holder having the dimension "h" of 25 or greater comes with two shim seats. An insert "7.94-mm thick" can be also mounted by removing one of the shim seats.

VN.. Inserts

Multi-clamp holder

WVJN

Double-Clamp

HVJN

Dimple-Clamp


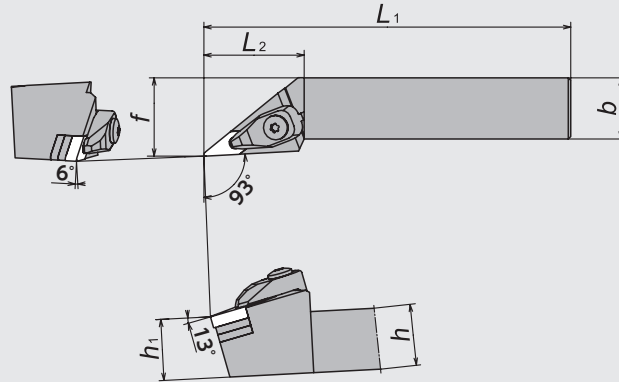


Figure-1

● Right-hand shown.

WVPN

Double-Clamp

HVPN

Dimple-Clamp


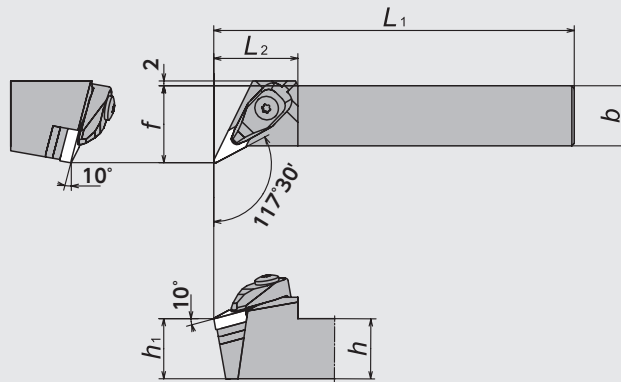


Figure-2

● Right-hand shown.

WVVN

Double-Clamp

HVVN

Dimple-Clamp


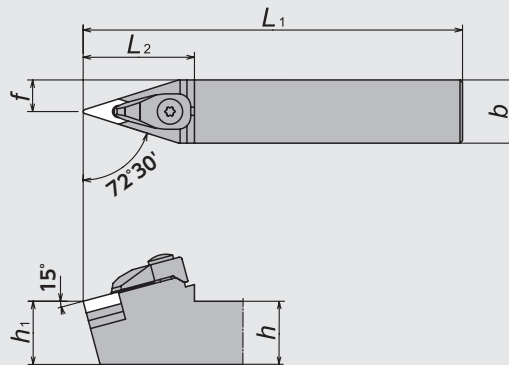








Figure-3

■ Dimensions of toolholders and spare parts / Multi-clamp holder

Figure	Code No.		Item Number	Stock		Dimensions (mm)						Clamp	Shim	Clamp Screw	Shim Screw	Wrench (for Clamp Screw)	Wrench (for Shim Screw)	Snap ring
	R	L		R	L	h	b	L ₁	h ₁	f	L ₂							
1	5682828	5682836	WVJN ^R 2525M16	●	●	25	25	150	25	32	41	DC6VN Double-Clamp	AVN 323	AOS-6 *30W* screw-able from both ends	FSS15- 3.0*12	LLR-T20	LLR-T10	ASGL6-D
	5682844	5682851	3225P16	●	●	32	25	170	32	32	41							
			3232P16			32	32	170	32	39	41							
	5701396	5701412	HVJN ^R 2525M16	●	●	25	25	150	25	32	41	HC6VN Dimple-Clamp						
	5701420	5701438	3225P16	●	●	32	25	170	32	32	41							
		3232P16			32	32	170	32	39	41								
2	5682885	5682893	WVPN ^R 2525M16	●	●	25	25	150	25	32	35	DC6VN Double-Clamp	AVN 323	AOS-6 *30W* screw-able from both ends	FSS15- 3.0*12	LLR-T20	LLR-T10	ASGL6-D
			3225P16			32	25	170	32	32	35							
			3232P16			32	32	170	32	32	35							
	5701461	5701479	HVPN ^R 2525M16	●	●	25	25	150	25	32	35	HC6VN Dimple-Clamp						
			3225P16			32	25	170	32	32	35							
		3232P16			32	32	170	32	39	35								
3	5682877		WVVNN2525M16	●		25	25	150	25	12.5	44	DC6VN Double-Clamp	AVN 323	AOS-6 *30W* screw-able from both ends	FSS15- 3.0*12	LLR-T20	LLR-T10	ASGL6-D
			3225P16			32	25	170	32	12.5	44							
			3232P16			32	32	170	32	16	44							
	5701453		HVVNN2525M16	●		25	25	150	25	12.5	44	HC6VN Dimple-Clamp						
			3225P16			32	25	170	32	12.5	44							
		3232P16			32	32	170	32	16	44								

※AOS-6*30WH is an option for hexagonal hole type screw.

■ Applicable inserts

Figure	Item Number	Insert	Insert Image	Listed on pages
1	WVJN ^R ...*	VN□A1604(1607) VN□G1604		E14 • 27 • 38
	HVJN ^R ...	VNGX1607		—
2	WVPN ^R ...*	VN□A1604(1607) VN□G1604		E14 • 27 • 38
	HVPN ^R ...	VNGX1607		—
3	WVPN ^R ...*	VN□A1604(1607) VN□G1604		E14 • 27 • 38
	HVPN ^R ...	VNGX1607		—

※A holder having the dimension "h" of 25 or greater comes with two shim seats. An insert "7.94-mm thick" can be also mounted by removing one of the shim seats.

Multi-clampholder

Just changing the clamps enables the holder to clamp pin type, flat or dimple style inserts.

WN.. Inserts

Multi-clamp holder

WWLN

Double-Clamp


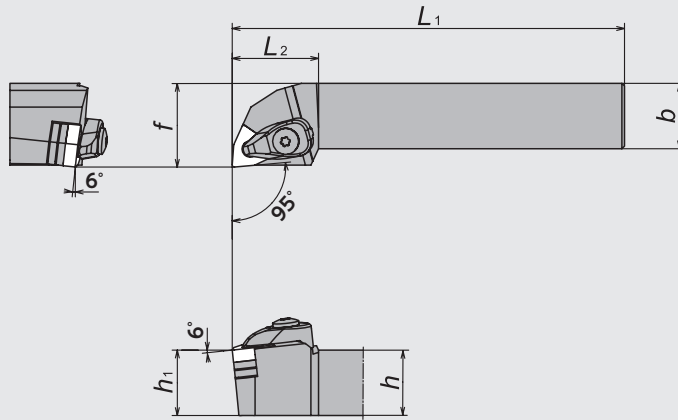


Figure-1

● Right-hand shown.

WWLN-2

Double-Clamp


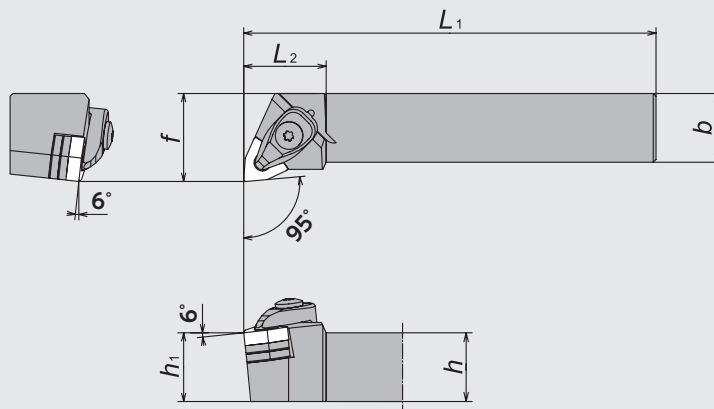











Figure-2

● Right-hand shown.

■ Dimensions of toolholders and spare parts / NEW Multi-clamp holder

Figure	Code No.		Item Number	Stock		Dimensions (mm)						Clamp	Shim	Clamp Screw	Shim Screw	Wrench (for Clamp Screw)	Wrench (for Shim Screw)	Spring
	R	L		R	L	h	b	L ₁	h ₁	f	L ₂							
1	5683016	5683024	WWLN [®] /2525M08	●	●	25	25	150	25	32	33	DC6CN Double- Clamp		AOS-6 * 30W screw-able from both ends	FSS15- 3.0 * 12			
			3225P08			32	25	170	32	32	33							
			3232P08			32	32	170	32	40	33							
2	5701578	5701586	WWLN [®] /2525M08-2	●	●	25	25	150	25	32	30	DC6CN Double- Clamp		AOS-6 * 30W screw-able from both ends	FSS15- 3.0 * 12			
			3225P08-2			32	25	170	32	32	30							
			3232P08-2			32	32	170	32	40	30							

■ Applicable inserts

Figure	Item Number	Insert	Listed on pages
1	WWLN [®] /...	WN□A0804 WN□G0804	E14 • 38
2	WWLN [®] /...-2		

※A holder having the dimension “h” of 25 or greater comes with two shim seats.
An insert “7.94-mm thick” can be also mounted by removing one of the shim seats.

RN.. Inserts

C54/CRDN

Clamp-on


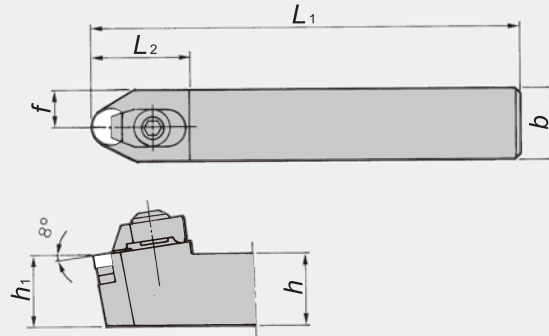


Figure-1



C55/CRGN

Clamp-on


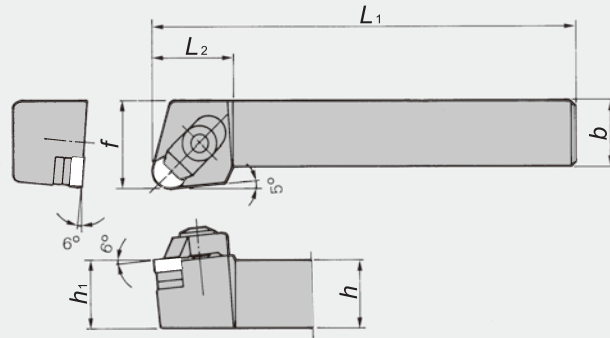


Figure-2



● Right-hand shown.

Dimensions of toolholders and spare parts

Figure	Code No.		Item Number	Stock		Dimensions (mm)						Clamp	Shim	Clamp Screw	Shim Screw	Wrench (for Clamp Screw)	Snap ring
	R	L		R	L	h	b	L ₁	h ₁	f	L ₂						
1		5538392	C54M-44	●		25	25	160	25	12.5	33	CC08M	ARN42	BS0835W	M3 * 12	LW-4	SR08
		5700323	CRDNN2525M12	●		25	25	150	25	12.5	34						
		5700331	3225P12	●		32	25	170	32	12.5	34						
2		5538400	C55^RL-33	●		19	19	140	19	28	30	CC08M	ARN42	BS0829W	M3 * 12	LW-4	SR08
		5573027	-44	●	●	25	25	160	25	30	30						
		5768221	-45	●		32	25	160	32	30	30						
		5829395	CRGN^RL3225P12	●		32	25	170	32	32	30						



Applicable inserts

Figure	Item Number	Insert	Listed on pages
1	C54M-...	RN□N1204 (1207)	E9 • 23
	CRDNN...12		
2	C55 ^R L-...	RN□N1204 (1207)	E9 • 23
	CRGN ^R L...-12		

※A holder having the dimension "h" of 25 or greater comes with two shim seats. An insert "7.94-mm thick" can be also mounted by removing one of the shim seats.


CDH.. Inserts

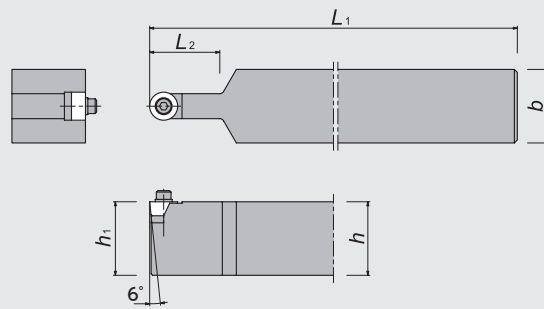HRCD







● Right-hand shown.

Dimensions of toolholders

Code No. R N L	Item Number	Stock R N L	Dimensions (mm)					insert	
			h	b	L_1	h_1	L_2		
5454921	HRCD-22	●	50	50	300	50	30		CDH22
5144274	-33	●					50		CDH33
5454947	-42						80		CDH42
5844113	-43						80		CDH43
	-53						100		CDH53



Inserts → E17 • L26

Spare parts

Parts	Clamp Screw	Washer	Shim	Wrench (for Clamp Screw)
Toolholder				
HRCD-22	CS0316	W120	HACDH22	LW-2.5
HRCD-33	CS0625	W110	HACDH33	LW-5
HRCD-42	1/4-20UNC * 11/4	W106	HACDH42	LWU-4
HRCD-43	1/4-20UNC * 11/2		HACDH43	
HRCD-53	3/8-16UNC * 11/2	W107	HACDH53	LWU-5


RCGX/RPGX.. Inserts

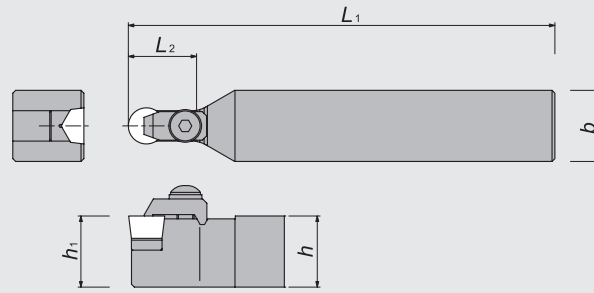CRDC









● Right-hand shown.

Dimensions of toolholders

Code No.	Item Number	Stock	Dimensions (mm)					insert			
			R	N	L	h	b		L ₁	h ₁	L ₂
5720750	CRDCN2525M06										※RCGX/RPGX0607(08)
5478706	2525M09				25		150	25			※RCGX/RPGX0907(08)
5691613	2525M12					25			20		※RCGX/RPGX1207(08)
5911557	3225P06	●									※RCGX/RPGX0607(08)
5829528	3225P09	●									※RCGX/RPGX0907(08)
5829510	3225P12	●			32		170	32	25		※RCGX/RPGX1207(08)
5634241	3232P15					32			30		RCGX/RPGX1510



※Both of thickness 07&08 can be used.
Inserts **E17 · L18 · L27**

Spare parts

Parts	Clamp Screw	Washer	Shim	Clamp	Spring pin	Wrench (for Clamp Screw)
Toolholder						
CRDCN3225P06	BS0520	WS-5	HARCGX06 (A)	HC35KR-4099	—	LW-3
CRDCN3225P09	BS0625	WS-6	HARCGX0908V (B)	HC35KR-6075	2 * 8AW	LW-4
CRDCN3225P12			HARCGX1208V (B)	HC35KR-6076	2.5 * 8AW	


RCGY.. Inserts

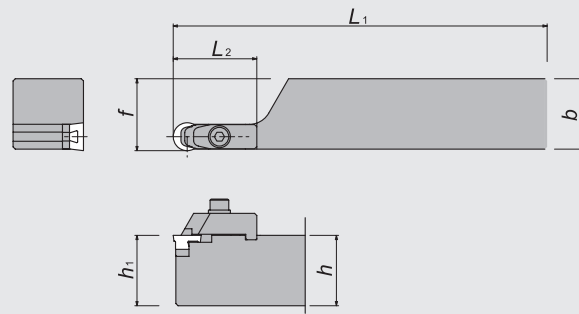CRXC









● Right-hand shown.

■ Dimensions of toolholders

Code No.		Item Number	Stock			Dimensions (mm)					insert			
R	N		L	R	N	L	h	b	L ₁	h ₁	f	L ₂		
5981469		CRXC _{R/L} 3232P09Y	●			32	32	170	32	32.7		28		RCGY090603
5981188		3232P12Y	●								38	RCGY120603		


Inserts → E17 • L22

■ Spare parts

Parts	Clamp Screw	Washer	Shim	Shim Screw	Spring	Clamp	Wrench (for Clamp Screw)
	Toolholder						
CRXCR3232P09Y	CS0425	WS-4	HAR09Y	M2*8	ASGL4	CRN4	LW-3
CRXCR3232P12Y	CS0525	WS-5	HAR12Y	M3*8	ASGL5	CRN5	LW-4

MEMO

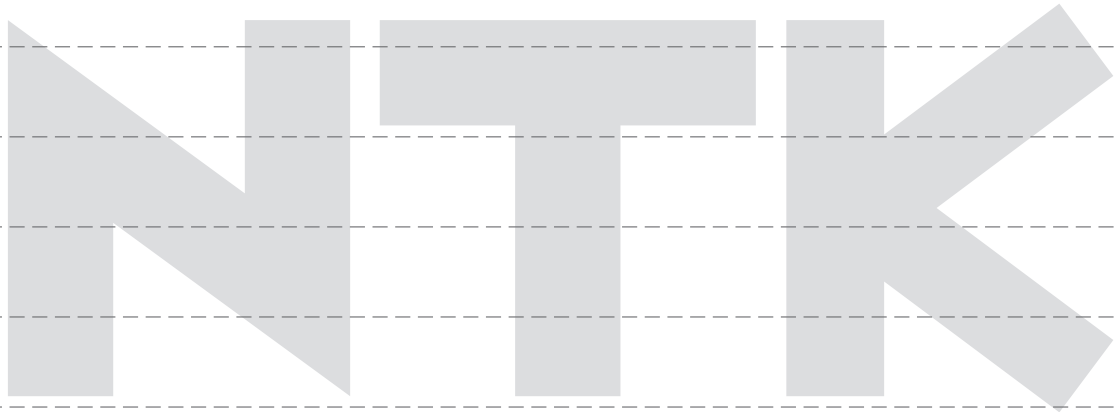New Products
Tool Materials / Selection Guide
BIDEMCS, PCD, CBN and Ceramics
Micrograin Carbide, PVD/Coated Carbide
Insert Item List
General Turning Toolholders
Unique Swiss tooling
Grooving / Side Turning
Threading
Shaper
ID Tooling
Application Introduction
Endmills
Rotating Tools
Information
Index



G

Unique Swiss Tooling

Tooling for Swiss-type Lathes **G2**

- Spare Parts - Wrenches **G4**
- Clamp Screws and Wrenches **G5**
- Holder and inserts Combination **G6**

Front Turning **G7**

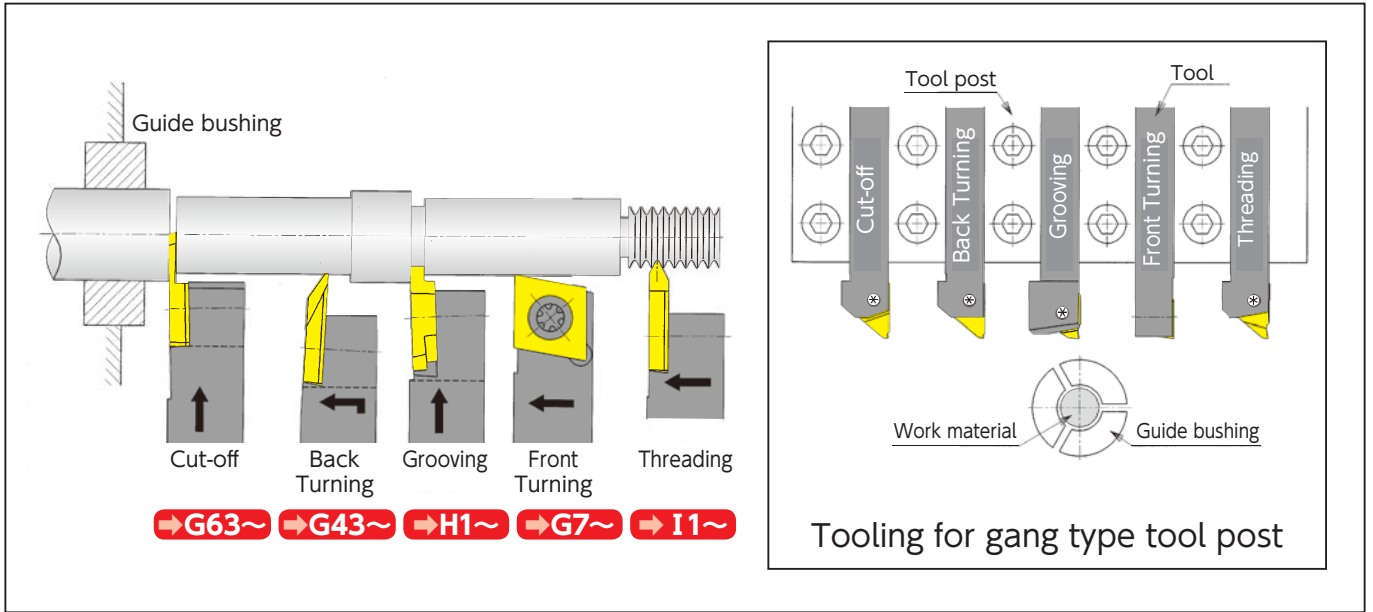
Back Turning **G43**

Cut-off **G63**


Original Series **G93**



Tooling example for a small CNC automatic lathe (gang type)





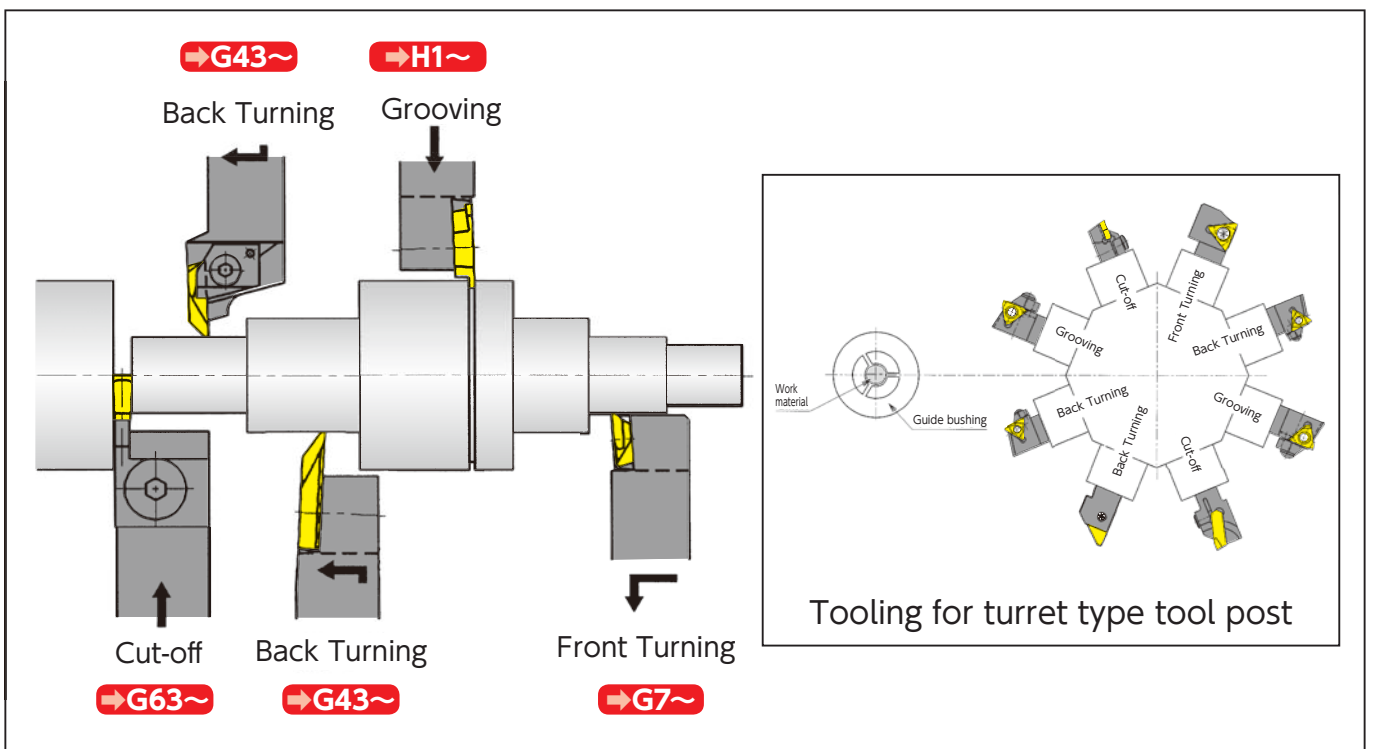Tooling example for a small CNC automatic lathe (turret type)





Tooling example for a small CNC automatic lathe (horizontal gang style)

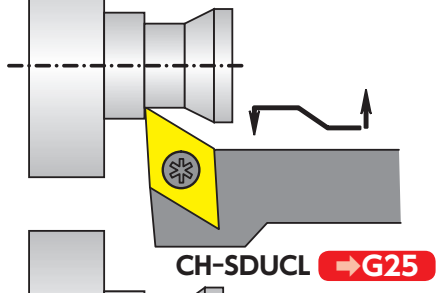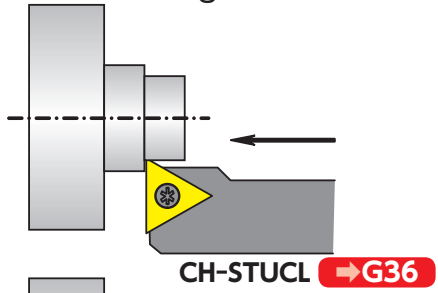
■ Front Turning





■ Back Turning

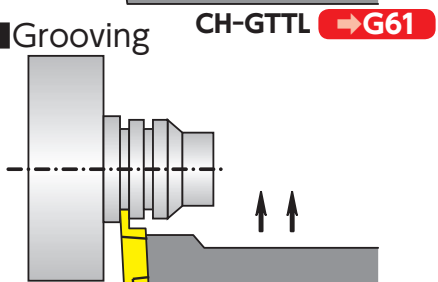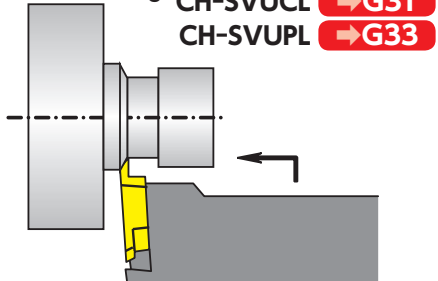

■ Grooving

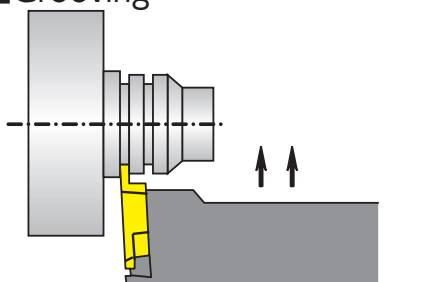



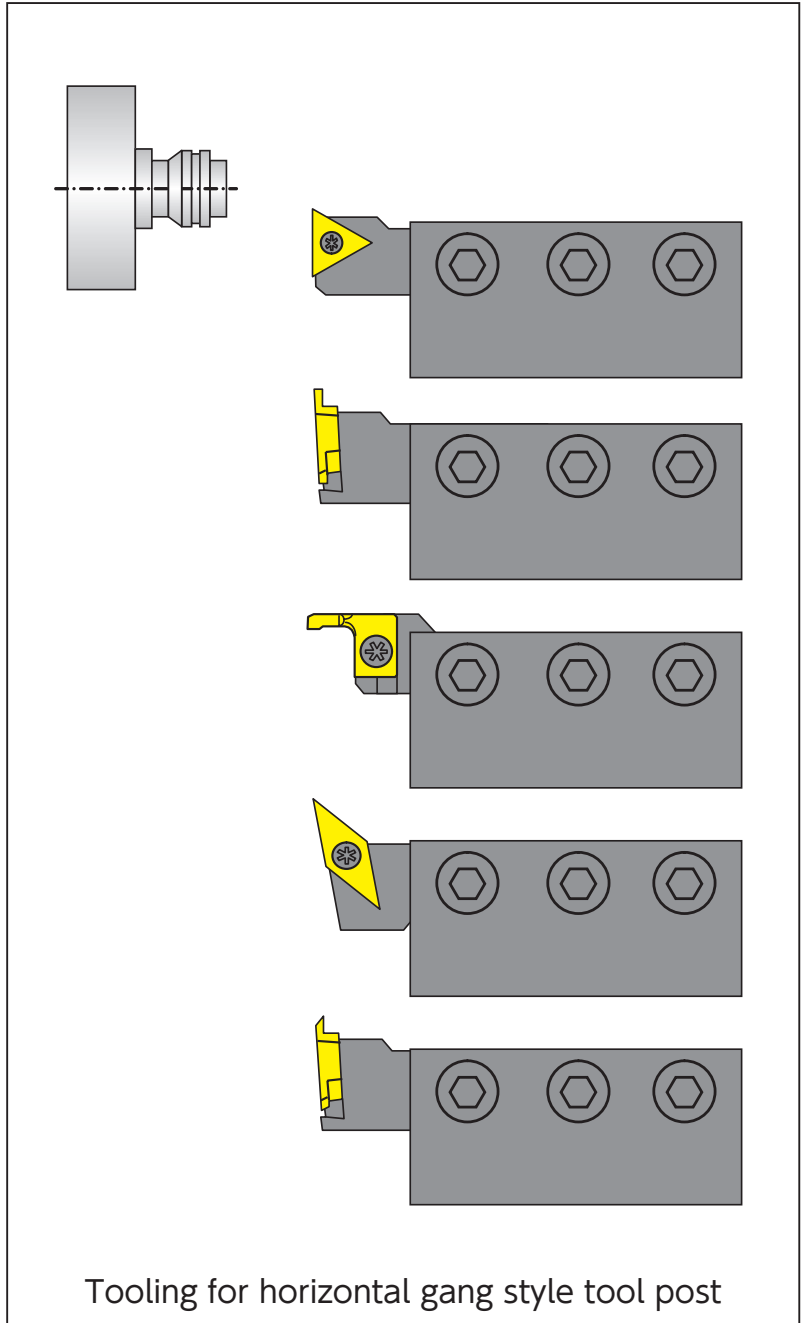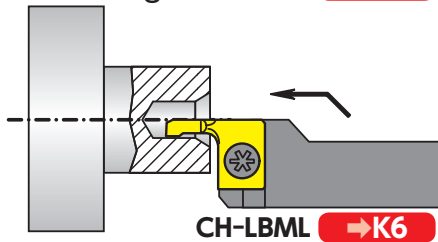



■ ID Tooling



Tooling for Swiss-type Lathes

Spare Parts - Wrenches

Standard Items


Item Number	Appearance
CLR-13S (Formerly RLR-13S)	
CLR-15S (Formerly RLR-15S)	
RLR-20S	
LLR-25S	
LLR-25S-20*65	
LLR-28S	





Optional Items

<LLR Type>

Item Number	Appearance
LLR-13S	
LLR-15S	
LLR-20S	

<Driver type wrench for increased adaptability>

Item Number	Magnetic Driver Handle
XX2815-04	

Item Number	Replaceable Bits
HLR-13S	
HLR-15S	
HLR-20S	
HLR-25S	

<Driver type wrench kits>

Item Number	Contents
XX2815-04-13S	XX2815-04 with HLR-13S
XX2815-04-15S	XX2815-04 with HLR-15S
XX2815-04-20S	XX2815-04 with HLR-20S
XX2815-04-25S	XX2815-04 with HLR-25S




Clamp Screws and Wrenches

Clamp Screw			Dimension (mm)				Standard Wrench		Adaptable standard wrench					
Appearance	Order Code	Item Number	a	b	c	θ (°)	Order Code	Item Number	LR	Hexalobular (6-LOBE)				
	5704739	LR-S-2×3.5	M2×P0.4	3.1	3.5	82	5681994	CLR-13S	LR-1	T-6				
	5907704	LR-S-2×3.7	M2×P0.4	3.1	3.7	82								
	5907712	LR-S-2×4.4	M2×P0.4	3.1	4.4	82								
	5907720	LR-S-2×5.5	M2×P0.4	3.0	5.5	90								
	5907738	LR-S-2.5×4.8	M2.5×P0.45	3.6	4.8	82								
	5704747	LR-S-2.5×5.5	M2.5×P0.45	3.6	5.5	82	5681978	CLR-15S	LR-2	T-7				
	5907746	LR-S-2.5×6	M2.5×P0.45	3.5	6.0	90								
	5907753	LR-S-2.5×6.8	M2.5×P0.45	3.5	6.8	90								
	5773619	LR-S-3×5.8	M3×P0.5	4.1	5.8	90								
	5907761	LR-S-3×6.2	M3×P0.5	5.2	6.2	82								
	5907779	LR-S-3×7.8	M3×P0.5	4.0	7.8	90	5485164	RLR-20S	LR-3	T-10				
	5907787	LR-S-4×5.8	M4×P0.7	5.8	6.0	82								
	5907795	LR-S-4×9	M4×P0.7	5.8	9.0	82								
	5116991	LR-S-4×10PW	M4×P0.7	5.8	10.0	90					5681978	CLR-15S	LR-2	T-7
	5534029	LRIS-2×6	M2×P0.4	2.6	6.0	60								
	5907803	LRIS-2.2×6	M2.2×P0.45	3.15	6.0	60	5681994	CLR-13S	LR-1	T-6				
	5989181	LRIS-2.5×5	M2.5×P0.45	3.6	5.0	60								
	5907811	LRIS-2.5×7	M2.5×P0.45	3.6	7.0	60	5681978	CLR-15S	LR-2	T-7				
	5907829	LRIS-3×6	M3×P0.5	4.0	6.0	60								
	5428156	LRIS-3×8	M3×P0.5	4.2	8.0	60	5485164	RLR-20S	LR-3	T-10				
5477328	LRIS-4×5	M4×P0.7	5.85	5.0	60									
	5907837	LRIS-4×6	M4×P0.7	5.85	6.0	60	5364930	LLR-25S	LR-4	T-15				
	5977566	LRIS-4×8	M4×P0.7	5.85	8.0	60								
	5907845	LRIS-4×10	M4×P0.7	5.85	10.0	60	5794698	LLR-25S-20*65	LR-4	T-15				
	5684105	LRIS-4×12	M4×P0.7	5.85	12.0	60								
	5907852	LRIS-5×10	M5×P0.8	7.0	9.5	60	5364948	LLR-28S	-	T-20				
5116983	LRIS-4×10PW	M4×P0.7	5.7	10.0	60	5681978	CLR-15S	LR-2	T-7					
5090576	LRIS-4×12PW	M4×P0.7	5.7	12.0	60									

Attention: When tightening screws

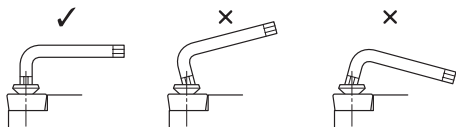- Make sure the wrench tip and wrench hole are neither deformed nor stripped
- Engage the wrench straight to screw hole



- Do not apply more torque than the recommended amount (as shown to the right)

Note: Wrenches and bits come in a pack of five
Clamp screws come in a pack of ten

Recommended Tightening Torque

Item Number	Recommended Tightening Torque (N·m)
CLR LLR HLR 13S	0.7
CLR LLR HLR 15S	1.4
RLR LLR HLR 20S	3.0
LLR HLR 25S	5.0
LLR HLR 28S	7.0
LW-4	12
LW-5	15

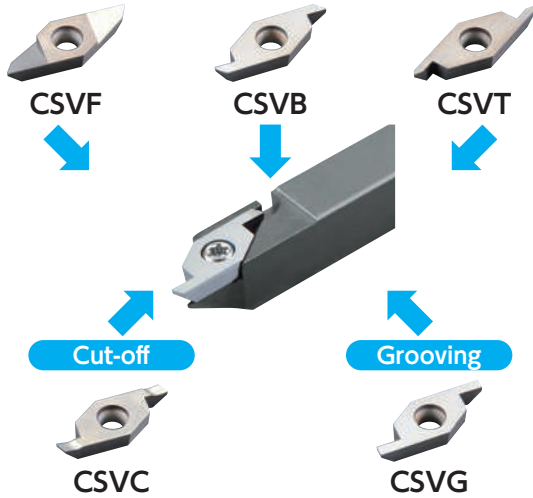
Holder and inserts Combination

Inserts can use the same toolholder!!

CSV series →G94

Able to use in Cam-style machine lathe


Front Turning Back Turning Threading



CTPS series →G98

Best for

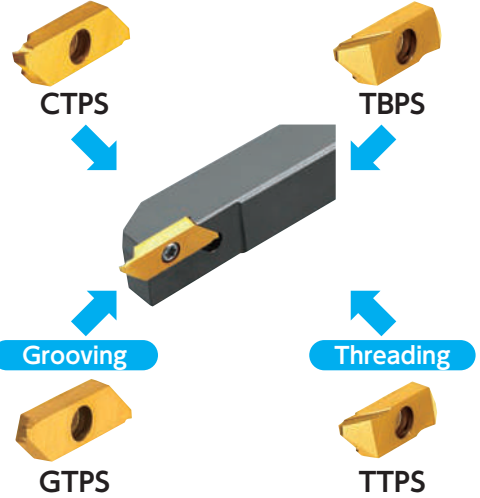Cut-off Back Turning



GTT type →H19

Grooving




Back Turning

TBMH32

CTPA type →G80

Cut-off

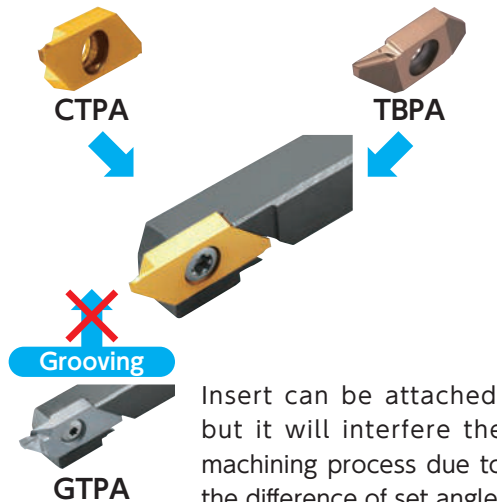Back Turning



Insert can be attached, but it will interfere the machining process due to the difference of set angle.

※No compatibility in CTP (Cut-off) • TBP (Back Turning) • TTP (Threading)

Any insert can be attached in each holder, but it will interfere the machining process due to the difference of set angle.

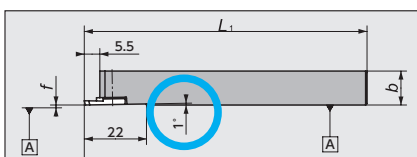
Cut-off
CTP →G74




Back Turning
TBP →G52




Threading
TTP →I12



Set angle : 1°

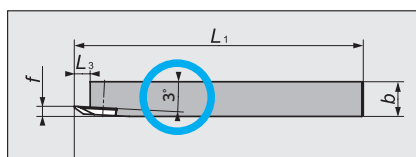

Set angle : -3°

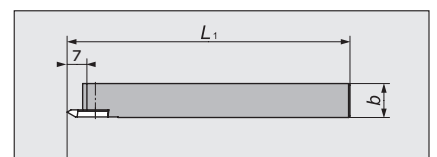


Set angle : 0°



General Turning / Front Turning

● Front Turning Tools	G8
● Recommended Cutting Conditions ..	G10
● General Information	G11
● Tool List	G20
CSV Series	G20
CC.. Series	G22
DC.. Series	G24
VC.. Series	G28
VP.. Series	G32
TFT Series	G34
TC.. Series	G36
TN.. Series	G38
CN.. Series	G40
DN.. Series	G41

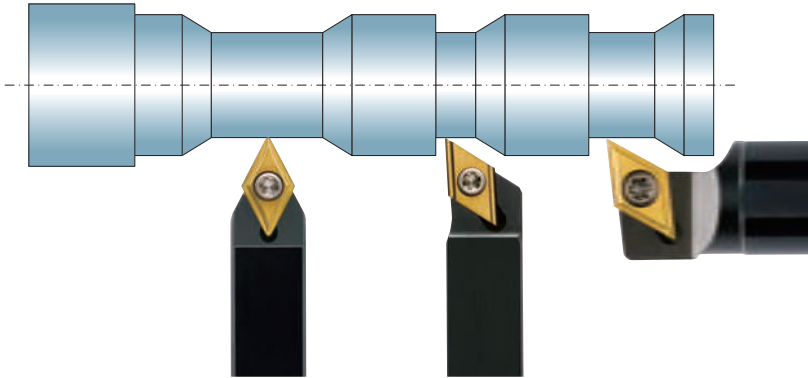NTK General / Front Turning Tools - Product Lines



Insert	CSVF →G21
Holder	 →G20

Unique Swiss Tooling

Front Turning

Insert	CC..0602/09T3.. →E39 ~					
Holder	SCAC →G22	SLC →G22	SCLC-OH2/OH →G22 Coolant through	SCLC-F →G22 Shifted	DS-SCLL →G22 DS Holder	DS-SCLL-ACH →G22 DS-ACH

Back Turning

Insert	DC..0702/11T3..			DC..0702/11T3..WP →E42 ~		
Holder	SDJC →G24	SDJC-OH2/OH →G24 Coolant through	SDJC-F →G24 Shifted	Y-SDJC →G26 Y-axis	Y-SDJC-OH2/OH →G26 Y-axis/Coolant through	CH-SDUC →G24

Cut-off

Insert	DC..0702/11T3..-WP →E44		DC..0702/11T3.. →E42 ~				
Holder	DS-SDUL →G26 DS Holder	DS-SDUL-ACH →G26 DS-ACH	SDXC →G24	DS-SDX →G26 DS Holder	SDQC →G24	SDNC →G24	Y-SDNC →G26 Y-axis

Original Series

Insert	VC.. 1103.. ➔E49 ~				
	VC..1103..-WP				
Holder	SVAC	SVJC	SVJC-OH	Y-SVXCL	Y-SVJC-OH
			Coolant through	Y-axis	Y-axis/Coolant through

Insert	VC..1103.. ➔E49					VC..1102.. ➔E50
Holder	SVXC	DS-SVX	SVQC	SVVCN	SVAC-1L	
		DS Holder				

Insert	VP..0802.. ➔E50			VP..1103.. ➔E50		
Holder	SVQP	CH-SVUP	DS-SVXP	SVXP	DS-SVVPN	DS-SVVPN-ACH
			DS Holder		DS Holder	DS-ACH

Insert	TFX33..	TF33..	TC..0902/1102..-WP		TC..0902..	CN..1204..	DN..1504..
Holder	TFX-OH	TFT	STAC	CH-STUC	PCLN	PDJN	

Insert	TN..1604.. ➔E37					
Holder	PTXN	STXN	DS-PTX	DS-PTX-ACH	PTAN	PTLN
			DS Holder	DS-ACH		

New Products
 Tool Materials / Selection Guide
 Micrograin Carbide, BIDE/MCS, PCD
 PVD Coated Carbide, CBN and Ceramics
 Insert Item List
 General Turning Toolholders
 Unique Swiss Tooling
 Grooving / Side Turning
 Threading
 Shaper
 ID Tooling
 Application Introduction
 Endmills
 Rotating Tools
 Information
 Index

Recommended Insert Grade and Cutting Conditions

Unique Swiss Tooling

Front Turning

Back Turning

Cut-off


Original Series

Work Material				Grade	Recommended Chipbreaker			Cutting Speed (m/min)
					Depth of cut (mm)			
Common Name	JIS	GB	AISI/ASTM		~ 0.3	0.5 ~ 2.0	2.0 ~	
Low Carbon Steel	S10C } S30C	10 } 30	1010 } 1030	ZM3 DT4	AMX	AM3,YL,UL S,AT,U1	CL,ZP S,AT,U1	50 90 130
Carbon Steel	S45C } S55C	45 } 55	1045 } 1055	QM3 DM4	AMX	AM3,YL,UL S,AT,U1	CL,ZP S,AT,U1	50 80 120
Alloy Steel	SCr415 } SCr440	15Cr } 40Cr	5140	QM3 DM4	AMX	AM3,YL,UL S,AT,U1	CL,ZP S,AT,U1	50 80 120
Stainless Steel (Austenitic)	SUS303	Y1Cr18Ni9	303	ST4 DT4	AMX	AM3,YL,UL S,AT,U1	CL,UL S,AT,U1	50 90 130
Stainless Steel (Austenitic)	SUS304 SUS316 SUS316L	0Cr18Ni9 0Cr17Ni12Mo2 00Cr17Ni14Mo2	304 316 316L	ST4 DT4	AMX	CL,YL,UL S,AT,U1	CL,UL S,AT,U1	40 70 100
Stainless Steel (Ferritic)	SUS430 SUS430F	1Cr17 Y1Cr17	430 430F	ST4 DT4	AMX	CL,YL,UL S,AT,U1	CL,UL S,AT,U1	50 100 180
Stainless Steel (Martensitic) (Precipitation hardenic)	SUS440C SUS630	9Cr18 11Cr17 9Cr18Mo	440C	ST4 DM4	AMX	AM3,YL,UL S,AT	CL,UL S,AT	40 60 90
Sulfur free cutting steel Sulfur complex free cutting steel	SUM22 SUM23 SUM24L	Y15	1213 1215 12L14	VM1 TM4	AMX	CL,YL,UL S,AT,U1	CL,UL S,AT,U1	50 120 200
Electromagnetic soft iron	SUY-0 SUY-1 SUY-2			DT4 QM3	AMX	CL,S,ZP	CL,S,ZP	200 300 350
Electromagnetic stainless				DT4 QM3	AMX	AM3,CL,S UL,ZP	AM3,CL,S UL,ZP	50 80 120
High-carbon chromium bearing steel	SUJ2	GCr5	52100	DM4 QM3	AMX	AM3,YL,UL S,AT,U2	CL,UL S,AT,U2	50 80 120
Titanium alloy	6AL-4V 6AL-4VELI			DT4 TM4	AMX	CL,YL,UL S,AT,U1	CL,UL S,AT,U1	50 70 120
Aluminum alloy	A5052 A6061 A7025	5A02 7A09	5052 7175	KM1 PD2	No (Mirror finish)	No (Mirror finish)	No (Mirror finish)	60 150 200 100 200 350

General Turning Inserts Explained


Advantage for each geometry

CC.. Style (80°)




- Increased toughness. Cutting edge is close to insert pocket.
- Not applicable to undercut

DC.. Style (55°)



- Versatile geometry. Toughness of CC.. with flexibility of VC..
- Up to 30 deg. undercuts


VB / VC / VP Style (35°)



- Wide coverage in work geometry.
- Up to 45 deg. undercuts


Chip Control and Finish

SCLCR →G22




Rigid clamping
High dimensional repeatability

SDJCR →G24




Increased room for chip evacuation
creates better surface finish

SDNCN →G24




Chips flow away from the work

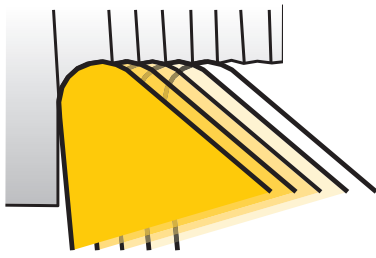
Surface Finish in General Turning Using Inserts with Wiper Flat



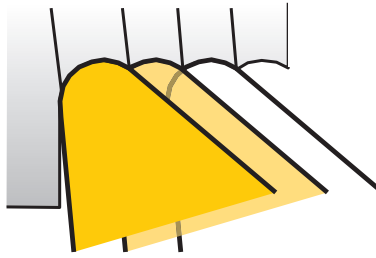Slower feed rates create better finishes but sacrifices cycle time, chip control, and tool life.



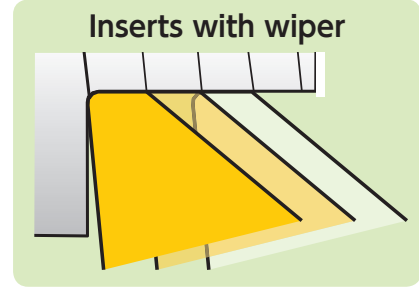Fast feed rates improve chip control but produce a bad surface finish.



Inserts with a wiper flat create good chip control and surface finish when feed rates are increased.

Wiper Flat Insert - WP series

DCGT.. -WP (TFD) →G24




for SDJC toolholders

TCGT.. -WP (TFT) →G36




for STAC toolholders

VCGT.. -WP (TFV) →G29




for SVJC toolholders

Roughing and Finishing Long Work on Swiss Lathes




Single pass machining is common in Swiss front turning operations.



Conventional toolholders are not suitable for roughing or finishing of long parts. The guide-bushing cannot hold machined bar stock.

Shifted Holders




Shifted Holders make a finishing process possible without worrying about the bar stock coming out of the guide-bushing. Coolant flows effectively which improves chip control thanks to the increased room between the tools and guide-bushing.

SCLC-N-F →G22


SDJC-N-F →G24

Combination of Grooving Tool and DS Holders



Rough with grooving tool for good chip control

GTWP Holders →H28



Finish by using general turning inserts with DS Holders

DS Holders

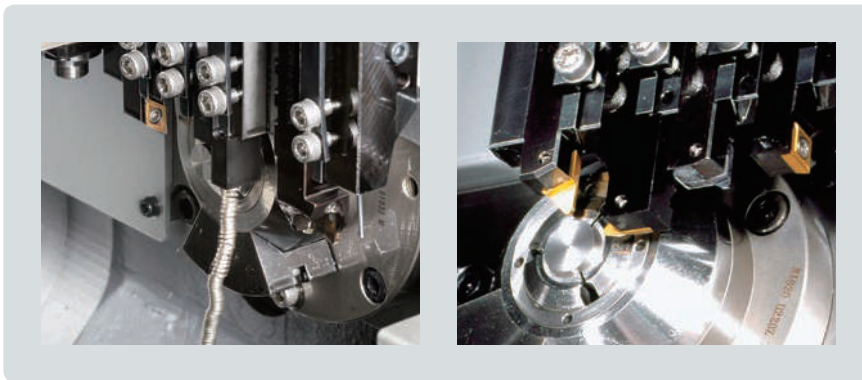
Y-axis Toolholders

Chip control by gravity

WATCH ON
YouTube

Features

- Chip drops down to the bed of the machine due to gravity, and chip control problem is solved
- Available in coolant through style
- Front turning, grooving, and back turning operations can be performed by utilizing Y-axis control



- Perfect solution for chip problems
- Less wear, more stable dimensions

Programming guidance

Regular Toolholder					Y-axis Toolholder			
① T300				Select tool	① T300			
② G0	X11.0	Z0	T3	Position tool	② G0	Y11.0	Z0	T3
③					③	X0		
④ G1	X8.0		F0.08	Move to OD to cut	④ G1	Y8.0		F0.08
⑤		Z5.0	F0.05	Cut 5mm length	⑤		Z5.0	F0.05
⑥	X11.0			Cut face	⑥	Y11.0		
⑦ G0	X11.0				⑦ G0	X11.0		

Cut by X-axis

Cut by Y-axis

Note: Need Y-offset for holder shank size.

→G27 · G29 · G31

TFD-AM3 breaker

Lined up Front turning


Good surface! 

Good chip control! 


Good inside corner R! 




Edge design




Surface finish in front turning



Unstable chip control at low feed rate to keep surface finish




Bad surface finish at high feed rate to improve chip control



TFD wiper insert offers good chip control and surface finish

Cutting condition

Work material	SUS304
Cutting speed	$v_c = 30 \sim 80 \text{m/min}$
Feed speed	$f = 0.015 \text{mm/rev}$
Depth of cut	$a_p = 0.15 \text{mm}$
DT4 TFD11FR05AM3	1500pcs /corner
Conventional tool	700pcs/corner

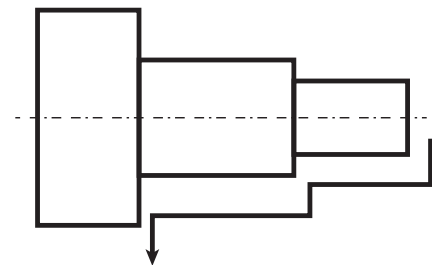

Surface finish of conventional tool after 500pcs machined was $Ry10.2 \mu\text{m}$, and dimensional change 0.1mm occurred at start of machining.
TFD-AM3 chipbreaker(DT4 grade) achieved stable machining with no dimensional change after 1,000pcs machined. Surface roughness was $Ry2.3 \mu\text{m}$.

Front Turning Chipbreaker Quartet

YL Chipbreaker

→E40 • E43 • E49 • E50

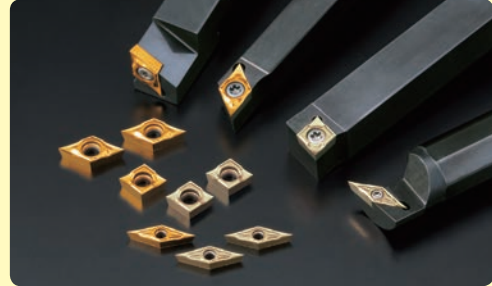


- Great combination of sharpness and toughness
- Covers extremely wide range
- Excellent chip control

WATCH ON
YouTube



CL Chipbreaker

→E40 • E43 • E50



- Sharpest molded Chipbreaker
- Excellent chip control
- Less tool pressure

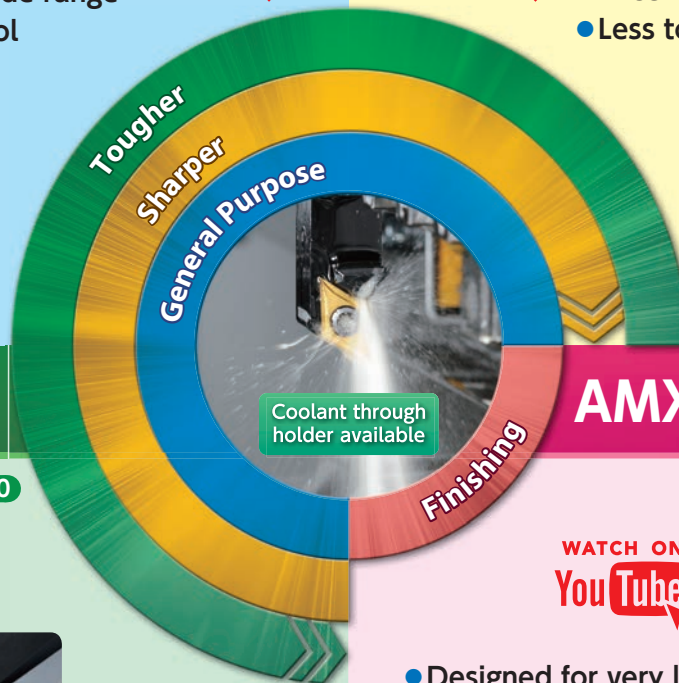WATCH ON
YouTube



AM3 Chipbreaker

→E39 • E42 • E44 • E49 • E50



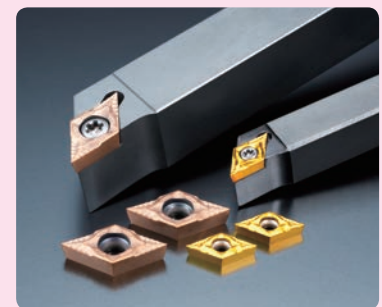
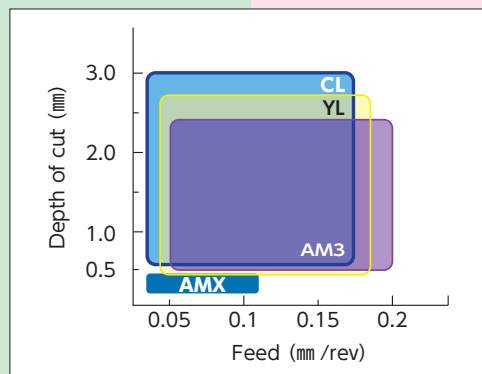
- All purpose chipbreaker
- Sharp edge with toughness

AMX Chipbreaker

→E42

WATCH ON
YouTube

- Designed for very light depth of cut
- Exceptional sharpness



UL Chipbreaker

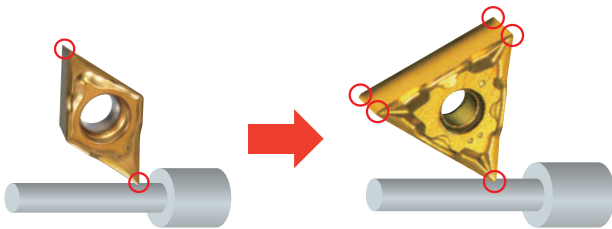
6 corner insert for Swiss machines



Features

- First negative style insert designed for Swiss machines
- Less tool pressure and good chip control


Reduce Cost in Swiss Machining




Positive insert with sharp cutting edge is required for Swiss machining.

With UL chipbreaker, negative insert provides sharp cutting edge AND more corners.

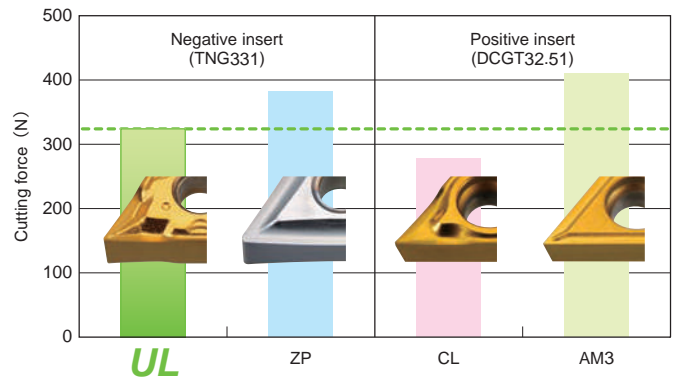Cuts Like Positive Inserts




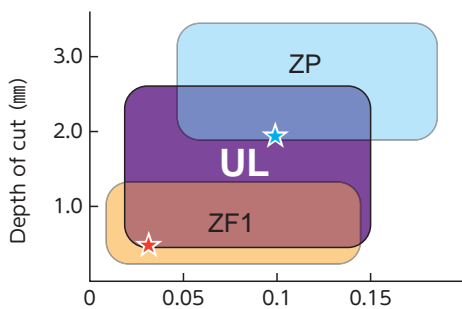
Covers a Wide Range of Cutting Conditions with Good Chip Control



《SUS304》 260 SFM WET

★ 0.03mm /rev 0.5mm DOC

★ 0.1mm /rev 2.0mm DOC



Toolholders for Swiss Machines



Available in ACH (Adjustable centerline height) toolholder

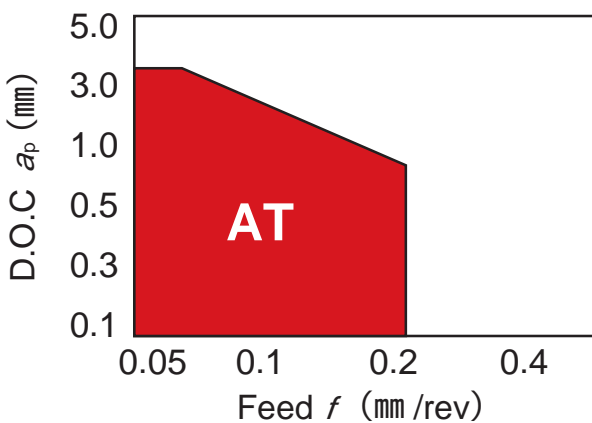
Holders → G38

Inserts → E37

AT breaker

Features

- **Almighty breaker which combines sharp edge and cutting edge strength!**
- **By mirror finish breaker, it is able to suppress built up edge in slow speed region and sticky work material (such as S10C e.t.c.)**
- **Able to machine high precision due to E class precision inserts.**



<Cutting edge shape>



mirror finished face



Case study

Shaft machining	
Work material	: S15C
Cutting speed (m/min)	: 20 ~ 150
Feed (mm/rev)	: 0.02
Depth of cut (mm)	: 0.10
Coolant	: WET
TM4 AT breaker	1,600 pcs/corner
Competitor's polished breaker (PVD coated carbide)	500 pcs/corner

Due to the strict dimensional tolerance, tool life was not stable using conventional product.
Thanks to AT breaker, deposition has been restrain and tool life became longer.

Shaft machining	
Work material	: S45CL
Cutting speed (m/min)	: 200
Feed (mm/rev)	: 0.07
Depth of cut (mm)	: 0.5
Coolant	: WET
TM4 AT breaker	1,500 pcs/corner
Competitor's polished breaker (PVD coated carbide)	900 pcs/corner

Stable machining and longer tool life can realize due to the sharp edge and cutting edge toughness of AT breaker.

DS-ACH Toolholders

Features




- Adjust centerline height simply with a wrench

1 Adjust centerline height easily

- Eliminate center boss on end faces
- Provide constant OD dimension
- Adjust easily in machine

1 Turn screw clockwise

2 Adjustment wedge goes down



3 Insert edge moves up

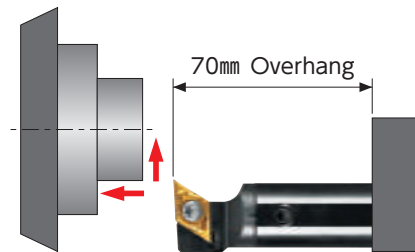
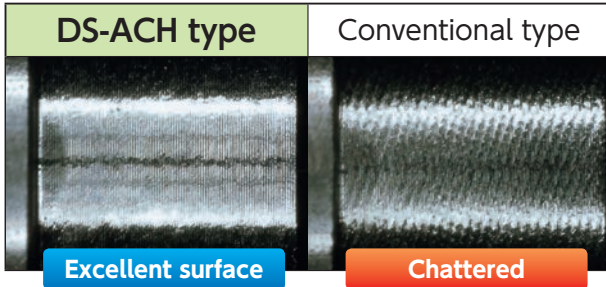
Range of centerline height adjustment
0 - 0.2mm

2 Optimized design reduces vibration

Improved chatter resistance.





Tested cutting conditions (SUS304)

Work material : SUS304
Holder : DS-SDUL19-11-ACH
Insert : DCGT11T302MCL TM4
Cutting condition : $V_c=75$ m/min, $f=0.05$ mm/rev, $a_p=2.0$ WET



How to use

Insert moves in an upward direction only. (Loosen wedge screw before making any adjustment)



① Install the holder slightly below centerline. Then take a facing test cut.

② Measure the diameter of the centerboss.

③ Raise the center height by one half of the diameter of the boss. Adjustment references are available in the tool case.

④ Re-machine the end face.

*Adjustment instructions are supplied in the tool case

DS Toolholders

Make the most of vacant drill sleeves

DS / DS-ACH Toolholders



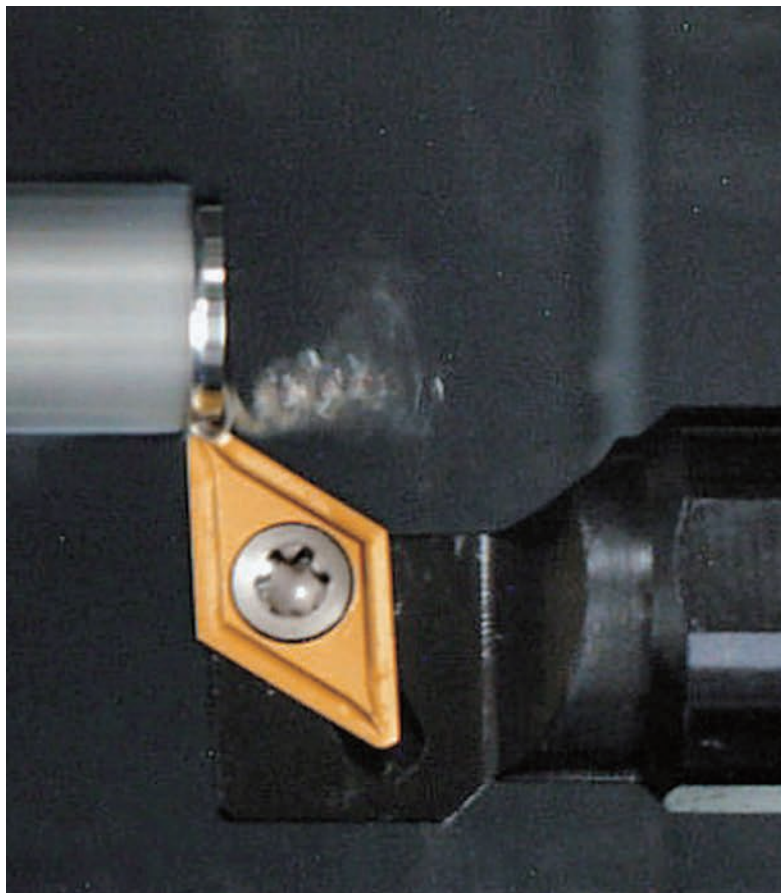
Are you satisfied with the number of tool positions in your machine? NTK DS type toolholders are useful when additional tool positions are required

Front turning, Back turning, Grooving, Threading, and Small boring which fit into the machines' vacant drill sleeves

DS Series toolholders can be used with both Swiss or non-Swiss type CNC lathes

Features

- More turning tools without any hassle
- Available for Front turning, Back turning, Grooving, Threading, Micro-boring, and interchangeable tooling
- Available shank size range: from 14 mm to 32 mm



CSV Series

CSV

For Cam-style machine

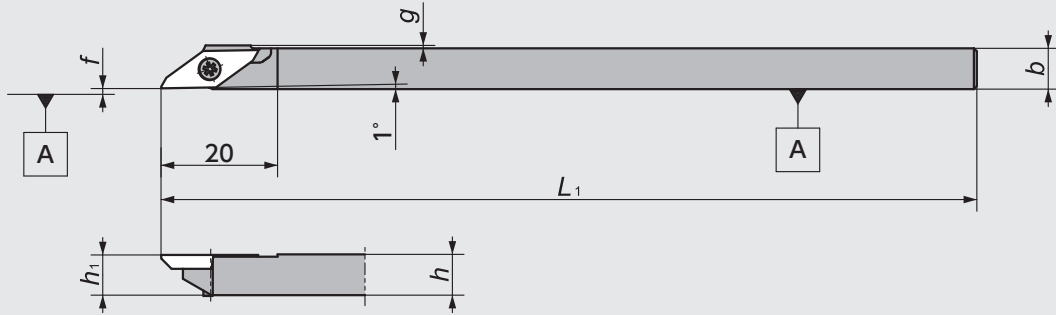


Figure-1

● Right-Hand style shown

CSV-NC

For Gang-style machine

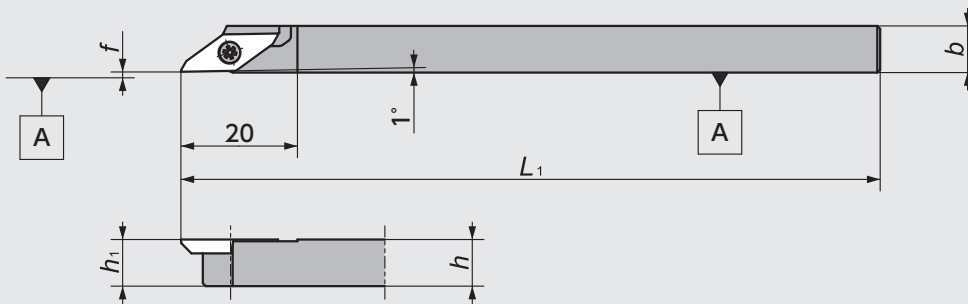


Figure-2

● Right-Hand style shown

CSV-NC-F

For Gang-style machine

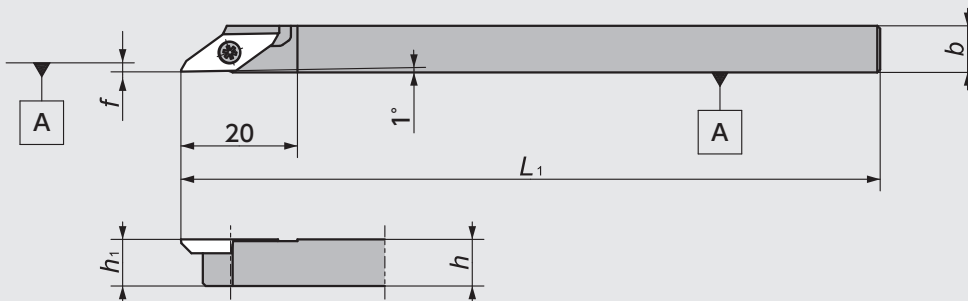


Figure-3

● Right-Hand style shown

☆All the inserts can use the same toolholder CSV series ➔ G94

CSV Series - Toolholders

Figure	Code No.		Item Number	Stock		Dimensions (mm)						Gage insert	Spare Parts		
	R	L		R	L	h	b	L ₁	h ₁	f	g		Clamp Screw	Wrench	
1	5492962		CSV_{R/L} 07GX	●		7	7	85	7	0.1	0.5				
	5303169	5303193	07	●	●			140							
	5492954		08GX	●		8	8	85	8						
	5303151	5303201	08	●	●			140							
	5303136		095	●		9.5	9.5	140	9.5						0.0
	5303144	5303177	10	●	●	10	10	10							
	5474770		12GX	●		12	12	85	12						
	5327929		12	●				140							
2	5514062	5514070	CSV_{R/L} 08NC	●	●	8	8	120	8	0.1	-	CSVF	LRIS-2.5*7	CLR-15S	
	5563010		10GXNC	●		10	10	85	10	0.1					
	5477492	5477542	10NC	●	●			120							
	5477534	5477500	12NC	●	●	12	12	12							
3	5789615		CSV_{R/L} 08NC-F	●		8	8	120	8	0.0 0.1	-	CSVF	LRIS-2.5*7	CLR-15S	

CSV Series - Inserts Mirror finish

Shape	Item Number	Chip-breaker	Dimensions (mm)		PVD Coated Carbide									
			Max. Depth of Cut	Edge Geometry (α × β°)	ZM3			VM1			DT4			
					R	Stock	L	Stock	R	Stock	L	Stock	R	Stock
 Thickness: 2.38 ● Right-Hand style shown	CSVF11F _{R/L} V M	No	-	0.3 × 5°					5303516	●	5303557	●		
	11F _{R/L} V-A M							5358858	●					
	11F _{R/L} V-M M				0.15 × 2°	5436019	●		5386248	●	5386255	●	5850235	●
	11F _{R/L} V-C M				0.15 × 5°			5358577	●					
 Thickness: 2.38 ● Right-Hand style shown	CSVF11F _{R/L} VB M	Yes	3.00	0.3 × 5°					5313168	●	5313150	●		
	11F _{R/L} VB-A M							5358692	●					
	11F _{R/L} VB-M M				0.15 × 2°	5436001	●		5386263	●	5386271	●	5850243	●
	11F _{R/L} VB-C M				0.15 × 5°			5358700	●					
 Thickness: 2.38 ● Left-Hand style shown	CSVF11F _{R/L} VX M	No	-								5358866	●		

Note: All angles shown are obtained when insert is set in the holder.

Toolholders for CC.. Inserts

SCAC-N

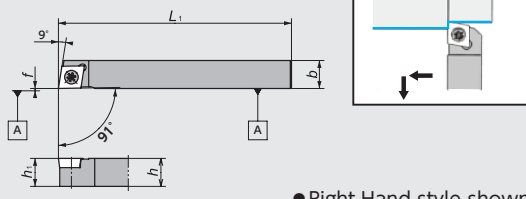


Figure-1

● Right-Hand style shown

SCLC-N

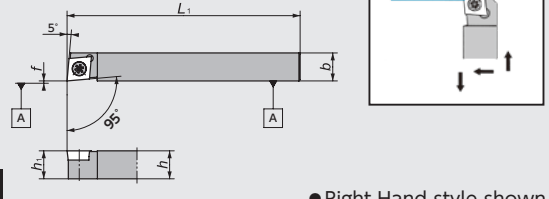


Figure-2

● Right-Hand style shown

SCLC-N-F

(Shifted)

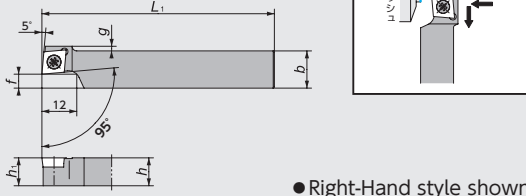


Figure-3

● Right-Hand style shown

SCLC

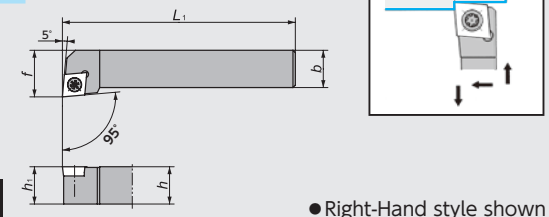


Figure-4

● Right-Hand style shown

SCLC-OH2

(Coolant through)

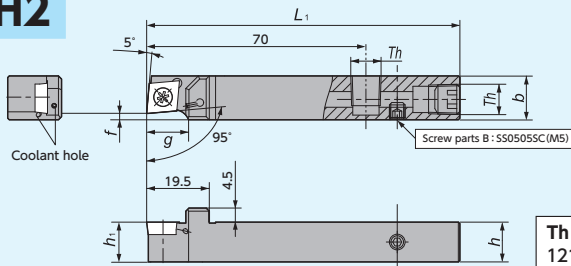


Figure-5

Th (Screw parts A)
1214/1616 size : SPR1/8(Rc1/8)

● Right-Hand style shown

SCLC-OH

(Coolant through)

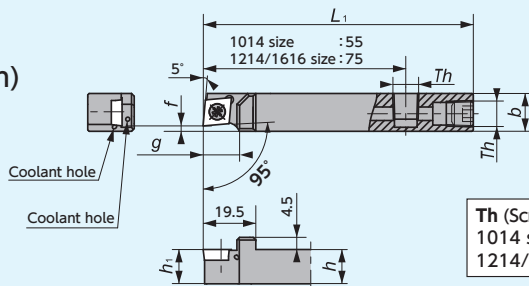


Figure-6

Th (Screw parts A)
1014 size : SS0605SC (M6×1.0)
1214/1616 size : SPR1/8(Rc1/8)

● Right-Hand style shown

DS-SCL

(DS Holder)

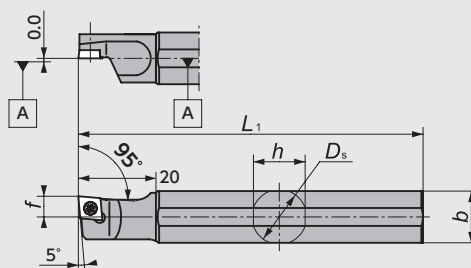


Figure-7

● Left-Hand style shown

☆ Takes Right-hand or Neutral insert

DS-SCLL-ACH

(DS-holder with Adjustable centerline height)

(Parts)

Shank	Wedge	Screw for Wedge
φ16		WS060415-003 (5795539)
φ19.05	ACH-W18 (5805601)	WS060419-004 (5799226)
φ20		
φ22		
φ25	ACH-W24 (5805619)	

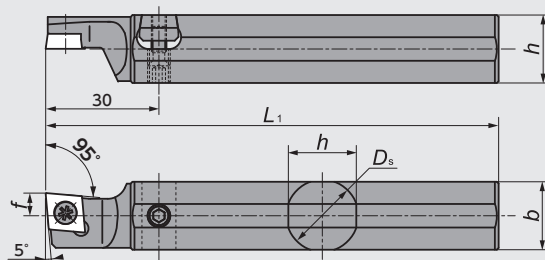





Figure-8

● Left-Hand style shown

☆ Takes Right-hand or Neutral insert

CC.. Series - Toolholders

Figure	Code No.		Item Number	Stock		Dimensions (mm)						Gage insert 	Spare Parts		
	R	L		R	L	D_s	h	b	L_1	h_1	f		g	Clamp Screw 	Wrench 
1	5137013	5137922	SCAC ^{R/L} 0808X06N	●	●	-	8	8	120	8	0.0	-	CC0602 E28-39~40	LRIS-2.5*7	CLR-15S (A)
	5119060	5137914	1010X06N	●	●		10	10	120	10					
	5459847		1212GX09N	●			12	12	85	12					
	5137088	5137906	1212X09N	●	●		12	12	120	12					
2	5137021	5137898	SCLC ^{R/L} 0808X06N	●	●	-	8	8	120	8	0.0	-	CC0602 E28-39~40	LRIS-2.5*7	CLR-15S (A)
	5122171	5137880	1010X06N	●	●		10	10	120	10					
	5873872		1010H09N	●			10	10	100	10					
	5152889	5152897	1010X09N	●	●		10	10	120	10					
	5459839	5459821	1212GX09N	●	●		12	12	85	12					
	5137039	5137872	1212X09N	●	●		12	12	120	12					
	5191200	5191218	1616X09N	●	●		16	16	120	16					
3	5700240	5700257	SCLC ^{R/L} 1015X09N-F05	●		-	10	15	120	10	5	2	CC09T3 E28-39~40	LRIS-4*10	LLR-25S (B)
	5700265	5700273	1020X09N-F10	●			10	20	120	10	10	2			
	5700364	5700372	1218X09N-F06	●			12	18	120	12	6	0			
	5700380	5700398	1224X09N-F12	●			12	24	120	12	12	0			
4	5744719	5884911	SCLC ^{R/L} 20-X09	●	●	-	20	20	120	20	24.0	-	CC09T3 E28-39~40	LRIS-4*10	LLR-25S (B)
5	5037957		SCLC ^{R/L} 1214H09N-F02OH2	●		-	12	14	100	12	2	12	CC09T3 E28-39~40	LRIS-4*10	LLR-25S (B)
	5044011		1616X09N-F02OH2	●			16	16	120	16	2	17.7			
6	5905740		SCLC ^{R/L} 1014F09N-F02OH	●		-	10	14	80	10	2	12	CC09T3 E28-39~40	LRIS-4*10	LLR-25S (B)
	5905732		SCLC ^{R/L} 1214H09N-F02OH	●			12	14	100	12	2	12			
	5905658		SCLC ^{R/L} 1616H09N-F02OH	●			16	16	100	16	2	17.7			
7		5602636	DS-SCL ^{R/L} 14F-06	●		14.000	13	13	80	-	6.0	-	CC0602 E28-39~40	LRIS-2.5*7	CLR-15S (A)
		5486923	15H-06	●		15.875	15	15	100						
		5601703	16F-06*	●		16.000	15	15	80						
		5338876	19-06	●		19.050	18	18	120						
		5520630	20X-06	●		20.000	19	19	95						
		5388608	20-06	●		20.000	19	19	120						
		5484936	22-06*	●		22.000	21	21	120						
		5520689	25-06MET	●		25.000	24	24	150						
		5486691	25-06	●		25.400	24	24	150						
		5601729	14F-09	●		14.000	13	13	80						
		5486931	15H-09	●		15.875	15	15	100						
		5601711	16F-09*	●		16.000	15	15	80						
		5563168	19GX-09	●		19.050	18	18	85						
		5338884	19-09	●		19.050	18	18	120						
		5520655	20X-09	●		20.000	19	19	95						
		5374699	20-09	●		20.000	19	19	120						
		5401096	22-09*	●		22.000	21	21	120						
	5520671	25-09MET	●		25.000	24	24	150							
	5486709	25-09	●		25.400	24	24	150							
	5939327	32-09	●		32.000	30	30	150							
8		5833694	DS-SCL ^{R/L} 16F-09-ACH*	●		16.00	15.5	15.5	80	-	6.0	-	CC09T3 E28-39~40	LRIS-4*8	LLR-25S -20*65 (B)
		5833702	19-09-ACH	●		19.05	18.0	18.0	120						
		5833710	20-09-ACH	●		20.00	19.0	19.0	120						
		5833728	22-09-ACH*	●		22.00	21.0	21.0	150						
		5934013	25-09MET-ACH	●		25.00	24.0	24.0	150						
		5833736	25-09-ACH	●		25.40	24.0	24.0	150						

※Compatible with 16mm / 22mm round shank DS Series holders. DS-Sleeve  G23

New Products
 Tool Materials / Selection Guide
 Micrograin Carbide, BIDE/MCS, PCD, PCBN and Ceramics
 Insert Item List
 General Turning Toolholders
 Unique Swiss Tooling
 Grooving / Side Turning
 Threading
 Shaper
 ID Tooling
 Application Introduction
 Endmills
 Rotating Tools
 Information
 Index

Toolholders for DC.. Inserts

SDJC-N/SDJC


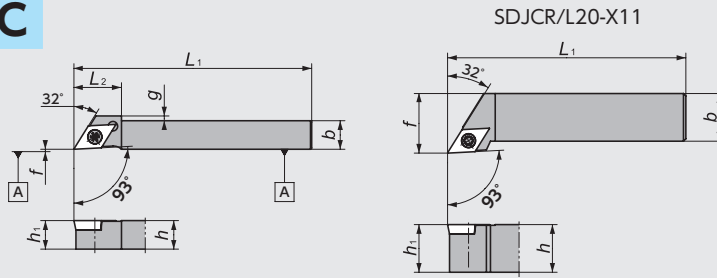


Figure-1



● Right-Hand style shown

SDJC-OH2

(Coolant through)


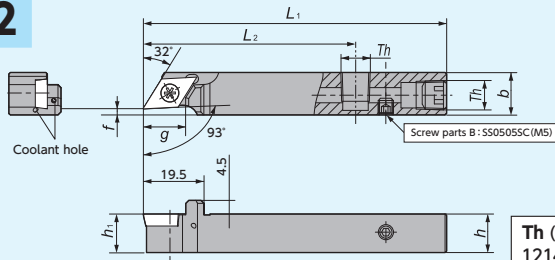


Figure-2

Th (Screw parts A)
1214/1616 size: SPR1/8(Rc1/8)



● Right-Hand style shown

SDJC-OH

(Coolant through)


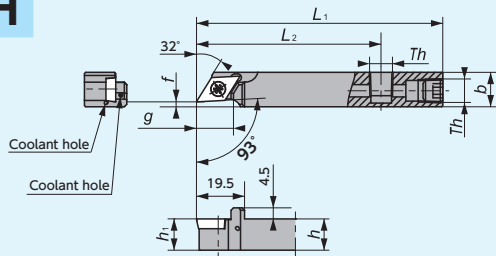


Figure-3

Th (Screw parts A)
1014 size: SS06055C (M6x1.0)
1214/1616 size: SPR1/8(Rc1/8)



● Right-Hand style shown

SDJC-N-F

(Shifted)


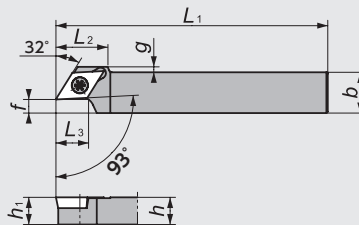


Figure-4



● Right-Hand style shown

SDXC-N

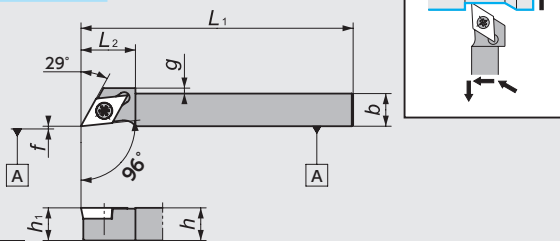


Figure-5

● Right-Hand style shown

SDQC

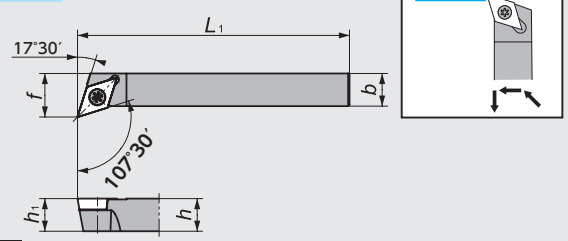


Figure-6

● Right-Hand style shown

SDNC

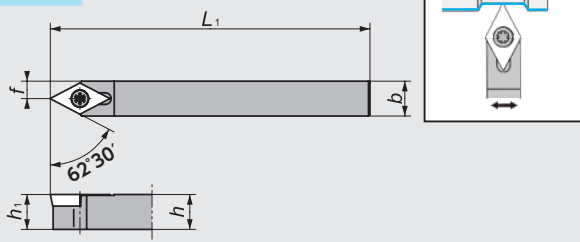


Figure-7

CH-SDUC

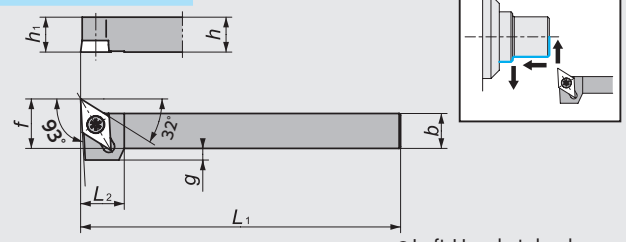





Figure-8

● Left-Hand style shown
☆ Takes Right-hand or neutral insert

DC.. Series - Toolholders

Figure	Code No.		Item Number	Stock		Dimensions (mm)							Gage insert 	Spare Parts			
	R	L		R	L	h	b	L ₁	h ₁	f	L ₂	g		L ₃	Clamp Screw 	Wrench 	
1	5137047	5137864	SDJC ^{R/L} 0808X07N	●	●	8	8	120	8						DC ^{R/L} 0702 E29•42~43 TFD07 E44	LRIS-2.5*7	CLR-15S (A)
	5502125		1010GX07N	●		10	10	85	10								
	5120464	5137856	1010X07N	●	●			120									
	5463070		1212X07N	●		12	12	120	12						DC ^{R/L} 0702 E29•42~43 TFD07 E44	LRIS-2.5*7	CLR-15S
	5873880		1010H11N	●				100	10								
	5152863	5153234	1010X11N	●	●	10	10		120	10	0	19	2		DC ^{R/L} 11T3 E29•42~43 TFD11 E44	LRIS-4*10	LLR-25S (B)
	5122155		1012X11N	●				12									
	5459813	5473681	1212GX11N	●	●			85	12								
	5593215		1216GX11N	●		12	16										
	5122163	5137849	1212X11N	●	●		12										
5180583	5180609	1616X11N	●	●	16	16	120	16									
5744743	5852793	20-X11	●	●	20	20		20	25.0								
2	5034871		SDJC ^{R/L} 1214H11N-F02OH2	●		12	14	100	12						DC ^{R/L} 11T3 E29•42~43 TFD11 E44	LRIS-4*10	LLR-25S (B)
	5044029		SDJC ^{R/L} 1616X11N-F02OH2	●		16	16	120	16	2	70	16		18.4			
3	5903208		SDJC ^{R/L} 1014F11N-F02OH	●		10	14	80	10						DC ^{R/L} 11T3 E29•42~43 TFD11 E44	LRIS-4*10	LLR-25S (B)
	5886254		1214H11N-F02OH	●		12		100	12	2	55	16					
	5903216		1616H11N-F02OH	●		16	16		16			75	18.4				
4	5700588	5700570	SDJC ^{R/L} 1015X07N-F05	●			15					5			DC ^{R/L} 0702 E29•42~43 TFD07 E44	LRIS-2.5*7	CLR-15S (A)
	5700562	5700554	1020X07N-F10	●			20				10						
	5700547	5700539	1015X11N-F05	●		10	15					5	19	2	DC ^{R/L} 11T3 E29•42~43 TFD11 E44	LRIS-4*10	LLR-25S (B)
	5700521	5700513	1020X11N-F10	●			20				10						
	5700505	5700497	1218X11N-F06	●		12	18	120				6					
	5700471	5700463	1224X11N-F12	●			24				12						
	5974456		1620X11N-F08	●		16	20					8					
5974464		1628X11N-F16	●			28				16			18.5	DC ^{R/L} 11T3 E29•42~43 TFD11 E44			
5	5525449		SDXC ^{R/L} 1010X11N	●		10	10					20	3		DC ^{R/L} 11T3 E29•42~43	LRIS-4*10	LLR-25S (B)
	5553169		1016X11N	●		10	16						0				
	5525456		1212X11N	●		12	12	120				20	1				
	5553177		1216X11N	●		12	16										
	5525464		1616X11N	●		16	16					16		0			
6	5743711	5743752	SDQC ^{R/L} 10-X07	●	●	10	10		10	12					DC ^{R/L} 0702 E29•42~43	LRIS-2.5*7	CLR-15S (A)
	5743729	5743760	12-X11	●	●	12	12	120		12	16						
	5743737	5747332	16-X11	●	●	16	16			16	20				DC ^{R/L} 11T3 E29•42~43	LRIS-4*10	LLR-25S (B)
	5743745		20-X11	●		20	20			20	25						
7	5742184		SDNCN08-X07	●		8	8		8	4					DC ^{R/L} 0702 E29•42~43	LRIS-2.5*7	CLR-15S (A)
	5742192		N10-X07	●		10	10		10	5							
	5742200		N12-X11	●		12	12	120		12	6				DC ^{R/L} 11T3 E29•42~43	LRIS-4*10	LLR-25S (B)
	5742218		N16-X11	●		16	16		16	8							
	5742226		N20-X11	●		20	20		20	10							
8		5659222	CH-SDUC ^{R/L} 1010H11		●	10	10		10	15		6			DC ^{R/L} 11T3 E29•42~43 TFD11 E44	LRIS-4*10PW	CLR-15S (A)
		5659230	1212H11		●	12	12	100		12	17	15	4				
		5004148	1616H11		●	16	16	100		16	21	15	0				
		5939616	2020H11		●	20	20	100		20	25	15	0				

New Products
 Tool Materials / Selection Guide
 BIDE/MCS, PCD, CBN and Ceramics
 Micrograin Carbide, PVD Coated Carbide
 Insert Item List
 General Turning Toolholders
 Unique Swiss Tooling
 Grooving / Side Turning
 Threading
 Shaper
 ID Tooling
 Application Introduction
 Endmills
 Rotating Tools
 Information
 Index

Toolholders for DC.. Inserts

Y-SDJC

(Y-axis)

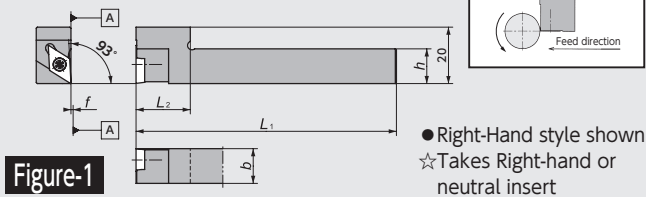


Figure-1

Y-SDNC

(Y-axis)

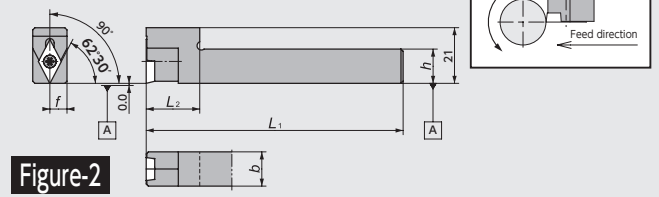


Figure-2

Y-SDJC-OH2

(Y-axis/
Coolant through)


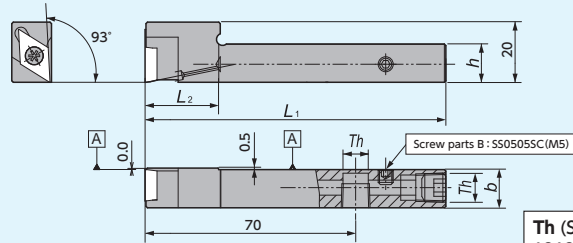


Figure-3

Th (Screw parts A)
1212 size : SPR 1/8(Rc 1/8)



● Right-Hand style shown
☆ Takes Right-hand or neutral insert

Y-SDJC-OH

(Y-axis/
Coolant through)


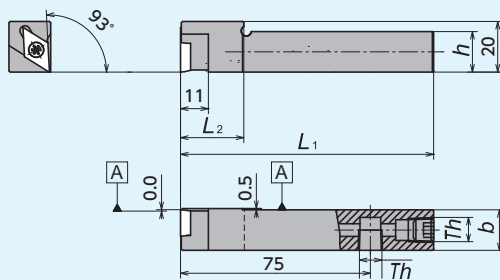


Figure-4



● Right-Hand style shown
☆ Takes Right-hand or neutral insert

DS-SDU

(DS Holder)


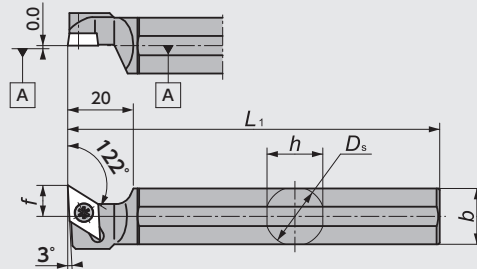


Figure-5



● Left-Hand style shown
☆ Takes Right-hand or neutral insert

DS-SDU-ACH

(DS-holder with Adjustable centerline height)

(Parts)		
Shank	Wedge	Screw for Wedge
φ16	ACH-W18 (5805601)	WS060415-003 (5795539)
φ19.05		
φ20		
φ22	ACH-W24 (5805619)	WS060419-004 (5799226)
φ25		
φ25.4		


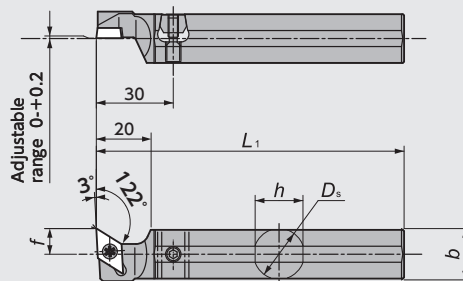


Figure-6



● Left-Hand style shown
☆ Takes Right-hand or neutral insert

DS-SDX

(DS Holder)


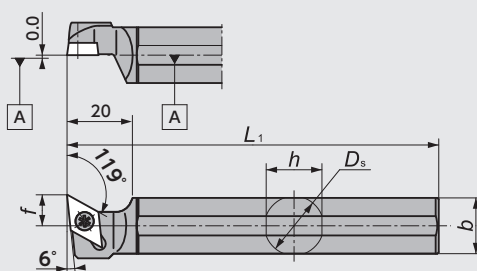


Figure-7



● Left-Hand style shown
☆ Takes Right-hand or neutral insert

DC.. Series - Toolholders



Figure	Code No.		Item Number	Stock	Dimensions (mm)						Gage insert	Spare Parts					
	R	N			L	R	N	L	D _s	h		b	L ₁	f	L ₂	Clamp Screw	Wrench
1	5371646		Y-SDJCR _L 10-07S	●				10.0	10				DC0702 E29•42~43 TFD07 E44	LRIS-2.5*7	CLR-15S (A)		
	5371661		12-07S	●				12.0	12								
	5926001		10-11S	●				10.0					DC11T3 E29•42~43 TFD11 E44	LRIS-4*10	LLR-25S -20*65 (B)		
	5950431		10-11MS	●		-	10.0			120	0.0	22					
	5600671		12-11S	●				12.0	16			20					
	5950423		12-11MS	●				12.0				22					
	5890025		16-11S	●				16.0				20					
2	5479191		Y-SDNCN12-11S	●				12.0	12				DC11T3 E29•42~43	LRIS-4*10	LLR-25S-20*65 (B)		
	5485875		N16-11S	●				16.0	16			120				6.0	20
3	5035209		Y-SDJCR _L 1212H11S-OH2	●				-	12	12	100	-	20	LRIS-4*10	LLR-25S-20*65 (B)		
4	5910575		Y-SDJCR _L 1212H11S-OH	●				-	12	12	100	-	20	DC11T3 E29•42~43 TFD11 E44	LRIS-4*10	LLR-25S-20*65 (B)	
	5910583		1616H11-OH	●				-	16	16			25				
5	5348545		DS-SDUR _L 14F-07	●				14.000	13.0	13	80		6.0	DC0702 E29•42~43 TFD07 E44	LRIS-2.5*7	CLR-15S (A)	
	5348107		15H-07	●			15.875			100							
	5520598		16F-07*	●			16.000	15.0	15	80							
	5341516		16X-07*	●						95							
	5278247		19-07	●			19.050	18.0	18	120							
	5520606		20X-07	●			20.000	19.0	19	95							
	5278239		20-07	●						120							
	5330758		22-07*	●			22.000	21.0	21								
	5601745		14F-11	●			14.000	13.0	13	80		10.0					
	5601737		16F-11*	●			16.000	15.0	15								
	5278262		19-11	●			19.050	18.0	18	120							
	5572730		19-11SPL	●						160	11.0						
	5520614		20X-11	●			20.000	19.0	19	95		10.0	DC11T3 E29•42~43 TFD11 E44	LRIS-4*10	LLR-25S -20*65 (B)		
	5278254		20-11	●						120							
	5324025		22-11*	●			22.000	21.0	21								
	5638606		23-11-007	●			23.000	22.0	22	70							
	5483417		25-11MET	●			25.000			120							
5317136		25-11	●			25.400	24.0	24		150							
5713581		25-11SPL	●			25.400				12.5							
6	5805635		DS-SDUR _L 16F-11-ACH*	●				16.000	15.5	15	80		10.0	DC11T3 E29•42~43 TFD11 E44	LRIS-4*10	LLR-25S -20*65 (B)	
	5805627		19-11-ACH	●			19.050	18.0	18								
	5799614		20-11-ACH	●			20.000	19.0	19	120							
	5799622		22-11-ACH*	●			22.000	21.0	21								
	5934021		25-11MET-ACH	●			25.000	24.0	24		150						
	5799648		25-11-ACH	●			25.400	24.0	24								
7	5462429		DS-SDXR _L 19-11	●				19.050	18.0	18	120		10.0	DC11T3 E29•42~43	LRIS-4*10	LLR-25S (B)	
	5520622		20X-11	●			20.000	19.0	19	95							
	5462437		20-11	●						120							
	5520697		25-11MET	●			25.000	24.0	24								
	5939335		32-11	●			32.000	30.0	30	150							

*Compatible with 16mm / 22mm round shank DS Series holders. DS-Sleeve → G104

Front Turning

Toolholders for VC.. Inserts

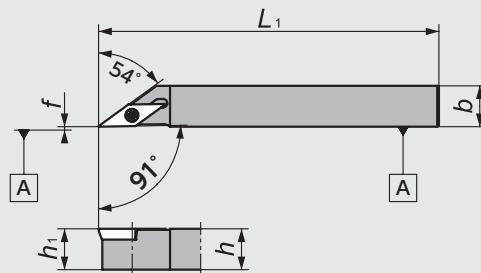SVAC-N





SVACR1010X11N is also available for cam-style machine

● Right-Hand style shown

Figure-1

SVAC-N-1L

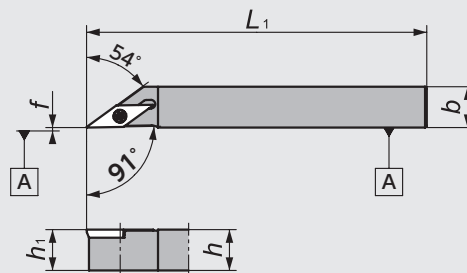(For VCGT1102)





● Right-Hand style shown

Figure-2

SVAC-NW


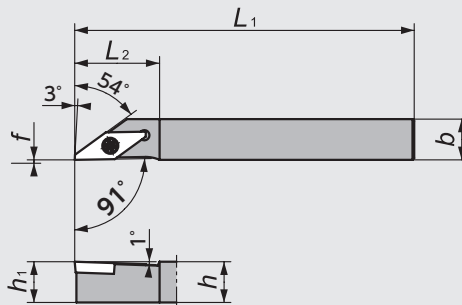
(For VCGT1303)



● Right-Hand style shown

Figure-3

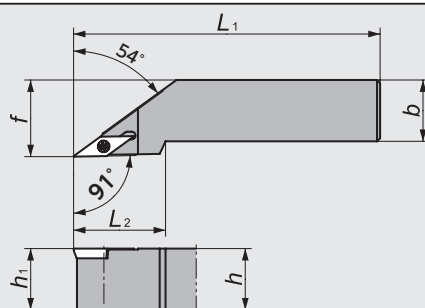SVAC





● Right-Hand style shown

Figure-4

SVAC-W


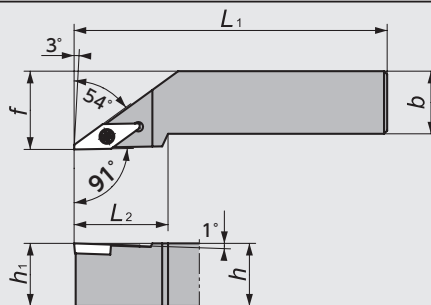
(For VCGT1303)



● Right-Hand style shown

Figure-5

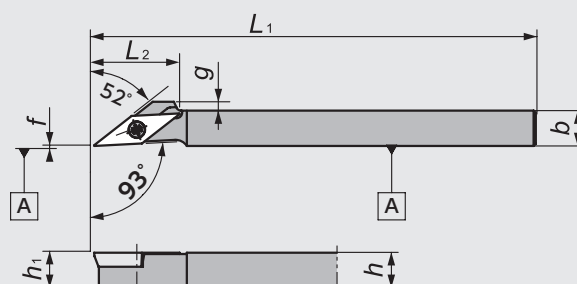SVJC-N





● Right-Hand style shown

Figure-6

SVJC-N-OH

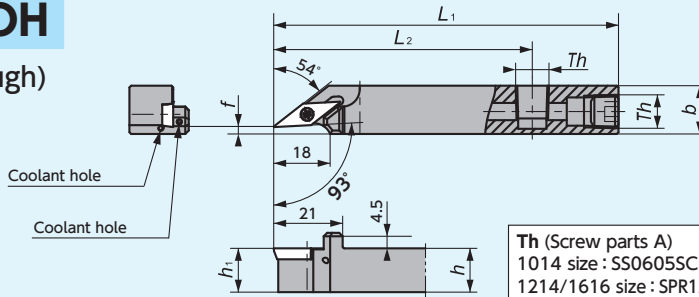(Coolant through)





● Right-Hand style shown

Figure-7

Th (Screw parts A)
1014 size : SS0605SC (M6×1.0)
1214/1616 size : SPR1/8 (Rc1/8)

Y-SVJC-OH

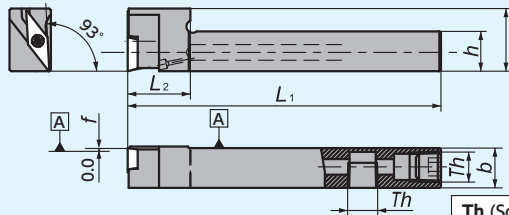(Y-axis/
Coolant through)



● Right-Hand style shown

☆ Takes Right-hand or neutral insert

Figure-8

Th (Screw parts A)
1212/1616 size : SPR1/8 (Rc1/8)

VC.. Series - Toolholders

Figure	Code No.		Item Number	Stock		Dimensions (mm)						Gage insert	Spare Parts			
	R	L		R	L	h	b	L ₁	h ₁	f	L ₂		g	Clamp Screw	Wrench	
1	5304043	5304092	SVAC ^{R/L} 1010X11N	●	●	10	10	120	10	0.0	—	—	VC ^{R/L} 1103 E35•49~50	LRIS-2.5*7	CLR-15S (A)	
	5304050	5304076	1212X11N	●	●	12	12		12							
	5304068		1616X11N	●		16	16		16							
2	5473053	5473038	SVAC ^{R/L} 1010X11N-1L	●	●	10	10	120	10	0.0	—	—	VCGT1102 E50	LRIS-2.5*7	CLR-15S (A)	
	5473061	5473046	1212X11N-1L	●	●	12	12		12							
3	5401724	5401708	SVAC ^{R/L} 1010L13NW	●	●	10	10	140	10	0.0	25	—	VCGT1303 E49	LRIS-3*8	RLR-20S (B)	
	5401732	5401716	1212L13NW	●	●	12	12		12							
	5401740	5431077	1616M13NW	●	●	16	16		16							
4	5744768		SVAC ^{R/L} 20-X11	●		20	20	120	20	25.0	30	—	VC ^{R/L} 1103 E35•49~50	LRIS-2.5*7	CLR-15S (A)	
5	5474549		SVAC ^{R/L} 2020M13W	●		20	20	150	20	25.0	30	—	VCGT1303 E49	LRIS-3*8	RLR-20S (B)	
6	5878012		SVJCR 0808H11N	●		8	8	100	8	0	19	2	VC ^{R/L} 1103 E35•49~50 TFV E51	LRIS-2.5*7	CLR-15S (A)	
	5339940	5517750	SVJC ^{R/L} 1010X11N	●	●	10	10	120	10	0.0	—	—				
	5339932	5517768	1212X11N	●	●	12	12		12							
	5339924	5517743	1616X11N	●	●	16	16		16							
7	5020482		SVJC ^{R/L} 1014F11N-F02OH	●		10	14		80				10	2.0	55	—
	5000419		1214H11N-F02OH	●		12		100	12	75						
	5020508		1616H11N-F02OH	●		16		16	16							
8	5021209		Y-SVJC ^{R/L} 1212H11S-OH	●		12	12	100	—	0	20	—	VC ^{R/L} 1103 E35•49~50 TFV E51	LRIS-2.5*7	CLR-15S (A)	
	5021191		1616H11S-OH	●		16	16									

Front Turning

Toolholders for VC.. Inserts

SVXC-N


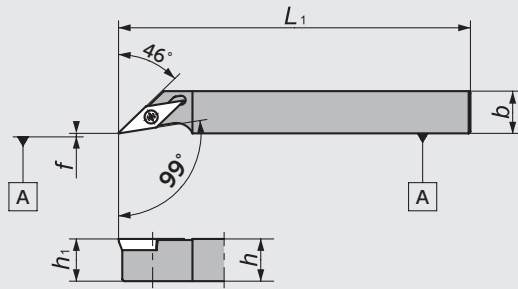


Figure-1



● Right-Hand style shown

Y-SVXCL

(Y-axis)


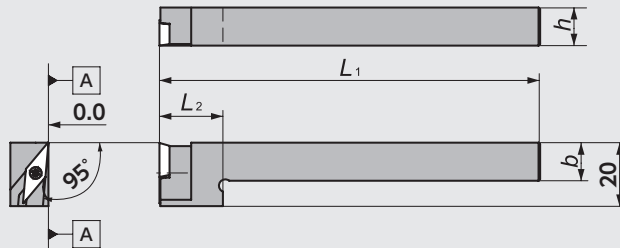


Figure-2



● Left-Hand style shown
☆ Takes Left-hand or neutral insert

SVQC


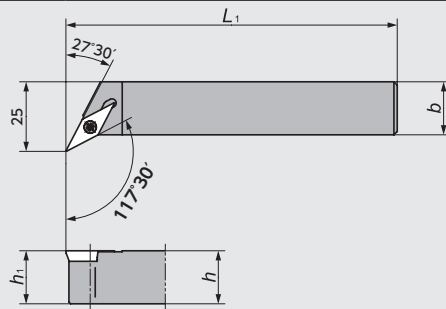


Figure-3



● Right-Hand style shown

SVVC-N


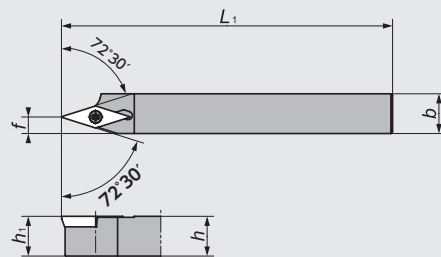


Figure-4



● Right-Hand style shown

SVVC-N


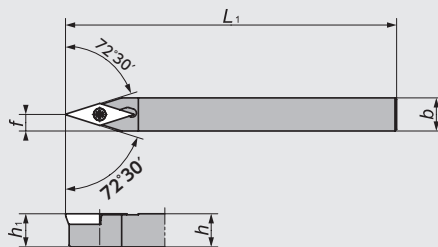


Figure-5



DS-SVX

(DS Holder)


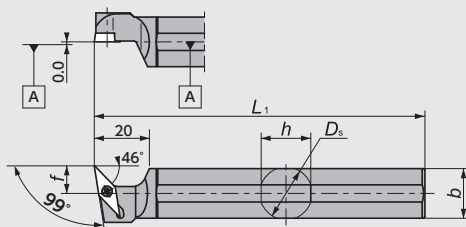


Figure-6



● Left-Hand style shown
☆ Takes Right-hand or neutral insert

CH-SVUC


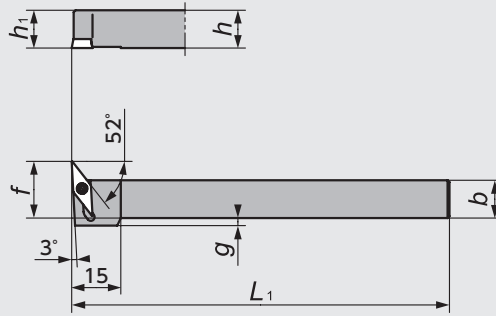




Figure-7

● Left-Hand style shown
☆ Takes Right-hand or neutral insert

VC.. Series - Toolholders

Figure	Code No.		Item Number	Stock		Dimensions (mm)								Gage insert	Spare Parts	
	R	L		R	L	D_s	h	b	L_1	h_1	f	L_2	g			
	N			N												
1	5393731	5415815	SVXC ^{R/L} 1012X11N	●	●	—	10	12	120	10	0.0	—	—	VC□□1103 E35•49~50	LRIS-2.5*7	CLR-15S
	5393749		1212X11N	●			12		12							
2		5917182	Y-SVXCL12-11S	●		—	12	12	120	—	—	20	—	VC□□1103 E35•49~50	LRIS-2.5*7	CLR-15S
3	5744776		SVQC ^{R/L} 20-X11	●		—	20	20	120	20	—	—	—		LRIS-2.5*7	CLR-15S
4	5523238		SVVC ^{R/L} 1212X11N	●		—	12	12	120	12	5	—	—	VC□□1103 E35•49~50	LRIS-2.5*7	CLR-15S
	5523212		1616X11N	●			16	16	16							
5	5877998		SVVCN0808H11N	●		—	8	8	100	8	4	—	—	VC□□1103 E35•49~50	LRIS-2.5*7	CLR-15S
	5461835		SVVCN1010X11N	●			10	10	120	10	5	—	—			
	5744792		N20-X11	●			20	20	20	10						
6	5601778		DS-SVX ^{R/L} 14F-11	●		14.000	13	13	80					VC□□1103 E35•49~50	LRIS-2.5*7	CLR-15S
	5418413		15H-11	●		15.875	15	15	100							
	5601752		16F-11*	●		16.000			80							
	5393756		19-11	●					120							
	5572722		19-11SPL	●		19.050	18	18	160	11.0	—	—				
	5520663		20X-11	●		20.000	19	19	95							
	5393764		20-11	●					120							
	5486675		22-11*	●		22.000	21	21		10.0						
	5953252		25-11MET	●		25.000	24	24	150							
	5486683		25-11	●		25.400										
7	5997077		CH-SVUC ^{R/L} 1010H11	●		—	10	10	100	10	18	—	2	VC□□1103 E35•49~50 TFV E51	LRIS-2.5*7	CLR-15S
	5995634		1212H11	●		—	12	12	100	12	20	—	0			
	5997085		1616H11	●		—	16	16	100	16	24	—	0			
	5997093		2020H11	●		—	20	20	100	20	28	—	0			

*Compatible with 16mm / 22mm round shank DS Series holders. DS-Sleeve → G104

Front Turning

Toolholders for VP.. Inserts

SVXP-N


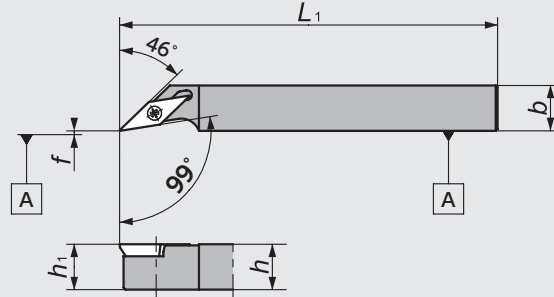


Figure-1

● Right-Hand style shown

SVQP-N

<Dimension of recessed groove>

R	ap	φD (Min)
0.05	0.2	2.5
	0.5	4.5
0.08	0.2	2.5
	0.5	4.5
0.18	0.2	3.5
	0.5	5.5
0.2	0.2	3.5
	0.5	5.5


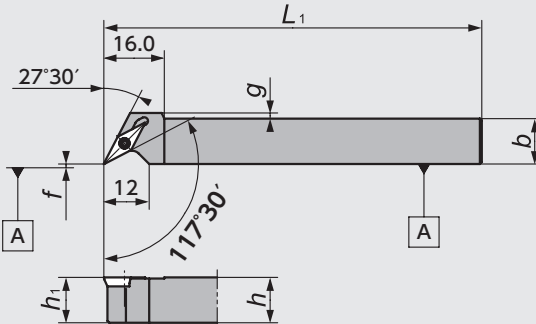



Figure-2

● Right-Hand style shown

CH-SVUP


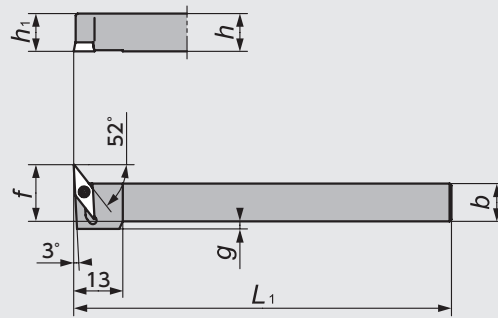


Figure-3

● Left-Hand style shown
☆ Takes Right-hand or neutral insert

DS-SVVP

(DS Holder)


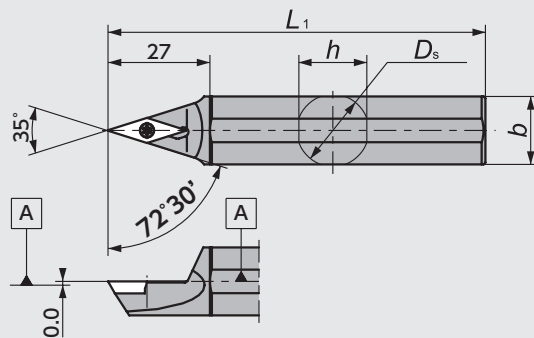


Figure-4

DS-SVVP-ACH

(DS-holder with Adjustable centerline height)

Shank	Wedge	Screw for Wedge
φ16		WS060415-003 (5795539)
φ19.05	ACH-W18 (5805601)	
φ20		
φ22		WS060419-004 (5799226)
φ25.4	ACH-W24 (5805619)	

Adjustable range 0-+0.2



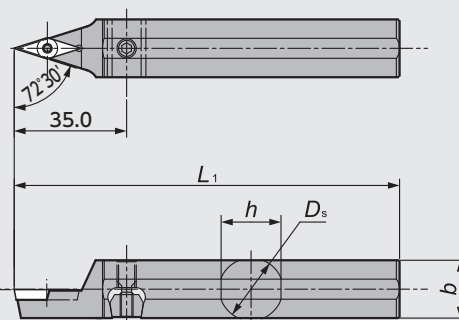



Figure-5

DS-SVXP

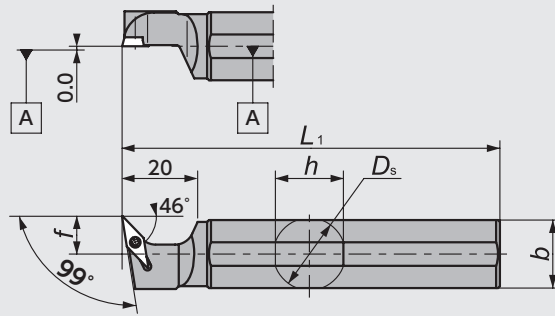(DS Holder)



● Left-Hand style shown
☆ Takes Right-hand or neutral insert

Figure-6

New Products

Tool Materials / Selection Guide

PCD, PCD and Ceramics
Micrograin Carbide, PVD Coated Carbide

Insert Item List

General Turning Toolholders

Unique Swiss Tooling

Grooving / Side Turning

Threading

Shaper

ID Tooling

Application Introduction

Endmills

Rotating Tools

Information

Index

VP.. Series - Toolholders



Figure	Code No.		Item Number	Stock		Dimensions (mm)						Gage Insert	Spare Parts			
	R	L		R	L	D_s	h	b	L_1	h_1	f	g		Clamp Screw	Wrench	
1	5511506	5511514	SVXP ^{R/L} 1012X11N	●	●	—	10.0	12	120	10	0.0	—	VP 1103 E50	LRIS-2.5*7	CLR-15S	
	5511522	5511548	1212X11N	●	●		12.0	12	120	12						
2	5600622	5600614	SVQP ^{R/L} 1010X08N	●	●	—	10.0	10	120	10	0.0	1.5	VP 0802 E50	LRIS-2*6	CLR-13S	
	5600598	5600606	1212X08N	●	●		12.0	12								10
	5600580	5600564	1616X08N	●	●		16.0	16								—
3		5659206	CH-SVUP ^{R/L} 1010H08	●	●	—	10.0	10	100	10	15	2	VP 0802 E50	LRIS-2*6	CLR-13S	
		5659214	1212H08	●	●		12.0	12								12
4	5511555		DS-SVVPN19-11	●	●	19.050	18.0	18	120	—	—	—	VP 1103 E50	LRIS-2.5*7	CLR-15S	
	5511563		N22-11	●	●	22.00	21.0	21								
5	5805643		DS-SVVPN16-11-ACH*	●	●	16.000	15.5	15	120	—	—	—	VP 1103 E50	LRIS-2.5*7	CLR-15S	
	5799655		N19-11-ACH	●	●	19.050	18.0	18								
	5799663		N20-11-ACH	●	●	20.000	19.0	19								
	5799671		N22-11-ACH*	●	●	22.000	21.0	21								
	5807524		N25-11-ACH	●	●	25.400	24.0	24								150
6	5534003		DS-SVXP ^{R/L} 19-08	●	●	19.050	18.0	18	120	—	10	—	VP 0802 E50	LRIS-2*6	CLR-13S	
	5534011		20-08	●	●	20.000	19.0	19								
	5600549		22-08*	●	●	22.000	21.0	21								
	5533997		25-08	●	●	25.400	24.0	24								150

*Compatible with 16mm / 22mm round shank DS Series holders. DS-Sleeve → G104

Toolholders for TFX / TF .. inserts

TFT-OH2

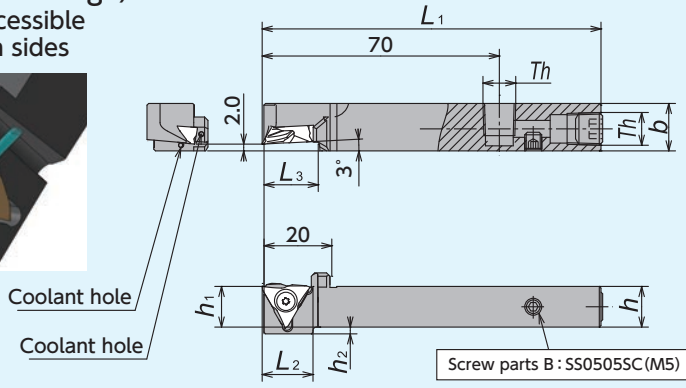(Coolant through)
Screw accessible from both sides




Coolant hole
Coolant hole

Screw parts B : SS0505SC (M5)

Th (Screw parts A)
1014 size : SS0605SC (M6×1.0)
1214/1616 size : SPR1/8 (Rc1/8)

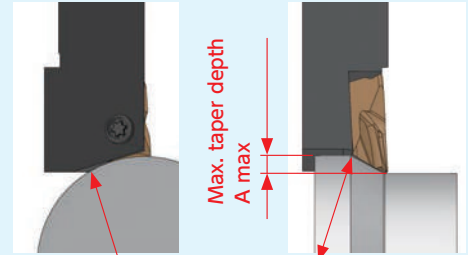● Right-Hand style shown



Taper cut capability



Max. bar diameter when cutting at A max (D max)

Max. taper angle T max



Item Number	Taper cut capability		
	D max	A max	T max
TFTR 1014H-OH2	20	2.5	30 °
1214H-OH2	30		
1616X-OH2	40		

Item Number	Stock	Dimensions (mm)							Spare Parts	
		h	b	L ₁	h ₁	h ₂	L ₂	L ₃	Clamp screw	Wrench
										
TFTR 1014H-OH2	●	10	14	100	10	4	15	15	LR-S-4*10PW	CLR-15S
1214H-OH2	●	12	14	100	12	2	15	15	LR-S-4*10PW	CLR-15S
1616X-OH2	●	16	16	120	16	—	—	17.5	LR-S-4*10PW	CLR-15S



When coolant is supplied from the tool post directly to the tools, please remove screw parts [B] and set screw parts A at side and rear of toolholder.
Wrench for screw parts [A] (SS0605SC) is not attached.
Please use hex wrench 3.0 (LW-3) for SS0605SC, hex wrench 5.0 (LW-5) for SPR1/8.

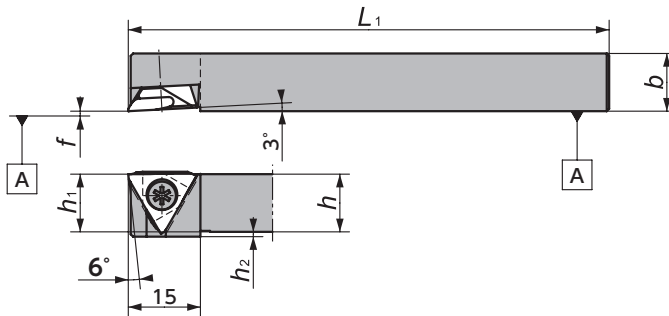TFT


Screw accessible from both sides



● Right-Hand style shown
※ No capability for taper cut


Item Number	Stock	Dimensions (mm)						Spare Parts	
		h	b	L ₁	f	h ₁	h ₂	Clamp screw	Wrench
									
TFTR 10	●	10	10	120	0.0	10	3	LR-S-4*10PW	CLR-15S
12	●	12	12	120	0.0	12	1		
16	●	16	16	120	0.0	16	—		
20	●	20	20	120	0.0	20	—		

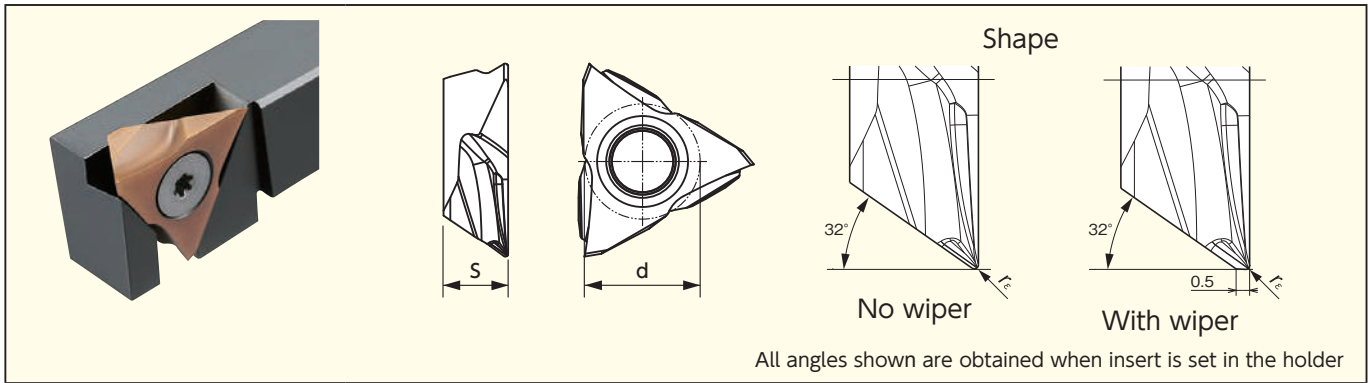NEW TFX Series - inserts (3D mold chipbreaker)



shape	Max. DOC (mm)	Wiper	Item number	Dimension (mm)			PVD coated carbide		
				r_ϵ	d	s	ST4	DM4	ZM3
	5.0	No	TFX 3301MR	0.08	9.525	4.76	●	●	
			3302MR	0.18	9.525	4.76	●	●	
			3304MR	0.38	9.525	4.76	●	●	
		Yes	TFX 3301MRW	0.08	9.525	4.76	●	●	
			3302MRW	0.18	9.525	4.76	●	●	
			3304MRW	0.38	9.525	4.76	●	●	

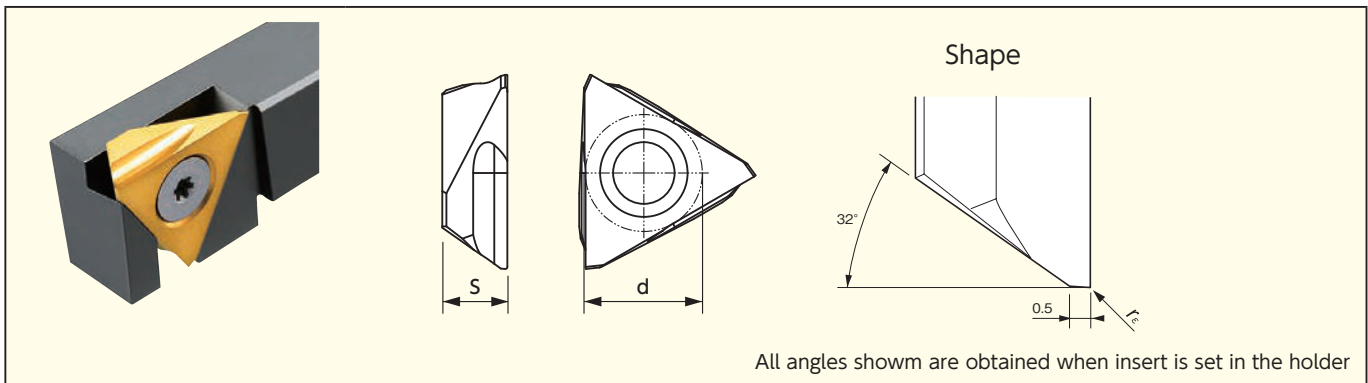TF Series - inserts (Ground chipbreaker)



shape	Max. DOC (mm)	Wiper	Item number	Dimension (mm)			PVD coated carbide		
				r_ϵ	d	s	ST4	DM4	ZM3
	4.0	Yes	TF 3300R	0.0	9.525	4.76			●
			3305R	0.05	9.525	4.76			●
			3315R	0.15	9.525	4.76			●
			3320R	0.2	9.525	4.76			●

Front Turning

Toolholders for TC.. Inserts

STAC-N


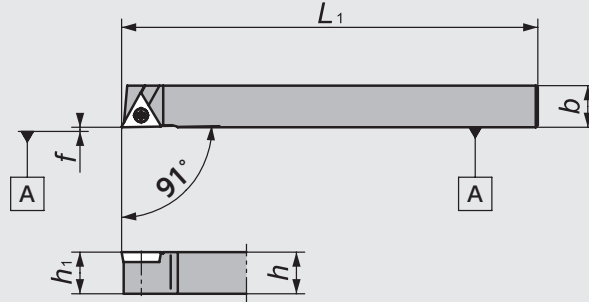


Figure-1

● Right-Hand style shown

CH-STUC


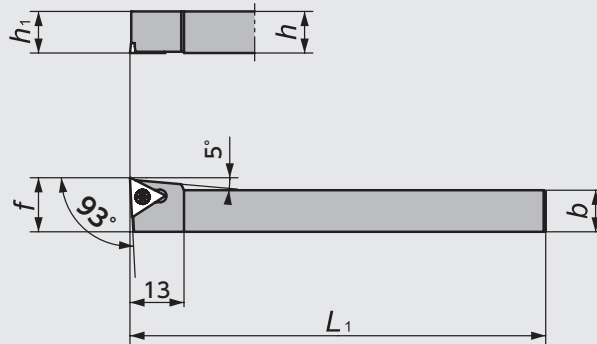










Figure-2

● Left-Hand style shown
☆ Takes Right-hand or neutral insert

TC.. Series - Toolholders

Figure	Code No.		Item Number	Stock		Dimensions (mm)					Gage insert	Spare Parts	
	R	L		R	L	h	b	L ₁	h ₁	f		Clamp Screw	Wrench
1	5137005	5137831	STAC [®] 0808X09N	●		8	8	120	8	0.0	 TC  0902 E46 TFT09 E48	 LRIS-2.2*6	 CLR-13S
	5137096	5137948	1010X09N	●	●	10	10		10				
	5119078	5137930	1212X11N	●	●	12	12		12				
2		5659180	CH-STUC [®] 1010H09		●	10	10	100	10	13	 TC  0902 E46	 LRIS-2.2*6	 CLR-13S
		5659198	1212H09		●	12	12		12				

MEMO

NTK

New Products

Tool Materials / Selection Guide

BIDEMCS, PCD, CBN and Ceramics

Micrograin Carbide, PVD Coated Carbide

Insert Item List

General Turning Toolholders

Unique Swiss Tooling

Grooving / Side Turning

Threading

Shaper

ID Tooling

Application Introduction

Endmills

Rotating Tools


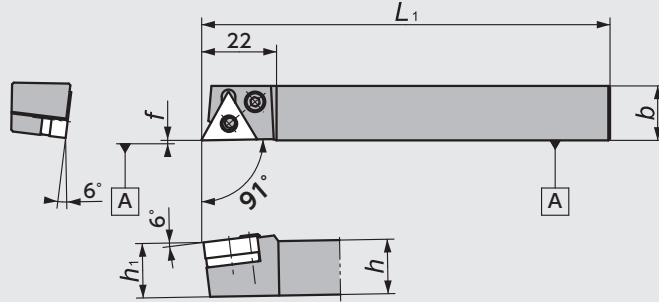
Information

Index

Toolholders for TN.. Inserts

PTAN-N

(Lever - lock)
Screw accessible from both sides





● Right-Hand style shown

Figure-1

PTLN

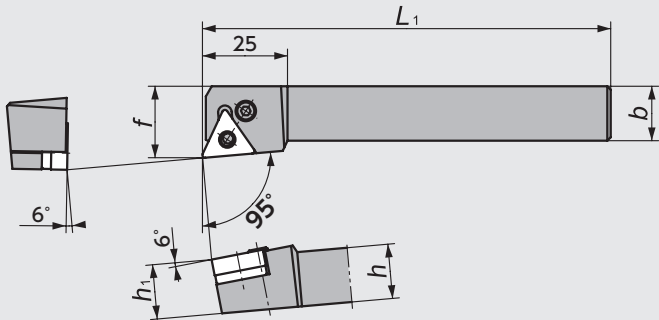(Lever - lock)
Screw accessible from both sides





● Right-Hand style shown

Figure-2

PTXN-N

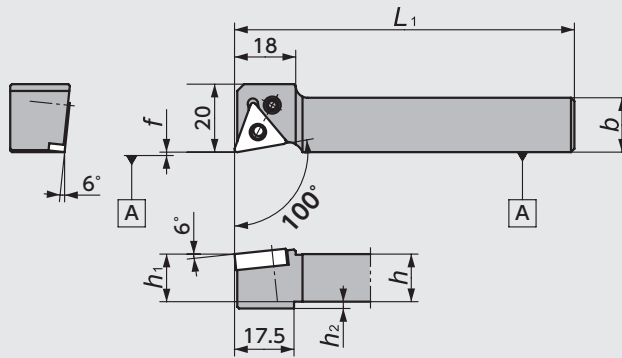(Lever - lock)





● Right-Hand style shown

Figure-3

DS-PTX

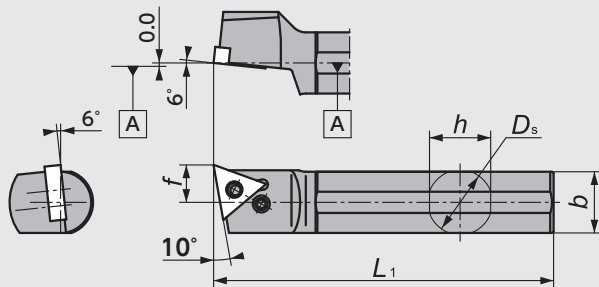(Lever - lock)
DS Holder





● Left-Hand style shown
☆ Takes Right-hand or neutral insert

Figure-4

DS-PTX-ACH

(DS-holder with Adjustable centerline height)

(Parts)		
Shank	Wedge	Screw for Wedge
φ16		WS060415-003 (5795539)
φ19.05	ACH-W18 (5805601)	
φ20		
φ22		WS060419-004 (5799226)
φ25	ACH-W24 (5805619)	
φ25.4		

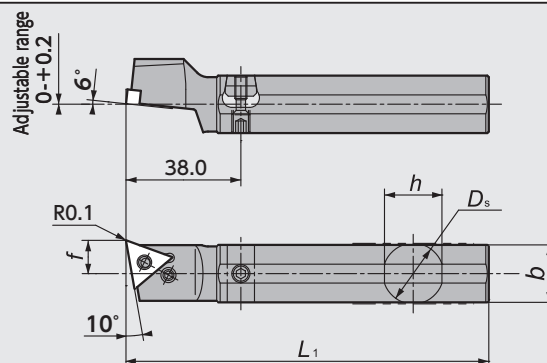

● Left-Hand style shown
☆ Takes Right-hand or neutral insert

Figure-5

STXNR-N

Screw-on


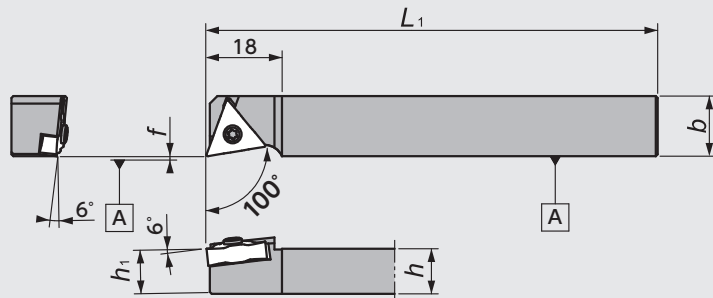


Figure-6

※Only for UL Chipbreaker

●Right-Hand style shown

New Products

Tool Materials / Selection Guide
BIDEMCS, PCD, CBN and Ceramics
Micrograin Carbide, PVD Coated Carbide

Insert Item List

General Turning Toolholders

Unique Swiss Tooling

Grooving / Side Turning

Threading

Shaper

ID Tooling

Application Introduction

Endmills

Rotating Tools

Information

Index

TN.. Series - Toolholders

Figure	Code No.		Item Number	Stock		Dimensions (mm)							Gage insert	Spare Parts					
	R	L		R	L	D _s	h	b	L ₁	h ₁	f	h ₂		Shim	Clamp Pin	Clamp Screw	Spring	Wrench	
1	5252325		PTAN ^{R/L} 1616X33N	●		—	16	16	120	16	0.0	—	TN ^{□□□□} 1604 E25~26• 37	LST317	LCL3	LCS3	LSP3	LW-2.5	
2	5552336	5552344	PTLN ^{R/L} 2020L33	●	●	—	20	20	140	20	25	—	TN ^{□□□□} 1604 E25~26• 37	LST317	LCL3	LCS3	LSP3	LW-2.5	
3	5479860		PTXN ^{R/L} 1016X33N	●		—	10	16	120	10	0.0	2	TN ^{□□□□} 1604 E25~26• 37	/	LCL33N	LCS33	/	LW-2	
	5016183		1216X33NGX	●			85		12										
	5479852		1216X33N	●			120		16										
	5489901		1616X33N	●			16		16										
	5513965		2020X33N	●			20		20										
4	5815766		DS-PTX ^{R/L} 16-33	★		16.00	15	18	120	—	—	—	TN ^{□□□□} 1604 E25~26• 37	/	LCL33N	LCS33	/	LW-2	
	5519707		19-33	●		19.05	18	18											11.0
	5519715		20-33	●		20.00	19	19											12.0
	5591029		22-33*	●		22.00	21	21											13.0
	5519699		25M-33	●		25.40	24	24											150
5	5805650		DS-PTX ^{R/L} 16-33-ACH*	●		16.00	15.5	15	120	—	—	—	TN ^{□□□□} 1604 E25~26• 37	/	LCL33N	LCS33	/	LW-2	
	5799689		19-33-ACH	●		19.05	18	18											11.0
	5799697		20-33-ACH	●		20.00	19	19											12.0
	5799705		22-33-ACH*	●		22.00	21	21											13.0
	5934039		25-33MET-ACH	●		25.00	24	24											150
	5799713		25-33-ACH	●		25.40	24	24											150

Figure	Code No.		Item Number	Stock		Dimensions (mm)							Gage insert	Spare Parts	
	R	L		R	L	D _s	h	b	L ₁	h ₁	f	h ₂		Clamp Screw	Wrench
6	5837893		STXNR1016X33N	●		—	10	16	120	10	0	—	TNGG1604□□ MFNUL E37	LR-S-3.5x10	LLR-20S
	5016191		1216X33NGX	●			85		12						
	5837901		1216X33N	●			120		16						
	5837919		1616X33N	●			16		16						

※Compatible with 16mm / 22mm round shank DS Series holders. DS-Sleeve → G104

Toolholders for CN.. Inserts

PCLN-N

(Lever - lock)

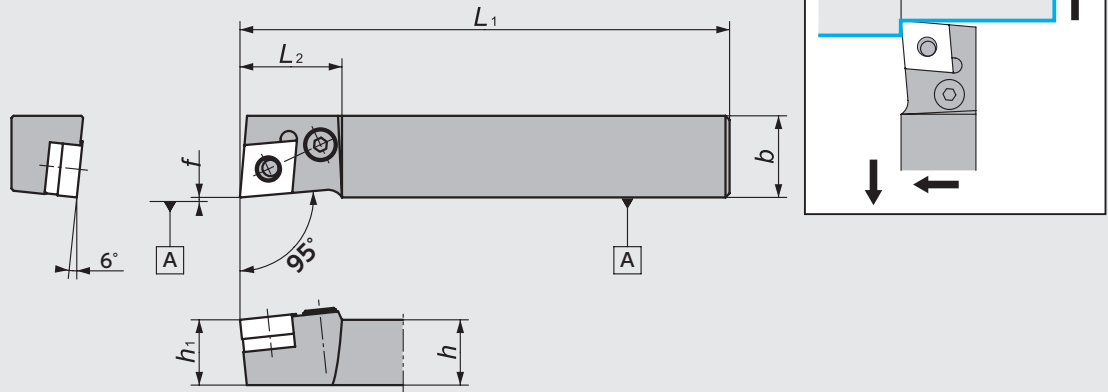


Figure-1

● Right-Hand style shown

PCLN

(Lever - lock)
Screw accessible from both sides

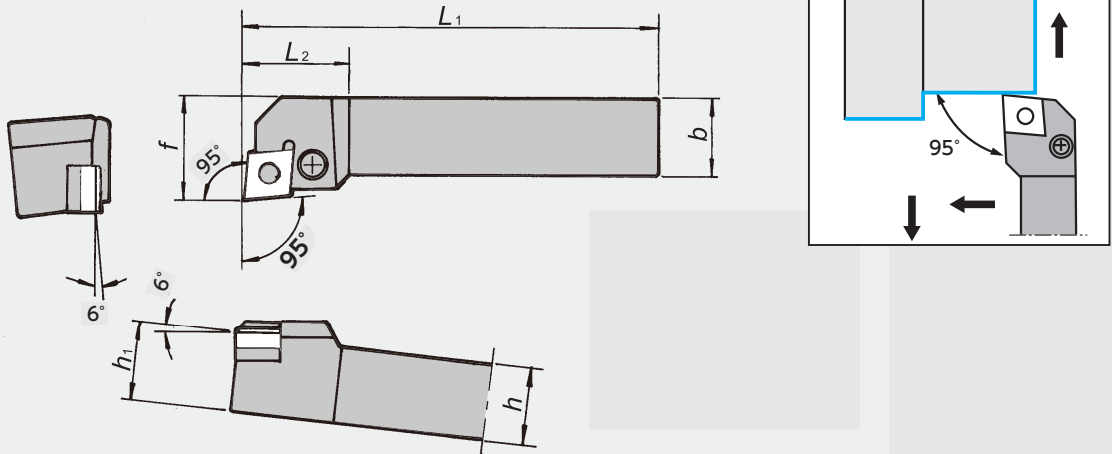


Figure-2

● Right-Hand style shown

CN.. Series - Toolholders

Figure	Code No.		Item Number	Stock		Dimensions (mm)						Gage insert	Spare Parts				
	R	L		R	L	h	b	L_1	h_1	f	L_2		Shim	Clamp Pin	Clamp Screw	Spring	Wrench
1	5259056		PCLN _{R/L} 1620X43N	●		16	20	120	16	0.0	25	CN _E 1204 E20~21• 36	LSC42	LCL4	LCS4CA	LSP4	LW-3
2	5321997	5322003	PCLN _{R/L} 2020K43	●	●	20	20	125	20	25	28	CN _E 1204 E20~21• 36	LSD42	LCL4	LCS4	LSP4	LW-3
	5322011	5322029	2525M43	●	●	25	25	150	25	32	28						

※For other shank sizes, please contact us for more information.

Toolholders for DN.. Inserts

PDJN-N

(Lever - lock)

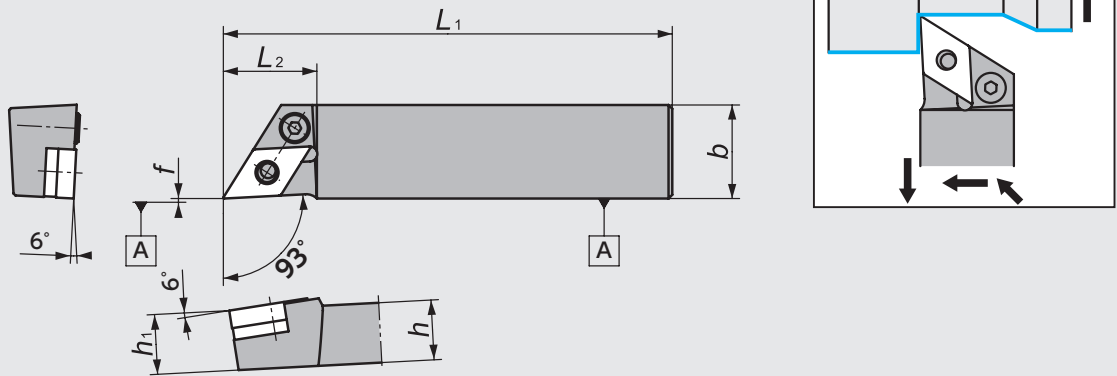


Figure-1

● Right-Hand style shown

PDJN

(Lever - lock)
Screw accessible from both sides

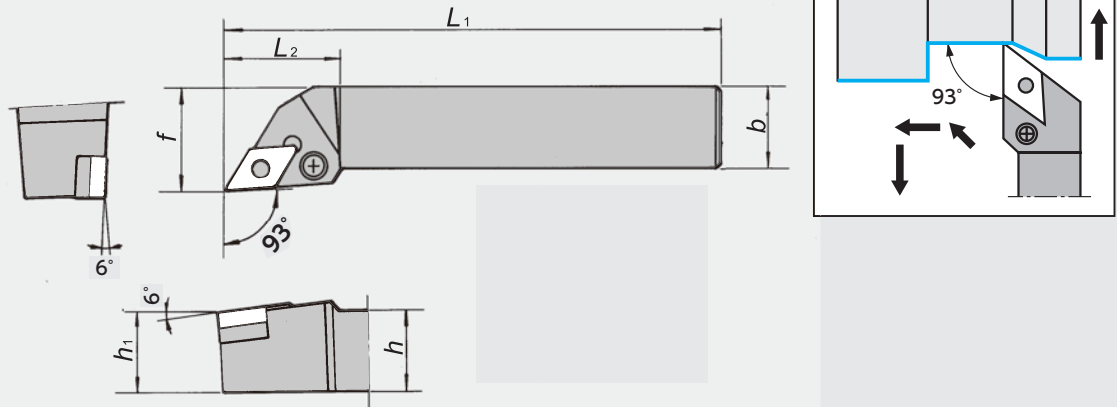


Figure-2

● Right-Hand style shown

DN.. Series - Toolholders

Figure	Code No.		Item Number	Stock		Dimensions (mm)						Gage insert	Spare Parts				
	R	L		R	L	h	b	L ₁	h ₁	f	L ₂		Shim	Clamp Pin	Clamp Screw	Spring	Wrench
1	5259072		PDJN _{R/L} 1625X43N	●		16	25	120	16	0.0	25	DN _{E22~23} 1504 36	LSD42	LCL4	LCS4CA	LSP4	LW-3
2	5322037	5322045	PDJN _{R/L} 2020K43	●	●	20	20	125	20	25	32	DN _{E22~23} 1504 36	LSD42	LCL4	LCS4	LSP4	LW-3
	5682463		2525M43	●		25	25	150	25	32							

※For other shank sizes, please contact us for more information.

MEMO

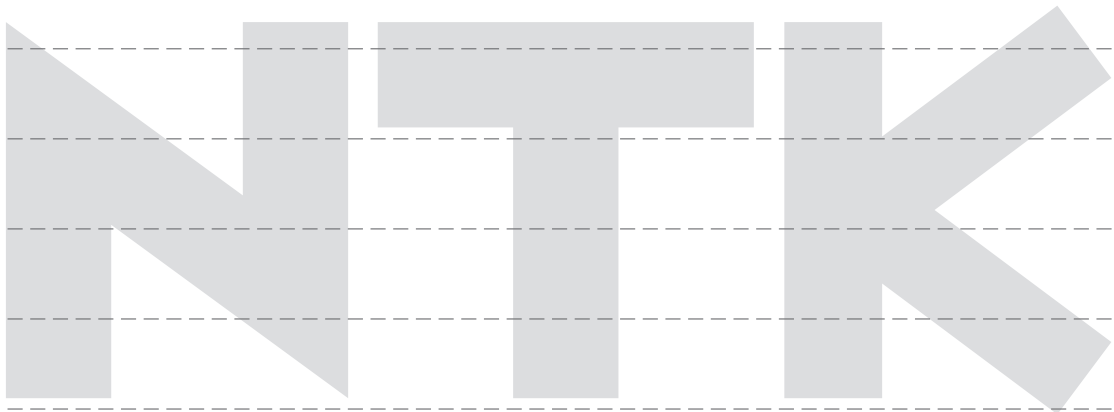
Unique Swiss Tooling

Front Turning

Back Turning

Cut-off

Original Series








Back Turning

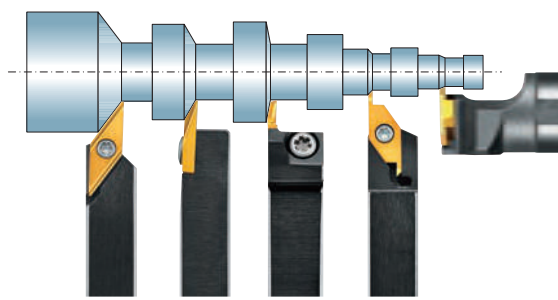





● Back Turning Tools	G44
● Recommended Cutting Conditions ..	G45
● General Information	G46
● Tool List	G50
CSV Series	G50
CTPS Series	G51
TBP Series	G52
TBPA Series	G54
TBVC Series	G56
TBDP Series	G57
TB Series	G58
TBMH Series	G60



NTK Back Turning Tools - Product Lines













a: Length of Blade
b: Max Depth of Cut

Insert	CSVB →G50
	CSV-NC
Holder	
	→G50
a	~1.0mm
b	~2.0mm
Shift amount	1.1~1.5mm

Insert	TBPS →G51	TBP →G53				
	CTPS	TBP	TBP-OH2/OH	Y-TBP	Y-TBP-OH	DS-TBP
Holder						
	→G51	→G52	→G52	→G52	→G52	→G52
			Coolant through	Y-axis	Y-axis/Coolant through	DS holder
a	~4.8mm			~4.8mm		
b	~4.8mm			~5.3mm		
Shift amount	2.4mm			3.5mm		


Insert	TBPA →G55	
	CTPA	TBPA-OH
Holder		
	→G54	→G54
		Coolant through
a		~6.3mm
b		~6.8mm
Shift amount		3.4mm

Insert	TBDP →G57	TB →G59	VC..1103.. →E49 ~ 50		VC..1303.. →E49
	TBDP	Y-TBDP	TBVC →G56		
Holder					
	→G57	→G57	→G56	→G56	→G62
		Y-axis			
a	3.5mm	~4.0mm	8.0mm	—	—
b	~5.0mm	~8.8mm	8.0mm	—	—
Shift amount	2.05mm	4.0mm	7.5/10mm	10mm	—

Insert	TBMH →G61				
	GTT	GTT-OH2/OH	Y-GTT	Y-GTT..-OH	DS-GTT
Holder					
	→G60	→G60	→G60	→G60	→G60
		Coolant through	Y-axis	Y-axis/Coolant through	
a			~1.3mm		
b			~2.7mm		
Shift amount			1.0/1.5mm		

Recommended Cutting conditions

Work Material		Cutting Speed (m/min)	CSV		TBP/TBPA-BM		TBP/TBPA/TBPS/TBVC/TBMH		TB32/TB43	
Common Name	JIS		Grade	Feed Rate (mm/rev)	Grade	Feed Rate (mm/rev)	Grade	Feed Rate (mm/rev)	Grade	Feed Rate (mm/rev)
Low Carbon Steel	S10C } S30C	50 80 120	DT4 VM1	X0.02 (0.005-0.03) Z0.03 (0.005-0.04)	TM4 DM4	X0.02 (0.01-0.03) Z0.06 (0.05-0.1)	QM3 ZM3	X0.02 (0.01-0.03) Z0.04 (0.02-0.06)	ZM3	X0.02 (0.01-0.04) Z0.06 (0.03-0.1)
Carbon Steel	S45C } S55C	50 80 100	DT4 VM1	X0.02 (0.005-0.03) Z0.02 (0.005-0.04)	DM4 TM4	X0.02 (0.01-0.03) Z0.06 (0.05-0.1)	QM3 ZM3	X0.02 (0.01-0.03) Z0.04 (0.02-0.06)	ZM3	X0.02 (0.01-0.04) Z0.06 (0.03-0.1)
Alloy Steel	SCr415 } SCr440	50 80 100	DT4 VM1	X0.02 (0.005-0.03) Z0.03 (0.005-0.04)	DM4 TM4	X0.02 (0.01-0.03) Z0.06 (0.05-0.1)	QM3 ZM3	X0.02 (0.01-0.03) Z0.04 (0.02-0.06)	ZM3	X0.02 (0.01-0.04) Z0.06 (0.03-0.1)
Stainless Steel (Austenitic)	SUS303	50 90 130	ZM3 DT4	X0.02 (0.005-0.03) Z0.03 (0.005-0.04)	ST4 DT4	X0.02 (0.01-0.03) Z0.06 (0.05-0.1)	ZM3	X0.02 (0.01-0.03) Z0.04 (0.02-0.07)	ZM3	X0.02 (0.01-0.04) Z0.06 (0.03-0.1)
Stainless Steel (Austenitic)	SUS304 SUS316 SUS316L	40 70 100	DT4 VM1	X0.02 (0.005-0.03) Z0.03 (0.005-0.04)	ST4 DT4	X0.02 (0.01-0.03) Z0.06 (0.05-0.1)	QM3 ZM3	X0.02 (0.01-0.03) Z0.04 (0.02-0.06)	ZM3	X0.02 (0.01-0.04) Z0.06 (0.03-0.1)
Stainless Steel (Ferritic)	SUS430 SUS430F	50 90 130	VM1 ZM3	X0.02 (0.005-0.03) Z0.03 (0.005-0.04)	ST4 DT4	X0.02 (0.01-0.03) Z0.06 (0.05-0.1)	VM1 ZM3	X0.02 (0.01-0.03) Z0.04 (0.02-0.06)	ZM3	X0.02 (0.01-0.04) Z0.06 (0.03-0.1)
Stainless Steel (Martensitic) (Precipitation hardenic)	SUS440C SUS630	40 60 90	DT4 VM1	X0.02 (0.005-0.03) Z0.02 (0.005-0.04)	ST4 DT4	X0.02 (0.01-0.03) Z0.06 (0.05-0.1)	QM3 TM4	X0.02 (0.01-0.03) Z0.04 (0.02-0.06)	ZM3	X0.02 (0.01-0.04) Z0.05 (0.03-0.1)
Sulfur free cutting steel Sulfur complex free cutting steel	SUM22 SUM23 SUM24L	50 120 150	VM1 DT4	X0.02 (0.005-0.03) Z0.03 (0.005-0.04)	TM4	X0.02 (0.01-0.03) Z0.06 (0.05-0.1)	VM1 ZM3	X0.02 (0.01-0.03) Z0.04 (0.02-0.06)	ZM3	X0.02 (0.01-0.04) Z0.06 (0.03-0.1)
Electromagnetic soft iron	SUY-0 SUY-1 SUY-2	200 300 350	VM1 DT4	X0.02 (0.005-0.03) Z0.03 (0.005-0.04)	DT4	X0.02 (0.01-0.03) Z0.06 (0.05-0.1)	VM1 ZM3	X0.02 (0.01-0.03) Z0.04 (0.02-0.06)	ZM3	X0.02 (0.01-0.04) Z0.06 (0.03-0.1)
Electromagnetic stainless		50 80 120	DT4 VM1	X0.02 (0.005-0.03) Z0.02 (0.005-0.04)	DT4	X0.02 (0.01-0.03) Z0.06 (0.05-0.1)	QM3	X0.02 (0.01-0.03) Z0.04 (0.02-0.06)	ZM3	X0.02 (0.01-0.04) Z0.06 (0.03-0.1)
High-carbon chromium bearing steel	SUJ2	50 80 120	DT4 VM1	X0.02 (0.005-0.03) Z0.02 (0.005-0.04)	DM4 TM4	X0.02 (0.01-0.03) Z0.06 (0.05-0.1)	QM3	X0.02 (0.01-0.03) Z0.04 (0.02-0.06)	ZM3	X0.02 (0.01-0.04) Z0.06 (0.03-0.1)
Titanium alloy	6AL-4V 6AL-4VELI	50 70 110	DT4 ZM3	X0.02 (0.005-0.03) Z0.03 (0.005-0.04)	TM4	X0.02 (0.01-0.03) Z0.06 (0.05-0.1)	TM4 ZM3	X0.02 (0.01-0.03) Z0.04 (0.02-0.06)	ZM3	X0.02 (0.01-0.04) Z0.06 (0.03-0.1)
Aluminum alloy	A5052 A6061 A7025	50 160 250	ZM3	X0.02 (0.005-0.03) Z0.03 (0.005-0.04)	TM4	X0.02 (0.01-0.03) Z0.06 (0.05-0.1)	PD1 KM1	X0.02 (0.01-0.03) Z0.04 (0.02-0.07)	ZM3	X0.02 (0.01-0.04) Z0.06 (0.03-0.15)

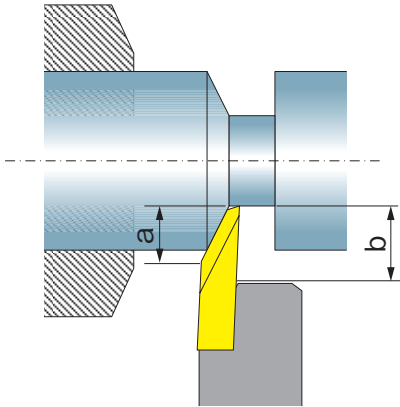

Recommended max. depth of cut for each pass



(Multiply this ratio by the length of blade (a) to obtain the max. depth of cut for each pass)

Work material	Grade	PVD Coated Carbide ST4·QM3·DT4·DM4·TM4·VM1·ZM3
Steel		a x 0.7
Stainless Steel		a x 0.6
Non-ferrous material		a x 0.9
Plastic		a x 0.9

a : Length of Blade b : Max. Depth of Cut

When the length of blade (a) is not long enough

Back turning can be performed multiple times until the total depth of cut reaches (b).

End face	
NTK BM-chipbreaker	Competitor
	
Excellent surface	Rough surface

When experiencing rough finish on shoulder

Turning the shoulder twice can improve the finish.
 This problem can be solved by using TBP-BM, TBPA-BM, TBDP inserts without increasing the number of passes

TBP-BM, TBPA-BM, TBDP come with NTK's uniquely designed molded chipbreaker providing single pass machining. These inserts can provide excellent surface finish.

TBP-BM →G53
 TBPA-BM →G55
 TBDP →G57

Finishing cut

Roughed section goes into the guide bushing when performing finish cuts. (Deburring may be needed upon roughing)

TBP
→G52

TBDP-L
→G57

TBVCR·F10
→G56

TBDP Left-hand toolholder will eliminate the risky process of pulling back the turned bar stock into the guide-bushing for finishing process, because its cutting point is away from the guide-bushing.

Cutting edge is located away from the guide-bushing. Roughing can be performed without retracting roughed part from guide-bushing.

Undercut

Assume undercut exists on back turning section
 $\theta = 22^\circ$ type
 $\theta = 45^\circ$ type


TBMH style inserts should be used to cut the undercut
 Inserts →G61
 Holders →G60

TBP-BM / TBPA-BM for Back Turning


Features

- "Single Pass Back Turning" offers excellent surface finishes
- Up-right style insert and screw clamping provides high rigidity
- Wiper flat on cutting edge offers excellent surface finishes even under high feed cutting conditions

New BM chipbreaker





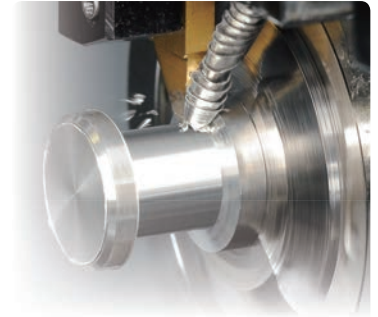- Prevents the rough end face from hitting the chip
- Wiper flat on cutting edge creates excellent surface finishes



Best Solution for Chip Control

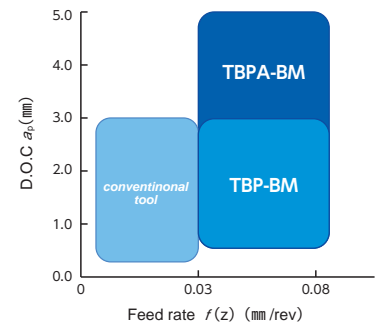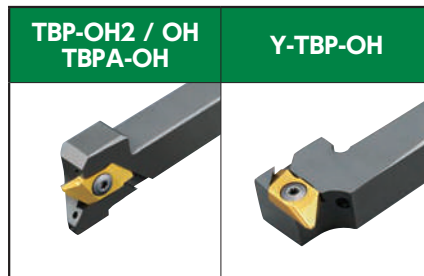Coolant through toolholders now available



Superior Surface Finish

1Pass 	BM chipbreaker		Competitor's tool	
	End face	OD	End face	OD
	 Excellent surface	 Ra : 0.72 μm Rz : 4.46 μm	 Rough surface	 Ra : 1.65 μm Rz : 6.01 μm


Material : SUS304 ($\phi 16$) , Cutting condition : $v_c=80\text{m/min}$ $f(x)=0.02\text{mm/rev}$ $f(z)=0.08\text{mm/rev}$ $a_p=3.0\text{mm}$ WET

Excellent Chip Control

Feed rate $f(z)$ (mm/rev)	BM chipbreaker		Competitor	
	0.05	0.08	0.05	0.08
0.5				
3.0				

Material : SUS304 ($\phi 16$) , Cutting condition : $v_c=80\text{m/min}$ WET

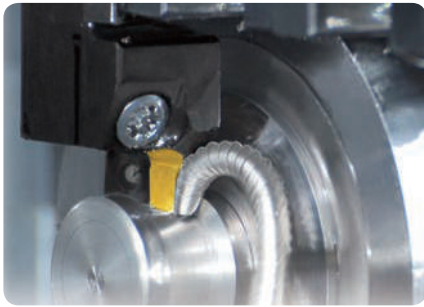BACK DUO




Features


- New chipbreaker covers a wide range of cutting conditions
- No-compromise quality back turning tools
- High quality finish in a single pass
- No finishing cut required → Reduced cycle time
- Multi point clamping system ensures rigidity

New 3D chipbreaker

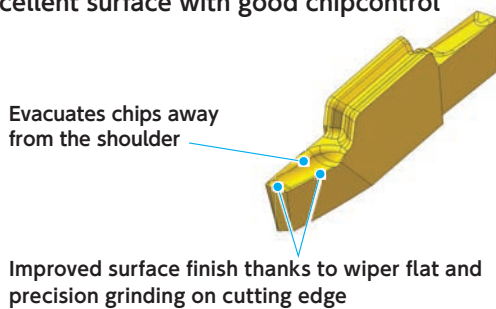Excellent surface with good chipcontrol



Chip control range

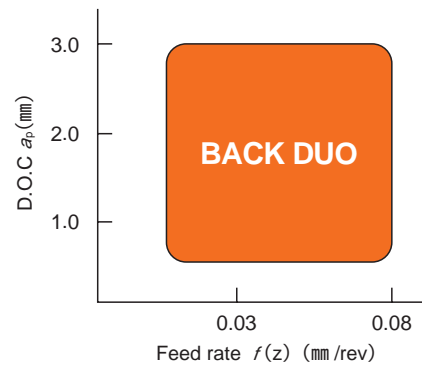

Surface finish comparison for SUS304

1Pass End face Diameter	BACK DUO		Competitor	
	End face	Diameter	End face	Diameter
 Excellent surface	 Ra : 0.90 μm Rz : 4.11 μm	 Rough surface	 Ra : 2.16 μm Rz : 10.28 μm	
				Work material : SUS304 Holder : TBDPR12 Insert : TBDP2201MR TM4 Cutting condition : $v_c=80\text{m/min}$ $f(x)=0.02\text{mm/rev}$ $f(z)=0.08\text{mm/rev}$ $a_p=3.0\text{mm}$ WET

Chip control comparison


SUS304		BACK DUO		Competitor	
		$f(z)$ (mm/rev)			
Depth of cut a_p (mm)	3.0	0.05	0.08	0.05	0.08
				Incredible chip control 	
Work material : SUS304 Holder : TBDPR12 Insert : TBDP2201MR TM4 Cutting condition : $v_c=80\text{m/min}$ $f(x)=0.02\text{mm/rev}$ $f(z)=0.08\text{mm/rev}$ $a_p=3.0\text{mm}$ WET					

Holders → G57

Inserts → G57

CTPS Series

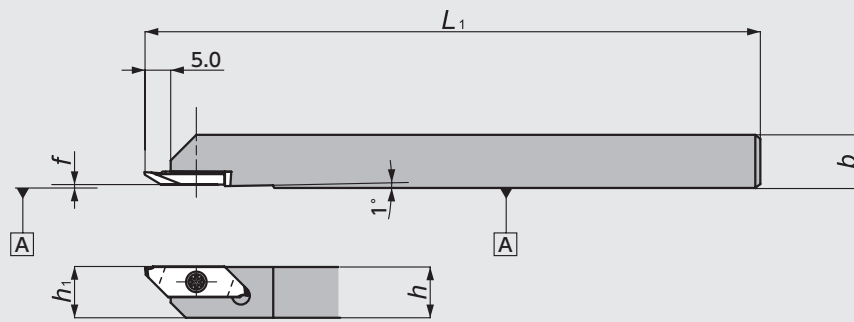CTPS



● Right-Hand style shown

CTPS Series - Toolholders

Code No.	Item Number	Stock	Dimensions (mm)					Gage insert	Spare Parts	
			<i>h</i>	<i>b</i>	<i>L</i> ₁	<i>h</i> ₁	<i>f</i>		Clamp Screw	Wrench
5346572	CTPSR10	●	10	10	120	10	0.0	TBPS	LRIS-2.5*7	CLR-15S
5397187	R12	●	12	12		12				

☆ All the inserts can use the same toolholder CTPS series → G98

TBPS Series - Inserts

Shape	Item Number	Chip-breaker	Length of Blade <i>a</i>	Max Depth of cut <i>b</i>	Dimensions (mm)		PVD Coated Carbide			
					θ	<i>r_ε</i>	ZM3	Stock	VM1	Stock
(with Chipbreaker) 	TBPS 60FR00	Yes	3.1	3.5	60°	0.0	5346150	●	5362553	●
	60FR10					0.1	5346168	●	5362561	●
(without Chipbreaker) Mirror finish 	TBPS 60FRV	No	4.8	4.8	60°	0.0	5357058	●	5362579	●

Note: All angles shown are obtained when insert is set in the holder.

TBP Series

TBP

Screw accessible from both sides



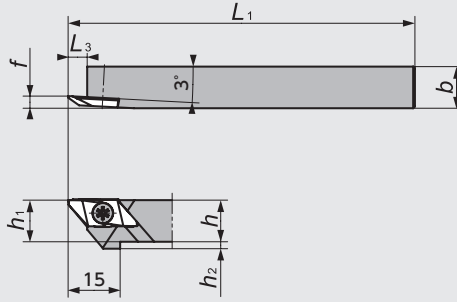


Figure-1

● Right-Hand style shown

TBP-OH2

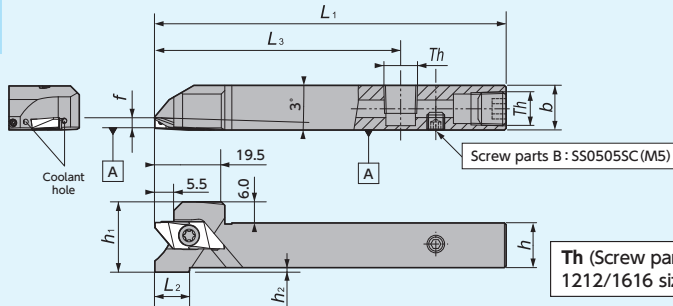(Coolant through)
Screw accessible from both sides



Th (Screw parts A)
1212/1616 size : SPR1/8(Rc1/8)





Figure-2

● Right-Hand style shown

TBP-OH

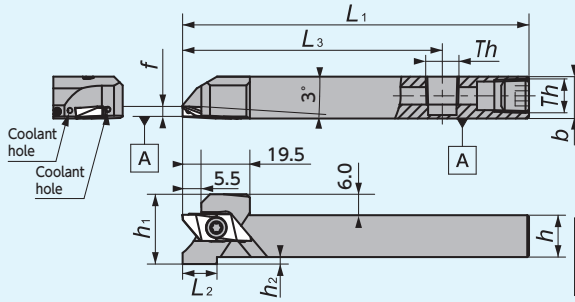(Coolant through)
Screw accessible from both sides



Th (Screw parts A)
1012 size : SS0605SC (M6×1.0)
1212/1616 size : SPR1/8(Rc1/8)




Figure-3

● Right-Hand style shown

Y-TBP

Screw accessible from both sides



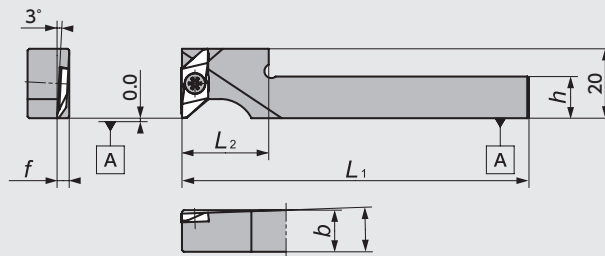


Figure-4

● Right-Hand style shown
☆ Takes Right-hand insert

Y-TBP-OH

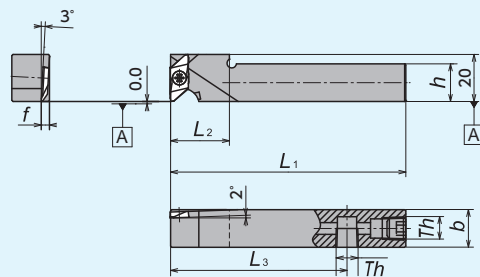(Coolant through)
Screw accessible from both sides



Th (Screw parts A)
1212/1616 size : SPR1/8(Rc1/8)




Figure-5

● Right-Hand style shown
☆ Takes Right-hand insert

DS-TBP

(DS Holder)


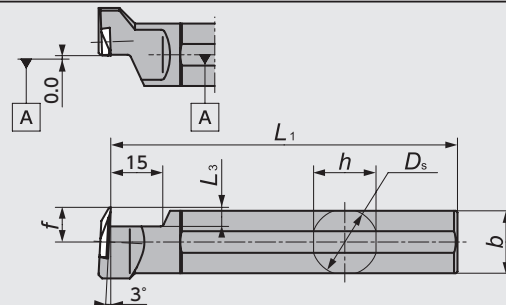



Figure-6

● Left-Hand style shown
☆ Takes Right-hand insert

TBP Series - Toolholders

Figure	Code No.		Item Number	Stock		Dimensions (mm)								Gage insert	Spare Parts			
	R	L		R	L	D_s	h	b	L_1	h_1	h_2	f	L_2		L_3	Clamp Screw		Wrench
																(A)	(B)	(A)
1	5133285	5133293	TBP $\frac{R}{L}$ 08	●	●	-	8	10	120	8	4	3.5	-	5.5	TBP	LRIS-4*10PW (A)	CLR-15S (A)	
	5873856		10H	●	●		10	10	100	10	2							
	5090436	5090444	10	●	●		12	12	85	12	0							
	5459771		12GX	●	●		13	13	120	13	0							
	5090451	5090469	12	●	●		16	16	100	16	0							
	5090477	5090485	13	●	●		16	16	120	16	0							
	5459789		16H	●	●													
5270822	5270830	16	●	●														
2	5037965		TBPR $\frac{R}{L}$ 12H-OH2	●	●	-	12	12	100	12	2	3.5	10	70	TBP	LRIS-4*12PW (A)	CLR-15S (A)	
	5043971		16X-OH2	●	●		16	16	120	16	0							
3	5925722		TBP $\frac{R}{L}$ 1012H-OH	●	●	-	10	12	100	10	4	3.5	19	75	TBP	LRIS-4*10PW (A)	CLR-15S (A)	
	5925730		12H-OH	●	●		12	12		12	2							
	5925748		16H-OH	●	●		16	16		16	0							
4	5371554		Y-TBP $\frac{R}{L}$ 10S	●	●	-	10	10	120	-	-	3.5	20	-	TBP	LRIS-4*10PW(A) LRIS-4*10PW(A) LRIS-4*12PW(A) LRIS-4*10PW(A)	CLR-15S (A)	
	5950399		10MS	●	●		10	10										22
	5371588		12S	●	●		12	12										20
	5950407		12MS	●	●		12	12										22
5	5911508		Y-TBP $\frac{R}{L}$ 12HS-OH	●	●	-	12	12	100	-	-	3.5	20	-	TBP	LRIS-4*12PW (A)	CLR-15S (A)	
	5911516		16H-OH	●	●		16	16										25
6		5540414	DS-TBP $\frac{R}{L}$ 19	●	●	19.050	18	18	120	-	-	10.0	-	5.5	TBP	LRIS-4*10 (B)	LLR-25S -20*65 (B)	
		5540422	20	●	●	20.000	19	19										
		5540430	25	●	●	25.400	24	24										150

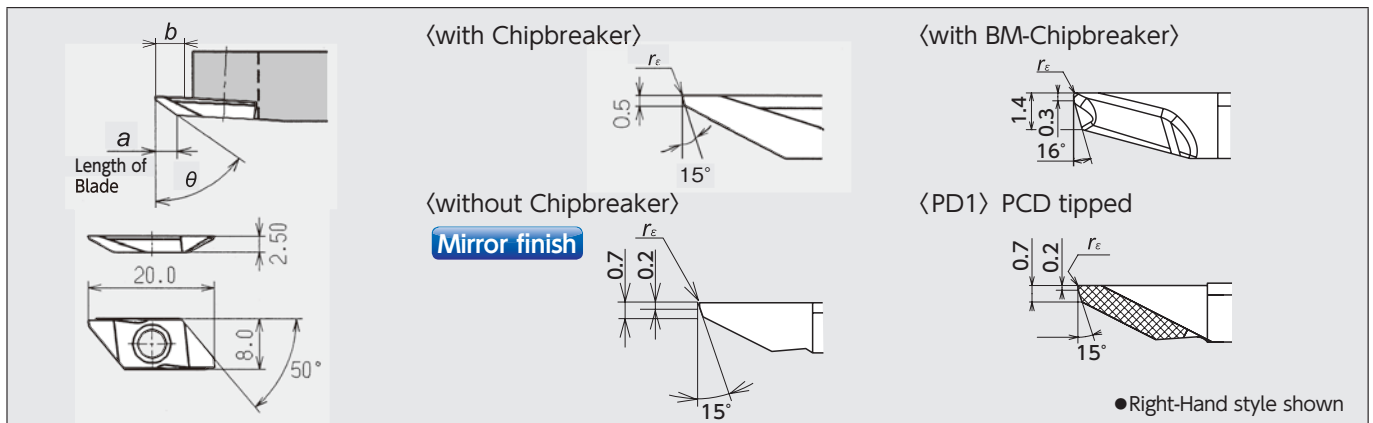TBP Series - Inserts



Item Number	Chip-breaker	Length of Blade a	Max Depth of cut b	Dimensions (mm)		PVD Coated Carbide												Carbide		PCD								
				θ	r_e	ST4		ZM3		QM3		VM1		TM4		DT4		DM4		KM1		PD1						
						R	Stock	R	Stock	L	Stock	R	Stock	R	Stock	L	Stock	R	Stock	R	Stock	R	Stock	R	Stock			
TBP72FR05-BM 72FR10M-BM 72FR20M-BM	Yes	3.5	72°	0.05	5039524	●												5868310	●			5868401	●					
				0.08	5039532	●														5868351	●			5868419	●			
				0.18	5039540	●															5868336	●			5868393	●		
TBP55F $\frac{R}{L}$ 00 55F $\frac{R}{L}$ 10	Yes	3.0	55°	0.00			5090378	●	5090360	●																		
				0.10			5090352	●	5090386	●				5294301	●													
TBP60F $\frac{R}{L}$ 00 60F $\frac{R}{L}$ 05 60F $\frac{R}{L}$ 10 60F $\frac{R}{L}$ 10M 60F $\frac{R}{L}$ 20 60F $\frac{R}{L}$ V	Yes	3.7	5.3	0.00			5090410	●	5090428	●	5494711	●	5275508	●					5710108	●	5850805	●						
				0.05																								
				0.10			5090402	●	5090394	●	5362488	●	5269949	●							5706114	●						
				※0.08								5486964	●	5476403	●									5850813	●			
				0.2																		5738844	●					
60FRV00-P	No	4.8	60°	0.00			5345715	●					5264940	●	5264957	●								5299276	●			
60FRV00-P	No	4.0		0.00																					5781745 (1 corner)	●		
60F $\frac{R}{L}$ V05	No	4.8		0.05										5440680	●									5575675	●			
60F $\frac{R}{L}$ V10	No	4.8		0.10				5482690	●					5440698	●										5575683	●		
60FRV10-P	No	4.0	0.10																						5785118 (1 corner)	●		

※Inserts having "10M" the R code can be used for machining when the component drawing specifies that the radius is less than R=0.1
Note: All angles shown are obtained when insert is set in the holder.

TBPA Series

CTPA

Screw accessible from both sides


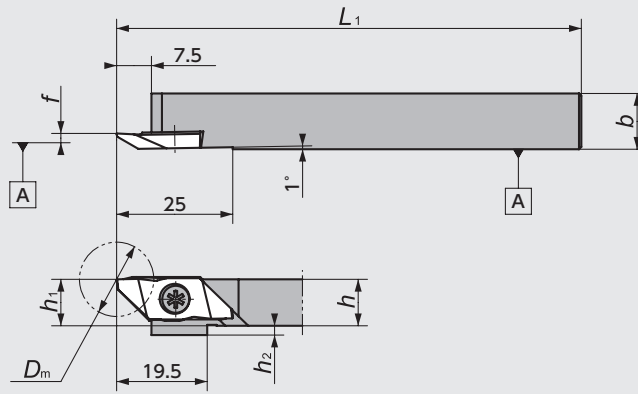


Figure-1

● Right-Hand style shown

TBPA-OH

(Coolant through)
Screw accessible from both sides


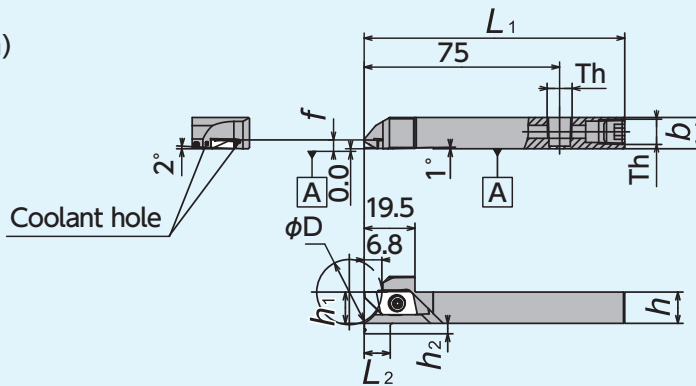


Figure-2

● Left-Hand coolant through holders are designed for Right-Hand machines.

Th □12, □16, □20 : Rc1/8 (PT1/8)

● Right-Hand style shown

CH-TBPA


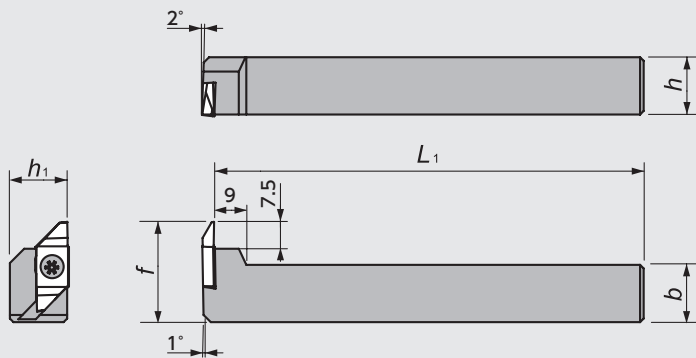


Figure-3

● Left-Hand style shown
☆ Takes Right-hand insert


TBPA Series - Toolholders

Figure	Code No.		Item Number	Stock		Dimensions (mm)						Gage insert	Spare Parts		
	R	L		R	L	h	b	L ₁	h ₁	f	h ₂		D _m	Clamp Screw	Wrench
1	5199187	5199153	CTPA ^R / _L 10	●	●	10	10		10				TBPA (Back Turning) CTPA (Cut-off)	LRIS-4*10PW(A) LRIS-4*12PW(A) LRIS-4*10(B)	CLR-15S (A) LLR-25S(B)
	5199195	5199161	12	●	●	12	12	120	12	3.4	0	16			
	5199203	5199179	16	●	●	16	16		16						
	5459540	5459557	20F	●	●	20	20	80	20						

Figure	Code No.	Item Number	Stock	Max Bar Dia φD (mm)	Dimensions (mm)						Gage insert	Spare Parts	
					h	b	L ₁	h ₁	f	L ₂		h ₂	Clamp Screw
2	5932983	TBPAR12H-OH	●	25	12	12		12			TBPA (Back Turning)	LRIS-4*12PW	CLR-15S
	5932991	16H-OH	●	35	16	16	100	16	3.4	10			
	5945811	20H-OH	●	50	20	20		20					

Figure	Code No.		Item Number	Stock		Dimensions (mm)					Gage insert	Spare Parts	
	R	L		R	L	h	b	L ₁	h ₁	f		Clamp Screw	Wrench
3		5884945	CH-TBPA ^R / _L 16	●	●	16	16	120	16	28	TBPA (Back Turning)	LRIS-4*10	LLR-25S
		5884952	20	●	●	20	20		20	32			

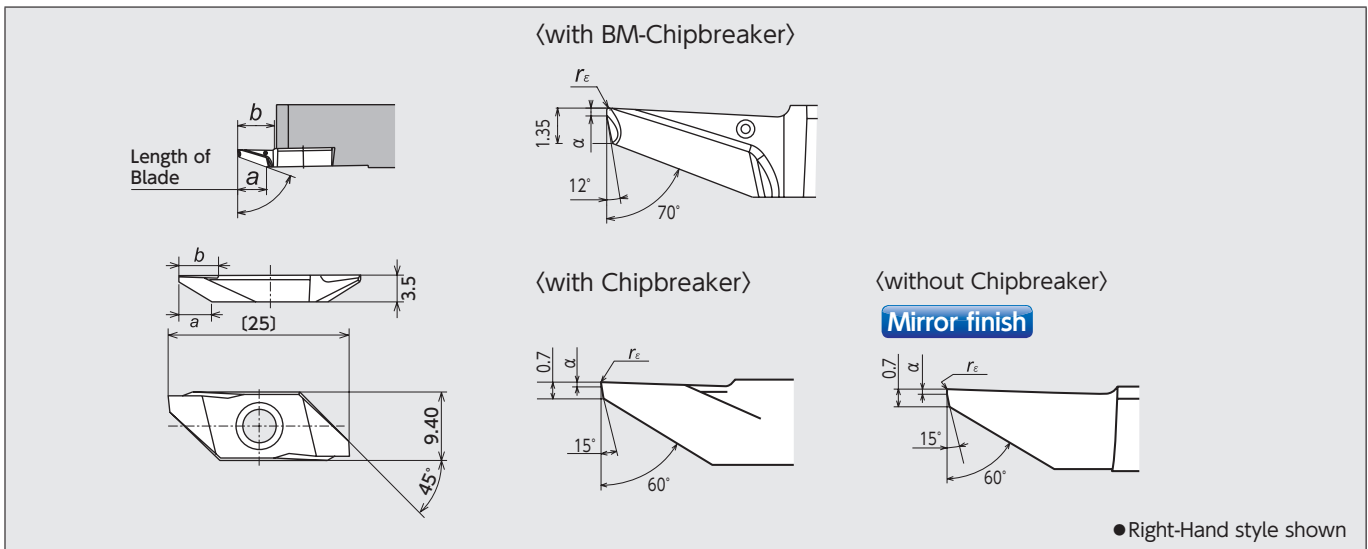TBPA Series - Inserts



Item Number	Chip-breaker	Length of Blade a	Max Depth of cut b	Dimensions (mm)		PVD Coated Carbide															
				α	r _ε	ST4		ZM3		QM3		VM1		TM4		DT4		DM4			
						R	Stock	R	Stock	L	Stock	R	Stock	R	Stock	R	Stock	R	Stock	R	Stock
TBPA70FR05-BM	Yes	5.5	6.5	0.05	5039557	●										5892583	●		5892591	●	
TBPA70FR10M-BM				0.08	5039565	●											5892567	●		5892575	●
TBPA70FR20M-BM				0.18	5039573	●											5892542	●		5892559	●
TBPA60F ^R / _L VB		0.2	0.0		5344833	●	5362538	●				5439344	●			5850847	●				
TBPA60F ^R / _L PB10		0.1			5344858	●	5362520	●				5379151	●								
TBPA60F ^R / _L 10M		0.3	*0.08									5486956	●								
TBPA60F ^R / _L PB10M													5476395	●				5850821	●		
TBPA60F ^R / _L PB20M																		5850839	●		
TBPA60F ^R / _L V	No	6.3	6.8	0.2	0.0			5344817	●	5362546	●				5439336	●					

*Inserts having "10M", "20M" as the R code can be used for machining when the component drawing specifies that the radius is less than R=0.1, R=0.2
Note: All angles shown are obtained when insert is set in the holder.

■ TBVC Series

TBVC


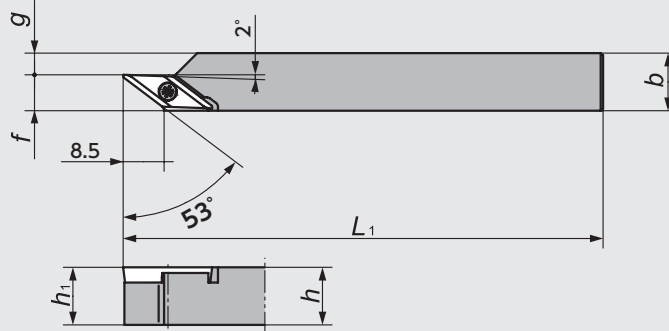


Figure-1



● Right-Hand style shown
※ For non-ferrous materials

TBVC-F10


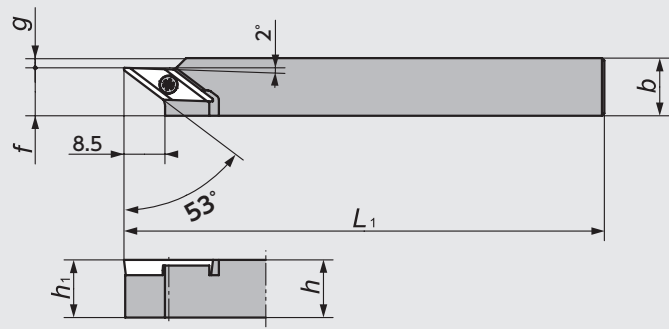


Figure-2



● Right-Hand style shown
※ For steel materials

CH-SVXCL


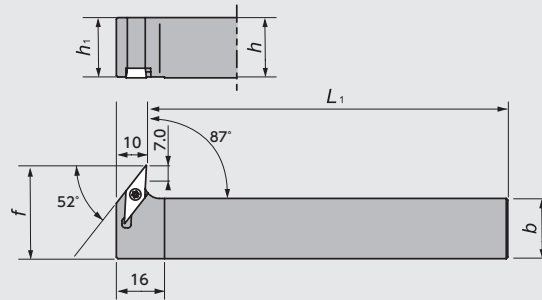


Figure-3



● Left-Hand style shown
☆ Takes Right-hand or Neutral insert

■ TBVC Series - Toolholders



Figure	Code No.		Item Number	Stock		Dimensions (mm)					Gage insert	Spare Parts		
	R	L		R	L	h	b	L ₁	h ₁	f		g	Clamp Screw	Wrench
1		5204953	TBVC _{R/L} 10	●		10	10		10		2.5	TBVC VCGT1103 E49~50	LRIS-2.5*7	CLR-15S
		5204946	12	●		12	12	120	12	7.5	4.5			
		5204920	16	●		16	16		16		8.5			
2		5344254	TBVC _{R/L} 10-F10	●		10	10	120	10		0	TBVC VCGT1103 E49~50	LRIS-2.5*7	CLR-15S
		5459797	12GX-F10	●				85	12		2			
		5344262	12-F10	●		12	12	120			6			
		5459805	16H-F10	●		16	16	100	16		10			
		5344270	16-F10	●		16	16	120						
		5459565	20F-F10	●		20	20	80	20					
3		5890637	CH-SVXC _{R/L} 1616X11	●		16	16	120	16	27	-	VC _{□□□□} 1103 E49~50	LRIS-2.5*7	CLR-15S
		5890645	2020X11	●		20	20		20	31	-			

■ TBVC Series - Inserts

Shape	Item Number	Dimensions (mm)			PVD Coated Carbide			
		d	s	r _ε	ZM3	Stock	VM1	Stock
	TBVC11FR05U	6.35	3.18	0.05	5204870	●		
	11FR10U			0.10	5204888	●	5341763	●
	11FR10S	6.35	3.18	0.10	5433107	●		

● Right-Hand style shown

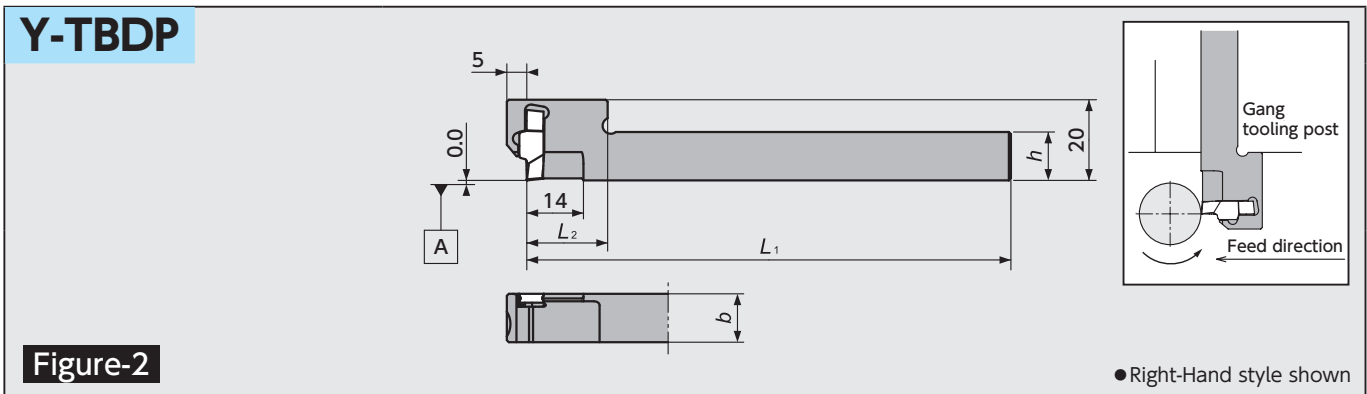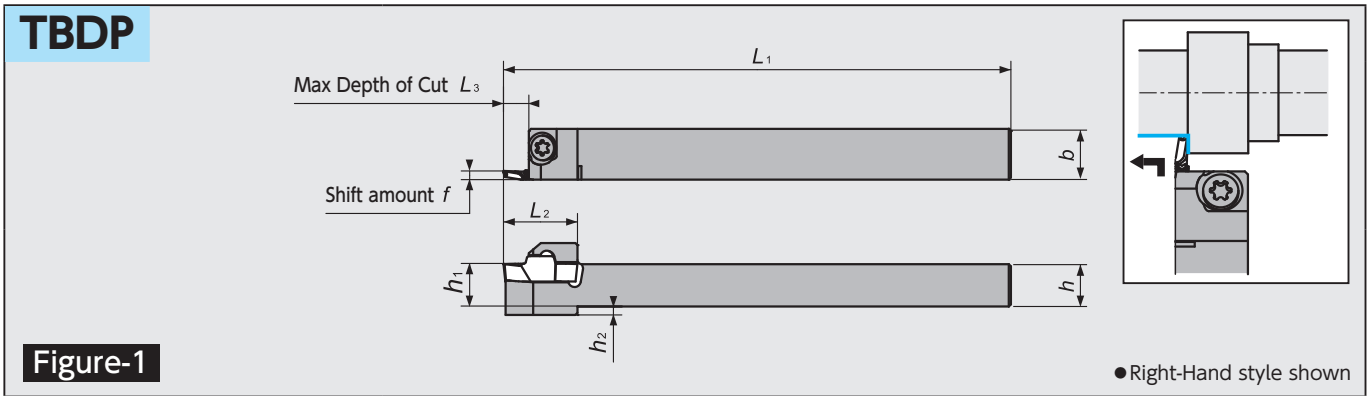TBDP (Back Duo) Series



TBDP Series - Toolholders

Figure	Code No.		Item Number	Stock		Dimensions (mm)							Gage insert 	Spare Parts		
	R	L		R	L	h	b	L ₁	h ₁	f	L ₂	L ₃		h ₂	Clamp Screw 	Wrench
1	5873864		TBDP ^{R/L} 1012H	●		10	12	100	10		15	3	2	TBDP	LRIS-4*12	LLR-25S
	5814678	5837265	1012	●	●											
	5810445	5837273	12	●	●	12	12	120	12	2.05	18					
	5810452	5837281	16	●	●	16	16		16		19.5	5	0			
	5842414		20	●		20	20		20		19.5					
2	5839139		Y-TBDP ^{R/L} 12S	●		12	12	120	—	2.05	20	5.0	—			

※Do not tighten clamp screw without installing insert as it may damage the insert pocket.



TBDP Series - Inserts

Shape 	Item Number	Length of Blade a	Dimensions (mm)		PVD Coated Carbide					
			θ	r _e	QM3	Stock	TM4	Stock	DM4	Stock
	TBDP22005R	3.5	80	0.05	5833116	●	5810460	●	5877865	●
	2201MR			0.08	5833132	●	5810486	●	5903125	●
	2202MR			0.18	5833140	●	5810577	●	5902408	●

TB Series

TBT


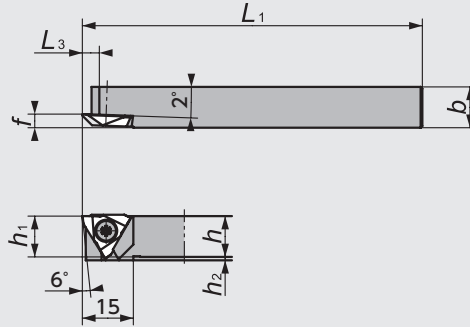
Screw accessible from both sides



● Right-Hand style shown

Figure-1


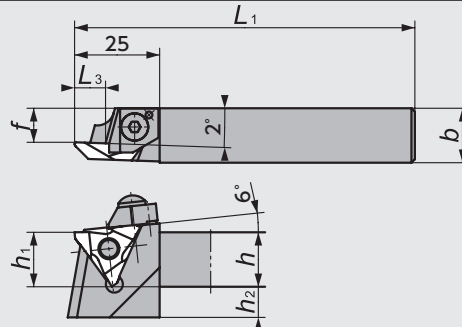
TB-N



● Right-Hand style shown

Figure-2

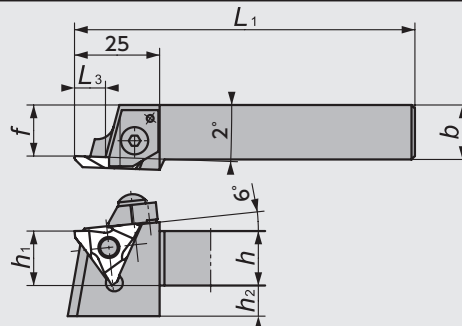TB-F




● Right-Hand style shown

Figure-3

TB Series - Toolholders

Figure	Code No.		Item Number	Stock		Dimensions (mm)							Gage insert	Spare Parts				
	R	L		R	L	h	b	L ₁	h ₁	h ₂	f	L ₃		Clamp Screw	Clamp	Clamp Bolt	Spring	Wrench
1	5107511	5107503	TBT ^{R/L} 08F	●	●	8	8	80	8	5			TB32	LR-S-4* 10PW	-	-	-	CLR-15S (A)
	5107578	5107560	08K	●	●			120										
	5107495	5107487	10F	●	●	10	10	80	10	3	4	5.0						
	5107552	5107545	10K	●	●			120										
	5107479	5107461	12F	●	●	12	12	80	12	1								
	5107537	5107529	12K	●	●			120										
2	5837141		TB ^{R/L} 16N-42	●				78			11.5	9.0	TB42	-	CPR/L5S	A0S-5*25	ASG-5	LW-2.5 (B)
	5504543		16NS	●							9	5.0						
	5504550	5524145	16N	●	●	16	16				10							
	5820618		16N-H	●				100				9.0						
	5848288		16N-K	●				125										
	5553540	5524152	20N	●	●	20	20	100	20	5	14							
	5524160	25N	●		25	25	150	25	0	19								
3	5505029		TB ^{R/L} 16FS	●		16	16		16	9	15	5.0	TB43	-	CPR/L5	A0S-5*25	ASG-5	LW-2.5 (B)
	5505037		16F	●				100				9.0						
	5526298		20FS	●		20	20		20	5	20	5.0						
	5505052		20F	●														
	5519723		25F	●		25	25	150	25	0	25	9.0						

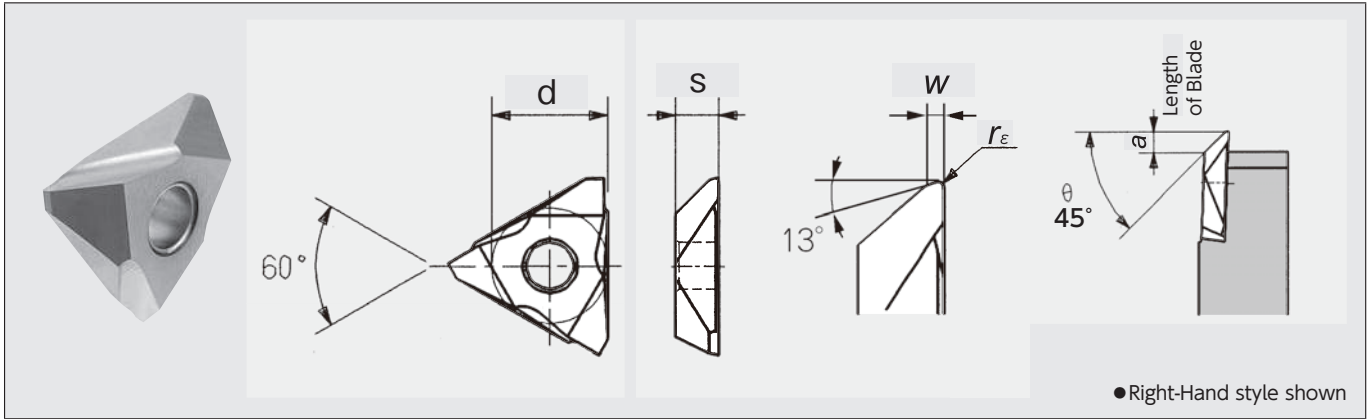TB Series - Inserts



Item Number	Chip-breaker	Length of Blade <i>a</i>	Max Depth of cut <i>b</i>	Dimensions (mm)					PVD Coated Carbide			
				θ	r_e	<i>w</i>	<i>d</i>	<i>s</i>	ZM3			
									R	Stock	L	Stock
TB3200 ^{R/L}	Yes	2.7	4.8	45°	0.00	0.5	9.525	3.18	5810544	●		
TB3205 ^{R/L}					0.05				5810536	●	5982335	●
TB3215 ^{R/L}					0.15				5810528	●	5033550	●
TB3220 ^{R/L}					0.20				5160544	●		
TB4215 ^{R/L}		2.3	8.8	45°	0.15	1.0	12.70	3.18	5914270	●		
TB4305 ^{R/L}	4.0	4.8 ^{*1}	8.8	45°	0.05	1.0	12.70	4.76	5810502	●		
TB4315 ^{R/L}					0.15				5756614	●		
TB4340 ^{R/L}					0.40				5796412	●		

Note: All angles shown are obtained when insert is set in the holder.

GTT Series

GTT

Screw accessible from both sides



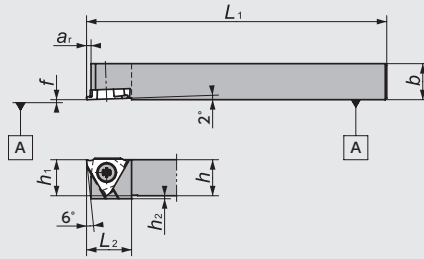



Figure-1

● Right-Hand style shown

GTT-OH2

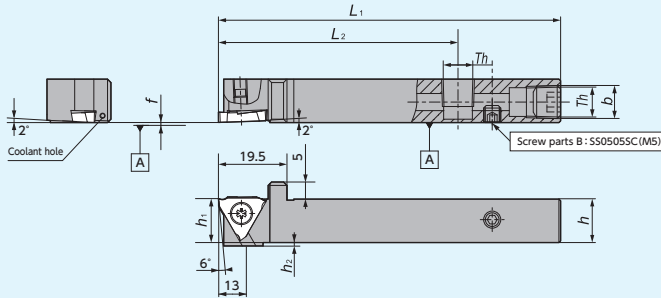(Coolant through)
Screw accessible from both sides





Th (Screw parts A)
1212/1616 size : SPR1/8(Rc1/8)

Figure-2

● Right-Hand style shown

GTT-OH

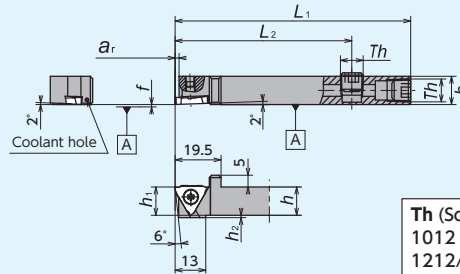(Coolant through)
Screw accessible from both sides



Th (Screw parts A)
1012 size : SS0605SC (M6x1.0)
1212/1616 size : SPR1/8(Rc1/8)

Figure-3

● Right-Hand style shown

CH-GTT


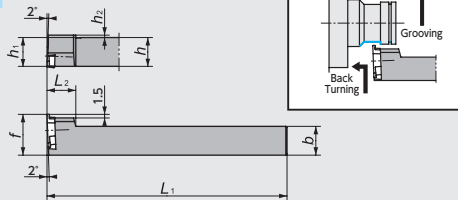


Figure-4

● Left-Hand style shown

DS-GTT





Figure-5

● Left-Hand style shown
☆ Takes Right-hand insert

Y-GTT

Screw accessible from both sides


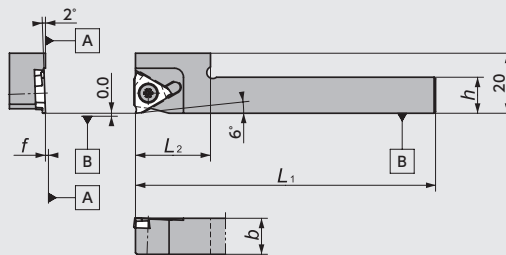


Figure-6

● Right-Hand style shown
☆ Takes Right-hand insert

Y-GTT-OH

(Coolant through)
Screw accessible from both sides


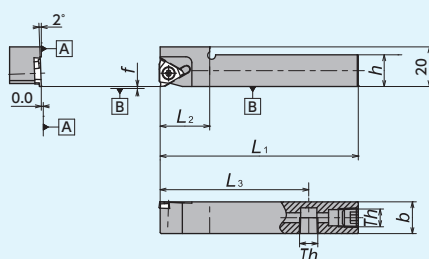









Figure-7

Th (Screw parts A)
1212/1616 size : SPR1/8(Rc1/8)



● Right-Hand style shown
☆ Takes Right-hand insert

GTT Series - Toolholders

Figure	Code No.		Item Number	Stock		Dimensions (mm)								Gage insert	Spare Parts		
	R	L		R	L	D_s	h	b	L_1	h_1	f	L_2	a_r		h_2	Clamp Screw	Wrench
1	5107305	5107313	GTT$\frac{R}{L}$08F00	●	●	-	8	8	80	8	0	15	1.6	5		R:LR-S-4*10PW (A)	
	5608682		0810F00	●				10	10								
	5107206	5107214	08K00	●	●			8	120								
	5608690		0810K00	●				10	10								
	5107321	5107339	10F00	●	●			10	80							10	
	5107222	5107230	10K00	●	●			10	120							10	
	5107347	5107354	12F00	●	●			12	80							12	
	5107248	5107255	12K00	●	●			12	120							12	
	5459896	5551387	16H00	●	●			16	100							16	
	5173687	5173679	16K00	●	●			16	120							16	
	5530852	5780317	20K00	●	●			20	125							20	
	5780309	5780291	25M00	●	●			25	150							25	
	5107362	5107370	10F15	●	●			10	80							10	
	5107263	5107271	10K15	●	●			10	120							10	
	5537220	5537147	12F15	●	●			12	80							12	
	5537246	5537162	12K15	●	●			12	120							12	
	5537261	5537188	16H15	●	●			16	100							16	
	5537287	5537204	16K15	●	●			16	120							16	
	5107388	5107396	10F25	●	●			10	80							10	
	5107289	5107297	10K25	●	●			10	120							10	
5537238	5537154	12F25	●	●	12	80	12										
5537253	5537170	12K25	●	●	12	120	12										
5537279	5537196	16H25	●	●	16	100	16										
5537295	5537212	16K25	●	●	16	120	16										
2	5035381		GTT$\frac{R}{L}$12H00-OH2	●		-	12	12	100	12	0	70	1.6	1		LR-S-4*10PW (A)	CLR-15S
	5043997		16X00-OH2	●				16	16	120						16	
3	5921705		GTT$\frac{R}{L}$1012H00-OH	●		-	10	12	100	12	0	70	1.6	1		LR-S-4*10PW (A)	CLR-15S (A)
	5890157		12H00-OH	●				12	16	16							
	5921713		16H00-OH	●				16	16	16							
4	5659248		CH-GTT$\frac{R}{L}$10H00	●		-	10	10	100	15	12	1.5	3		LR-S-4*9 (B)	RLR-20S (B)	
	5659255		12H00	●				12	17	12							
	5960836		16H00	●				16	21	12							
5	5348560		DS-GTT$\frac{R}{L}$14F	●		14.000	13	13	80	6	20	1.6	-		LR-S-4*9 (B)	RLR-20S (B)	
	5348081		15H	●				15	15								100
	5341532		16X*	●				16	95								
	5278288		19	●				19	18								
	5278304		20	●				20	19								120
	5324041		22*	●				22	21								
	5483433		25MET	●				25	24								150
	5317144		25	●				25	24								120
5937693		32	●		32	30	150										
6	5371604		Y-GTT$\frac{R}{L}$10S	●		-	10	10	120	-	0	20	1.6	-		LR-S-4*10PW (A)	CLR-15S (A)
	5371620		12S	●				12	12								
7	5911466		Y-GTT$\frac{R}{L}$12H00S-OH	●		-	12	12	100	-	0	20	1.6	-		LR-S-4*10PW (A)	CLR-15S (A)
	5911474		16H00-OH	●				16	16								

*Compatible with 16mm / 22mm round shank DS Series holders. DS-Sleeve → G103

GTT Series - Inserts

Shape	Item Number	Chip-breaker	Length of Blade a	Max Depth of cut b	Dimensions (mm)			PVD Coated Carbide
					w	θ	r_e	
 	TBMH32100R05-22	Yes	0.3	1.8	1.0	22°	0.05	5395199 ●
	100R05-45							5395215 ●
	TBMH32150R05-22							5395207 ●
	150R05-45							5395223 ●

Note: All angles shown are obtained when insert is set in the holder.

Back Turning

SVAC-W Series (For Front and Back Turning)

SVAC-NW

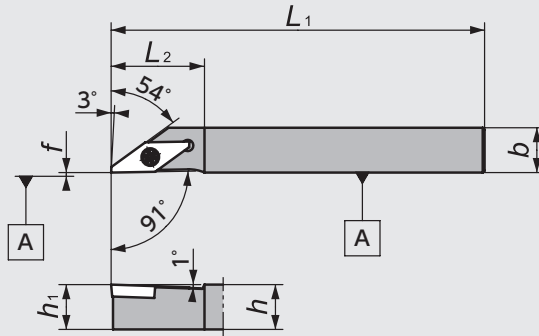


Figure-1

● Right-Hand style shown

SVAC-W

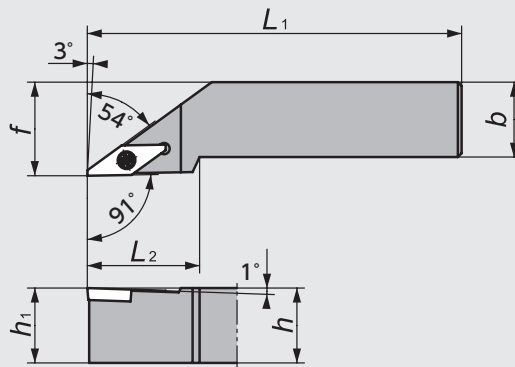


Figure-2

● Right-Hand style shown

SVAC-W Series - Toolholders

Figure	Code No.		Item Number	Stock		Dimensions (mm)						Gage insert	Spare Parts	
	R	L		R	L	h	b	L ₁	f	h ₁	L ₂		Clamp Screw	Wrench
1	5401724	5401708	SVAC [®] /L1010L13NW	●	●	10	10	140	0.0	10	25	VCGT1303	LRIS-3*8	RLR-20S
	5401732	5401716	1212L13NW	●	●	12	12			12				
	5401740	5431077	1616M13NW	●	●	16	16			16				
2	5474549		SVAC [®] /L2020M13W	●		20	20	150	25.0	20	30			

SVAC-W Series - Inserts

Shape	Item Number	Dimensions (mm)			PVD Coated Carbide			
		d	s	r _ε	DM4			
					R	Stock	L	Stock
<p>● Right-Hand style shown</p> <p>● Left-Hand style shown</p>	VCGT130300F [®] /L2M	7.94	3.18	0.0	5969126	●	5969134	●
	VCGT130301F [®] /L2M	7.94	3.18	0.1	5969100	●	5969118	●

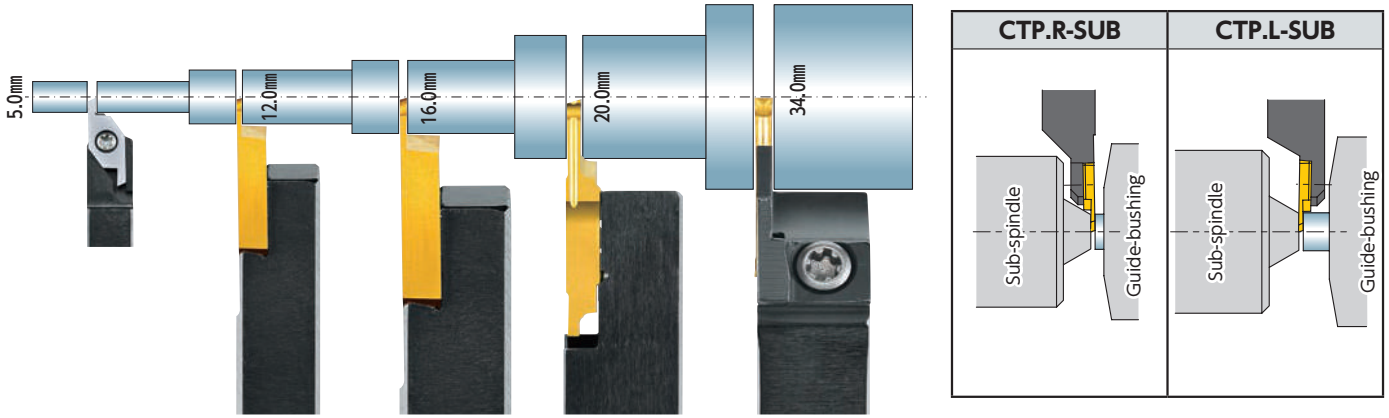





Cut-off / Parting





● Cut-off Tools	G64
● Cut-off Tool Selection Guide	G66
● Recommended Cutting Conditions ..	G68
● Tool List	G72
CSV Series (Up to dia. 5mm)	G72
CTPS Series (Up to dia. 4&10mm)	G73
CTP Series (Up to dia. 12mm)	G74
CTPA Series (Up to dia. 16mm)	G80
CTPW Series (Up to dia. 20mm)	G86
CTV-S Series (Up to dia. 20mm)	G87
CTDP Series (Up to dia. 34mm)	G88
CTWP Series (Up to dia. 42mm)	G89
CTV Series (Up to dia. 45mm)	G90





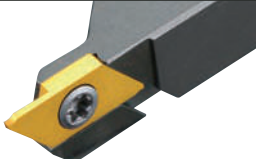NTK Cut-off Tools - Product Lines





NTK offers a variety of cut-off tools with as narrow a width as 0.5mm
 NTK cut-off tools are specialized for small part applications








Insert	CSV →G72	CTPS →G73	CTPS-001 →G73
Holder	 →G72	 →G73	 →G73
Max Cut-off Diameter	~5.0mm	~10.0mm	~4.0mm
Blade width	0.6 - 1.5mm	1.2 - 2.0mm	0.7mm

Insert	CTP →G76 ~			
Holder	 →G74	 →G74 Coolant through	 →G74	 →G74
Max Cut-off Diameter	~12.0mm			
Blade width	0.5 - 2.0mm			


Insert	CTPA →G82 ~			
Holder	 →G80	 →G80 Coolant through	 →G80	 →G80
Max Cut-off Diameter	~16.0mm			
Blade width	0.7 - 3.0mm			

Insert	CTPW →G86	CTDP →G88	CTDP →G88	GWPFM →G89
Holder	CTPW  →G86	CTDP  →G88	CTDP-OH2/OH  →G88	CTWP  →G89
Max Cut-off Diameter	~20.0mm	~34.0mm	~25.4mm	~φ 42.0mm
Blade width	2.5mm	2.0 · 2.5mm	2.0 · 2.5mm	3.0mm

Insert	CTV-S →G87		CTV →G91		
Holder	CTV-K2  →G87	CTVN-K2  →G87	CTV-S  →G90	CTV-M (B)  →G90	CTV-X  →G90
Max Cut-off Diameter	~20.0mm		~35.0mm	~45.0mm	~35.0mm
Blade width	2.2 - 2.5mm		2.5 · 3.0mm	2.5 · 3.0mm	3.0mm


CTP/CTPA/CTPS/CTPW selection guide : Right hand? Or Left hand?

Right-hand recommended



R-hand Toolholder using a R-hand insert with lead angle


Left-hand recommended



L-hand Toolholder with a non-lead angle insert when the bar stock is held by sub-spindle


CTP/CTPA-SUB selection guide Right hand? Or Left hand?

Right-hand recommended











R-hand Toolholder with R-hand insert with lead angle for longer parts or small diameter part. When part length is too short for sub-spindle to hold, use L-hand with slower speed.

Left-hand recommended



L-hand with L-hand insert with lead angle for short part

Cut-off Tool Selection Guide

Right-hand combination		Left-hand combination	
FR, FRFT, FRV Style		FLK, FLKFT, FLKV Style	
 <p>FRFT: Flat top FRV : Flat top with mirror finish</p>	<ul style="list-style-type: none"> • Common geometry in cut-off • Lead angle minimizes center-boss • End face is likely to get scratched from chip control because of lead angle and chip-breaker configuration • Good for small diameter machining as it cuts near guide-bushing 		<ul style="list-style-type: none"> • Can cut-off closer to the sub-spindle • Less burrs with hollow work • Sub-spindle should hold the work
FRN, FRS,FRNV Style		FLN, FLS Style	
 <p>FRS : Flat top FRNV: Flat top with mirror finish</p>	<ul style="list-style-type: none"> • Good for small diameter machining as it cuts near guide-bushing • 1st recommendation when sub-spindle holds the part • No lead angle helps to prevent scratches on both faces 		<ul style="list-style-type: none"> • Recommended when required to cut-off close to the sub-spindle due to short part length • Good for big diameter part • No lead angle helps to prevent scratches on both faces • Sub-spindle should hold the work
FRK Style		FL, FLV Style	
	<ul style="list-style-type: none"> • Used with inverse spindle rotation • Short part length and using sub-spindle • Less burrs with hollow work 		<ul style="list-style-type: none"> • Used with inverse spindle rotation • Without sub-spindle • Less burrs with hollow work
CTP. R-SUB		CTP. L-SUB	
	<ul style="list-style-type: none"> • Recommended when cut-off point is close to guide-bushing for small and thin parts • When the part length is short, extended sub-spindle guide-bushing is generally used 		<ul style="list-style-type: none"> • Recommended when required to cut-off close to the sub-spindle especially with small diameters • Can cut much closer to the sub-spindle than the other left-handed tool holders • Sub-spindle should hold the work


Notification about max cut-off diameter

※Max cut-off diameter in the catalog shows when X end point is 0.0.

① When cut-off

When X end point became over X0.0, the work material will fall off so that interference will not occur. (Fig 1)

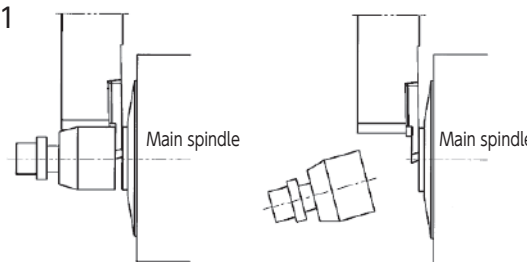Fig 1



② When cut-off while grabbing (When using neutral type)

Max cut-off diameter will depend on X end point, so please check the max cut-off diameter based on X end point.

※Please used the formula below.

【Calculation formula】

Possible machining diameter = Max cut-off diameter - X end point
(Value notice on the catalog) (Optional)

《Example》

When machining until X-1.0 using CTP15FRN
12.0 - 1.0 = 11.0 (Max workable diameter)

③ When cut-off while grabbing (When using lead angle type)

Max cut-off diameter will depend on X end point, so please check the max cut-off diameter based on "dimension A" below (Fig.2) and X end point.

※Please used the formula below.

【Calculation formula】

Possible machining diameter = Max cut-off diameter - X end point
(Value notice on the catalog)

【How to decide X end point】


X end point \geq dimension A \times 2
(Fig.2)

《Example》

When using CTP15FR
X end point : 0.460 \times 2 = 0.920
(dimension A)

12.0 - 0.920 = 11.08 (Max workable diameter)

Fig 2



Recommended Cutting conditions

Unique Swiss Tooling

Front Turning


Back Turning

Cut-off

Original Series


Work Material		Cutting Speed (m/min)	CSV/CTPS		CTP/CTPA/CTPW		CTDP/CTV/CTWP	
Common Name	JIS		Grade	Feed Rate (mm/rev)	Grade	Feed Rate (mm/rev)	Grade	Feed Rate (mm/rev)
Low Carbon Steel	S10C } S30C	50 90 130	VM1 ZM3	0.03 (0.01-0.05)	DT4 QM3	0.04 (0.02-0.06)	DM4 QM3	0.08 (0.04-0.2)
Carbon Steel	S45C } S55C	50 80 120	VM1 ZM3	0.03 (0.01-0.05)	QM3 DT4	0.04 (0.02-0.06)	DM4 QM3	0.08 (0.04-0.2)
Alloy Steel	SCr415 } SCr440	50 80 120	VM1 ZM3	0.03 (0.01-0.05)	QM3 DT4	0.04 (0.02-0.06)	DM4 QM3	0.08 (0.04-0.2)
Stainless Steel (Austenitic)	SUS303	50 90 130	VM1 ZM3	0.03 (0.01-0.05)	ST4 DT4	0.04 (0.02-0.06)	TM4 ZM3	0.09 (0.05-0.2)
Stainless Steel (Austenitic)	SUS304 SUS316 SUS316L	40 70 100	VM1 ZM3	0.02 (0.01-0.03)	ST4 QM3	0.03 (0.02-0.05)	DM4 QM3	0.06 (0.04-0.15)
Stainless Steel (Ferritic)	SUS430 SUS430F	50 100 130	VM1 ZM3	0.03 (0.01-0.05)	ST4 DT4	0.04 (0.02-0.06)	TM4 ZM3	0.09 (0.05-0.2)
Stainless Steel (Martensitic) (Precipitation hardenic)	SUS440C SUS630	50 60 90	VM1 ZM3	0.02 (0.01-0.03)	ST4 DT4	0.03 (0.02-0.05)	DM4 QM3	0.05 (0.03-0.15)
Sulfur free cutting steel Sulfur complex free cutting steel	SUM22 SUM23 SUM24L	50 120 200	VM1 ZM3	0.03 (0.01-0.05)	DT4 VM1	0.04 (0.02-0.06)	TM4 ZM3	0.09 (0.05-0.2)
Electromagnetic soft iron	SUY-0 SUY-1 SUY-2	200 300 350	VM1 ZM3	0.03 (0.01-0.05)	DT4	0.04 (0.02-0.06)	TM4 ZM3	0.09 (0.05-0.2)
Electromagnetic stainless		50 80 120	VM1 ZM3	0.03 (0.01-0.05)	DT4	0.04 (0.02-0.06)	DM4 QM3	0.08 (0.04-0.2)
High-carbon chromium bearing steel	SUJ2	50 80 120	VM1 ZM3	0.03 (0.01-0.05)	QM3 DT4	0.04 (0.02-0.06)	DM4 QM3	0.08 (0.04-0.2)
Titanium alloy	6AL-4V 6AL-4VELI	50 70 120	VM1 ZM3	0.02 (0.01-0.03)	TM4 DT4	0.03 (0.02-0.05)	TM4 ZM3	0.06 (0.03-0.15)
Aluminum alloy	A5052 A6061 A7025	60 150 200	ZM3	0.03 (0.01-0.05)	KM1 ZM3	0.05 (0.03-0.07)	ZM3 TM4	0.1 (0.05-0.2)

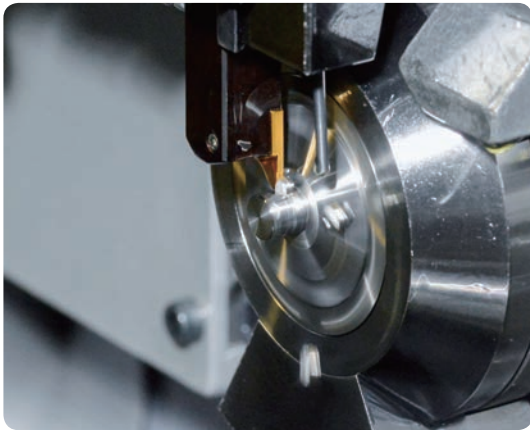CTP-CX / CTPA-CX for Cut-off



Features

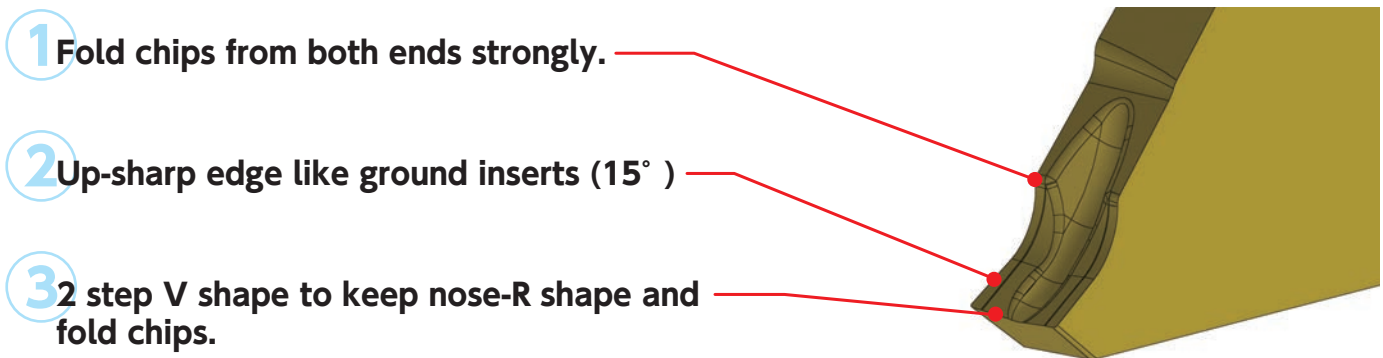- New 3D molded chipbreaker on CTP style inserts
- Excellent chip control and straight-line stability with proprietary designed CX chipbreaker.
- Fold chips strongly from both ends result superior machined surface finish



With lead angle

Neutral



Best Solution for Chip Control

Coolant through toolholders now available

CTP-OH2 / OH, CTPA-OH2 / OH



Superior Surface Finish and Excellent Chip control


Feed f (mm / rev)	CX chipbreaker		Conventional (ground chipbreaker)		Competitor (3D chipbreaker)	
	Chip	Surface finish	Chip	Surface finish	Chip	Surface finish
0.02						
0.05						
	Excellent machined surface finish		Rough surface finish		Vibration occurs by low rigidity	
Material : SUS304 ($\phi 8$) , Cutting condition : $v_c=80\text{m/min}$ WET Holder : CTPR12 Insert : CTP15FRN-CX DM4						

CUT DUO



Features

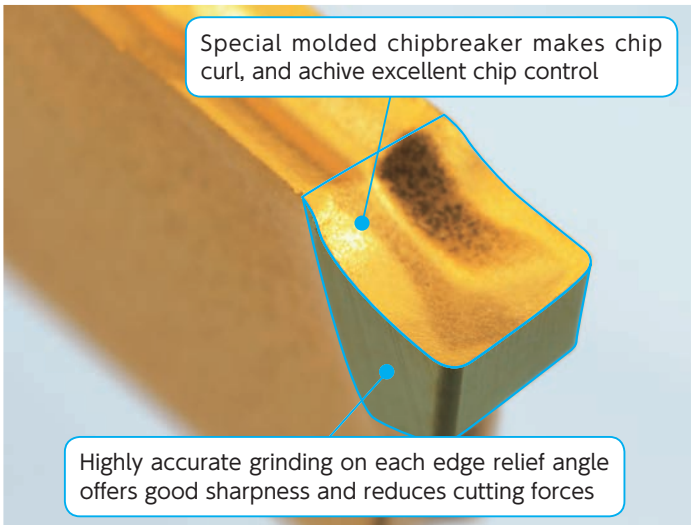
- Offers excellent chip control and superior surface finishes due to a special molded chipbreaker and precision grinding
- Achieves rigid clamping because of a 3-V point clamping design
- Wide toolholder selection for various diameters



Chip control (Vc=80m/min)

	0.05mm/rev	0.08mm/rev	0.12mm/rev
SCM435			
SUS304			

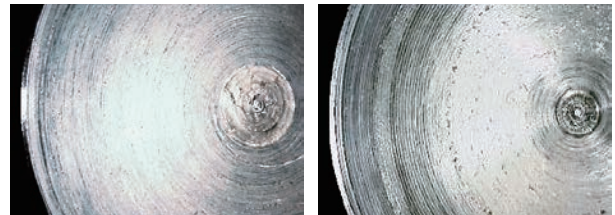Surface finish




CUT DUO

Competitor's 3D chipbreaker

Chip control comparison

	Edge view	Chip control
NTK CTDPL12-20D20 CTDP20N02 DM4	100pcs 	Stable chip control <p>Beginnig of machining End of machining</p>
Competitor's Carbide	50pcs chipping <p>chipped</p>	<p>Beginnig of machining End of machining</p>
Work material : SUS304 Cutting condition : Vc=110m/min f=0.05mm/rev WET		

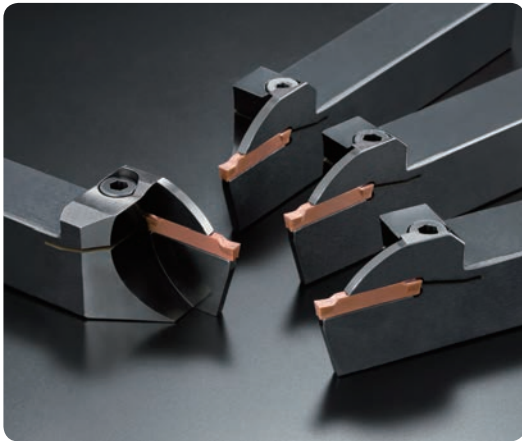CUT DUO EXTRA




Features


- New double-edge cut-off tools with 3mm width for max. cut-off diameter of 42mm
- Original 'S' shape chipbreaker provides controlled chip evacuation

1 Chip control

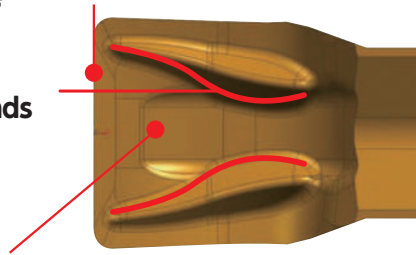- Straight design improves toughness of cutting edge
- Folds chips from both ends strongly
- High rake angle for up-sharp edge



2 High rigidity

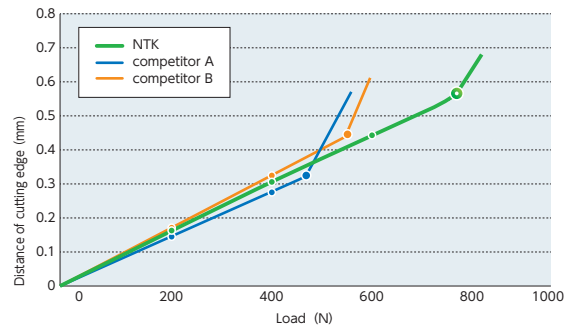

- Improved reliability and productivity on high-load cut-off application

Case study

Feed f (mm / rev)	CUT DUO EXTRA		Competitor A (3D molded low cutting force type chipbreaker)		Competitor B (3D molded rigid type chipbreaker)	
	Chip	Surface finish	Chip	Surface finish	Chip	Surface finish
0.03						
0.05						
0.1						
	Excellent machined surface finish		In high feed rate area, rough surface finish		In low feed rate area, rough surface finish	

Cutting condition : $v_c=100\text{m/min}$ WET Material : SUS304 ($\phi 8$)
 Holder : CTWPR2020K-3D42 Insert : GWPFM300N02-GT DM4

SS Tools for Cutting off

CSV Series Best for up to 5mm diameter material

CSV For Cam-style machine

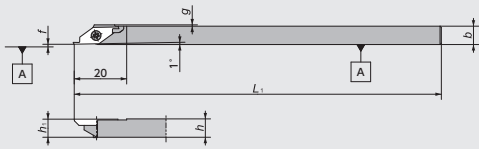


Figure-1

● Right-Hand style shown

CSV-NC For Gang-style machine

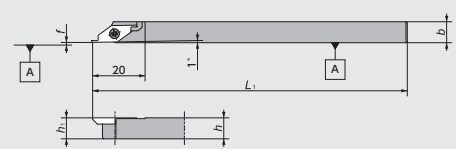


Figure-2

● Right-Hand style shown

CSV-NC-F

For Gang-style machine

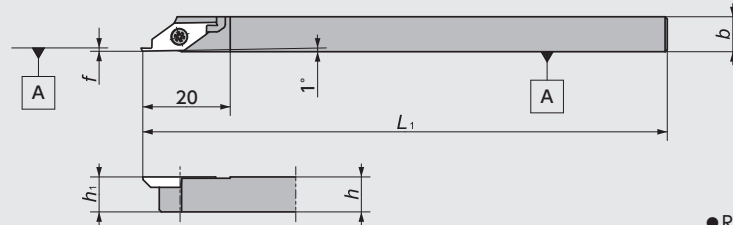


Figure-3

● Right-Hand style shown

CSV Series - Toolholders

Figure	Code No.		Item Number	Stock		Max. Cut-off Dia (mm) φD	Dimensions (mm)					Gage insert	Spare Parts	
	R	L		R	L		h	b	L ₁	h ₁	f		g	Clamp Screw
1	5492962		CSV _{R/L} 07GX	●		5.0 ※	7	7	85	7	0.1	CSVC	LRIS-2.5*7	CLR-15S
	5303169	5303193	07	●	●				140					
	5492954		08GX	●			8	8	85	8				
	5303151	5303201	08	●	●		9.5	9.5	140	9.5	0.0			
	5303136		095	●			10	10	140	10				
	5303144	5303177	10	●	●		12	12	85	12				
	5474770		12GX	●			12	12	140	12				
5327929		12	●											
2	5514062	5514070	CSV _{R/L} 08NC	●	●	5.0 ※	8	8	120	8	0.1	CSVC	LRIS-2.5*7	CLR-15S
	5563010		10GXNC	●			10	10	85	10	0.1			
	5477492	5477542	10NC	●	●		12	12	120	12	—			
	5477534	5477500	12NC	●	●									
3	5789615		CSV _{R/L} 08NC-F	●		5.0 ※	8	8	120	8	0.0~0.1	CSVC	LRIS-2.5*7	CLR-15S

※The Max. cut-off diameter varies depending on the insert used. Please refer to the below.

☆All the inserts can use the same toolholder CSV series → G94

CSV Series - Inserts Mirror finish

Shape	Item Number	Chip-breaker	※1 Max. Cut-off Dia (mm) φD	Dimensions (mm)			PVD Coated Carbide			
				A	r _ε	w	VM1			
							R	Stock	L	Stock
<p>● Right-Hand style shown</p>	CSVC 11F _{R/L} V06	No	3.0	0.31	0.0	0.6	5352547	●		
	11F _{R/L} V07					0.7	5324272	●	5330840	●
	11F _{R/L} V08					0.8	5324256	●	5330832	●
	11F _{R/L} V09					0.9	5352554	●		
	11F _{R/L} V10					1.0	5303490	●	5303599	●
	11F _{R/L} V13					1.3	5311824	●	5311816	●
11F _{R/L} V15	1.5	5303615	●	5303631	●					
<p>● Right-Hand style shown</p>	CSVC 11F _{R/L} VB06	Yes	3.0	0.31	0.0	0.6	5358734	●		
	11F _{R/L} VB07					0.7	5358742	●		
	11F _{R/L} VB08					0.8	5358767	●		
	11F _{R/L} VB09					0.9	5358775	●		
	11F _{R/L} VB10					1.0	5358783	●		
	11F _{R/L} VB13					1.3	5358676	●		
11F _{R/L} VB15	1.5	5358668	●							

※ 1 : Max. cut-off diameter shows when X end point is 0.0. For more information, see page G67.

※ 2 : All angles shown are obtained when insert is set in the holder.

CTPS Series

CTPS

Best for up to 10mm diameter material

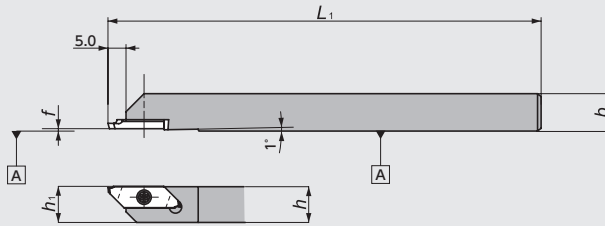


Figure-1

● Right-Hand style shown

CTPSR-SUB

Best for up to 4mm diameter material


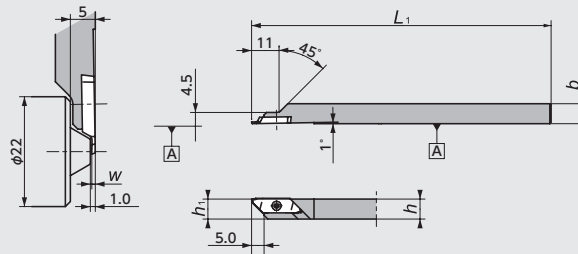


Figure-2

● Right-Hand style shown

CTPS Series - Toolholders

Figure	Code No.	Item Number	Stock	Max. Cut-off Dia (mm) ϕD	Dimensions (mm)					Gage insert	Spare Parts	
					h	b	L_1	h_1	f		Clamp Screw	Wrench
1	5346572	CTPSR10 R12	●	10.0	10	10	120	10	0.0			
	5397187		●		12	12		12				
2	5486717	CTPSR08-SUB04	●	4.0	8	8	120	8	—	CTPS-001	LRIS-2.5*4.5	CLR-15S

☆ All the inserts can use the same toolholder CTPS series → G98

CTPS Series - Inserts

CTPS

Shape	Item Number	Chip-breaker	*1 Max. Cut-off Dia (mm) ϕD	Dimensions (mm)				PVD Coated Carbide			
				w	A	θ *2	r_e	ZM3	Stock	VM1	Stock
(with Chipbreaker) ● Right-Hand style shown	CTPS12FR	Yes	4.0	1.2	0.37	16°	0.05	5346275	●	5362587	●
	15FR		5.0	1.5	0.46			5346267	●	5362595	●
	18FR		8.5	1.8	0.55			5346283	●	5362603	●
	20FR		10.0	2.0	0.61			5374210	●	5374194	●
(without Chipbreaker) Mirror finish ● Right-Hand style shown	CTPS12FRV	No	4.0	1.2	0.47	20°	0.0	5346937	●	5362611	●
	15FRV		5.0	1.5	0.58			5346929	●	5362629	●
	18FRV		8.5	1.8	0.70			5346945	●	5362637	●
	20FRV		10.0	2.0	0.77			5374202	●	5374228	●

*1: Max. cut-off diameter shows when X end point is 0.0. For more information, see page G67.

*2: All angles shown are obtained when insert is set in the holder.

CTPS-001

Shape	Item Number	Chip-breaker	*1 Max. Cut-off Dia (mm) ϕD	Dimensions (mm)				PVD Coated Carbide	
				w	A	θ *2	r_e	ZM3	Stock
 ● Right-Hand style shown	CTPS07FRN-001	Yes	4.0	0.7	—	0°	0.05	5460670	●
	CTPS07FR-001				0.23	16°	0.05	5441852	●
	CTPS07FRV-001				0.28	20°	0.0	5441860	●

*1: Max. cut-off diameter shows when X end point is 0.0. For more information, see page G67.

*2: All angles shown are obtained when insert is set in the holder. **G73**


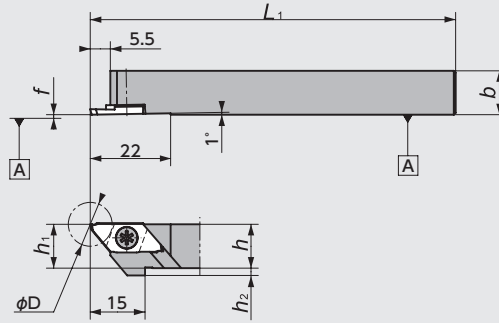
SS Tools for Cutting off

CTP Series Max. Cut-off Dia. ~ 12.0mm

Unique Swiss Tooling

CTP

Screw accessible from both sides





● Right-Hand style shown

Figure-1

CTP-OH2

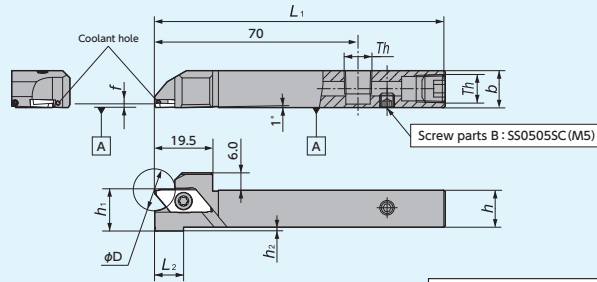(Coolant through)
Screw accessible from both sides



● Right-Hand style shown



Figure-2 ● Left-Hand holders are designed for Right-Hand machines

Th (Screw parts A)
1212 size : SPR1/8 (Rc1/8)

Front Turning

CTP-OH

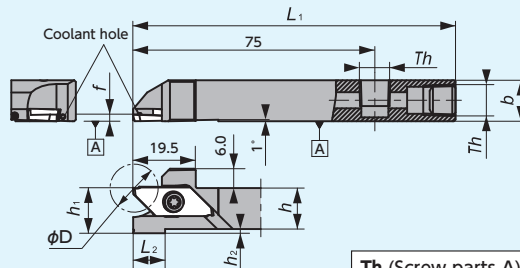(Coolant through)
Screw accessible from both sides





● Right-Hand style shown

Figure-3 ● Left-Hand holders are designed for Right-Hand machines

Th (Screw parts A)
1012 size : SS0605SC (M6×1.0)
1212/1616 size : SPR1/8 (Rc1/8)

Back Turning

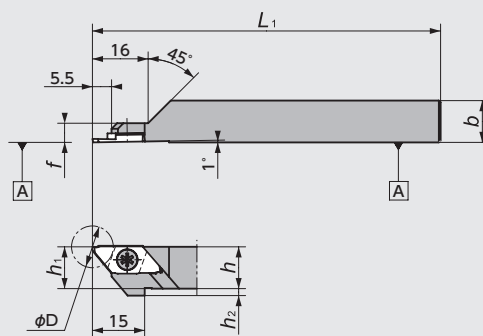CTPR-SUB





● Right-Hand style shown

Figure-4

φDs
CTPR-SUB : φ 30mm

Cut-off

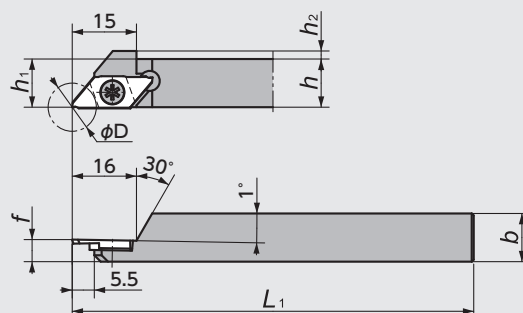CTPL-SUB










● Left-Hand style shown

Figure-5

φDs
CTPL-SUB : φ 30mm

Original Series

CTP Series - Toolholders

Figure	Code No.		Item Number	Stock		Max. Cut-off Dia (mm) ϕD	Dimensions (mm)						Gage insert 	Spare Parts			
	R	L		R	L		h	b	L_1	h_1	h_2	L_2		f	Clamp Screw (A)  (B) 		Wrench (A)  (B) 
1	5131362	5131354	CTP ^{R/L} 08	●	●	12.0※	8		120	8	4	0	0.0	CTP-CX CTP CTP-X CTPX G76~79	 LRIS-4*10PW (A)	 CLR-15S (A)	
	5873849	5893458	10H	●	●		10	10	100								
	5089644	5089636	10	●	●				120	10	2	0					
	5459730	5459748	12GX	●	●		12	12	85	12							
	5089651	5089669	12	●	●				120								
	5089677	5089685	13	●	●		13	13		13	0	0					
	5459755		16H	●			16	16	100	16							
	5183496	5183504	16	●	●				120								
2	5037874	5037866	CTP ^{R/L} 12H-OH2	●	●	12.0※	12	12	100	12	2	10	1.5※	CTP-CX CTP CTP-X CTPX G76~79	LRIS-4*12PW (A)	CLR-15S (A)	
3	5921853	5921861	CTP ^{R/L} 1012H-OH	●	●	12.0※	10	12		12	4	19	1.5※	CTP-CX CTP CTP-X CTPX G76~79	LRIS-4*12PW (A)	CLR-15S (A)	
	5918651	5918040	12H-OH	●	●		12	12	100		2	10					
	5921879	5921887	16H-OH	●	●		16	16		16	0	0					
4	5571831		CTPR 08-SUB	●		12.0※	8	8	120	8	4	0	5.5	CTP-CX CTP-FR (N) (V) (NV) CTP-FRX (FRNX) CTPX-FR (N) G76~79	LRIS-4*5 (B)	LLR-25S (B)	
	5607999		08J-SUB	●			110										
	5391610		10F-SUB	●			10	10	80	10	2	0					
	5605282		10KX-SUB	●			120										
	5474580		12GX-SUB	●			12	12	85	12	0	0					
	5391628		12-SUB	●			120										
5		5570791	CTPL 08-SUB	●		12.0※	8	8	120	8	4	0	5.5	CTP-CX CTP-FLK CTP-FLKV CTP-FLN CTP-FLNV CTPX-FLN CTPX-FLNX G76~79	LRIS-4*5 (B)	LLR-25S (B)	
		5608005	08J-SUB	●			110										
		5499389	10GX-SUB	●			10	10	85	10	2	0					
		5482534	12GX-SUB	●			12	12		12	0	0					



※ Would be changed by insert.

CTP Series - Inserts (Ground Chipbreaker)

Shape	Item Number	*1 Max. Cut-off Dia (mm) ϕD	Dimensions (mm)				PVD Coated Carbide					
			w	A	**2 θ	r_e	ZM3	Stock	VM1	Stock	DT4	Stock
	CTP05FR-SH	5.0	0.5	0.17	16°	0.05	5788732	●				
	07FR	8.0	0.7	0.23			5126255	●				
	10FR	12.0	1.0	0.32			5089594	●			5847868	●
	10FR-SH	7.0	1.0	0.32			5788724	●			5847876	●
	13FR	12.0	1.3	0.40			5988704	●			5988738	●
	15FR	12.0	1.5	0.46			5089602	●	5284690	●		
	20FR	12.0	2.0	0.61			5125521	●	5432372	●		
	CTP05FRN-SH	5.0	0.5	—	0°	0.05	5788799	●				
	10FRN	12.0	1.0	—			5133327	●		5847884	●	
	10FRN-SH	7.0	1.0	—			5788757	●		5847892	●	
	13FRN	12.0	1.3	—			5988712	●		5988746	●	
	15FRN	12.0	1.5	—			5133301	●	5306543	●		
	20FRN	12.0	2.0	—			5133335	●	5272224	●		
	CTP10FRK	11.0	1.0	0.32	16°	0.05	5131412	●				
	13FRK	12.0	1.3	0.40			5988720	●		5988761	●	
	15FRK	11.0	1.5	0.46			5131404	●				
	20FRK	11.0	2.0	0.61			5131388	●				
	CTP07FL	8.0	0.7	0.23	16°	0.05	5126263	●				
	10FL	12.0	1.0	0.32			5089586	●				
	13FL	12.0	1.3	0.40			5988779	●			5988795	●
	15FL	12.0	1.5	0.46			5089610	●				
	20FL	12.0	2.0	0.61			5125513	●				
	CTP05FLN-SH	5.0	0.5	—	0°	0.05	5788773	●				
	10FLN	12.0	1.0	—			5133350	●		5847900	●	
	10FLN-SH	7.0	1.0	—			5788765	●		5847918	●	
	13FLN	12.0	1.3	—			5988787	●		5988811	●	
	15FLN	12.0	1.5	—			5133319	●	5378526	●		
	20FLN	12.0	2.0	—			5133343	●	5273008	●		
	CTP05FLK-SH	5.0	0.5	0.17	16°	0.05	5788781	●				
	10FLK	11.0	1.0	0.32			5131420	●		5847926	●	
	10FLK-SH	7.0	1.0	0.32			5788807	●		5847934	●	
	13FLK	11.0	1.3	0.40			5926399	●		5988837	●	
	15FLK	11.0	1.5	0.46			5131396	●	5328240	●		
	20FLK	11.0	2.0	0.61			5131370	●	5280722	●		
	15FLKB	11.0	1.5	0.46			5645254	●				

*1: Max. cut-off diameter shows when X end point is 0.0. For more information, see page G67.
 *2: All angles shown are obtained when insert is set in the holder.

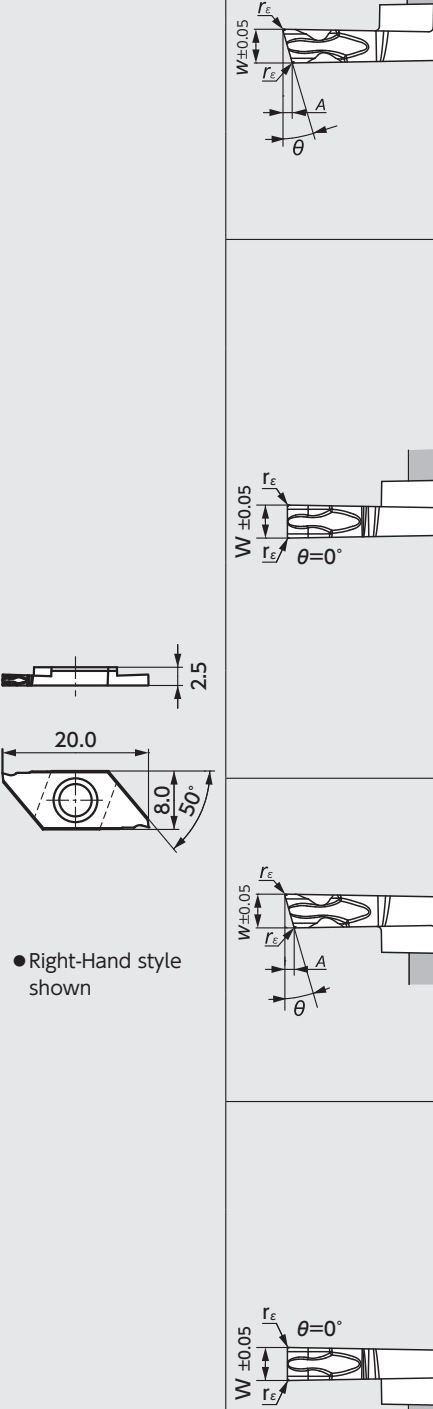CTP Series - Inserts (3D Molded Chipbreaker)

	Item Number	*1 Max. Cut-off Dia. (mm) ϕD	Dimensions (mm)				PVD Coated Carbide					
			w	A	**2 θ	r_ϵ	ST4	Stock	DM4	Stock		
 <p>● Right-Hand style shown</p>	CTP10FR-CX	12.0	1.0	0.32	16°	0.05	5044722	●	5044714	●		
	CTP13FR-CX		1.3	0.40			5039318	●	5004726	●		
	CTP15FR-CX		1.5	0.46			5039383	●	5004734	●		
	CTP10FRN-CX		1.0	—	0°		0.05	5039300	●	5999669	●	
	CTP13FRN-CX		1.3	—				5039226	●	5965710	●	
	CTP13FRN02-CX		—	0.2				5039342	●	5965686	●	
	CTP15FRN-CX		1.5	—				0.05	5039391	●	5957725	●
	CTP15FRN02-CX		—	0.2				5039409	●	5957717	●	
	CTP10FLK-CX		1.0	0.32				16°	0.05	5044748	●	5044730
	CTP13FLK-CX	1.3	0.40	5039359	●	5004742	●					
	CTP15FLK-CX	1.5	0.46	5039417	●	5004759	●					
	CTP10FLN-CX	1.0	—	0°	0.05	5039292	●	5999677	●			
	CTP13FLN-CX	1.3	—			5039367	●	5965702	●			
	CTP13FLN02-CX	—	0.2			5039375	●	5965694	●			
	CTP15FLN-CX	1.5	—			0.05	5039433	●	5957733	●		
	CTP15FLN02-CX	—	0.2			5039441	●	5957741	●			

※ 1 : Max. cut-off diameter shows when X end point is 0.0. For more information, see page G67.

※ 2 : All angles shown are obtained when insert is set in the holder.

CTP Series - Inserts (Without Chipbreaker) Mirror finish

Shape	Item Number	*1 Max. Cut-off Dia (mm) ϕD	Dimensions (mm)				Carbide		PVD Coated Carbide					
			w	A	**2 θ	r_ϵ	KM1	Stock	ZM3	Stock	VM1	Stock	DT4	Stock
<p>• Right-Hand style shown</p>	CTP10FRV	12.0	1.0	0.40	20°	0.0	5576079	●	5255708	●	5264841	●	5847942	●
	15FRV		1.5	0.58			5576087	●	5255682	●	5264858	●		
	20FRV		2.0	0.77			5576095	●	5255666	●	5264866	●		
	CTP15FRNV		1.5	—	0°		5576111	●						
	20FRNV		2.0	—			5576020	●						
	CTP10FLV		12.0	1.0	0.40		20°	0.0			5255641	●	5264882	●
	15FLV	1.5		0.58					5255625	●	5264890	●		
	20FLV	2.0		0.77					5255609	●	5264908	●		
	CTP15FLNV	1.5		—	0°	5576012	●							
	20FLNV	2.0		—		5576004	●							
	CTP15FLKV	11.0		1.5	0.58	20°	0.05		5576103	●		5264874	●	
	20FLKV		2.0	0.77							5392691	●		

※ 1: Max. cut-off diameter shows when X end point is 0.0. For more information, see page G67.
 ※ 2: All angles shown are obtained when insert is set in the holder.

CTP Series - Inserts (Ground Chipbreaker : cost advantage style)

Shape	Item Number	*1 Max. Cut-off Dia (mm) ϕD	Dimensions (mm)				PVD Coated Carbide					
			w	A	**2 θ	r_ϵ	ZM3	Stock	QM3	Stock	DT4	Stock
<p>• Right-Hand style shown</p>	CTPX15FR	12.0	1.5	0.46	16°	0.05	5334909	●	5535729	●	5827514	●
	20FR		2.0	0.61			5334834	●	5535745	●	5850169	●
	CTPX15FRN		1.5	—	0°				5535711	●	5850193	●
	20FRN		2.0	—					5535737	●	5850144	●
	CTPX15FL		1.5	0.46	16°						5850227	●
	20FL		2.0	0.61							5850185	●
	CTPX15FLN	1.5	—	0°					5535653	●	5850201	●
	20FLN	2.0	—						5535638	●	5830468	●
	CTPX15FLK	11.0	1.5	0.46	16°	0.05			5535646	●	5850219	●
	20FLK		2.0	0.61					5535620	●	5850177	●

※ 1: Max. cut-off diameter shows when X end point is 0.0. For more information, see page G67.
 ※ 2: All angles shown are obtained when insert is set in the holder.

CTP Series - Inserts (Ground Chipbreaker : Strengthen edge with land style)

Shape	Item Number	*1 Max. Cut-off Dia (mm) ϕD	Dimensions (mm)				PVD Coated Carbide	
			w	A	*2 θ	r_ϵ	ZM3	Stock
<p>● Right-Hand style shown</p>	CTP15FRX	12.0	1.5	0.46	16°	0.05	5360847	●
	20FRX		2.0	0.61			5360839	●
	CTP15FRNX		1.5	—	0°		5360813	●
	20FRNX		2.0	—			5360821	●

※ 1 : Max. cut-off diameter shows when X end point is 0.0. For more information, see page G67.
 ※ 2 : All angles shown are obtained when insert is set in the holder.

CTP Series - Inserts (Ground Chipbreaker : Strengthen edge with land style)

Shape	Item Number	*1 Max. Cut-off Dia (mm) ϕD	Dimensions (mm)				PVD Coated Carbide	
			w	A	*2 θ	r_ϵ	ST4	Stock
<p>● Right-Hand style shown</p>	CTP10FR-TH	12.0	1.0	0.32	16°	0.05	5038823	●
	CTP15FR-TH		1.5	0.46			5040118	●
	CTP20FR-TH		2.0	0.61			5040167	●
	CTP10FRN-TH		1.0	—	0°		5038849	●
	CTP15FRN-TH		1.5	—			5040134	●
	CTP20FRN-TH		2.0	—			5040183	●
	CTP10FLK-TH	11.0	1.0	0.32	16°		5038856	●
	CTP15FLK-TH		1.5	0.46			5040142	●
	CTP20FLK-TH		2.0	0.61			5040191	●
	CTP10FLN-TH	12.0	1.0	—	0°		5038864	●
	CTP15FLN-TH		1.5	—			5040159	●
	CTP20FLN-TH		2.0	—			5040209	●


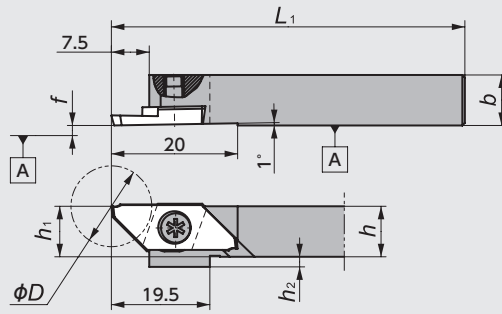
※ 1 : Max. cut-off diameter shows when X end point is 0.0. For more information, see page G67.
 ※ 2 : All angles shown are obtained when insert is set in the holder.

New Products
 Tool Materials / Selection Guide
 Micrograin Carbide, BIDEIMS, PCD, CBN and Ceramics
 PVD Coated Carbide
 Insert Item List
 General Turning Toolholders
 Unique Swiss Tooling
 Grooving / Side Turning
 Threading
 Shaper
 ID Tooling
 Application Introduction
 Endmills
 Rotating Tools
 Information
 Index

CTPA Series Max. Cut-off Dia. ~ 16.0mm

CTPA

Screw accessible from both sides



● Right-Hand style shown

Figure-1


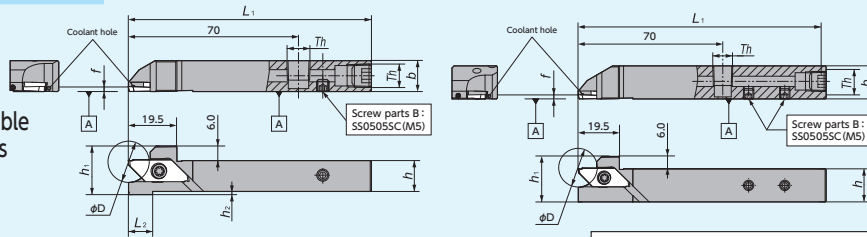
CTPA-OH2

□12 : CTPA $\frac{R}{L}$ 12H-OH2

□16 : CTPA $\frac{R}{L}$ 16X-OH2

(Coolant through)

Screw accessible from both sides





● Right-Hand style shown

Figure-2 ● Left-Hand holders are designed for Right-Hand machines

Th (Screw parts A)
1212/1616 size : SPR1/8(Rc1/8)

CTPA-OH

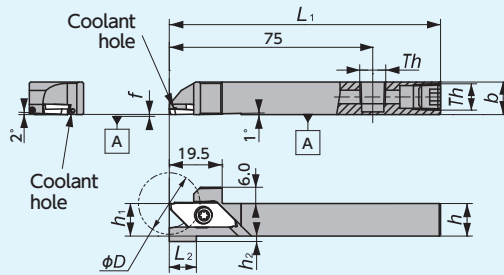(Coolant through)
Screw accessible from both sides





● Right-Hand style shown

Figure-3 ● Left-Hand holders are designed for Right-Hand machines

Th
□12, □16 : Rc1/8 (PT1/8)

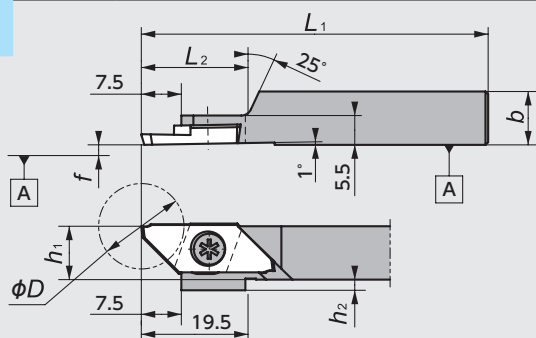CTPAR-SUB





● Right-Hand style shown

Figure-4

ϕD_s
CTPAR-SUB : $\phi 36\text{mm}$

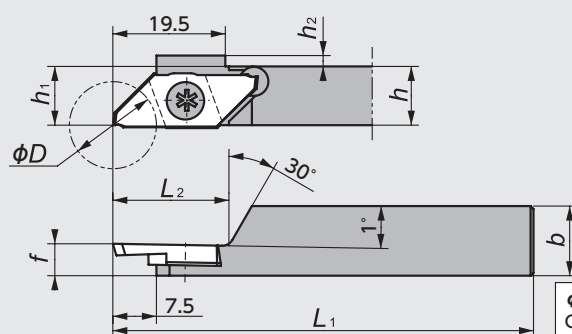CTPAL-SUB











● Left-Hand style shown

Figure-5






ϕD_s
CTPAL-SUB : $\phi 36\text{mm}$

CTPA Series - Toolholders

Figure	Code No.		Item Number	Stock		Max. Cut-off Dia (mm) ϕD	Dimensions (mm)							Gage insert 	Spare Parts		
	R	L		R	L		h	b	L ₁	h ₁	h ₂	L ₂	f		Clamp Screw		Wrench
															(A)	(B)	(A) 
1	5199187	5199153	CTPA $\frac{R}{L}$ 10	●	●	16.0 ※	10	10	120	10	2	—	0.0	 CTPA (Cut-off) G82~84 TBPA (Back Turning) G55	LRIS-4*10PW (A)		
	5016209	5016217	12GX	●	●		12	12	85	12	0				LRIS-4*12PW (A)	CLR-15S (A)	
	5199195	5199161	12	●	●		16	16	16	16	0				LRIS-4*10 (B)	LLR-25S (B)	
	5199203	5199179	16	●	●		20	20	80	20	0						
	5459540	5459557	20F	●	●												
2	5037932	5037924	CTPA $\frac{R}{L}$ 12H-OH2	●	●	16.0 ※	12	12	100	12	2	10	2.0※	 CTPA (Cut-off) G82~84	LRIS-4*12PW (A)		CLR-15S (A)
	5043872	5043864	16X-OH2	●	●		16	16	120	16	0	0	2.0※				
3	5931522	5931530	CTPA $\frac{R}{L}$ 12H-OH	●	●	16.0 ※	12	12	100	12	2	10	2.0※	 CTPA (Cut-off) G82~84	LRIS-4*12PW (A)		CLR-15S (A)
	5931548	5931563	16H-OH	●	●		16	16		16	0	0	2.0※				
4	5600770		CTPAR10GX-SUB	●		16.0 ※	10	10	85	10	2	20	0.0	 CTPA-FR (N)(V)(NV) G82~84	LRIS-4*5 (B)		LLR-25S (B)
	5454681		12GX-SUB	●			12	12		12	0						
	5570676		12KX-SUB	●			120										
5		5505904	CTPAL10GX-SUB		●	16.0 ※	10	10	85	10	2	5.5	0	 CTPA-FL (N)(K)(NV)(KV) G82~84	LRIS-4*5 (B)		LLR-25S (B)
		5454699	12GX-SUB		●		12	12		12	0				28		
		5570684	12KX-SUB		●		120										
		5604871	16GX-SUB		●		16	16		85	16				28		
		5981659	16KX-SUB		●		120										

※ Would be changed by insert.


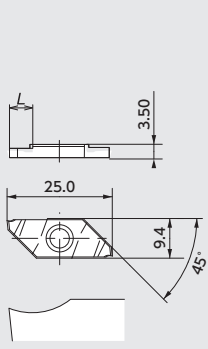
CTPA Series - Inserts (Ground Chipbreaker)

Shape	Item Number	※1 Max. Cut-off Dia (mm) ϕD	Dimensions (mm)				PVD Coated Carbide					PCD		
			w	A	※2 θ	r_ϵ	ZM3 Stock	QM3 Stock	VM1 Stock	DT4 Stock	PD1 Stock			
	CTPA07FR	8.0	0.7	0.23	16°	0.05	5501242	●						
	10FR	12.0	1.0	0.32			5501218	●						
	15FR	16.0	1.5	0.46			5248075	●	5270020	●	5439328	●	5855077	●
	20FR	16.0	2.0	0.61			5194113	●	5229596	●	5439310	●	5854997	●
	CTPA07FRN	8.0	0.7	—	0°	0.05	5512496	●						
	10FRN	12.0	1.0	—			5496880	●						
	15FRN	16.0	1.5	—			5271473	●	5556881	●	5415096	●	5855051	●
	20FRN	16.0	—	—			5199146	●	5562715	●	5476338	●	5854989	●
	20FRN-P	16.0	2.0	—			0.1						5781620 (1 corner)	●
	30FRN	3.0	—	—			0.05		5789151	●				
	CTPA07FL	8.0	0.7	0.23	16°	0.05	5501234	●						
	10FL	12.0	1.0	0.32			5501226	●						
	15FL	16.0	1.5	0.46			5342688	●				5855101	●	
	20FL	16.0	2.0	0.61			5199138	●				5855036	●	
	CTPA10FLN	12.0	—	—	0°	0.05	5496898	●						
	10FLND	12.0	1.0	—			5789599	●						
	15FLN	16.0	1.5	—			5286349	●	5562707	●	5365747	●	5855085	●
	20FLN	16.0	2.0	—			5199120	●	5250964	●	5439351	●	5854971	●
	20FLN-P	16.0	—	—			0.1						5781646 (1 corner)	●
	30FLN	3.0	—	—			0.05		5782677	●				
	CTPA07FLK	6.5	0.7	0.23	16°	0.05	5505912	●						
	10FLK	11.0	—	0.32			5496906	●						
	10FLKD	16.0	1.0	0.32			5789607	●						
	15FLK	14.5	1.5	0.46			5248083	●	5562699	●	5476320	●	5855093	●
	20FLK	14.5	2.0	0.61			5199112	●	5250774	●	5439369	●	5855002	●

● Right-Hand style shown


※ 1: Max. cut-off diameter shows when X end point is 0.0. For more information, see page G67.
 ※ 2: All angles shown are obtained when insert is set in the holder.

CTPA Series - Inserts (3D Molded Chipbreaker)

 	Item Number	*1 Max. Cut-off Dia (mm) ϕD	Dimensions (mm)				PVD Coated Carbide			
			w	A	**2 θ	r_e	ST4	Stock	DM4	Stock
<ul style="list-style-type: none"> ● Right-Hand style shown 	CTPA15FR-CX	16.0	1.5	0.46	16°	0.05	5044763	●	5044755	●
	CTPA15FRN-CX	16.0	1.5	—	0°	0.05	5039458	●	5999685	●
	CTPA15FLK-CX	14.5	1.5	0.46	16°	0.05	5044789	●	5044771	●
	CTPA15FLN-CX	16.0	1.5	—	0°	0.05	5039466	●	5999693	●

※ 1 : Max. cut-off diameter shows when X end point is 0.0. For more information, see page G67.
 ※ 2 : All angles shown are obtained when insert is set in the holder.

CTPA Series - Inserts (Ground Chipbreaker : Strengthen edge with land style)

Shape	Item Number	*1 Max. Cut-off Dia (mm) ϕD	Dimensions (mm)				PVD Coated Carbide	
			w	A	**2 θ	r_e	ST4	Stock
 <ul style="list-style-type: none"> ● Right-Hand style shown 	CTPA15FR-TH	16	1.5	0.46	16°	0.05	5040035	●
	20FR-TH		2.0	0.61			5040076	●
	CTPA15FRN-TH	16	1.5	—	0°		5040043	●
	20FRN-TH		2.0	—			5040084	●
	CTPA15FLK-TH	14.5	1.5	0.46	16°		5040050	●
	20FLK-TH		2.0	0.61			5040092	●
	CTPA15FLN-TH	16	1.5	—	0°		5040068	●
	20FLN-TH		2.0	—			5040100	●

※ 1 : Max. cut-off diameter shows when X end point is 0.0. For more information, see page G67.
 ※ 2 : All angles shown are obtained when insert is set in the holder.

CTPA Series - Inserts (Without Chipbreaker)

Shape	Item Number	※1 Max. Cut-off Dia (mm) ϕD	Dimensions (mm)				Carbide		PVD Coated Carbide				
			w	A	※2 θ	r_ϵ	KM1	Stock	ZM3	Stock	VM1	Stock	
	CTPA20FRS	16.0	2.0	-	0°	0.05			5378823	●			
Mirror finish 	CTPA20FRV			0.77	20°		5576038	●			5264916	●	
Mirror finish 	CTPA20FRNV					0.0			5576046	●			
	CTPA20FLS					-	0°	0.05			5225255	●	
Mirror finish 	CTPA20FLV			0.77	20°							5264924	●
Mirror finish 	CTPA20FLNV					-	0°	0.0	5576053	●			
Mirror finish 	CTPA20FLKV			14.5	0.77	20°			5576061	●			5264932

● Right-Hand style shown

※ 1 : Max. cut-off diameter shows when X end point is 0.0. For more information, see page G67.
 ※ 2 : All angles shown are obtained when insert is set in the holder.

MEMO

NTK

New Products

Tool Materials / Selection Guide

BIDEMCS, PCD, CBN and Ceramics

Micrograin Carbide, PVD Coated Carbide

Insert Item List

General Turning Toolholders

Unique Swiss Tooling

Grooving / Side Turning

Threading

Shaper

ID Tooling

Application Introduction

Endmills

Rotating Tools


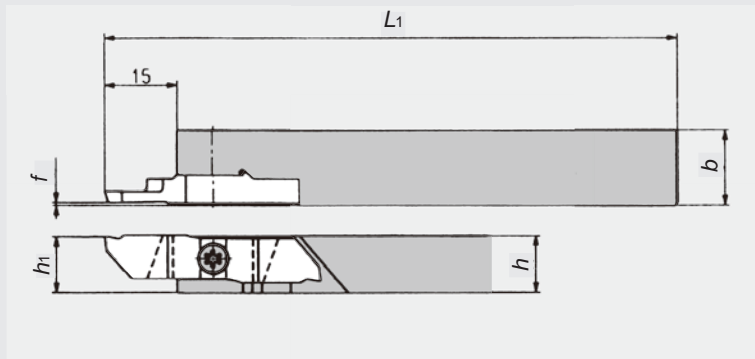
Information

Index

SS Tools for Cutting off




CTPW Series Max. Cut-off Dia. ~ 20.0mm

CTPW

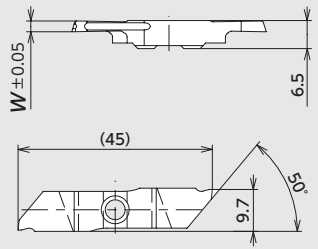









● Right-Hand style shown

CTPW Series - Toolholders

Code No.		Item Number	Stock		Max. Cut-off Dia (mm) ϕD	Dimensions (mm)					Gage insert 	Spare Parts	
R	L		R	L		h	b	L ₁	h ₁	f		Clamp Screw 	Wrench 
—	5487004	CTPW^{R/L}10A	—	●	20.0	10	12	120	9.95	0.6	CTPW25 ^{R/L}	LRIS-4*10	LLR-25S
5443593	—	10	●	—		16	12		11.95				
—	5488150	12A	—	●		12	12	15.95					
5443601	—	12	●	—		16	16	19.95					
5443627	5486980	16	●	●		16	16	19.95					
5443635	5486998	20	●	●		20	20	19.95					

CTPW Series - Inserts



Shape	Item Number	Chip-breaker	Max. Cut-off Dia (mm) ϕD	Dimensions (mm)					PVD Coated Carbide ZM3			
				w	A	θ	r _{e1}	r _{e2}	R	Stock	L	Stock
 <p>● Left-Hand style shown</p>	 CTPW25F^{R/L}	No	20.0	2.5	0.81	17°	0.05	0.20	5437991	●	5487053	●
	 CTPW25F^{R/L}K	Yes			0.81	17°	0.05	0.20	5437991	●	5487012	●
	 CTPW25F^{R/L}N	No			—	0°	0.05	0.05	5438056	●	5487046	●
	 CTPW25F^{R/L}P 	No			0.81	17°	0.05	0.20	5443650	●	5487038	●
	 CTPW25F^{R/L}NV 	No			—	0°	0.00	0.00	5438049	●	5487020	●

※ 1 : Max. cut-off diameter shows when X end point is 0.0. For more information, see page G67.
 ※ 2 : All angles shown are obtained when insert is set in the holder.

CTV Series Max. Cut-off Dia. ~ 20.0mm

CTV-K2

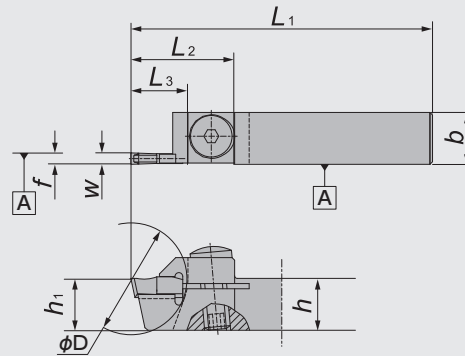Screw accessible from both sides



● Right-Hand style shown

Figure-1

CTVN-K2

Screw accessible from both sides


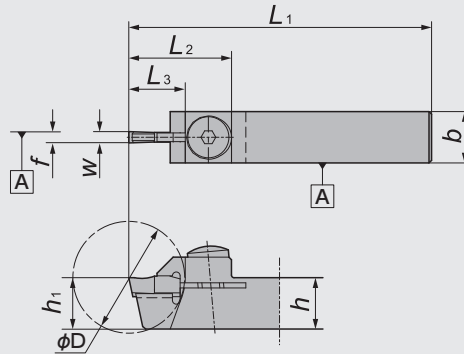


Figure-2

CTV Series - Toolholders

Figure	Code No.		Item Number	Stock		*1 Max. Cut-off Dia. (mm) ϕD	Dimensions (mm)						Gage insert	Spare Parts			
	R	L		R	L		w	h	b	L ₁	h ₁	f		L ₂	L ₃	Clamp Screw	Wrench
1	5111919	5111927	CTV ^{R/L} 10K2	●	●	20.0	2.2	10	10	120	10	0.0	20.0	11	CTV-S	AOS-5*16	LW-2.5S
		5459763	12GX2		●		2.2	12	12	85	12						
	5111950	5111935	12K2	●	●		2.2	12	12	120	12						
2	5208236		CTVN10K2	●		20.0	2.2	10	10	120	10	3.9	19.5	11	CTV-S	AOS-5*16	LW-2.5S
	5208244		12K2	●			2.2	12	12	120	12	4.9					

Note: f shows when takes CTV22.. insert.

*1: Max. cut-off diameter shows when X end point is 0.0. For more information, see page G67.




CTV Series - Inserts

Shape	Item Number	Dimensions (mm)					PVD Coated Carbide		
		w	L	A	*2 θ	r _ε	ZM3	Stock	
<p>Single-sided</p> <p>CTV..N.S CTV..R.S CTV..L.S</p>	CTV22N05S	2.2	10	—	0°	0.05	5111976	●	
	22N10S			—		0.10	5111992	●	
	CTV25N05S	2.5		—		0.05	5112024	●	
	25N10S			—		0.10	5112073	●	
	CTV22R05S	2.2		0.74		17°	0.05	5111968	●
	22R10S			0.74			0.10	5112008	●
	CTV25R05S	2.5	0.83	0.05	5112032		●		
	25R10S		0.83	0.10	5112065		●		
	CTV22L05S	2.2	0.74	0.05	5111984		●		
	22L10S		0.74	0.10	5112016		●		
	CTV25L05S	2.5	0.83	0.05	5112040	●			
	25L10S		0.83	0.10	5112057	●			

*2: All angles shown are obtained when insert is set in the holder.

SS Tools for Cutting off

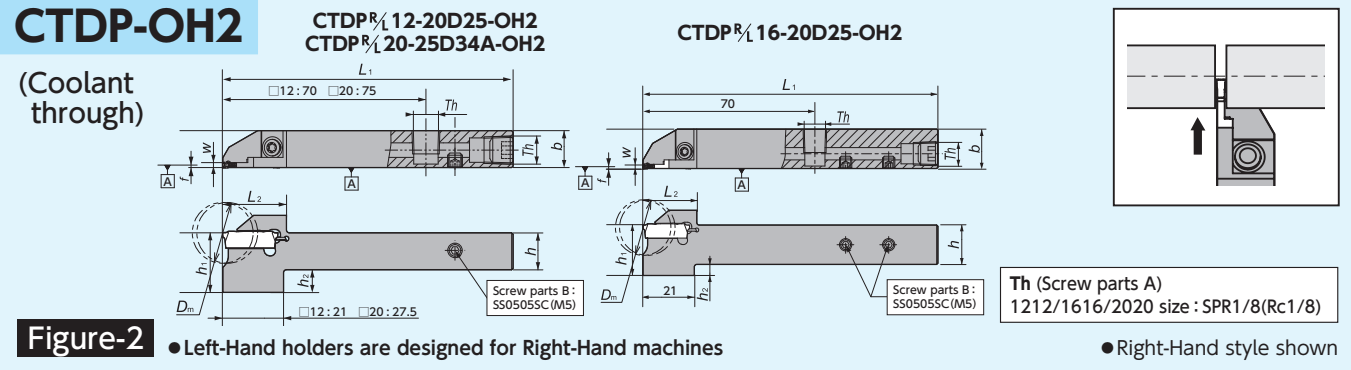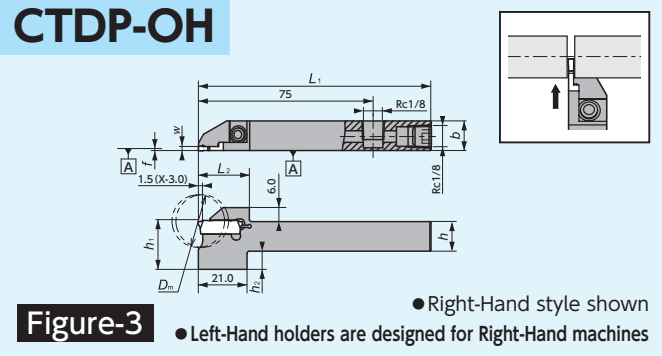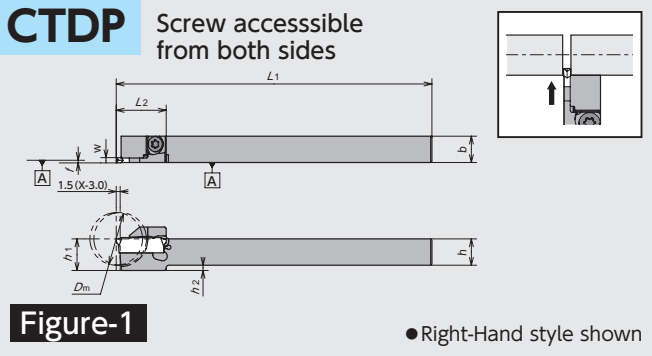CTDP (Cut Duo) Series Max. Cut-off Dia. ~ 20.0, ~ 25.4, ~ 32.0, ~ 34.0mm



CTDP Series - Toolholders

Figure	Code No.		Item Number	Stock		Max. Cut-off Dia (mm) D _m	Dimensions (mm)							Gage insert	Spare Parts	
	R	L		R	L		w	h	b	L ₁	h ₁	h ₂	f		L ₂	Clamp Screw
1	5750534	5750559	CTDP _{R/L} 10-20D20	●	●	20.0	2.0	10	10	120	10	2	0.15	CTDP20	LRIS-4 * 12	LLR-25S
	5717087	5717079	12-20D20	●	●		2.0	12	12	120	12	0				
	5717103	5717095	12-20D25	●	●	25.4	2.0	12	12	120	12	0				
	5750567	5750575	16-20D25	●	●		2.0	16	16	120	16	0				
	5842299	5842307	16-20D32A	●	●	32.0	2.0	16	16	120	16	0				
	5842331	5842349	2012-20D32A	●	●		2.0	20	12	120	20	0				
	5842315	5842323	20-20D32A	●	●	34.0	2.0	20	20	120	20	0				
	5842356	5842364	16-25D34A	●	●		2.5	16	16	120	16	0				
	5842398	5842406	2012-25D34A	●	●	34.0	2.5	20	12	120	20	0				
	5842372	5842380	20-25D34A	●	●		2.5	20	20	120	20	0				
2	5037916	5037908	CTDP _{R/L} 12-20D25-OH2	●	●	25.4	2.0	12	12	100	20.5	8.5	0.15	CTDP20	LRIS-4 * 12	LLR-25S
	5043856	5043849	16-20D25-OH2	●	●		2.0	16	16	120	20.5	4.5				
	5043930	5043948	20-25D34A-OH2	●	●		2.5	20	20	120	24.0	4.0				
3	5972567	5972989	CTDP _{R/L} 12-20D25-OH	●	●	25.4	2.0	12	12	100	20.5	8.5	0.15	CTDP20	LRIS-4 * 12	LLR-25S
	5972575	5973003	16-20D25-OH	●	●		2.0	16	16	100	20.5	4.5				

*Do not tighten clamp screw without installing insert as it may damage the insert pocket.


CTDP Series - Inserts

Shape	Item Number	Dimensions (mm)				PVD Coated Carbide								
		w	L	θ	r _e	TM4	Stock	QM3	Stock	DM4	Stock			
	CTDP20N	2.0	19.1	0°	0.05	5717012	●	5717004	●	5844972	●			
	20N02				0.2	5716998	●	5716980	●	5839352	●			
	20R6			6°	0.05	5717038	●	5717020	●	5844956	●			
	20R15				0.05	5717061	●	5717046	●	5844964	●			
	CTDP25N				2.5	21.2	0°	0.05	5750682	●	5750690	●	5846944	●
	25N02							0.2	5750708	●	5750732	●	5846936	●
25R6	6°	0.05	5750740	●			5750757	●	5852694	●				
25R15		0.05	5750765	●	5750773	●	5849377	●						

CTWP (CUT DUO EXTRA) Series Max. Cut-off Dia. ~ 42.0mm

CTWP

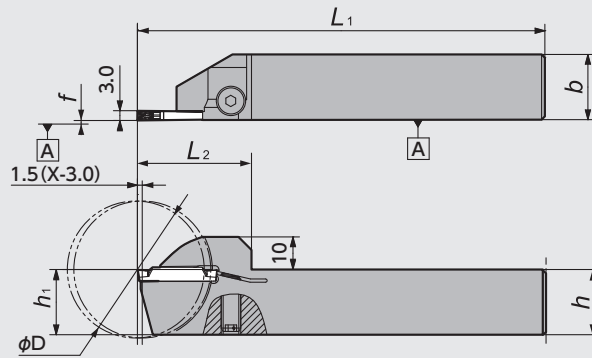Screw accessible from both sides




● Right-Hand style shown

Figure-1

CTWP-003

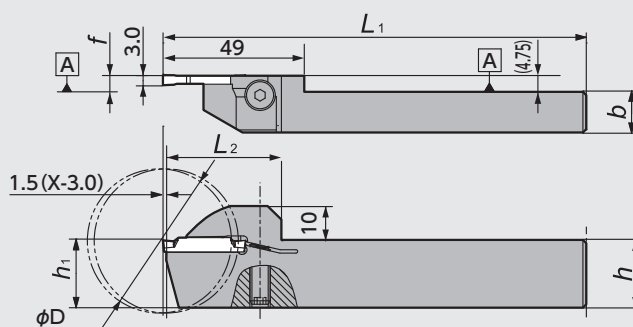Screw accessible from both sides



● Left-Hand style shown

Figure-2

CTWP Series - Toolholders

Figure	Code No.		Item Number	Stock		Max. Cut-off Dia (mm) ϕD	Dimensions (mm)						Gage insert	Spare Parts	
	R	L		R	L		h	b	L ₁	h ₁	f	L ₂		Clamp Screw	Wrench
1	5973912	5973920	CTWP _{R/L} 2012K-3D42	●	●	42	20	12	125	20	0.25	35	GWPFM300	CS0623LSHW	LW-3
	5973870	5973904	2020K-3D42	●	●		20	20							
	5973854	5973862	2525M-3D42	●	●		25	25	150	25					
2		5012976	CTWPL2012K-3D42-003		★		20	12	125	20	5	44			

※Do not tighten clamp screw without installing insert as it may damage the insert pocket.

CTWP Series - Inserts

Shape	Item Number	Dimensions (mm)					PVD Coated Carbide	
		w	r _e	M	L	S	DM4	Stock
	GWPFM300N02-GT	3.0	0.2	2.2	24.5	(4.2)	5963251	●
	GWPFM300N04-GT		0.4				5963269	●

SS Tools for Cutting off

CTV Series Max. Cut-off Dia. ~ 45.0mm

CTV(-S)


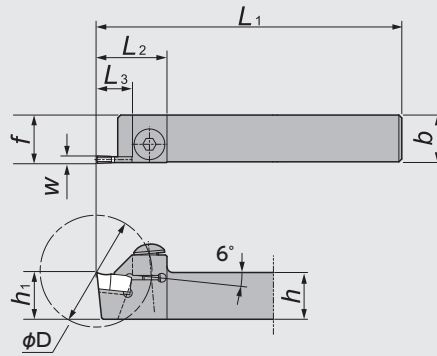


Figure-1

● Right-Hand style shown

CTV-X


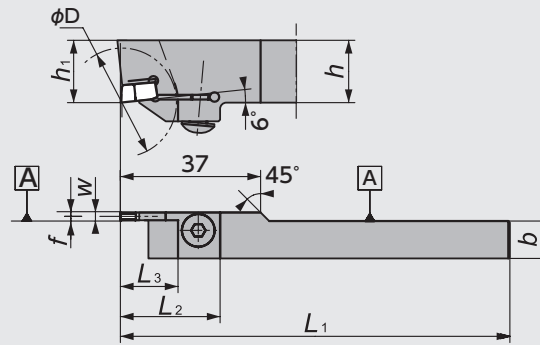


Figure-2

● Left-Hand style shown

CTV-M(B)


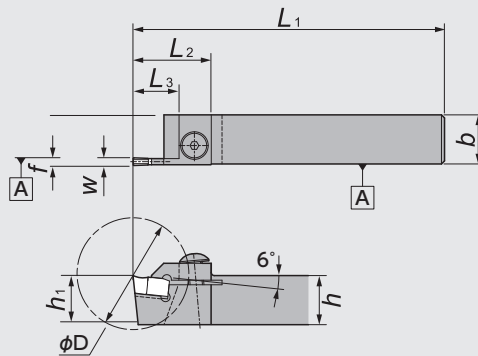























Figure-3

● Right-Hand style shown

CTV Series - Toolholders

Figure	Code No.		Item Number	Stock		*1 Max. Cut-off Dia (mm) ϕD	Dimensions (mm)						Gage insert	Spare Parts												
	R	L		R	L		w	h	b	L ₁	h ₁	f		L ₂	L ₃	Clamp Screw	Wrench									
1	5904131		CTV ^{R/L} 16K25S	●		23.0	2.5	16	16	125	16	16.5	24	12.2												
	5904180		20K25S	●				20	20		20	20.5														
	5904149		16K30S	●			3.0	16	16		16	16.5														
	5904172		20K30S	●				20	20		20	20.5														
	5853619	5853627	16K25	●	●		35.0	2.5	16		16	140	16	16.5				32	18.5							
	5853643	5853635	20K25	●	●				20		20		20	20.5												
	5853593	5853601	16K30	●	●			3.0	16		16		16	16.5												
	5853577	5853585	20K30	●	●				20		20		20	20.5												
	5120423	5122197	1913L25	●	●			3.0	2.5		19		13	19				13.0	32				18.5			
	5120431	5122189	1913L30	●	●				2.5		19		13	19				13.0								
2		5595384	CTVL2012K30X-1		●	3.0		20	12	125	20		3.0													
3	5177100		CTV ^{R/L} 16-25M	●		28.0		2.5	16	16	120		16	0.5	25.5	15										
	5185541		20-25M	●					20	20			20													
	5185566		16-30M	●				3.0	16	16			16		25.5	15										
	5183314		20-30M	●			20		20	20																
	5162219	5184528	25-30B	●	●		45.0	3.0	25	25		150	25		34.5	23.5										

*1 : Max. cut-off diameter shows when X end point is 0.0. For more information, see page G67.

CTV Series - Inserts

Shape	Item Number	Dimensions (mm)					PVD Coated Carbide			
		w	L	A	θ	r_ϵ	ZM3	Stock	QM3	Stock
<p>Single-sided</p>	CTV25N	2.5	12	—	0°	0.20	5862248	●		
	30N	3.0		—			5864145	●	5972997	●
	25R	2.5	0.41	8°		5868633	●			
	30R	3.0	0.49		5866892	●				
	25L	2.5	0.41							
	30L	3.0	0.49		5129564	●				
<p>Single-sided</p>	CTV30N038	3.0	12	—	0°	0.20	5524921	●		
<p>Single-sided</p>	CTV25R00A	2.5	12	0.41	8°	0.05 max.	5162003	●		
	30R00A	3.0		0.49			5185327	●		
	25R00B	2.5		0.83	17°		5185178	●		
	30R00B	3.0		1.00			5183223	●		

※ 2 : All angles shown are obtained when insert is set in the holder.

- New Products
- Tool Materials / Selection Guide
- Micrograin Carbide, BIDEIMCS, PCD, PVD Coated Carbide, CBN and Ceramics
- Insert Item List
- General Turning Toolholders
- Unique Swiss Tooling
- Grooving / Side Turning
- Threading
- Shaper
- ID Tooling
- Application Introduction
- Endmills
- Rotating Tools
- Information
- Index

MEMO

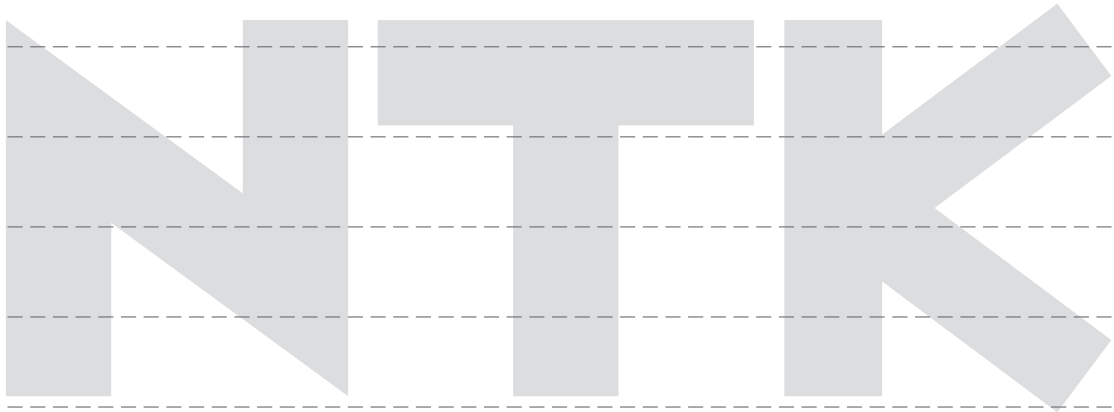
Unique Swiss Tooling

Front Turning

Back Turning

Cut-off

Original Series





Original Series

- CSV Series G94
- CTPS Series G98
- Y-axis Toolholders G100
- Shifted Toolholders G103
- DS Sleeves G104

CSV Series

Tooling for small diameter parts

Best tool for up to 5mm diameter materials

Unique Swiss Tooling



Features

- Very up- sharp edge with mirror finish provides superior precise machining
- Interchangeable tool : All the inserts can use the same toolholder
- Specially designed edge shape for small diameter machining

Front Turning



Front turning

Back Turning



Back turning

Cut-off



Cut-off



CSV toolholder

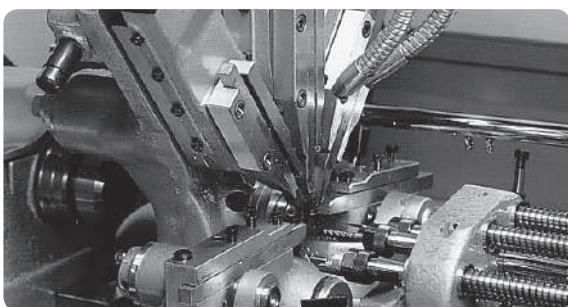


Threading



Grooving

Original Series



- Holders for Cam-style machine also available

CSV Series

CSV

For Cam-style machine

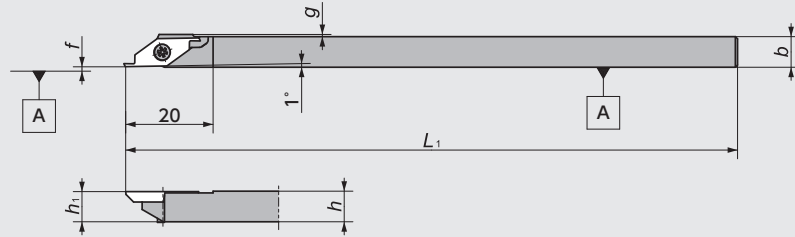


Figure-1

●Right-Hand style shown

CSV-NC

For Gang-style machine

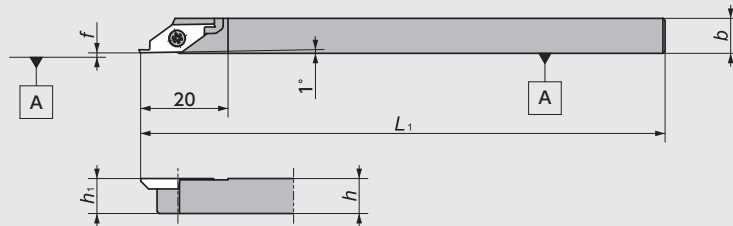


Figure-2

●Right-Hand style shown

CSV-NC-F

For Gang-style machine

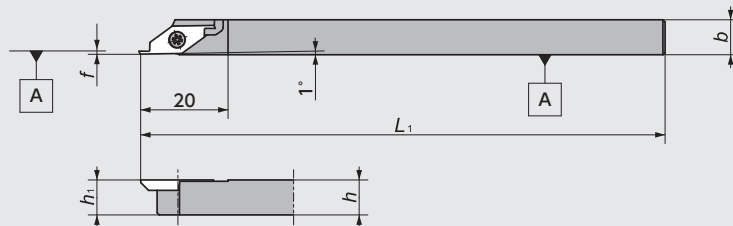


Figure-3

●Right-Hand style shown

CSV Series - Toolholders

Figure	Code No.		Item Number	Stock		Dimensions (mm)						Gage insert	Spare Parts		
	R	L		R	L	h	b	L ₁	h ₁	f	g		Clamp Screw	Wrench	
1	5492962		CSV ^{R/L} 07GX	●		7	7	85	7	0.1	0.5	CSVF CSVB CSVG CSVV CSVW G96~97	LRIS-2.5*7	CLR-15S	
	5303169	5303193	07	●	●			140							
	5492954		08GX	●		8	8	85	8						
	5303151	5303201	08	●	●			140							
	5303136		095	●		9.5	9.5	140	9.5						0.0
	5303144	5303177	10	●	●	10	10	10	10						
	5474770		12GX	●		12	12	85	12						
	5327929		12	●				140							
2	5514062	5514070	CSV ^{R/L} 08NC	●	●	8	8	120	8	0.1	-	CSVF CSVB CSVG CSVV CSVW G96~97	LRIS-2.5*7	CLR-15S	
	5563010		10GXNC	●		10	10	85	10						
	5477492	5477542	10NC	●	●			120							
	5477534	5477500	12NC	●	●	12	12	12	12						
3	5789615		CSV ^{R/L} 08NC-F	●		8	8	120	8	0.0~0.1	-	CSVF CSVB CSVG CSVV CSVW G96~97	LRIS-2.5*7	CLR-15S	

CSV Series - Inserts

Front turning

● CSVF Mirror finish

Shape	Item Number	Chip-breaker	Max Depth of cut (mm)	Dimensions (mm)			PVD Coated Carbide												
				Edge Geometry ($\alpha \times \beta^\circ$)	r_ϵ	ZM3				VM1				DT4					
						R	Stock	L	Stock	R	Stock	L	Stock	R	Stock	L	Stock		
<p>● Right-Hand style shown</p>	CSVF11F ^{R/L} V M	No	—	0.3×5°	0.0					5303516	●	5303557	●						
	11F ^{R/L} V-A M									5358858	●								
	11F ^{R/L} V-M M									5436019	●	5386248	●	5386255	●	5850235	●		
	11F ^{R/L} V-C M											5358577	●						
<p>● Right-Hand style shown</p>	CSVF11F ^{R/L} VB M	Yes	3.0	0.3×5°	0.0					5313168	●	5313150	●						
	11F ^{R/L} VB-A M									5358692	●								
	11F ^{R/L} VB-M M									5436001	●	5386263	●	5386271	●	5850243	●		
	11F ^{R/L} VB-C M											5358700	●						
<p>● Left-Hand style shown</p>	CSVF11F ^{R/L} VX M	No	—	—	0.0									5358866	●				

Note: All angles shown are obtained when insert is set in the holder.

Back turning

● CSVB Mirror finish

Shape	Item Number	Chip-breaker	Length of Blade a (mm)	Max Depth of cut (mm)	Dimensions (mm)			PVD Coated Carbide												
					W	Edge Geometry ($\alpha \times \beta^\circ$)	r_ϵ	ZM3				VM1				DT4				
								R	Stock	L	Stock	R	Stock	L	Stock	R	Stock	L	Stock	
<p>● Right-Hand style shown</p>	CSVB11F ^{R/L} V M	No	0.7	2.0	1.00	0.0					5303573	●	5303532	●						
	11F ^{R/L} V-A M		0.7								5358791	●								
	11F ^{R/L} V-M M		0.7								5435995	●	5386289	●	5386297	●	5827480	●		
	11F ^{R/L} V-C M		0.7										5358809	●						
	11F ^{R/L} V12 M		0.8						1.20				5344890	●						
	11F ^{R/L} V14 M		1.0						1.40				5344908	●						
<p>● Right-Hand style shown</p>	CSVB11F ^{R/L} VB M	Yes	0.7	2.0	1.00	0.0					5358825	●								
	11F ^{R/L} VB-A M		0.7								5358833	●								
	11F ^{R/L} VB-M M		0.7								5435987	●	5386305	●	5386313	●	5827472	●		
	11F ^{R/L} VB-C M		0.7										5358841	●						
	11F ^{R/L} VB12 M		0.8						1.20				5358718	●						
	11F ^{R/L} VB14 M		1.0						1.40				5358726	●						
<p>● Left-Hand style shown</p>	CSVB11F ^{R/L} VX M	No	—	—	—	0.0									5358817	●				

Note: All angles shown are obtained when insert is set in the holder.

Cut-off

● CSVC Mirror finish

Shape	Item Number	Chip-breaker	※ 1 Max. Cut-off Dia (mm) ϕD	Dimensions (mm)			PVD Coated Carbide			
				A	r_ϵ	w	VM1			
							R	Stock	L	Stock
<p>Thickness:2.38</p> <p>● Right-Hand style shown</p>	CSVC11FR/V06	No	3.0	0.31	0.0	0.6	5352547	●		
	11FR/V07		0.36	0.7		5324272	●	5330840	●	
	11FR/V08		0.41	0.8		5324256	●	5330832	●	
	11FR/V09		0.46	0.9		5352554	●			
	11FR/V10		0.51	1.0		5303490	●	5303599	●	
	11FR/V13		0.65	1.3		5311824	●	5311816	●	
	11FR/V15		0.74	1.5		5303615	●	5303631	●	
<p>Thickness:2.38</p> <p>● Right-Hand style shown</p>	CSVC11FR/VB06	Yes	3.0	0.31	0.0	0.6	5358734	●		
	11FR/VB07		0.36	0.7		5358742	●			
	11FR/VB08		0.41	0.8		5358767	●			
	11FR/VB09		0.46	0.9		5358775	●			
	11FR/VB10		0.51	1.0		5358783	●			
	11FR/VB13		0.65	1.3		5358676	●			
	11FR/VB15		0.74	1.5		5358668	●			

※ 1: Max. cut-off diameter shows when X end point is 0.0. For more information, see page G67.
 ※ 2: All angles shown are obtained when insert is set in the holder.

Grooving

● CSVG Mirror finish

Shape	Item Number	Chip-breaker	Max Depth of cut (mm)	Dimensions (mm)			PVD Coated Carbide				
				w	L	r_ϵ	VM1				
							R	Stock	L	Stock	
<p>Thickness:2.38</p> <p>● Right-Hand style shown</p>	CSVG11FR/V025	No	0.15	0.25	0.50	0.0	0.25	5354634	●		
	11FR/V030						0.30	5344940	●		
	11FR/V035						0.35	5354402	●		
	11FR/V040						0.40	5344932	●		
	11FR/V045		0.45	5354394	●						
	11FR/V050		0.50	5354642	●						
	11FR/V055		0.55	5344924	●						
	11FR/V060		0.60	5344916	●						
	11FR/V065		0.65	5354410	●						
	11FR/V070		0.70	5354428	●						
	11FR/V075		0.75	5332812	●	5332820	●				
	11FR/V080		0.80	5358650	●						
	11FR/V085		0.85	5354436	●						
	11FR/V090		0.90	5354444	●						
	11FR/V095		0.95	5332846	●	5332838	●				
	11FR/V100		1.00	5352562	●						
	11FR/V110		1.10	5358643	●						
	11FR/V120		1.20	5352570	●	5357561	●				
	11FR/V130		1.30	5358627	●						
	11FR/V140		1.40	5358619	●						
11FR/V150	1.50	5358601	●								

Threading

● CSVT Mirror finish


Shape	Item Number	Chip-breaker	Pitch	Dimensions (mm)		PVD Coated Carbide			
				r_ϵ	VM1				
					R	Stock	L	Stock	
<p>Thickness:2.38</p> <p>● Right-Hand style shown</p>	CSVT11FR/LP60-035A	No	0.2 ~ 0.5	R0.03MAX	5344874	●	5386909	●	
<p>Thickness:2.38</p> <p>● Right-Hand style shown</p>	CSVT11FR/LP60-035B	No	0.2 ~ 0.5	R0.03MAX	5344882	●	5386917	●	

Note: All angles shown are obtained when insert is set in the holder.

New Products
 Tool Materials / Selection Guide
 BIDE/MCS, PCD, CBN and Ceramics
 Micrograin Carbide, PVD Coated Carbide
 Insert Item List
 General Turning Toolholders
 Unique Swiss Tooling
 Grooving / Side Turning
 Threading
 Shaper
 ID Tooling
 Application Introduction
 Endmills
 Rotating Tools
 Information
 Index

CTPS Series

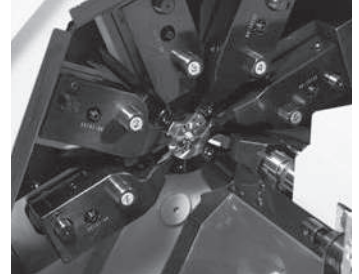Best tool for Cam-style machine !!



Features

- All the inserts can use the same toolholder
- Designed to be used for back turning, cut-off, grooving and threading
- The dedicated SVAC-N type is offered for front turning

CTPS

Best for up to 10mm diameter material

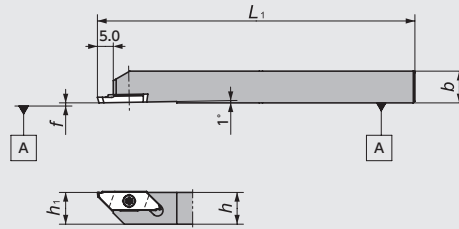


Figure-1

• Right-Hand style shown

CTPSR-SUB

Best for up to 4mm diameter material


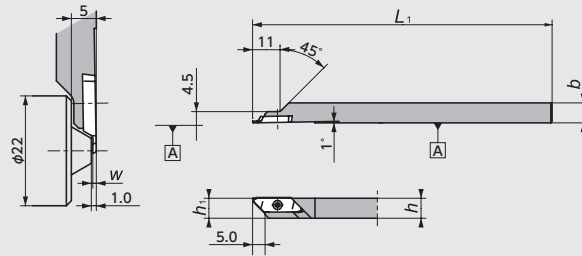


Figure-2



• Right-Hand style shown

CTPS Series - Toolholders

Figure	Code No.	Item Number	Stock	Dimensions (mm)					Gage insert	Spare Parts	
				h	b	L ₁	h ₁	f		Clamp Screw	Wrench
1	5346572	CTPSR10	●	10	10	120	10	0.0	TBPS CTPS GTPS TTPS G98 ~ 99	LRIS-2.5*7	CLR-15S
	5397187	R12	●	12	12		12				
2	5486717	CTPSR08-SUB04	●	8	8	120	8	-	CTPS-001 G99	LRIS-2.5*4.5	CLR-15S

CTPS Series - Inserts

Back turning

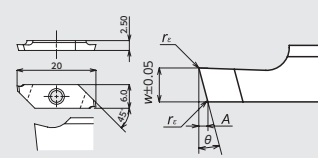




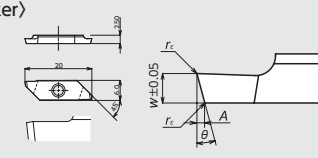




- TBPS

Shape	Item Number	Chip-breaker	Length of Blade a	Max Depth of cut b	Dimensions (mm)		PVD Coated Carbide			
					θ	r _ε	ZM3	Stock	VM1	Stock
(with Chipbreaker) 	TBPS60FR00	Yes	3.1	3.5	60°	0.0	5346150	●	5362553	●
	60FR10						5346168	●	5362561	●
(without Chipbreaker) 	TBPS60FRV	No	4.8	4.8	60°	0.0	5357058	●	5362579	●

Note: All angles shown are obtained when insert is set in the holder.

Cut-off



● CTPS

Shape	Item Number	Chip-breaker	*1 Max. Cut-off Dia (mm) ϕD	Dimensions (mm)				PVD Coated Carbide			
				w	A	θ *2	r_ϵ	ZM3	Stock	VM1	Stock
(with Chipbreaker)  ● Right-Hand style shown	CTPS12FR 	Yes	4.0	1.2	0.37	16°	0.05	5346275	●	5362587	●
	15FR 		5.0	1.5	0.46			5346267	●	5362595	●
	18FR 		8.5	1.8	0.55			5346283	●	5362603	●
	20FR 		10.0	2.0	0.61			5374210	●	5374194	●
(without Chipbreaker) Mirror finish  ● Right-Hand style shown	CTPS12FRV 	No	4.0	1.2	0.47	20°	0.0	5346937	●	5362611	●
	15FRV 		5.0	1.5	0.58			5346929	●	5362629	●
	18FRV 		8.5	1.8	0.70			5346945	●	5362637	●
	20FRV 		10.0	2.0	0.77			5374202	●	5374228	●

※ 1 : Max. cut-off diameter shows when X end point is 0.0. For more information, see page G67.
 ※ 2 : All angles shown are obtained when insert is set in the holder.

Cut-off


● CTPS-001

Shape	Item Number	Chip-breaker	*1 Max. Cut-off Dia (mm) ϕD	Dimensions (mm)				PVD Coated Carbide	
				w	A	θ *2	r_ϵ	ZM3	Stock
 ● Right-Hand style shown	CTPS07FRN-001	Yes	4.0	0.7	—	0°	0.05	5460670	●
	CTPS07FR-001				0.23	16°	0.05	5441852	●
	CTPS07FRV-001 	No	0.28	20°	0.0	5441860	●		

※ 1 : Max. cut-off diameter shows when X end point is 0.0. For more information, see page G67.
 ※ 2 : All angles shown are obtained when insert is set in the holder.


Grooving

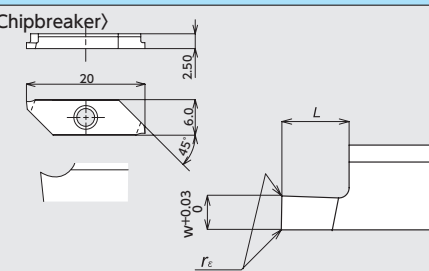● GTPS

Shape	Item Number	Max Depth of cut (mm)	Dimensions (mm)			PVD Coated Carbide			
			w	L	r_ϵ	ZM3	Stock	VM1	Stock
(with Chipbreaker)  ● Right-Hand style shown	GTPS075FR	1.0	0.75	1.5	0.0	5346952	●	5362652	●
	095FR	1.5	0.95	2.0		5346960	●	5362660	●
	100FR		1.00	5346978		●	5362678	●	
	120FR	2.5	1.20	3.0		5346986	●	5362686	●
	150FR		1.50			5346994	●	5362694	●
	200FR		2.00			5347000	●	5362702	●

Threading

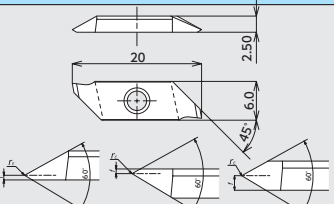● TTPS

Shape	Item Number	Type	Pitch	Dimensions (mm)		PVD Coated Carbide			
				f	r_ϵ	ZM3	Stock	VM1	Stock
 ● Right-Hand style shown	TTPS60FR4A	A	0.2 ~ 0.75	0.4	0.05MAX Flat	5346648	●	5362710	●
	60FR4B	B				5346663	●	5362728	●
	60FR8A	A	0.5 ~ 1.25	0.8	0.05	5346689	●	5362744	●
	60FR8B	B				5346671	●	5362736	●
	60FR-N	N	1.0 ~ 1.5	1.25	0.1	5346655	●	5362751	●

Note: All angles shown are obtained when insert is set in the holder.

Y-axis Toolholders

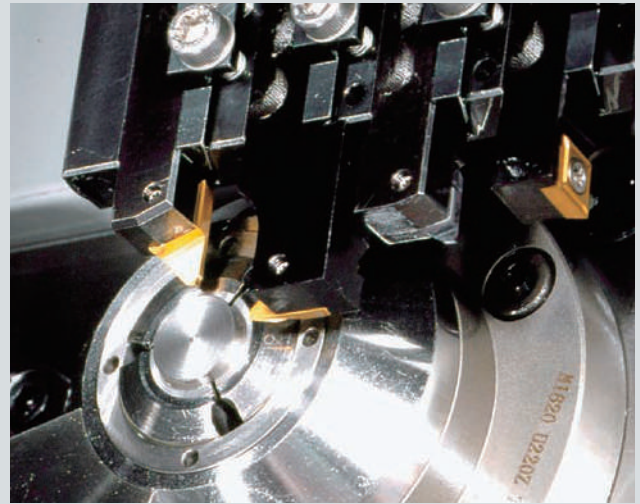
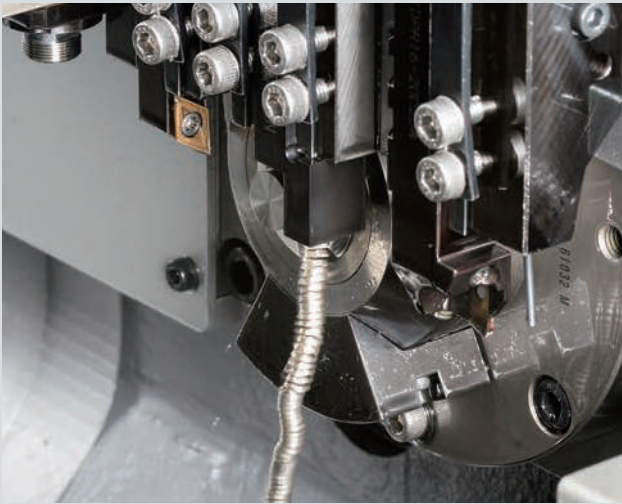
Chip control by gravity



Features

- Chip drops down to the bed of the machine due to gravity, and chip control problem is solved
- Available in coolant through style
- Front turning, grooving, and back turning operations can be performed by utilizing Y-axis control

Front Turning



Back Turning

Cut-off



- Perfect solution for chip problems
- Less wear, more stable dimensions

Original Series





Programming guidance

Regular Toolholder					Y-axis Toolholder			
① T300				Select tool	① T300			
② G0	X11.0	Z0	T3	Position tool	② G0	Y11.0	Z0	T3
③					③	X0		
④ G1	X8.0		F0.08	Move to OD to cut	④ G1	Y8.0		F0.08
⑤		Z5.0	F0.05	Cut 5mm length	⑤		Z5.0	F0.05
⑥	X11.0			Cut face	⑥	Y11.0		
⑦ G0	X11.0				⑦ G0	X11.0		

Cut by X-axis



Cut by Y-axis

Note: Need Y-offset for holder shank size.





Lineup

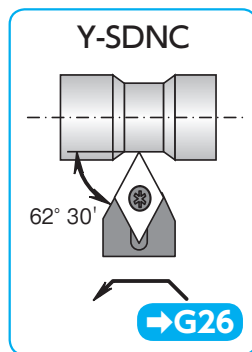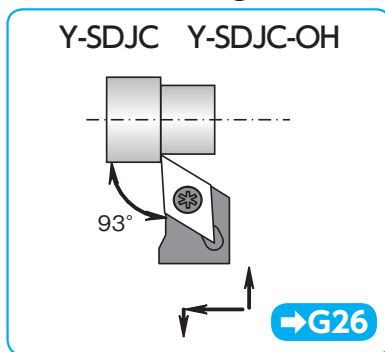
Front Turning



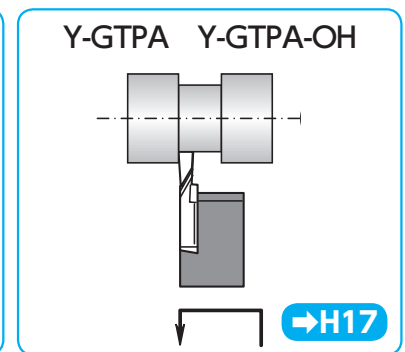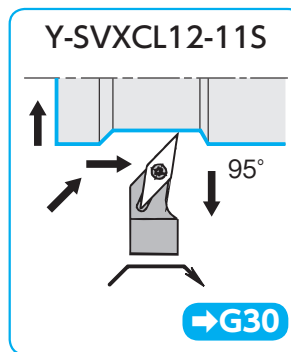
Multi-functional Grooving for non-ferrous material



Back Turning

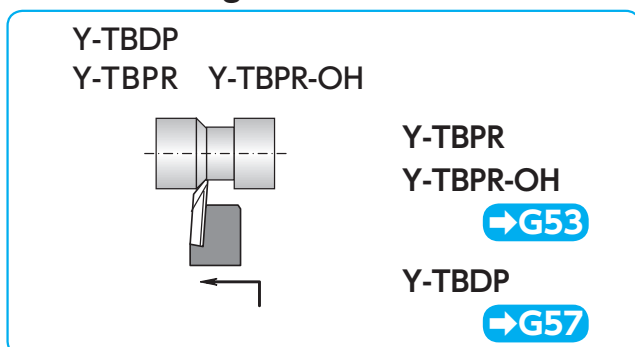

Grooving / Side turning / Back turning

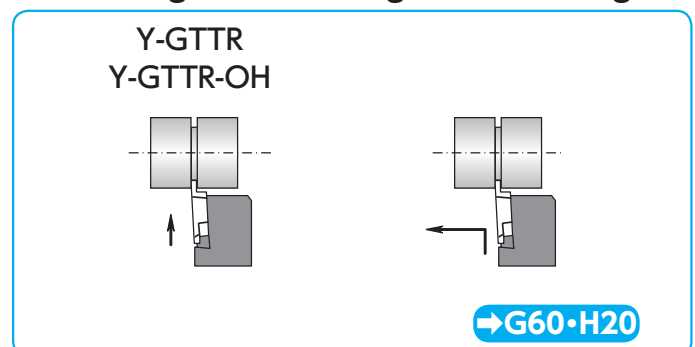


◆ Important notes for using Y-axis holders



Up to 2 Y-axis holders can be installed on a tool post. Do not install side by side in order to prevent interference.

When changing tools, set the backward position of the tool post with the overhang of the Y-axis holder(s) as per the reference.


When changing from the tool No. (2) to (4)





If installed side by side, the work piece and the Y-axis holders may interfere with each other.



Move the tool post back based on the position of the cutting edge of the Y-axis holder (3).



Install a non-Y-axis type holder between the two Y-axis holders.



OD machining table

The OD that can be machined are indicated by the grooving holder "Y-GTTR type" as an example (The dimensions of other Y-axis holders are the same.)

Overhang of the Y-axis holder	Figures	L			
		Item	20	22	25
20		D1 Machinable outer dia. for holder A	Not limited	Not limited	Not limited
		D2 Machinable outer dia. for holder B	13	13	13
		D3 Machinable outer dia. for holder C	Not limited	Not limited	Not limited
25		D1 Machinable outer dia. for holder A	38	58	Not limited
		D2 Machinable outer dia. for holder B	14.9	13.6	13
		D3 Machinable outer dia. for holder C	38	58	Not limited
30		D1 Machinable outer dia. for holder A	26.8	29	38.5
		D2 Machinable outer dia. for holder B	20.6	17.9	14.9
		D3 Machinable outer dia. for holder C	33 26.8 for TBP type	37 29 for TBP type	51.5 38.5 for TBP type

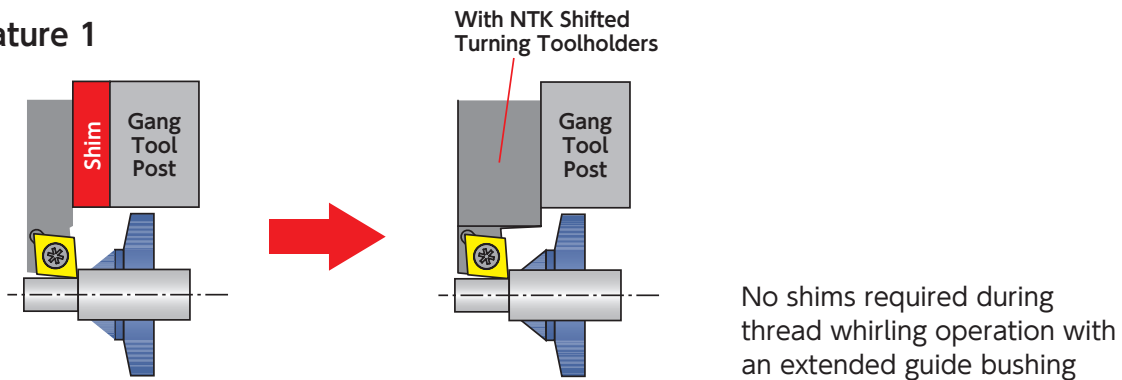
Shifted Toolholders Toolholders for extended guide-bushing




Two Major Features

1. Eliminate shims for turning holders when extended guide bushing is used (especially in thread whirling)
2. Performs finish cut without retracting roughed section (bar) from guide bushing

• Feature 1



• Feature 2

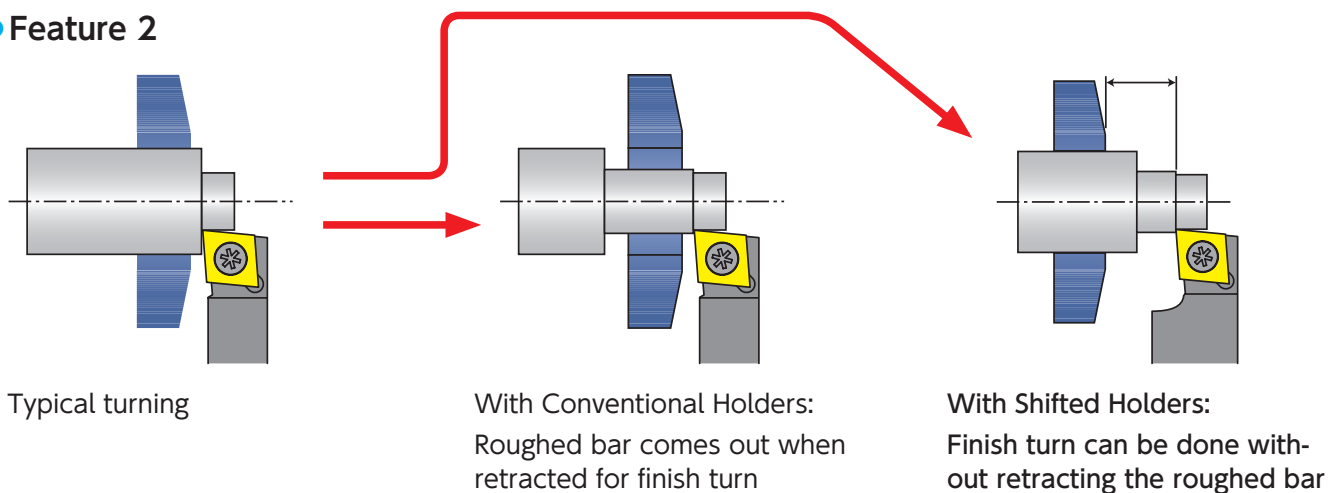

DS Sleeve

Features

- Prevents coolant and chips from damaging live tool stations
- Accepts DS Series holders to perform various back working
- Designed exclusively for 22mm and 34mm round shank stations
- Compatible with 16mm / 22mm round shank DS Series holders



First Recommendation for Turning

✗

Coolant and chips sneak in.

When DS holders are used directly in live tool stations, coolant and chips sneak in from the flat of holders to damage the live stations

➔

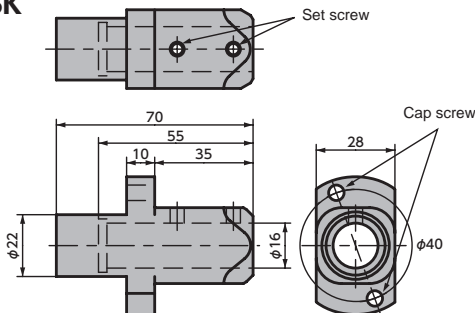
✓

Stop coolant and chips from damaging live tool stations.

By using the DS Sleeve, you can use the DS Series holders without any worry about damaging live stations


For Back 4-spindle unit

SS-DSU-SK




SS-DSU-L23

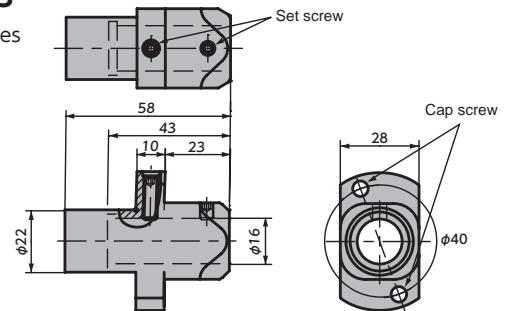For DS-ACH series




For Back 8-spindle unit

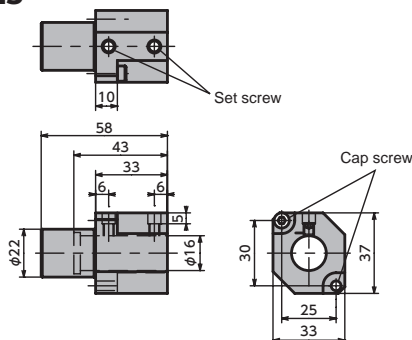SS-DSU-B8L23



SS-DSU-B8D34

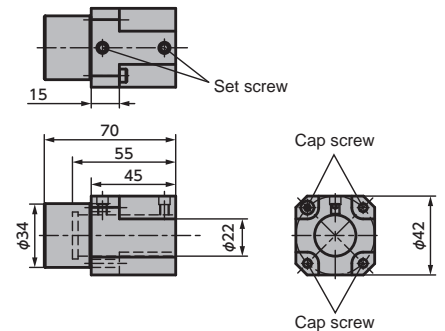

Code No.	Item number	Stock	Spare parts				Coment
			Cap screw	Wrench	Set screw	Wrench	
5788401	SS-DSU-SK	●	CS0520	LW-4	SS0506	LW-2.5	For DS-ACH Series
5814512	SS-DSU-L23	●	CS0520	LW-4	SS0506 SS0515	LW-2.5	
5892070	SS-DSU-B8L23	●	CS0420	LW-3	SS0506	LW-2.5	Can take DS-ACH Series
5948252	SS-DSU-B8D34	●	CS0425	LW-3	SS0506	LW-2.5	

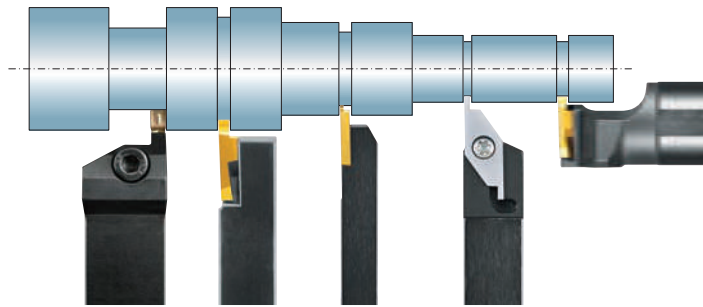
H





Grooving / Side Turning







● Grooving Tools	H2
● Recommended Cutting Conditions	H4
● General Information	H8
● Tool List	H14
CSV Series	H14
CTPS Series	H16
GTPA Series	H17
GTM.32 Series	H18
GTM.43 Series	H26
GTW Series (SCRUM DUO)	H28
TWG Series	H32
SBG Series (ID grooving)	H34
BG Series (ID grooving)	H35
GKV Series (ID grooving)	H36
SFG Series (ID Face grooving)	H37
SATURN DUO Series (Face grooving)	H38
GWPFM Series (SCRUM DUO BLADE)	H40
GFV Series	H48







NTK Grooving / Side Turning Tools - Product Lines




Insert	CSVG →H15	GTPS →H16
	CSV	CTPS
Holder		
	→H14	→H16
Blade width	0.25 ~ 1.50mm	0.75 ~ 2.0mm
Depth of cut	~ 2.60mm	~ 2.50mm





OD Grooving

Insert	GTMH32 / GTMX32 →H22					
	GTT	GTT-OH2/OH	Y-GTT	Y-GTT-OH	DS-GTT	CH-GTT
Holder						
	→H18	→H18 Coolant through	→H20 Y-axis	→H20 Y-axis/Coolant through	→H18 DS Holder	→H18
Blade width	0.3 ~ 3.0mm					
Depth of cut	~ 2.7mm					

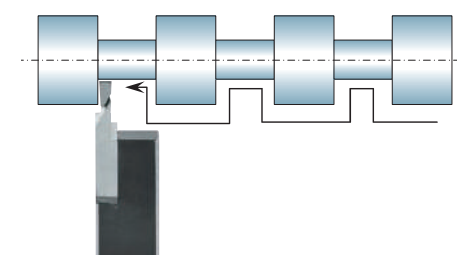
Insert	GWP →H29	GTMA43 / GTMT43 →H27		TWG →H32	GTV/GEV →H31	
	GTWP	NGTN(B)	NGTA	TWG	GTV	GKV
Holder						
	→H28	→H26	→H26	→H32	→H30	→H30
Blade width	3.0 ~ 5.9mm	1.45 ~ 5.5mm		2.0 ~ 3.0mm	3.0 ~ 8.0mm	3.0 ~ 8.0mm
Depth of cut	~ 9.0mm	4.50mm		~ 3.0mm	11.0mm	11.0mm




Multifunctional Grooving for non-ferrous material







Insert	GTPA →H17			
	GTPA	GTPA-OH	Y-GTPA	Y-GTPA-OH
Holder				
	→H17	→H17 Coolant through	→H17 Y-axis	→H17 Y-axis/Coolant through
Blade width	2.0 ~ 2.50mm			
Depth of cut	~ 6.0mm			

Face Grooving







Insert	FGV ➔H39	FBV ➔H39	
Holder	 ➔H38	 ➔H38 DS Holder	 ➔H38
Blade width	1.0mm ~ 2.0mm		
Depth of cut	~ 3.0mm	FGV : ~ 3.0mm FBV : ~ 4.0mm	





Insert	GWPFM ➔H42	GFV ➔H48	
Holder	 ➔H41	 ➔H48	 ➔H48
Blade width	3.0 ~ 6.0mm	6.0mm	
Depth of cut	~ 15.0mm	6.0mm	


ID Grooving




Insert	SBG ➔H34	GTG ➔H35
Holder	 ➔K8	 ➔H35
Blade width	0.5 ~ 2.0mm	0.5 ~ 2.0mm
Depth of cut	~ 2.0mm	~ 3.0mm

Insert	GEV ➔H36	TWG ➔H32
Holder	 ➔H36	 ➔H32
Blade width	3.0 ~ 3.5mm	2.0 ~ 3.0mm
Depth of cut	~ 9.5mm	~ 3.0mm

ID Face Grooving



Insert	SFG ➔H37
Holder	 ➔K8
Blade width	1.0 ~ 3.0mm
Depth of cut	~ 2.8mm

Grooving / Side Turning

Recommended Cutting Conditions

OD Grooving / Multifunctional Grooving for non-ferrous material

Feed Rate (mm/rev) ① Grooving ② Side turning	Work Material	Low Carbon Steel	Carbon Steel	Alloy Steel	Stainless Steel		
		S10C ~ 30C	S45C ~ S55C	SCr/SCM	Ferritic	Austenitic	Martensitic Precipitation hardenic
		SUS303/SUS430	SUS304/ SUS316L	SUS440C/ SUS630			
Cutting Speed (m/min)	50 90 130	50 80 130	50 80 130	50 100 170	50 70 100	30 60 80	
CSVG11F $\frac{\%}{\square}$ V $\square\square\square$ Side Turning Max Depth of Cut : 0.2mm.	Grade	VM1	VM1	VM1	VM1	VM1	VM1
	Blade width (mm)						
	0.25 ~ 0.5	① 0.005 ~ 0.02 ② 0.002 ~ 0.01	① 0.005 ~ 0.02 ② 0.002 ~ 0.01	① 0.005 ~ 0.02 ② 0.002 ~ 0.01	① 0.005 ~ 0.03 ② 0.002 ~ 0.01	① 0.005 ~ 0.02 ② 0.002 ~ 0.01	① 0.005 ~ 0.015 ② 0.002 ~ 0.01
	0.5 ~ 1.0	① 0.005 ~ 0.03 ② 0.005 ~ 0.02	① 0.005 ~ 0.03 ② 0.005 ~ 0.02	① 0.005 ~ 0.03 ② 0.005 ~ 0.02	① 0.005 ~ 0.04 ② 0.005 ~ 0.02	① 0.005 ~ 0.03 ② 0.005 ~ 0.02	① 0.005 ~ 0.02 ② 0.005 ~ 0.015
1.0 ~ 1.5	① 0.01 ~ 0.04 ② 0.01 ~ 0.03	① 0.01 ~ 0.04 ② 0.01 ~ 0.03	① 0.01 ~ 0.04 ② 0.01 ~ 0.03	① 0.01 ~ 0.05 ② 0.01 ~ 0.03	① 0.01 ~ 0.04 ② 0.01 ~ 0.02	① 0.01 ~ 0.03 ② 0.01 ~ 0.02	
GTMH32 $\square\square\square$ RGX Side Turning Max Depth of Cut : 0.75 ~ 2.0mm.	Grade	DM4/TM4	DM4	DM4	ST4	ST4	ST4
	Blade width (mm)						
	0.75 ~ 1.0	① 0.02 ~ 0.06 ② 0.01 ~ 0.06	① 0.02 ~ 0.06 ② 0.01 ~ 0.06	① 0.02 ~ 0.06 ② 0.01 ~ 0.06	① 0.02 ~ 0.07 ② 0.01 ~ 0.07	① 0.02 ~ 0.05 ② 0.01 ~ 0.05	① 0.02 ~ 0.04 ② 0.01 ~ 0.04
	1.0 ~ 1.5	① 0.03 ~ 0.07 ② 0.02 ~ 0.07	① 0.03 ~ 0.07 ② 0.02 ~ 0.07	① 0.03 ~ 0.07 ② 0.02 ~ 0.07	① 0.03 ~ 0.08 ② 0.02 ~ 0.08	① 0.02 ~ 0.06 ② 0.02 ~ 0.06	① 0.02 ~ 0.05 ② 0.01 ~ 0.05
2.0 ~ 3.0	① 0.03 ~ 0.10 ② 0.03 ~ 0.09	① 0.03 ~ 0.10 ② 0.03 ~ 0.09	① 0.03 ~ 0.10 ② 0.03 ~ 0.09	① 0.03 ~ 0.12 ② 0.03 ~ 0.10	① 0.03 ~ 0.08 ② 0.02 ~ 0.07	① 0.02 ~ 0.07 ② 0.02 ~ 0.06	
GTMX32 $\square\square\square$ $\frac{\%}{\square}$ T $\square\square$ GTMH32 $\square\square\square$ RVT Side Turning Max Depth of Cut : 0.25 ~ 2.0mm.	Grade	DT4	QM3	QM3	DT4/VM1	DT4/QM3	DT4/QM3
	Blade width (mm)						
	0.30 ~ 0.75	① 0.005 ~ 0.04 ② 0.005 ~ 0.02	① 0.005 ~ 0.04 ② 0.005 ~ 0.02	① 0.005 ~ 0.04 ② 0.005 ~ 0.02	① 0.005 ~ 0.05 ② 0.005 ~ 0.03	① 0.005 ~ 0.04 ② 0.005 ~ 0.02	① 0.005 ~ 0.03 ② 0.005 ~ 0.02
	0.75 ~ 1.2	① 0.02 ~ 0.06 ② 0.01 ~ 0.04	① 0.02 ~ 0.06 ② 0.01 ~ 0.04	① 0.02 ~ 0.06 ② 0.01 ~ 0.04	① 0.02 ~ 0.07 ② 0.01 ~ 0.05	① 0.02 ~ 0.06 ② 0.01 ~ 0.04	① 0.02 ~ 0.05 ② 0.01 ~ 0.04
1.2 ~ 2.0	① 0.02 ~ 0.08 ② 0.02 ~ 0.05	① 0.02 ~ 0.08 ② 0.02 ~ 0.05	① 0.02 ~ 0.08 ② 0.02 ~ 0.05	① 0.02 ~ 0.09 ② 0.02 ~ 0.06	① 0.02 ~ 0.08 ② 0.02 ~ 0.05	① 0.02 ~ 0.06 ② 0.02 ~ 0.05	
2.0 ~ 3.0	① 0.03 ~ 0.10 ② 0.03 ~ 0.07	① 0.03 ~ 0.10 ② 0.03 ~ 0.07	① 0.03 ~ 0.10 ② 0.03 ~ 0.07	① 0.03 ~ 0.10 ② 0.03 ~ 0.08	① 0.03 ~ 0.09 ② 0.03 ~ 0.06	① 0.03 ~ 0.08 ② 0.03 ~ 0.06	
GTMH32 $\square\square\square$ $\frac{\%}{\square}$ E $\square\square\square$ GTMH32 $\square\square\square$ RSSH GTMX32 $\square\square\square$ RSS GTMX32 $\square\square\square$ RLS Side Turning Max Depth of Cut : 0.2mm.	Grade	ZM3	ZM3	ZM3	ZM3	ZM3	ZM3
	Blade width (mm)						
	0.30 ~ 0.75	① 0.005 ~ 0.04 ② 0.005 ~ 0.02	① 0.005 ~ 0.04 ② 0.005 ~ 0.02	① 0.005 ~ 0.04 ② 0.005 ~ 0.02	① 0.005 ~ 0.05 ② 0.005 ~ 0.03	① 0.005 ~ 0.04 ② 0.005 ~ 0.02	① 0.005 ~ 0.03 ② 0.005 ~ 0.02
	0.75 ~ 1.2	① 0.02 ~ 0.06 ② 0.01 ~ 0.04	① 0.02 ~ 0.06 ② 0.01 ~ 0.04	① 0.02 ~ 0.06 ② 0.01 ~ 0.04	① 0.02 ~ 0.07 ② 0.01 ~ 0.05	① 0.02 ~ 0.06 ② 0.01 ~ 0.04	① 0.02 ~ 0.05 ② 0.01 ~ 0.04
1.0 ~ 2.0	① 0.02 ~ 0.08 ② 0.02 ~ 0.05	① 0.02 ~ 0.08 ② 0.02 ~ 0.05	① 0.02 ~ 0.08 ② 0.02 ~ 0.05	① 0.02 ~ 0.09 ② 0.02 ~ 0.06	① 0.02 ~ 0.08 ② 0.02 ~ 0.05	① 0.02 ~ 0.06 ② 0.02 ~ 0.05	
2.0 ~ 3.0	① 0.03 ~ 0.10 ② 0.03 ~ 0.07	① 0.03 ~ 0.10 ② 0.03 ~ 0.07	① 0.03 ~ 0.10 ② 0.03 ~ 0.07	① 0.03 ~ 0.10 ② 0.03 ~ 0.08	① 0.03 ~ 0.09 ② 0.03 ~ 0.06	① 0.03 ~ 0.08 ② 0.03 ~ 0.06	
GTMT43 $\square\square\square$ $\frac{\%}{\square}$ GTM43 $\square\square\square$ R $\square\square$ R Side Turning Max Depth of Cut : 0.2mm.	Grade	QM3/DM4	QM3/DM4	QM3/DM4	DM4	DM4/QM3	DM4
	Blade width (mm)						
	1.00 ~ 2.00	① 0.02 ~ 0.08 ② 0.02 ~ 0.05	① 0.02 ~ 0.08 ② 0.02 ~ 0.05	① 0.02 ~ 0.08 ② 0.02 ~ 0.05	① 0.02 ~ 0.09 ② 0.02 ~ 0.06	① 0.02 ~ 0.08 ② 0.02 ~ 0.05	① 0.02 ~ 0.06 ② 0.02 ~ 0.05
2.00 ~ 3.00	① 0.03 ~ 0.10 ② 0.03 ~ 0.07	① 0.03 ~ 0.10 ② 0.03 ~ 0.07	① 0.03 ~ 0.10 ② 0.03 ~ 0.07	① 0.03 ~ 0.10 ② 0.03 ~ 0.08	① 0.03 ~ 0.09 ② 0.03 ~ 0.06	① 0.03 ~ 0.08 ② 0.03 ~ 0.06	
3.00 ~ 5.50	① 0.05 ~ 0.15 ② 0.04 ~ 0.10	① 0.05 ~ 0.15 ② 0.04 ~ 0.10	① 0.05 ~ 0.15 ② 0.04 ~ 0.10	① 0.05 ~ 0.15 ② 0.04 ~ 0.10	① 0.05 ~ 0.12 ② 0.04 ~ 0.10	① 0.05 ~ 0.12 ② 0.04 ~ 0.10	
GWPG $\square\square\square$ N0 $\square\square$ -GW GWPG $\square\square\square$ N0 $\square\square$ -GV GWPM $\square\square\square$ N0 $\square\square$ -GW Side Turning Max Depth of Cut : 3.5mm.	Grade	DM4	DM4	DM4	DM4	DM4	DM4
	Blade width (mm)						
	3.00 ~ 4.00	① 0.05 ~ 0.12 ② 0.03 ~ 0.10	① 0.05 ~ 0.12 ② 0.03 ~ 0.10	① 0.05 ~ 0.12 ② 0.03 ~ 0.10	① 0.05 ~ 0.12 ② 0.03 ~ 0.10	① 0.05 ~ 0.10 ② 0.03 ~ 0.08	① 0.05 ~ 0.08 ② 0.03 ~ 0.07
	4.00 ~ 5.00	① 0.05 ~ 0.15 ② 0.03 ~ 0.13	① 0.05 ~ 0.15 ② 0.03 ~ 0.13	① 0.05 ~ 0.15 ② 0.03 ~ 0.13	① 0.05 ~ 0.15 ② 0.03 ~ 0.13	① 0.05 ~ 0.13 ② 0.03 ~ 0.10	① 0.05 ~ 0.11 ② 0.03 ~ 0.09
5.00 ~ 6.00	① 0.05 ~ 0.15 ② 0.04 ~ 0.13	① 0.05 ~ 0.15 ② 0.04 ~ 0.13	① 0.05 ~ 0.15 ② 0.04 ~ 0.13	① 0.05 ~ 0.15 ② 0.04 ~ 0.13	① 0.05 ~ 0.15 ② 0.04 ~ 0.10	① 0.05 ~ 0.13 ② 0.04 ~ 0.10	
GEV $\square\square\square$ N GTV $\square\square\square$ N GVMB20 $\square\square\square$ N Side Turning Max Depth of Cut : Blade width × 0.5mm.	Grade	QM3	QM3	QM3	QM3	QM3	QM3
	Blade width (mm)						
	3.00 ~ 4.50	① 0.05 ~ 0.12 ② 0.03 ~ 0.10	① 0.05 ~ 0.12 ② 0.03 ~ 0.10	① 0.05 ~ 0.12 ② 0.03 ~ 0.10	① 0.05 ~ 0.12 ② 0.03 ~ 0.10	① 0.05 ~ 0.10 ② 0.03 ~ 0.08	① 0.05 ~ 0.08 ② 0.03 ~ 0.07
	4.50 ~ 6.00	① 0.05 ~ 0.15 ② 0.04 ~ 0.13	① 0.05 ~ 0.15 ② 0.04 ~ 0.13	① 0.05 ~ 0.15 ② 0.04 ~ 0.13	① 0.05 ~ 0.15 ② 0.04 ~ 0.13	① 0.05 ~ 0.15 ② 0.04 ~ 0.10	① 0.05 ~ 0.13 ② 0.04 ~ 0.10
6.00 ~ 8.00	① 0.05 ~ 0.20 ② 0.03 ~ 0.13	① 0.05 ~ 0.20 ② 0.03 ~ 0.13	① 0.05 ~ 0.20 ② 0.03 ~ 0.13	① 0.05 ~ 0.20 ② 0.03 ~ 0.13	① 0.05 ~ 0.15 ② 0.03 ~ 0.12	① 0.05 ~ 0.15 ② 0.03 ~ 0.12	
GTPA2 \square FRN01 GTPA2 \square FRN01-08 \square Side Turning Max Depth of Cut : Blade width × 0.8mm.	Grade	—	—	—	—	—	—
	Blade width (mm)						
2.00 ~ 2.50	—	—	—	—	—	—	

Sulfur free cutting steel Sulfur complex free cutting steel	High-carbon chromium bearing steel	Electromagnetic soft iron	Electromagnetic stainless	Titanium alloy	Aluminum alloy	Work Material	Feed Rate (mm/rev) ① Grooving ② Side turning
SUM	SUJ	SUY		6AL-4V	A5052		
50 100 150	50 90 160	50 100 150	50 90 160	50 70 100	80 150 200	Cutting Speed (m/min)	
VM1	VM1	VM1	VM1	VM1	VM1	Grade Blade width (mm)	
① 0.005 ~ 0.03 ② 0.002 ~ 0.01	① 0.005 ~ 0.02 ② 0.002 ~ 0.01	① 0.005 ~ 0.03 ② 0.002 ~ 0.01	① 0.005 ~ 0.02 ② 0.002 ~ 0.01	① 0.005 ~ 0.02 ② 0.002 ~ 0.01	① 0.005 ~ 0.03 ② 0.002 ~ 0.02	0.25 ~ 0.5	CSVG11F $\frac{1}{2}$ V □□□
① 0.005 ~ 0.05 ② 0.005 ~ 0.02	① 0.005 ~ 0.03 ② 0.005 ~ 0.02	① 0.005 ~ 0.05 ② 0.005 ~ 0.02	① 0.005 ~ 0.03 ② 0.005 ~ 0.02	① 0.005 ~ 0.02 ② 0.005 ~ 0.02	① 0.005 ~ 0.04 ② 0.005 ~ 0.03	0.5 ~ 1.0	Side Turning Max Depth of Cut : 0.2mm.
① 0.01 ~ 0.05 ② 0.01 ~ 0.03	① 0.01 ~ 0.04 ② 0.01 ~ 0.03	① 0.01 ~ 0.05 ② 0.01 ~ 0.03	① 0.01 ~ 0.04 ② 0.01 ~ 0.03	① 0.01 ~ 0.04 ② 0.01 ~ 0.02	① 0.01 ~ 0.05 ② 0.01 ~ 0.04	1.0 ~ 1.5	
TM4	DM4	DM4	DM4	TM4	TM4	Grade Blade width (mm)	
① 0.02 ~ 0.07 ② 0.01 ~ 0.07	① 0.02 ~ 0.06 ② 0.01 ~ 0.06	① 0.02 ~ 0.07 ② 0.01 ~ 0.07	① 0.02 ~ 0.06 ② 0.01 ~ 0.06	① 0.02 ~ 0.06 ② 0.01 ~ 0.05	① 0.02 ~ 0.08 ② 0.01 ~ 0.08	0.75 ~ 1.0	GTMH32 □□□ RGX
① 0.03 ~ 0.08 ② 0.02 ~ 0.08	① 0.03 ~ 0.07 ② 0.02 ~ 0.07	① 0.03 ~ 0.08 ② 0.02 ~ 0.08	① 0.03 ~ 0.07 ② 0.02 ~ 0.07	① 0.02 ~ 0.07 ② 0.02 ~ 0.06	① 0.03 ~ 0.10 ② 0.03 ~ 0.10	1.0 ~ 1.5	Side Turning Max Depth of Cut : 0.75 ~ 2.0mm.
① 0.03 ~ 0.12 ② 0.03 ~ 0.10	① 0.03 ~ 0.10 ② 0.03 ~ 0.09	① 0.03 ~ 0.12 ② 0.03 ~ 0.10	① 0.03 ~ 0.10 ② 0.03 ~ 0.09	① 0.03 ~ 0.10 ② 0.02 ~ 0.08	① 0.03 ~ 0.15 ② 0.03 ~ 0.10	2.0 ~ 3.0	
VM1/DT4	QM3/DT4	VM1/DT4	QM3/DT4	DT4	VM1	Grade Blade width (mm)	
① 0.005 ~ 0.05 ② 0.005 ~ 0.03	① 0.005 ~ 0.04 ② 0.005 ~ 0.02	① 0.005 ~ 0.05 ② 0.005 ~ 0.03	① 0.005 ~ 0.04 ② 0.005 ~ 0.02	① 0.005 ~ 0.04 ② 0.005 ~ 0.02	① 0.005 ~ 0.06 ② 0.005 ~ 0.03	0.30 ~ 0.75	GTMX32 □□□ $\frac{1}{2}$ T □□
① 0.02 ~ 0.07 ② 0.01 ~ 0.05	① 0.02 ~ 0.06 ② 0.01 ~ 0.04	① 0.02 ~ 0.07 ② 0.01 ~ 0.05	① 0.02 ~ 0.06 ② 0.01 ~ 0.04	① 0.02 ~ 0.06 ② 0.01 ~ 0.04	① 0.02 ~ 0.09 ② 0.01 ~ 0.05	0.75 ~ 1.2	GTMH32 □□□ RVT
① 0.02 ~ 0.09 ② 0.02 ~ 0.06	① 0.02 ~ 0.08 ② 0.02 ~ 0.05	① 0.02 ~ 0.09 ② 0.02 ~ 0.06	① 0.02 ~ 0.08 ② 0.02 ~ 0.05	① 0.02 ~ 0.08 ② 0.02 ~ 0.05	① 0.03 ~ 0.12 ② 0.03 ~ 0.10	1.2 ~ 2.0	Side Turning Max Depth of Cut : 0.25 ~ 2.0mm.
① 0.03 ~ 0.10 ② 0.03 ~ 0.08	① 0.03 ~ 0.10 ② 0.03 ~ 0.07	① 0.03 ~ 0.10 ② 0.03 ~ 0.08	① 0.03 ~ 0.10 ② 0.03 ~ 0.07	① 0.03 ~ 0.09 ② 0.03 ~ 0.06	① 0.03 ~ 0.15 ② 0.03 ~ 0.10	2.0 ~ 3.0	
ZM3	ZM3	ZM3	ZM3	ZM3	KM1/ZM3	Grade Blade width (mm)	
① 0.005 ~ 0.05 ② 0.005 ~ 0.03	① 0.005 ~ 0.04 ② 0.005 ~ 0.02	① 0.005 ~ 0.05 ② 0.005 ~ 0.03	① 0.005 ~ 0.04 ② 0.005 ~ 0.02	① 0.005 ~ 0.04 ② 0.005 ~ 0.02	① 0.005 ~ 0.06 ② 0.005 ~ 0.03	0.30 ~ 0.75	GTMH32 □□□ $\frac{1}{2}$ E □□□
① 0.02 ~ 0.07 ② 0.01 ~ 0.05	① 0.02 ~ 0.06 ② 0.01 ~ 0.04	① 0.02 ~ 0.07 ② 0.01 ~ 0.05	① 0.02 ~ 0.06 ② 0.01 ~ 0.04	① 0.02 ~ 0.06 ② 0.01 ~ 0.04	① 0.02 ~ 0.09 ② 0.01 ~ 0.05	0.75 ~ 1.2	GTMH32 □□□ RSSH
① 0.02 ~ 0.09 ② 0.02 ~ 0.06	① 0.02 ~ 0.08 ② 0.02 ~ 0.05	① 0.02 ~ 0.09 ② 0.02 ~ 0.06	① 0.02 ~ 0.08 ② 0.02 ~ 0.05	① 0.02 ~ 0.08 ② 0.02 ~ 0.05	① 0.03 ~ 0.12 ② 0.03 ~ 0.10	1.0 ~ 2.0	GTMX32 □□□ RSS
① 0.03 ~ 0.10 ② 0.03 ~ 0.08	① 0.03 ~ 0.10 ② 0.03 ~ 0.07	① 0.03 ~ 0.10 ② 0.03 ~ 0.08	① 0.03 ~ 0.10 ② 0.03 ~ 0.07	① 0.03 ~ 0.09 ② 0.03 ~ 0.06	① 0.03 ~ 0.15 ② 0.03 ~ 0.10	2.0 ~ 3.0	GTMX32 □□□ RLS
							Side Turning Max Depth of Cut : 0.2mm.
DM4	QM3/DM4	DM4	QM3/DM4	DM4	—	Grade Blade width (mm)	
① 0.02 ~ 0.09 ② 0.02 ~ 0.06	① 0.02 ~ 0.08 ② 0.02 ~ 0.05	① 0.02 ~ 0.09 ② 0.02 ~ 0.06	① 0.02 ~ 0.08 ② 0.02 ~ 0.05	① 0.02 ~ 0.08 ② 0.02 ~ 0.05	① 0.03 ~ 0.12 ② 0.03 ~ 0.10	1.00 ~ 2.00	GTMT43 □□□ $\frac{1}{2}$ R
① 0.03 ~ 0.10 ② 0.03 ~ 0.08	① 0.03 ~ 0.10 ② 0.03 ~ 0.07	① 0.03 ~ 0.10 ② 0.03 ~ 0.08	① 0.03 ~ 0.10 ② 0.03 ~ 0.07	① 0.03 ~ 0.09 ② 0.03 ~ 0.06	① 0.03 ~ 0.15 ② 0.03 ~ 0.10	2.00 ~ 3.00	GTMA43 □□□ R □□ R
① 0.05 ~ 0.15 ② 0.04 ~ 0.10	① 0.05 ~ 0.15 ② 0.04 ~ 0.10	① 0.05 ~ 0.15 ② 0.04 ~ 0.10	① 0.05 ~ 0.15 ② 0.04 ~ 0.10	① 0.05 ~ 0.12 ② 0.04 ~ 0.10	① 0.05 ~ 0.15 ② 0.04 ~ 0.10	3.00 ~ 5.50	Side Turning Max Depth of Cut : 0.2mm.
DM4	DM4	DM4	DM4	DM4	—	Grade Blade width (mm)	
① 0.05 ~ 0.12 ② 0.03 ~ 0.10	① 0.05 ~ 0.12 ② 0.03 ~ 0.10	① 0.05 ~ 0.12 ② 0.03 ~ 0.10	① 0.05 ~ 0.12 ② 0.03 ~ 0.10	① 0.05 ~ 0.12 ② 0.03 ~ 0.09	—	3.00 ~ 4.00	GWPG □□□ NO □□ -GW
① 0.05 ~ 0.15 ② 0.03 ~ 0.13	① 0.05 ~ 0.15 ② 0.03 ~ 0.13	① 0.05 ~ 0.15 ② 0.03 ~ 0.13	① 0.05 ~ 0.15 ② 0.03 ~ 0.13	① 0.05 ~ 0.15 ② 0.03 ~ 0.10	—	4.00 ~ 5.00	GWPG □□□ NO □□ -GV
① 0.05 ~ 0.15 ② 0.04 ~ 0.13	① 0.05 ~ 0.15 ② 0.04 ~ 0.13	① 0.05 ~ 0.15 ② 0.04 ~ 0.13	① 0.05 ~ 0.15 ② 0.04 ~ 0.13	① 0.05 ~ 0.15 ② 0.04 ~ 0.12	—	5.00 ~ 6.00	GWPM □□□ NO □□ -GW
							Side Turning Max Depth of Cut : 3.5mm.
QM3	QM3	QM3	QM3	QM3	—	Grade Blade width (mm)	
① 0.05 ~ 0.12 ② 0.03 ~ 0.10	① 0.05 ~ 0.12 ② 0.03 ~ 0.10	① 0.05 ~ 0.12 ② 0.03 ~ 0.10	① 0.05 ~ 0.12 ② 0.03 ~ 0.10	① 0.05 ~ 0.12 ② 0.03 ~ 0.09	—	3.00 ~ 4.50	GEV □□□ N
① 0.05 ~ 0.15 ② 0.04 ~ 0.13	① 0.05 ~ 0.15 ② 0.04 ~ 0.13	① 0.05 ~ 0.15 ② 0.04 ~ 0.13	① 0.05 ~ 0.15 ② 0.04 ~ 0.13	① 0.05 ~ 0.15 ② 0.04 ~ 0.12	—	4.50 ~ 6.00	GTV □□□ N
① 0.05 ~ 0.20 ② 0.03 ~ 0.13	① 0.05 ~ 0.20 ② 0.03 ~ 0.13	① 0.05 ~ 0.20 ② 0.03 ~ 0.13	① 0.05 ~ 0.20 ② 0.03 ~ 0.13	① 0.05 ~ 0.15 ② 0.03 ~ 0.12	—	6.00 ~ 8.00	GVMB20 □□□ N
							Side Turning Max Depth of Cut : Blade width × 0.5mm.
—	—	—	—	—	PD1/KM1	Grade Blade width (mm)	
—	—	—	—	—	① 0.05 ~ 0.15 ② 0.03 ~ 0.10	2.00 ~ 2.50	GTPA2 □ FRN01
							GTPA2 □ FRN01-08 □
							Side Turning Max Depth of Cut : Blade width × 0.8mm.

New Products
Tool Materials / Selection Guide
PCD, PCBN and Ceramics
BIDEMCS, PCBN and Ceramics
Micrograin Carbide, PVD Coated Carbide
Insert Item List
General Turning Toolholders
Unique Swiss Tooling
Grooving / Side Turning
Threading
Shaper
ID Tooling
Application Introduction
Endmills
Rotating Tools
Information
Index

Recommended Cutting Conditions

ID Grooving

Feed Rate (mm/rev) ① Grooving ② Side turning	Work Material	Low Carbon Steel	Carbon Steel	Alloy Steel	Stainless Steel		
		S10C ~ 30C	S45C ~ S55C	SCr/SCM	Ferritic	Austenitic	Martensitic Precipitation hardening
		SUS303/SUS430	SUS304/ SUS316L	SUS440C/ SUS630			
	Cutting Speed (m/min)	50 90 130	50 80 130	50 80 130	50 100 170	50 70 100	30 60 80
SBGO □ □ □ □ RB-S SBGO □ □ □ □ RB Side Turning Max Depth of Cut : 0.1mm.	Grade	ZM3	ZM3	ZM3	ZM3	ZM3	ZM3
	Round shank dia. (mm)						
	φ 3.0 ~ φ 4.0	① 0.01 ~ 0.02 ② 0.005 ~ 0.015	① 0.01 ~ 0.02 ② 0.005 ~ 0.015	① 0.01 ~ 0.02 ② 0.005 ~ 0.015	① 0.01 ~ 0.02 ② 0.005 ~ 0.015	① 0.01 ~ 0.02 ② 0.005 ~ 0.015	① 0.01 ~ 0.02 ② 0.005 ~ 0.015
	φ 4.0 ~ φ 6.0	① 0.01 ~ 0.04 ② 0.01 ~ 0.02	① 0.01 ~ 0.04 ② 0.01 ~ 0.02	① 0.01 ~ 0.04 ② 0.01 ~ 0.02	① 0.01 ~ 0.04 ② 0.01 ~ 0.02	① 0.01 ~ 0.03 ② 0.01 ~ 0.02	① 0.01 ~ 0.03 ② 0.01 ~ 0.02
GTG □ □ □ □ FL □ □ □ □ Side Turning Max Depth of Cut : 0.1mm.	Grade	TM4/ZM3	TM4/ZM3	TM4/ZM3	TM4/ZM3	TM4/ZM3	TM4/ZM3
	Round shank dia. (mm)						
	φ 8.0 ~ φ 12	① 0.01 ~ 0.04 ② 0.005 ~ 0.015	① 0.01 ~ 0.04 ② 0.005 ~ 0.015	① 0.01 ~ 0.04 ② 0.005 ~ 0.015	① 0.01 ~ 0.04 ② 0.005 ~ 0.02	① 0.01 ~ 0.03 ② 0.005 ~ 0.015	① 0.01 ~ 0.03 ② 0.005 ~ 0.015
	φ 12 ~ φ 16	① 0.02 ~ 0.06 ② 0.01 ~ 0.02	① 0.02 ~ 0.06 ② 0.01 ~ 0.02	① 0.02 ~ 0.06 ② 0.01 ~ 0.02	① 0.02 ~ 0.06 ② 0.01 ~ 0.02	① 0.02 ~ 0.04 ② 0.01 ~ 0.02	① 0.02 ~ 0.04 ② 0.01 ~ 0.02
GEV □ □ □ N □ □ Side Turning Max Depth of Cut : Blade width × 0.5mm.	Grade	QM3	QM3	QM3	QM3	QM3	QM3
	Blade width (mm)						
	3.0	① 0.05 ~ 0.15 ② 0.05 ~ 0.1	① 0.05 ~ 0.15 ② 0.05 ~ 0.1	① 0.05 ~ 0.15 ② 0.05 ~ 0.1	① 0.05 ~ 0.15 ② 0.05 ~ 0.1	① 0.05 ~ 0.15 ② 0.05 ~ 0.1	① 0.05 ~ 0.15 ② 0.05 ~ 0.1
	3.5	① 0.05 ~ 0.20 ② 0.05 ~ 0.15	① 0.05 ~ 0.20 ② 0.05 ~ 0.15	① 0.05 ~ 0.20 ② 0.05 ~ 0.15	① 0.05 ~ 0.20 ② 0.05 ~ 0.15	① 0.05 ~ 0.20 ② 0.05 ~ 0.15	① 0.05 ~ 0.20 ② 0.05 ~ 0.15

Face Grooving

Feed Rate (mm/rev) ① Grooving ② Side turning	Work Material	Low Carbon Steel	Carbon Steel	Alloy Steel	Stainless Steel		
		S10C ~ 30C	S45C ~ S55C	SCr/SCM	Ferritic	Austenitic	Martensitic Precipitation hardening
		SUS303/SUS430	SUS304/ SUS316L	SUS440C/ SUS630			
	Cutting Speed (m/min)	50 90 130	50 80 130	50 80 130	50 100 170	50 70 100	30 60 80
SFGO □ □ R □ □ □ B Side Turning Max Depth of Cut : 0.1mm.	Grade	TM4	TM4	TM4	TM4	TM4	TM4
	Round shank dia. (mm)						
	φ 6.0	① 0.01 ~ 0.06 ② 0.01 ~ 0.02	① 0.01 ~ 0.06 ② 0.01 ~ 0.02	① 0.01 ~ 0.06 ② 0.01 ~ 0.02	① 0.01 ~ 0.06 ② 0.01 ~ 0.02	① 0.01 ~ 0.05 ② 0.01 ~ 0.02	① 0.01 ~ 0.05 ② 0.01 ~ 0.02
FGV □ □ □ R B0 □ D6 Side Turning Max Depth of Cut : 0.1mm.	Grade	TM4	TM4	TM4	TM4	TM4	TM4
	Blade width (mm)						
	1.0	① 0.01 ~ 0.03 ② 0.01 ~ 0.02	① 0.01 ~ 0.03 ② 0.01 ~ 0.02	① 0.01 ~ 0.03 ② 0.01 ~ 0.02	① 0.01 ~ 0.03 ② 0.01 ~ 0.02	① 0.01 ~ 0.03 ② 0.01 ~ 0.02	① 0.01 ~ 0.03 ② 0.01 ~ 0.02
	1.5	① 0.01 ~ 0.04 ② 0.01 ~ 0.02	① 0.01 ~ 0.04 ② 0.01 ~ 0.02	① 0.01 ~ 0.04 ② 0.01 ~ 0.02	① 0.01 ~ 0.04 ② 0.01 ~ 0.02	① 0.01 ~ 0.03 ② 0.01 ~ 0.02	① 0.01 ~ 0.04 ② 0.01 ~ 0.02
GFV600N □ □ Side Turning Max Depth of Cut : 3.0mm.	Grade	QM3	QM3	QM3	QM3	QM3	QM3
	Blade width (mm)						
	5.00 ~ 6.00	① 0.05 ~ 0.20 ② 0.05 ~ 0.15	① 0.05 ~ 0.20 ② 0.05 ~ 0.15	① 0.05 ~ 0.20 ② 0.05 ~ 0.15	① 0.05 ~ 0.20 ② 0.05 ~ 0.15	① 0.05 ~ 0.20 ② 0.05 ~ 0.15	① 0.05 ~ 0.20 ② 0.05 ~ 0.15
	3.00 ~ 6.00	① 0.05 ~ 0.20 ② 0.05 ~ 0.20	① 0.08 ~ 0.20 ② 0.05 ~ 0.20	① 0.08 ~ 0.20 ② 0.05 ~ 0.20	① 0.08 ~ 0.20 ② 0.05 ~ 0.20	① 0.08 ~ 0.20 ② 0.05 ~ 0.20	① 0.08 ~ 0.20 ② 0.05 ~ 0.20

Sulfur free cutting steel Sulfur complex free cutting steel	High-carbon chromium bearing steel	Electromagnetic soft iron	Electromagnetic stainless	Titanium alloy	Aluminum alloy	Work Material	Feed Rate (mm/rev) ① Grooving ② Side turning
SUM	SUJ	SUY		6AL-4V	A5052		
50 100 150	50 90 160	50 100 150	50 90 160	50 70 100	80 150 200	Cutting Speed (m/min)	
ZM3	ZM3	ZM3	ZM3	ZM3	ZM3	Grade Round shank dia. (mm)	SBGO □ 0 □ □ □ RB-S SBGO □ 0 □ □ □ RB Side Turning Max Depth of Cut : 0.1mm.
① 0.01 ~ 0.02 ② 0.005 ~ 0.015	① 0.01 ~ 0.02 ② 0.005 ~ 0.015	① 0.01 ~ 0.02 ② 0.005 ~ 0.015	① 0.01 ~ 0.02 ② 0.005 ~ 0.015	① 0.01 ~ 0.02 ② 0.005 ~ 0.015	① 0.01 ~ 0.03 ② 0.01 ~ 0.015	φ 3.0 ~ φ 4.0	
① 0.01 ~ 0.04 ② 0.01 ~ 0.02	① 0.01 ~ 0.04 ② 0.01 ~ 0.02	① 0.01 ~ 0.04 ② 0.01 ~ 0.02	① 0.01 ~ 0.04 ② 0.01 ~ 0.02	① 0.01 ~ 0.03 ② 0.01 ~ 0.02	① 0.01 ~ 0.05 ② 0.01 ~ 0.02	φ 4.0 ~ φ 6.0	
① 0.01 ~ 0.06 ② 0.01 ~ 0.02	① 0.01 ~ 0.06 ② 0.01 ~ 0.02	① 0.01 ~ 0.06 ② 0.01 ~ 0.02	① 0.01 ~ 0.06 ② 0.01 ~ 0.02	① 0.01 ~ 0.05 ② 0.01 ~ 0.02	① 0.01 ~ 0.08 ② 0.01 ~ 0.02	φ 6.0 ~ φ 8.0	
TM4/ZM3	TM4/ZM3	TM4/ZM3	TM4/ZM3	TM4/ZM3	TM4/ZM3	Grade Round shank dia. (mm)	GTG □ □ □ □ □ FL □ □ □ Side Turning Max Depth of Cut : 0.1mm.
① 0.01 ~ 0.04 ② 0.005 ~ 0.02	① 0.01 ~ 0.04 ② 0.005 ~ 0.015	① 0.01 ~ 0.04 ② 0.005 ~ 0.02	① 0.01 ~ 0.04 ② 0.005 ~ 0.015	① 0.01 ~ 0.03 ② 0.005 ~ 0.015	① 0.01 ~ 0.05 ② 0.01 ~ 0.02	φ 8.0 ~ φ 12	
① 0.02 ~ 0.06 ② 0.01 ~ 0.02	① 0.02 ~ 0.06 ② 0.01 ~ 0.02	① 0.02 ~ 0.06 ② 0.01 ~ 0.02	① 0.02 ~ 0.06 ② 0.01 ~ 0.02	① 0.02 ~ 0.04 ② 0.01 ~ 0.02	① 0.02 ~ 0.07 ② 0.01 ~ 0.02	φ 12 ~ φ 16	
① 0.03 ~ 0.10 ② 0.01 ~ 0.02	① 0.03 ~ 0.10 ② 0.01 ~ 0.02	① 0.03 ~ 0.10 ② 0.01 ~ 0.02	① 0.03 ~ 0.10 ② 0.01 ~ 0.02	① 0.03 ~ 0.08 ② 0.01 ~ 0.02	① 0.03 ~ 0.15 ② 0.01 ~ 0.02	φ 16 ~ φ 20	
QM3	QM3	QM3	QM3	QM3	—	Grade Blade width (mm)	GEV □ □ □ N □ □ Side Turning Max Depth of Cut : Blade width × 0.5mm.
① 0.05 ~ 0.15 ② 0.05 ~ 0.1	① 0.05 ~ 0.15 ② 0.05 ~ 0.1	① 0.05 ~ 0.15 ② 0.05 ~ 0.1	① 0.05 ~ 0.15 ② 0.05 ~ 0.1	① 0.05 ~ 0.15 ② 0.05 ~ 0.1	—	3.0	
① 0.05 ~ 0.20 ② 0.05 ~ 0.15	① 0.05 ~ 0.20 ② 0.05 ~ 0.15	① 0.05 ~ 0.20 ② 0.05 ~ 0.15	① 0.05 ~ 0.20 ② 0.05 ~ 0.15	① 0.05 ~ 0.20 ② 0.05 ~ 0.15	—	3.5	


Sulfur free cutting steel Sulfur complex free cutting steel	High-carbon chromium bearing steel	Electromagnetic soft iron	Electromagnetic stainless	Titanium alloy	Aluminum alloy	Work Material	Feed Rate (mm/rev) ① Grooving ② Side turning
SUM	SUJ	SUY		6AL-4V	A5052		
50 100 150	50 90 160	50 100 150	50 100 150	50 70 100	80 150 200	Cutting Speed (m/min)	
TM4	TM4	TM4	TM4	TM4	TM4	Grade Round shank dia. (mm)	SFG0 □ □ R □ □ □ B Side Turning Max Depth of Cut : 0.1mm.
① 0.01 ~ 0.06 ② 0.01 ~ 0.02	① 0.01 ~ 0.06 ② 0.01 ~ 0.02	① 0.01 ~ 0.06 ② 0.01 ~ 0.02	① 0.01 ~ 0.06 ② 0.01 ~ 0.02	① 0.01 ~ 0.05 ② 0.01 ~ 0.02	① 0.01 ~ 0.08 ② 0.01 ~ 0.02	φ 6.0	
① 0.01 ~ 0.08 ② 0.01 ~ 0.02	① 0.01 ~ 0.08 ② 0.01 ~ 0.02	① 0.01 ~ 0.08 ② 0.01 ~ 0.02	① 0.01 ~ 0.08 ② 0.01 ~ 0.02	① 0.01 ~ 0.07 ② 0.01 ~ 0.02	① 0.01 ~ 0.10 ② 0.01 ~ 0.02	φ 8.0	
TM4	TM4	TM4	TM4	TM4	TM4	Grade Blade width (mm)	FGV □ □ □ % B0 □ D6 Side Turning Max Depth of Cut : 0.1mm.
① 0.01 ~ 0.03 ② 0.01 ~ 0.02	① 0.01 ~ 0.03 ② 0.01 ~ 0.02	① 0.01 ~ 0.03 ② 0.01 ~ 0.02	① 0.01 ~ 0.03 ② 0.01 ~ 0.02	① 0.01 ~ 0.03 ② 0.01 ~ 0.02	① 0.01 ~ 0.03 ② 0.01 ~ 0.02	1.0	
① 0.01 ~ 0.04 ② 0.01 ~ 0.02	① 0.01 ~ 0.04 ② 0.01 ~ 0.02	① 0.01 ~ 0.04 ② 0.01 ~ 0.02	① 0.01 ~ 0.04 ② 0.01 ~ 0.02	① 0.01 ~ 0.04 ② 0.01 ~ 0.02	① 0.01 ~ 0.05 ② 0.01 ~ 0.02	1.5	
① 0.01 ~ 0.05 ② 0.01 ~ 0.02	① 0.01 ~ 0.05 ② 0.01 ~ 0.02	① 0.01 ~ 0.05 ② 0.01 ~ 0.02	① 0.01 ~ 0.05 ② 0.01 ~ 0.02	① 0.01 ~ 0.04 ② 0.01 ~ 0.02	① 0.01 ~ 0.07 ② 0.01 ~ 0.02	2.0	
QM3	QM3	QM3	QM3	QM3	—	Grade Blade width (mm)	GFV600N □ □ Side Turning Max Depth of Cut : 3.0mm.
① 0.05 ~ 0.20 ② 0.05 ~ 0.15	① 0.05 ~ 0.20 ② 0.05 ~ 0.15	① 0.05 ~ 0.20 ② 0.05 ~ 0.15	① 0.05 ~ 0.20 ② 0.05 ~ 0.15	① 0.05 ~ 0.20 ② 0.05 ~ 0.15	—	5.00 ~ 6.00	
DM4	DM4	DM4	DM4	DM4	—	Grade Blade width (mm)	GWPFM □ □ □ N □ □ -GT Side Turning Max Depth of Cut : 3.0mm.
① 0.05 ~ 0.20 ② 0.05 ~ 0.20	① 0.08 ~ 0.20 ② 0.05 ~ 0.20	① 0.05 ~ 0.20 ② 0.05 ~ 0.20	① 0.08 ~ 0.20 ② 0.05 ~ 0.20	① 0.08 ~ 0.20 ② 0.05 ~ 0.20	—	3.00 ~ 6.00	

New Products
 Tool Materials / Selection Guide
 BIDEIMCS, PCD, CBN and Ceramics
 Micrograin Carbide, PVD Coated Carbide
 Insert Item List
 General Turning Toolholders
 Unique Swiss Tooling
 Grooving / Side Turning
 Threading
 Shaper
 ID Tooling
 Application Introduction
 Endmills
 Rotating Tools
 Information
 Index


General Information

OD Grooving

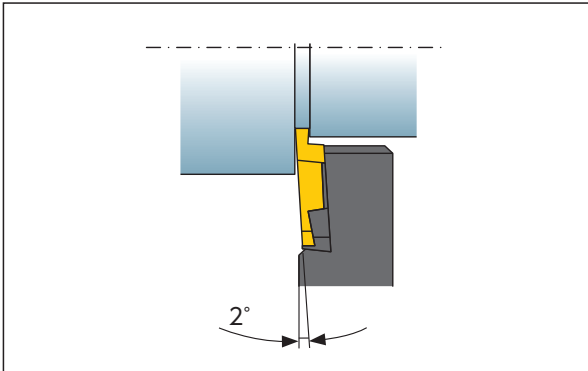
NTK GTMT / GTMH series can be used for uneven diameter grooving thanks to the 2 degree slanted insert mounting on the toolholder



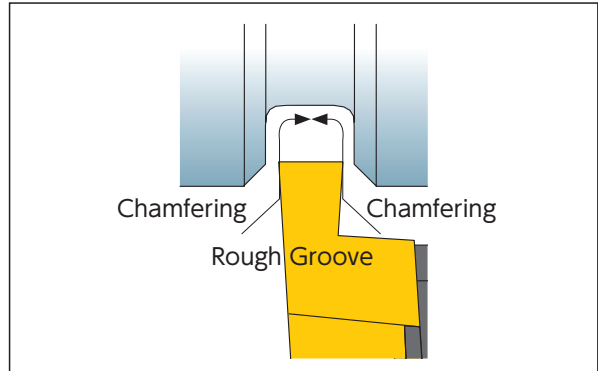
Chamfering and radius machining can be done after the rough grooving process at the center of the groove




Side Turning

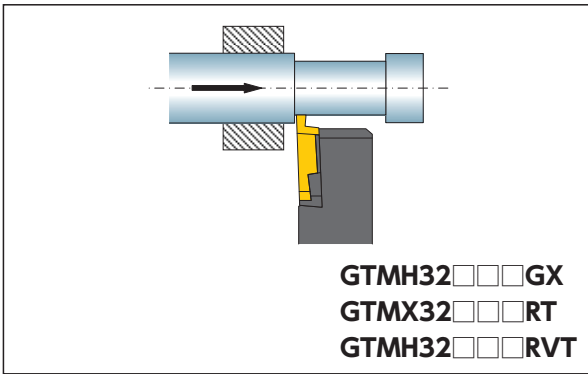


Full Radius

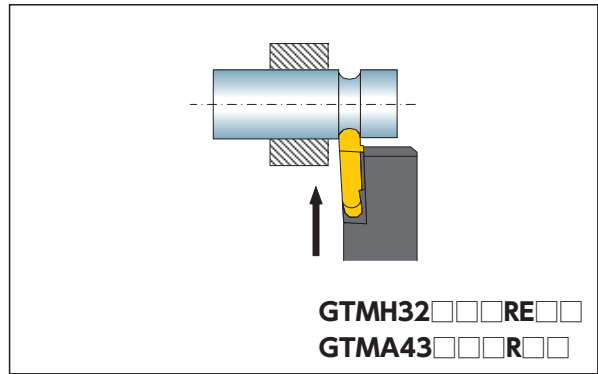


Rough Plunging for OD Turning

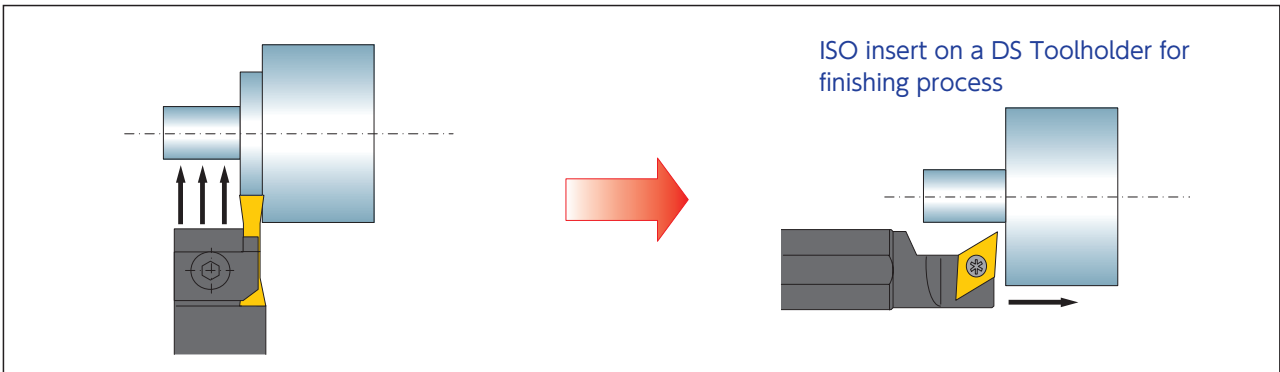


Spool Grooving

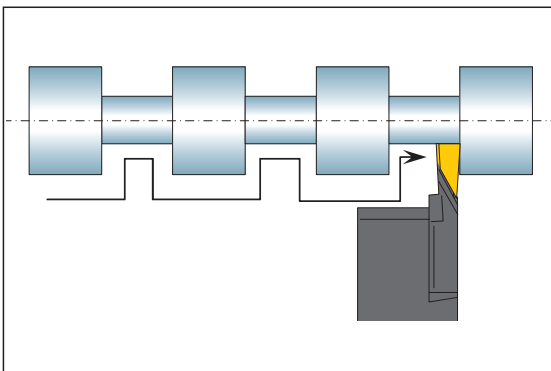


ID Grooving

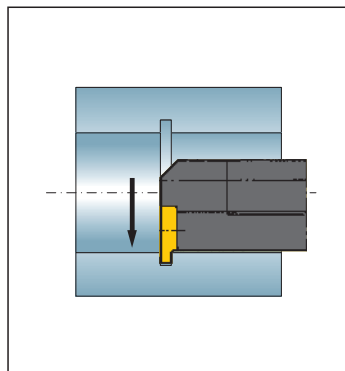

Face Grooving

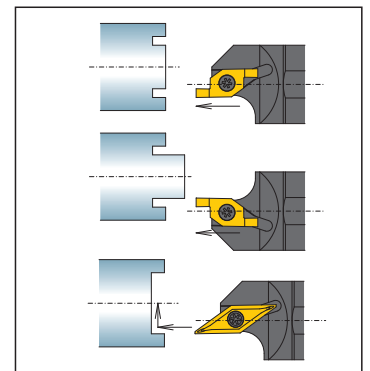

GTMH-GX for Grooving / Side Turning

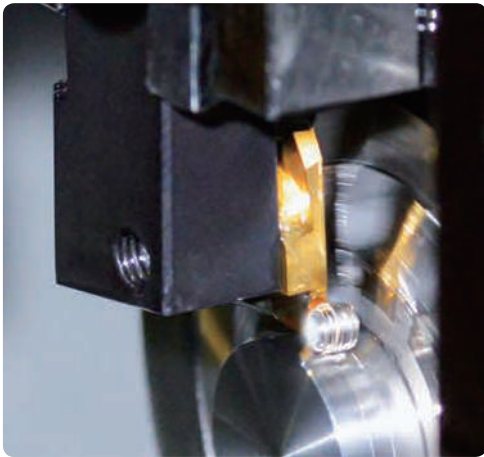

Features

- Can solve the problem of chips remaining in the grooves and bird's nest of chips
- Good surface finishes on groove side faces
- Up to 2.0mm DOC side turning capability

Typical Grooving Problems

- Chips remain at the bottom of groove
- Bird's nest of chips



Excellent Chip Control

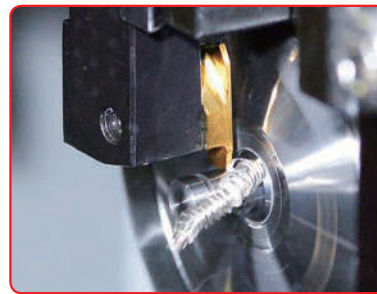
• Chipbreakers



Groove width 1.5mm~



Groove width ~ 1.0mm



GX chipbreaker can solve these problems

• Grooving

	Feed rate (mm/rev)	0.01	0.03	0.05
	GX chipbreaker			
Competitor's chipbreaker				

Material : SUS304 (Φ 6 → Φ 3) $v_c = 80\text{m/min}$ $a_r = 1.5\text{mm}$

Best Solution for Chip Control

Coolant through toolholders now available



• Side Turning

	DOC	Feed rate (mm/rev)			
		0.01	0.03	0.05	0.08
0.25					
0.5					
0.75					

Material : SUS304 $v_c = 80\text{m/min}$ 0.75mm width insert

→H22

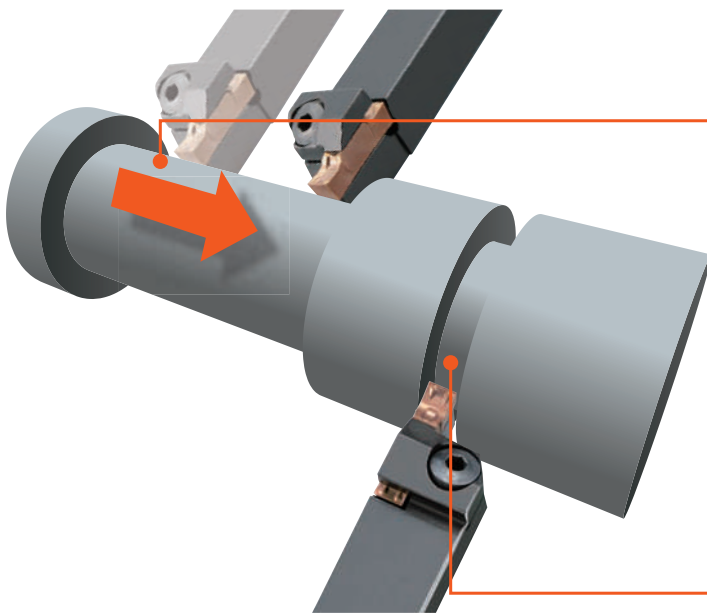
SCRUM DUO

New Products
Tool Materials / Selection Guide
BIDEMCS, PCD, CBN and Ceramics
Micrograin Carbide, PVD/Coated Carbide
Insert Item List
General Turning Toolholders
Unique Swiss tooling
Grooving / Side Turning
Threading
Shaper
ID Tooling
Application Introduction
Endmills
Rotating Tools
Information
Index



Features

- Grooving and side turning tools with highly rigid design
- 3D design chipbreakers result in less tool pressure and excellent chip control



Side-turning

	NTK:GW chipbreaker	Competitor
Chip		
Surface finish		

Material : SCM415 $V_c=150\text{m/min}$ $f=0.1\text{mm/rev}$ $a_p=1.0\text{mm}$

Grooving

	NTK:GW chipbreaker	Competitor
Chip		
Surface finish		

Material : SCM415 $V_c=150\text{m/min}$ $f=0.1\text{mm/rev}$ $a_p=7.0\text{mm}$



Chipbreaker

For Grooving / Side-turning

Less tool pressure

GW


GV



- Excellent chip control
- Good sharpness
- Side turning capability

- Superior sharp edge

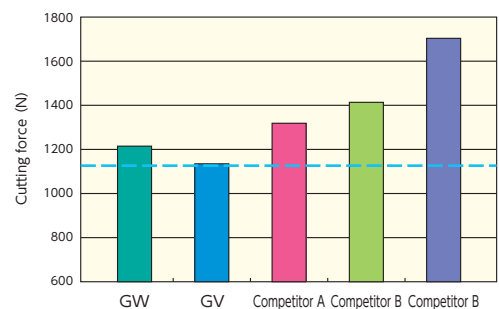Tool pressure comparison when grooving




STICK DUO Short type for ID Grooving

Features

- Added "short type" STICK DUO series for grooving
- Offers high precision!
- Best for internal grooving in work material's mouth.
- 2 corners=Economical!



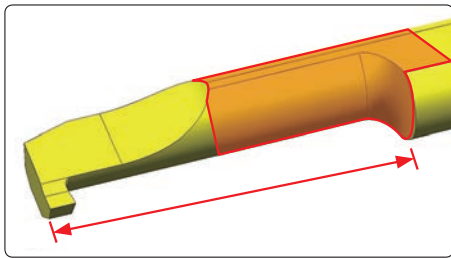
Former



For multiple work shape



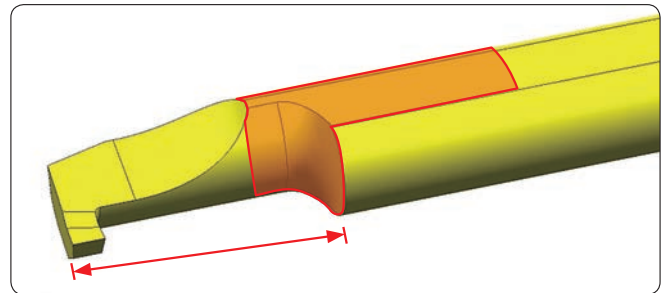Short type



Focused on rigidity

→H34

STICK DUO ID Face Grooving type

Features

- Added "face grooving type" STICK DUO series for grooving
- Best for back end surface grooving for small shank.
- 2 corners=Economical!



Application Example

Body machining	
Work material	: SUS303
Cutting speed (m/min)	: 110
Feed (mm/min)	: 0.04
Inserts width (mm)	: 2.0
Coolant	: WET
TM4	1000pcs/corner
Competitor	500pcs/corner

Able to machine twice as long as competitors due to TM4 coating which has wear resistance ability. Also, due to the excellence in sharpness, surface is good as well.

Machine parts machining	
Work material	: SUS304
Cutting speed (m/min)	: 70
Feed (mm/min)	: 0.04
Inserts width (mm)	: 1.5
Coolant	: WET
TM4	500pcs/corner
Competitor	300pcs/corner

Excellent chip control by best breaker design. Also, about two times longer tool life due to the coating of TM4 which is superior to wear resistance.

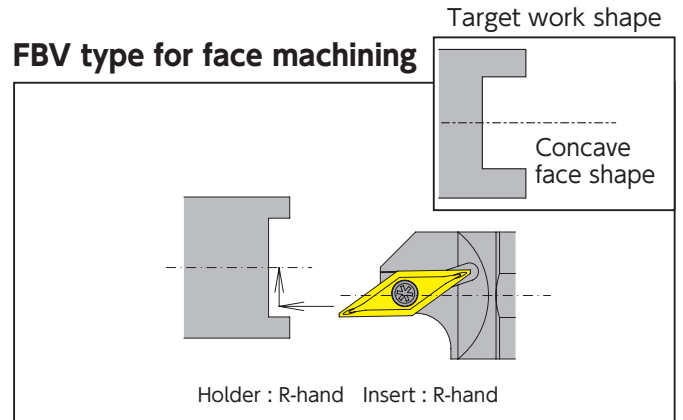
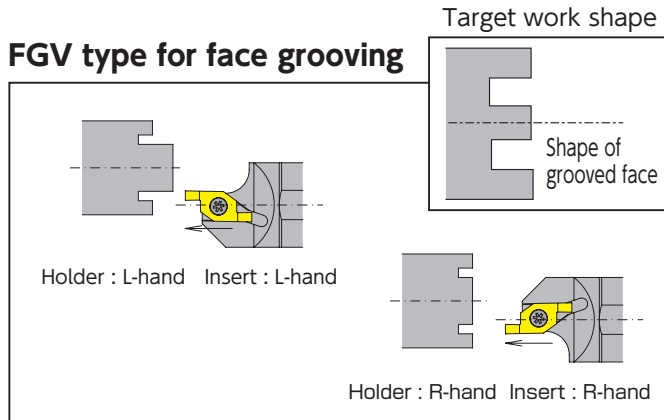
→H37

SATURN DUO

Face grooving tool

Features

- FGV type for face grooving and FBV type for face machining
- Economical double-corner specification
- Improved tool rigidity by optimizing the overhang and holder shape
- Gang-type, front-gang-type and sleeve holder types available



- Grooving is possible under a wide range of cutting conditions due to strengthened rigidity of both insert and holder
- Minimum machining diameter of $\phi 6.0$, and groove width of 1.0mm
- Left-hand types available for machining work with a boss

- Further improved face machining efficiency
- Minimum machining diameter of $\phi 8.0$

Recommended Cutting Condition for FGV Style Tooling (for Face Grooving)



		Steel (Carbon Steel, Alloy Steel)	Stainless Steel (Excluding SUS303)	Free Cutting Steel (Including SUS303)	Non-ferrous Metals (Brass, Aluminum, Copper)
Speed (m/min)		50 (30 ~ 100)	40 (30 ~ 100)	60 (30 ~ 100)	80 (50 ~ 120)
Feed Rate (mm/rev)	Groove Depth (mm)	1.0	0.03 (0.01 ~ 0.05)	0.04 (0.01 ~ 0.06)	0.04 (0.01 ~ 0.06)
		1.5	0.02 (0.01 ~ 0.04)	0.01 (0.005 ~ 0.03)	0.03 (0.01 ~ 0.05)
		2.0	0.01 (0.005 ~ 0.03)	0.01 (0.005 ~ 0.03)	0.02 (0.01 ~ 0.04)

☆Tips for Successful Face Grooving

- ① Run multiple passes if turning wider grooves.
Make sure to groove from outer diameter to inner diameter to avoid any interference.
- ② If lines appear on the boss section, slow down feed rate when retracting the tool.
- ③ If scratch appears at the end of the boss, slow down the feed rate.
- ④ If groove surface looks torn, either slow down feed rate or increase speed.
- ⑤ If groove bottom looks torn with a speed and feed condition, increase the speed.

☆Note

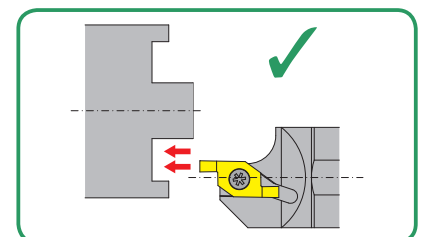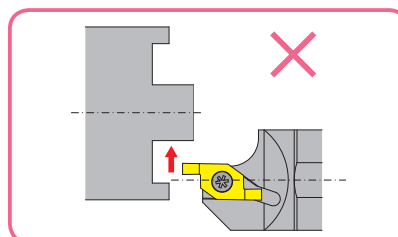Side turning cannot be performed with FGV style tooling



Recommended Cutting Conditions for FBV Style Tooling (for Face Grooving)


Minimum machining diameter: $\phi 8.0$ WET

		Steel (Carbon Steel, Alloy Steel)	Stainless Steel (Excluding SUS303)	Free Cutting Steel (Including SUS303)	Non-ferrous Metals (Brass, Aluminum, Copper)
Speed (m/min)		50 (30 ~ 70)	40 (30 ~ 60)	60 (30 ~ 80)	80 (50 ~ 100)
Feed Rate (mm/rev)	Groove Depth (mm)	1.0	0.025 (0.01 ~ 0.05)	0.02 (0.01 ~ 0.05)	0.05 (0.01 ~ 0.06)
		1.5	0.02 (0.01 ~ 0.05)	0.01 (0.005 ~ 0.025)	0.025 (0.01 ~ 0.05)
		2.0	0.01 (0.005 ~ 0.025)	0.01 (0.005 ~ 0.025)	0.02 (0.01 ~ 0.05)


* When machining difficult materials where chip control is problematic (such as SUS303), it is recommended that the machining be carried out in several stages.

☆Machining process

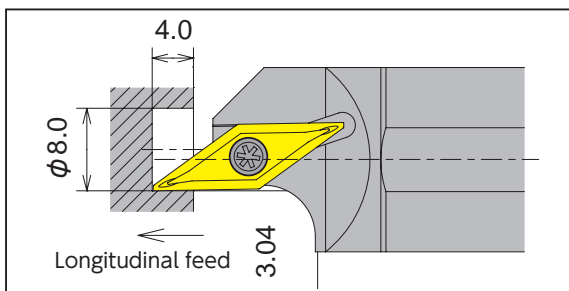- For materials with good machinability, it is possible to machine up to 4.0mm deep at a low feed rate in a single pass for both longitudinal feed and cross feed.



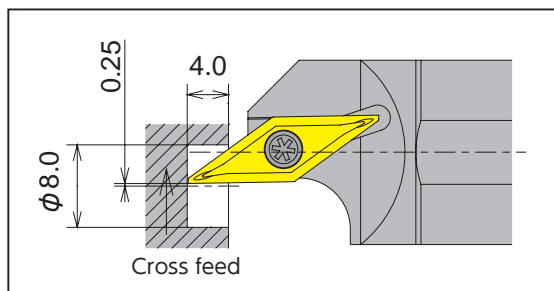Cutting in Z direction : Longitudinal feed




Cutting in X direction : Cross feed

☆Useful tips for machining


When burrs occur on ID surface, it is recommended to perform the cut in 2 passes, one for roughing and one for finishing as shown in the following procedure:

- ☆Example of 2-pass machining: Leave 0.2mm on roughing then run a finish cut

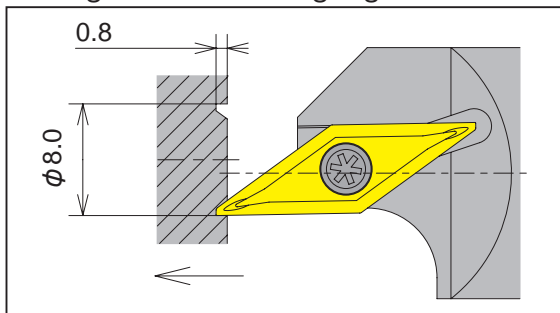
1 Longitudinal feed (roughing)




2 Longitudinal feed (finishing)

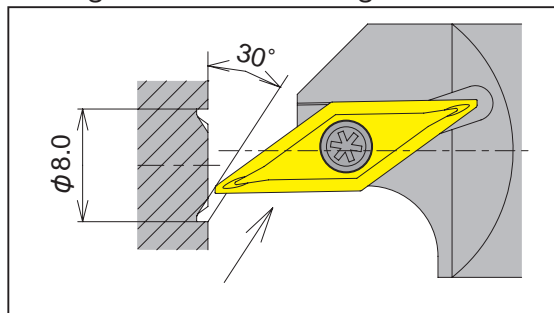

3 Slant machining (roughing)

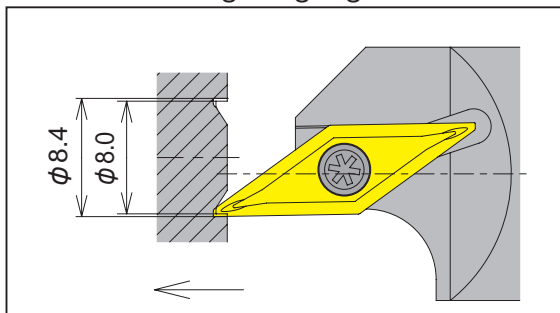

4 Cross feed (finishing)

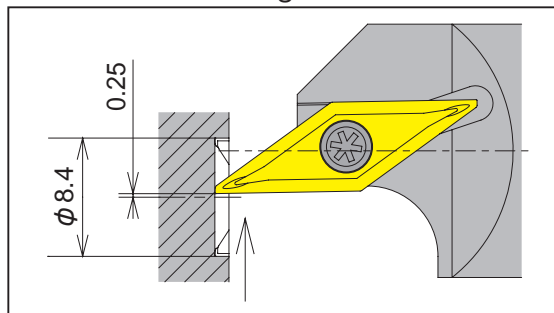

Grooving / Side Turning

CSV Series Best for up to 5mm diameter material

CSV

For Cam-style machine

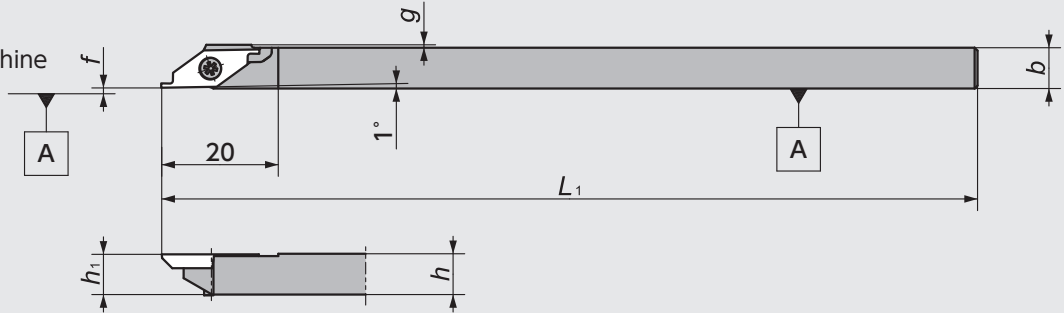


Figure-1

●Right-Hand style shown

CSV-NC

For Gang-style machine

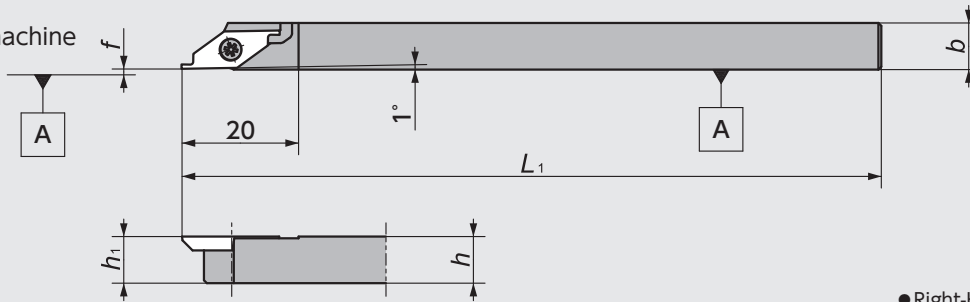


Figure-2

●Right-Hand style shown

CSV-NC-F

For Gang-style machine

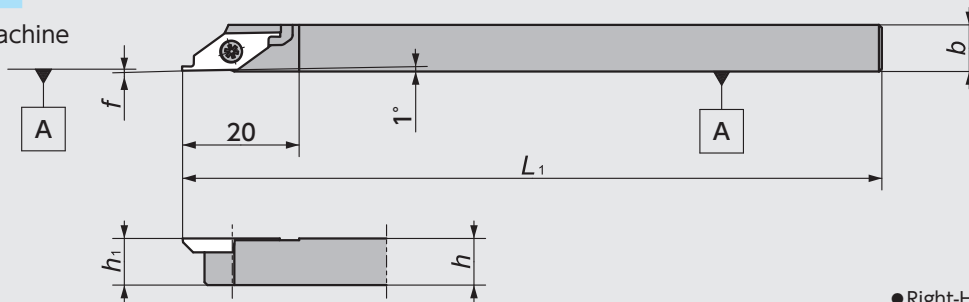





Figure-3

●Right-Hand style shown

CSV Series - Toolholders

Figure	Code No.		Item Number	Stock		Dimensions (mm)						Groove Width Range (mm) w	Gage insert 	Spare Parts	
	R	L		R	L	h	b	L ₁	h ₁	f	g			Clamp Screw 	Wrench 
1	5492962		CSV ^R _L 07GX	●		7	7	85	7		0.5	0.25 ∩ 1.50	CSVG	LRIS-2.5*7	CLR-15S
	5303169	5303193	07	●	●			140							
	5492954		08GX	●		8	8	85	8		0.1				
	5303151	5303201	08	●	●										
	5303136		095	●		9.5	9.5	140	9.5	0.1	0.0				
	5303144	5303177	10	●	●	10	10		10						
	5474770		12GX	●		12	12	85	12						
5327929		12	●				140								
2	5514062	5514070	CSV ^R _L 08NC	●	●	8	8	120	8			0.25	CSVG	LRIS-2.5*7	CLR-15S
	5563010		10GXNC	●		10	10	85	10	0.1	—	∩			
	5477492	5477542	10NC	●	●			120				1.50			
	5477534	5477500	12NC	●	●	12	12		12						
3	5789615		CSV ^R _L 08NC-F	●		8	8	120	8	0.0 ∩ 0.1	—	0.25 ∩ 1.50	CSVG	LRIS-2.5*7	CLR-15S

☆All the inserts can use the same toolholder CSV series ⇒G94

CSV Series - Inserts Mirror finish

Shape	Item Number	Chip-breaker	Dimensions (mm)				PVD Coated Carbide			
			w	L	r _e	Max Depth of cut	VM1			
							R	Stock	L	Stock
<p>Thickness 2.38</p> <p>6.35</p> <p>0.0</p> <p>w+0.03/0</p>	CSVG11F^R/L V025 M		0.25	0.50		0.15	5354634	●		
	11F^R/L V030 M		0.30				5344940	●		
	11F^R/L V035 M		0.35				5354402	●		
	11F^R/L V040 M		0.40				5344932	●		
	11F^R/L V045 M		0.45	1.00		0.45	5354394	●		
	11F^R/L V050 M		0.50				5354642	●		
	11F^R/L V055 M		0.55				5344924	●		
	11F^R/L V060 M		0.60				5344916	●		
	11F^R/L V065 M		0.65	2.00		1.40	5354410	●		
	11F^R/L V070 M		0.70				5354428	●		
	11F^R/L V075 M	No	0.75				5332812	●	5332820	●
	11F^R/L V080 M		0.80				5358650	●		
	11F^R/L V085 M		0.85	3.00		2.60	5354436	●		
	11F^R/L V090 M		0.90				5354444	●		
	11F^R/L V095 M		0.95				5332846	●	5332838	●
	11F^R/L V100 M		1.00				5352562	●		
	11F^R/L V110 M		1.10				5358643	●		
	11F^R/L V120 M		1.20				5352570	●	5357561	●
	11F^R/L V130 M		1.30				5358627	●		
	11F^R/L V140 M		1.40				5358619	●		
11F^R/L V150 M		1.50				5358601	●			

●Right-Hand style shown

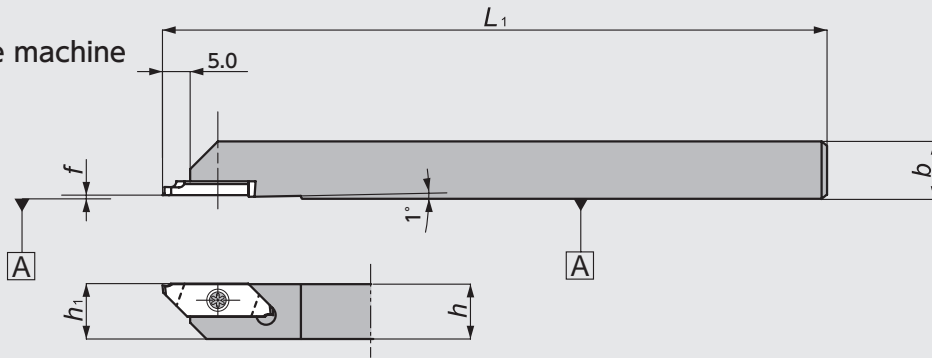
- New Products
- Tool Materials / Selection Guide
- BIDEMCS, PCD and Ceramics
- Micrograin Carbide / PVD Coated Carbide
- Insert Item List
- General Turning Toolholders
- Unique Swiss Tooling
- Grooving / Side Turning
- Threading
- Shaper
- ID Tooling
- Application Introduction
- Endmills
- Rotating Tools
- Information
- Index

Grooving / Side Turning

CTPS Series




CTPS

For Cam-style machine



● Right-Hand style shown


CTPS Series - Toolholders

Code No.	Item Number	Stock	Dimensions (mm)					Groove Width Range (mm) w	Gage insert 	Spare Parts	
			h	b	L_1	h_1	f			Clamp Screw 	Wrench 
5346572	CTPSR10	●	10	10	120	10	0.0	0.75 } 2.00	GTPS	LRIS-2.5*7	CLR-15S
5397187	R12	●	12	12		12					

☆All the inserts can use the same toolholder CTPS series ⇒G98





CTPS Series - Inserts

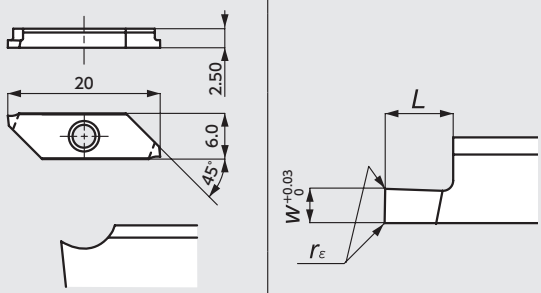● GTPS - Grooving

Shape	Item Number	Dimensions (mm)				PVD Coated Carbide				
		w	r_ϵ	L	Max Depth of cut	ZM3	Stock	VM1	Stock	
 <p>● Right-Hand style shown</p>	GTPS075FR	0.75	0.0	1.5	1.0	5346952	●	5362652	●	
	095FR	0.95		2.0		1.5	5346960	●	5362660	●
	100FR	1.00					5346978	●	5362678	●
	120FR	1.20		3.0	2.5		5346986	●	5362686	●
	150FR	1.50				5346994	●	5362694	●	
	200FR	2.00				5347000	●	5362702	●	

All angles shown are obtained when insert is set in the holder

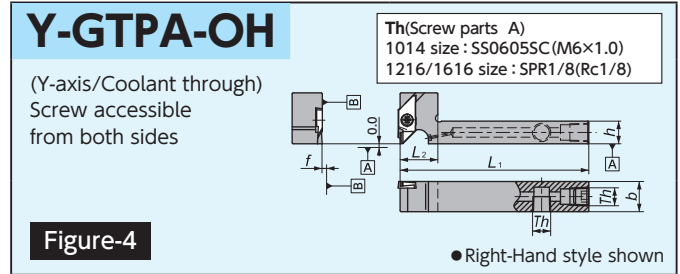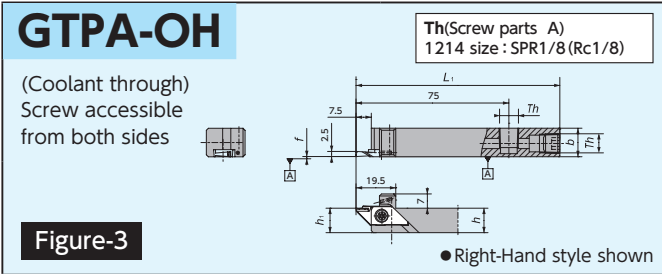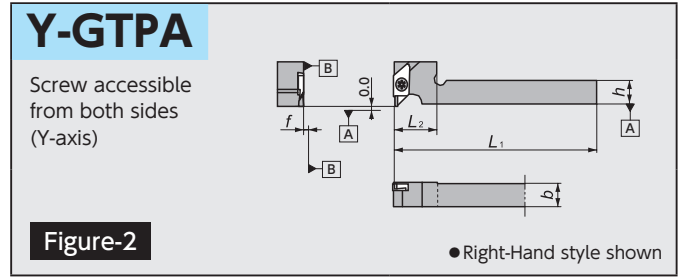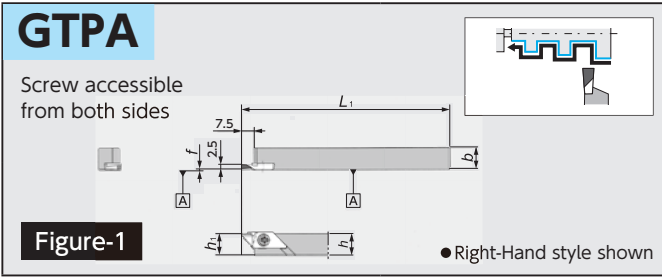
■ GTPA Series Best tool for Aluminum Spool Machining



■ GTPA Series - Toolholders

Figure	Code No.		Item Number	Stock		Dimensions (mm)						Groove Width Range (mm) w	Gage insert	Spare Parts	
	R	L		R	L	h	b	L ₁	h ₁	f	L ₂			Clamp Screw	Wrench
1		5552401	GTPA 1010	●		10	10		10				GTPA	LRIS-4 * 10PW	CLR-15S
		5552419	1212	●		12	12	120	12	0.1	—				
		5577291	1616	●		16	16		16						
2		5563820	Y-GTPA 1216	●		12	16	120	—	0.1	20	2.0 } 2.5	GTPA	LRIS-4 * 12PW	CLR-15S
3		5912845	GTPA 1214H-OH	●		12	14	100	12	0.1	—				
4		5930185	Y-GTPA 1014FSS-OH	●		10	14	80			15	2.0 } 2.5	GTPA	LRIS-4 * 12PW	CLR-15S
		5911482	1216HS-OH	●		12	16	100	—	0.1	20				
		5911490	1616H-OH	●		16	16				25				

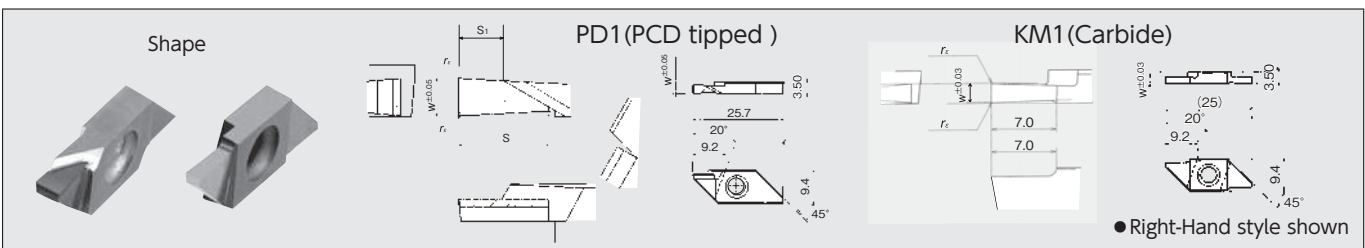■ GTPA Series - Inserts





Item Number	Dimensions (mm)					PCD		Carbide	
	w	s	s ₁	r _e	Max Depth of cut	PD1	Stock	KM1	Stock
GTPA20FRN01	2.0	6.0	4.0	R0.1 MAX	5.0	5552385	●		
20FRN01		—	—		6.0			5576525	●
20FRN01-SH		4.0	2.0		3.0	5966114	●		
GTPA25FRN01	2.5	6.0	3.0	R0.1 MAX	5.0	5552393	●		
25FRN01		—	—		6.0			5576533	●
25FRN01-081		4.0	1.0		3.0	5561808	●		

GTT Series

GTT

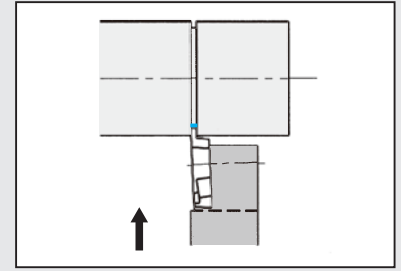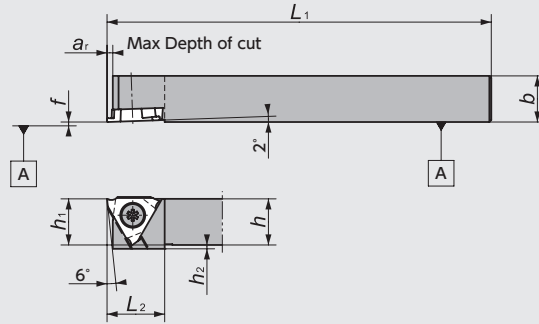Screw accessible from both sides





● Right-Hand style shown

Figure-1

GTT-OH2

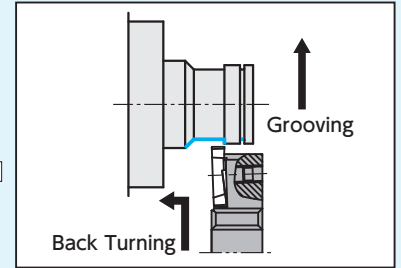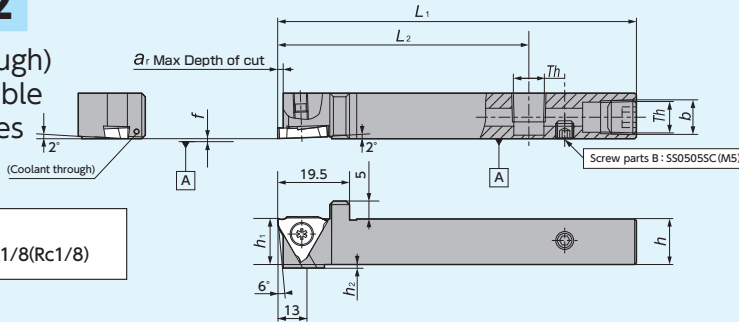(Coolant through)
Screw accessible from both sides





● Right-Hand style shown

Figure-2

GTT-OH

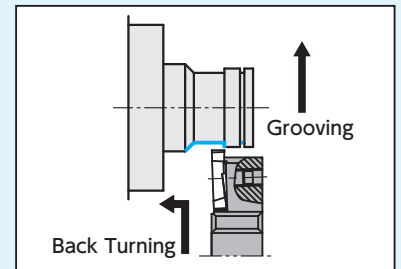
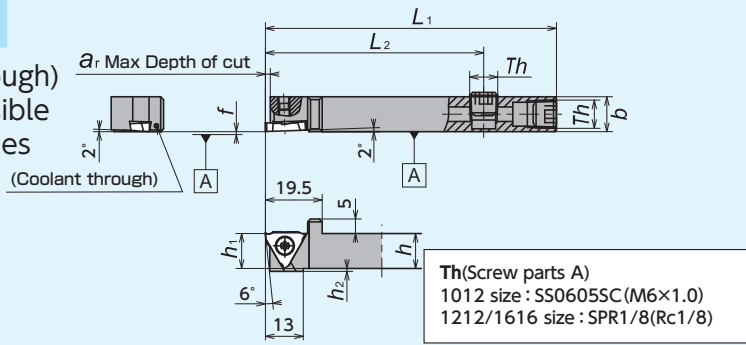
(Coolant through)
Screw accessible from both sides



● Right-Hand style shown

Figure-3

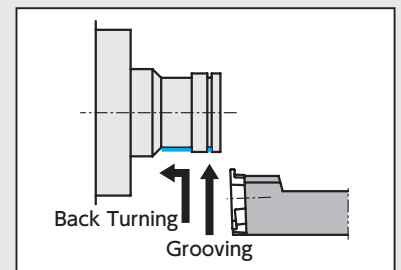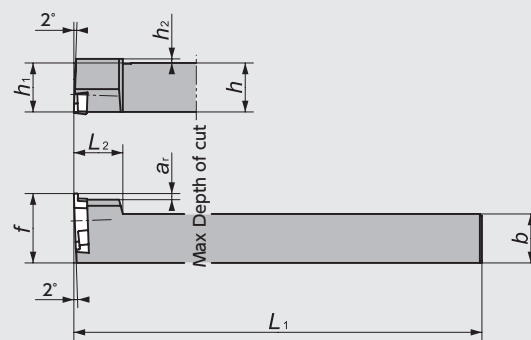CH-GTT





● Left-Hand style shown
☆ Takes Right-hand insert

Figure-4

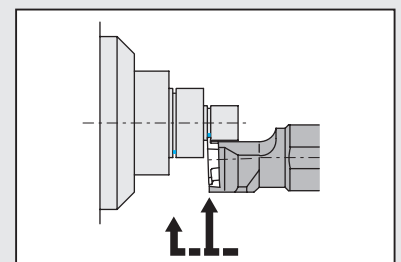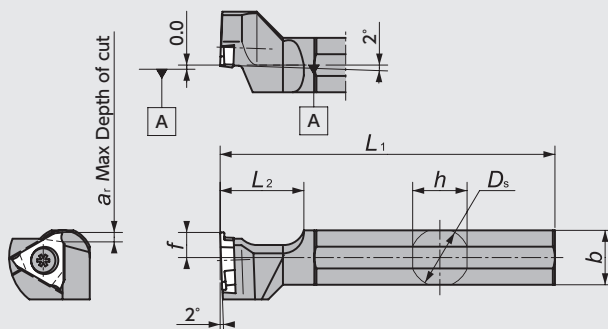DS-GTT







(DS Holder)



● Left-Hand style shown
☆ Takes Right-hand insert

Figure-5

GTT Series - Toolholders

Figure	Code No.		Item Number	Stock		Dimensions (mm)										Groove Width Range (mm) w	Gage insert 	Spare Parts			
	R	L		R	L	h	b	L ₁	h ₁	f	L ₂	a _r	h ₂	D _s	Clamp Screw			Wrench			
1	5107305	5107313	GTT^R/L08F00	●	●		8											 Right : LR-S-4*10PW (A) Left : LR-S-4*5.8 (B) LR-S-4*10PW (A) Right : LR-S-4*10PW (A) Left : LR-S-4*5.8 (B) CLR-15S (A) LR-S-4*10PW (A) 1.45 3.00 2.50 3.00 GTMH32 GTMX32 H22~25 TBMH32 G61	 	 	
	5608682		0810F00	●		8	10		8												
	5107206	5107214	08K00	●	●		8														
	5608690		0810K00	●			10														
	5107321	5107339	10F00	●	●	10	10	80													
	5107222	5107230	10K00	●	●			120				1.6									
	5107347	5107354	12F00	●	●	12	12	80													
	5107248	5107255	12K00	●	●			120													
	5459896	5551387	16H00	●	●	16	16	100													
	5173687	5173679	16K00	●	●			120													
	5530852	5780317	20K00	●	●	20	20	125	20												
	5780309	5780291	25M00	●	●	25	25	150	25	0	15										
	5107362	5107370	10F15	●	●	10	10	80													
	5107263	5107271	10K15	●	●			120													
	5537220	5537147	12F15	●	●	12	12	80													
	5537246	5537162	12K15	●	●			120													
	5537261	5537188	16H15	●	●	16	16	100													
	5537287	5537204	16K15	●	●			120				2.7									
	5107388	5107396	10F25	●	●	10	10	80													
	5107289	5107297	10K25	●	●			120													
5537238	5537154	12F25	●	●	12	12	80														
5537253	5537170	12K25	●	●			120														
5537279	5537196	16H25	●	●	16	16	100														
5537295	5537212	16K25	●	●			120														
2	5035381		GTT^R/L12H00-OH2	●		12	12	100	12												
	5043997		16X00-OH2	●		16	16	120	16	0	70	1.6	1								
3	5921705		GTT^R/L1012H00-OH	●		10			10												
	5890157		GTTR12H00-OH	●		12			100	12	0	70	1.6	1							
	5921713		GTT^R/L16H00-OH	●		16	16		16					0							
4	5659248		CH-GTT^R/L10H00	●		10	10	100	10	15				3							
	5659255		12H00	●		12	12	100	12	17		12	1.5	1							
	5960836		16H00	●		16	16	100	16	21				0							
5	5348560		DS-GTT^R/L14F	●		13	13	80								14.000					
	5348081		15H	●		15	15	100								15.875					
	5341532		16X ※2	●				95								16.000					
	5278288		19	●		18	18				6					19.050	0.30				
	5278304		20	●		19	19	120				20	1.6			20.000	3.00				
	5324041		22 ※2	●		21	21									22.000					
	5483433		25MET	●		24	24	150				10				25.000					
	5317144		25	●		24	24	120				10				25.400					
5937693		32	●		30	30	150				10				32.000						

※1 Would be changed by insert

※2 Compatible with 16mm / 22mm round shank DS Series holders DS-Sleeve → G104

New Products
Tool Materials / Selection Guide
Micrograin Carbide, BIDEEMCS, PCD
PVD/CVD-coated Carbide, CBN and Ceramics
Insert Item List
General Turning Toolholders
Unique Swiss Tooling
Grooving / Side Turning
Threading
Shaper
ID Tooling
Application Introduction
Endmills
Rotating Tools
Information
Index

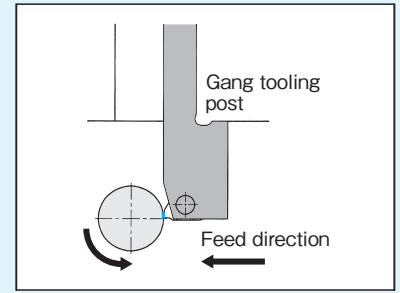
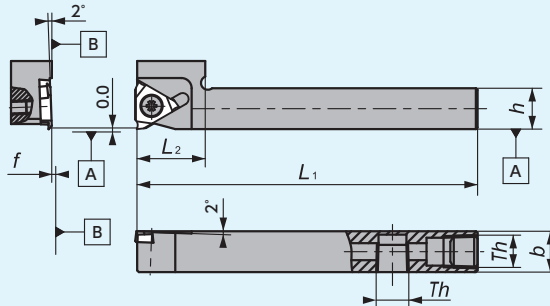
Grooving / Side Turning

GTT Series

Y-GTT-OH

(Y-axis/Coolant through)
Screw accessible from both sides

Th(Screw parts A)
1212/1616 size:SPR1/8(Rc1/8)





● Right-Hand style shown
☆ Takes Right-hand insert

Figure-1

Y-GTT

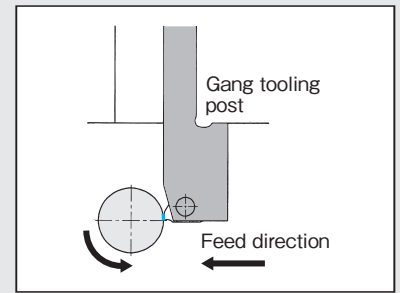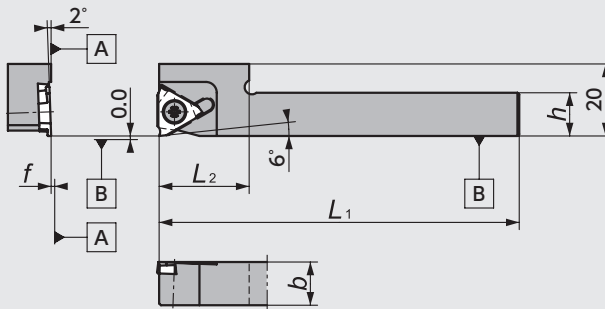(Y-axis)
Screw accessible from both sides



● Right-Hand style shown
☆ Takes Right-hand insert

Figure-2



GTT Series - Toolholders

Figure	Code No.		Item Number	Stock		Dimensions (mm)								Groove Width Range (mm) w	Gage insert	Spare Parts		
	R	L		R	L	h	b	L ₁	h ₁	f	L ₂	a _r	h ₂			Clamp Screw	Wrench	
1	5911466		Y-GTT [®] ¼12H00S-OH	●		12	12						20		GTMH32 GTMX32 H22~25	LR-S-4* 10PW	CLR-15S	
	5911474		Y-GTT [®] ¼16H00-OH	●		16	16	100	—	0			25					0.30 } 3.00 *1
2	5371604		Y-GTT [®] ¼10S	●									20		TBMH32 G61	LR-S-4* 10PW	CLR-15S	
	5950415		10MS	●		10	10						22					0.30 } 3.00 *1
	5371620		12S	●				120	—	0			20					
	5950472		12MS	●		12	12						22					

NGT Series

NGTN

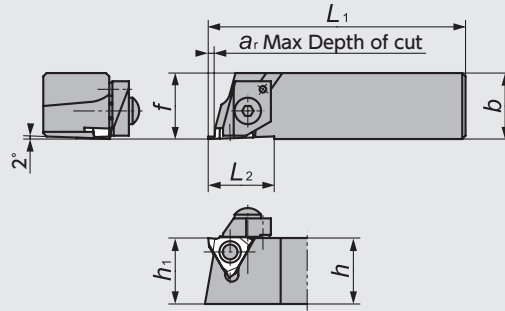Clamp-on
No-Offset





● Right-Hand style shown

Figure-1

NGTB

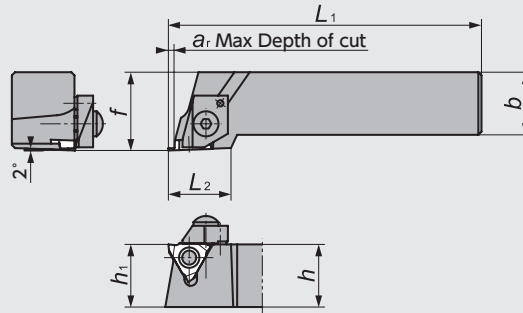Clamp-on
With Offset





● Right-Hand style shown

Figure-2

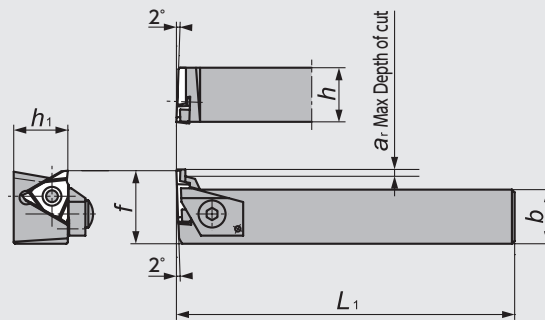NGTA






Clamp-on



● Left-Hand style shown
☆ Takes Right-hand insert

Figure-3

NGT Series - Toolholders


Figure	Code No.		Item Number	Stock		Dimensions (mm)								Groove Width Range (mm) w	Gage insert 	Spare Parts			
	R	L		R	L	h	b	L1	h1	f	L2	ar	h2			Clamp 	Clamp Bolt 	Spring 	Wrench 
1	5525928	5525738	NGTN [®] L161632-00	●	●								1.6	0.30~3.00 ※1	GTMH32 GTMX32 H22~25	CPR/L5S	AOS-5*20	ASG-5	LW-2.5
	5534110		161632-15	●		16	16	78	16	16	20	—	2.7	1.45~3.00					
	5534128		161632-25	●									—	2.50~3.00					
2	5542295		NGTB [®] L202032-00S	●									1.6	0.30~3.00 ※1	GTMH32 GTMX32 H22~25	CPR/L5	AOS-5*25	ASG-5	LW-2.5
	5537717		202032-15S	●		20	20	125	20	25			2.7	1.45~3.00					
	5553243		202032-25S	●							25	—	1.6	0.30~3.00 ※1					
	5549563		252532-00S	●									2.7	1.45~3.00					
	5545801		252532-15S	●		25	25	150	25	30			2.7	2.50~3.00					
	5553417		252532-25S	●									—	—					
3	5536370		NGTA [®] L202032-00S	●		20	20	125	20	25			1.6	0.30~3.00 ※1	GTMH32 GTMX32 H22~25	CPR/L5※	AOS-5*25	ASG-5	LW-2.5
	5536388		202032-15S	●									2.7	1.45~3.00					

※1 Would be changed by insert
※Left-Hand clamp with should be used with right-hand holder
Right-Hand clamp with should be used with left-hand holder


Grooving / Side Turning

GTT/NGT Series - Inserts

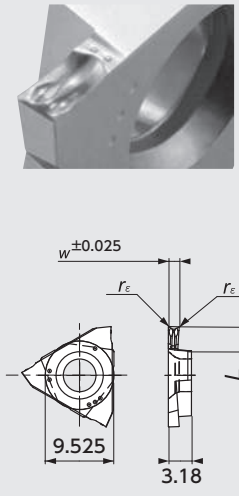
● GTMH32-GX

Shape	Item Number	Dimensions (mm)			Max Depth of cut		PVD Coated Carbide										
		w	L	r _ε	Grooving	Side Turning	ST4		TM4		DM4						
							R	Stock	R	Stock	R	Stock					
 <p>● Right-Hand style shown</p>	GTMH32033RGX	0.33	0.6	0.05	0.25	—	5039136	●	5019468	●	5019450	●					
	043RGX	0.43	1.2				5039144	●	5019443	●	5019435	●					
	050RGX	0.50					5039151	●	5019419	●	5019401	●					
	053RGX	0.53					5039169	●	5019393	●	5019336	●					
	075RGX	0.75					2.0	1.6	0.75	5039177	●	5910765	●	5910898	●		
	095RGX	0.95	5039185							●	5922224	●	5922216	●			
	100RGX	1.00	0.1							1.50	5039193	●	5910815	●	5910906	●	
	100RGX01										5039201	●	5910823	●	5910963	●	
	150RGX	1.50	0.05							2.7	2.00	5039219	●	5910740	●	5910914	●
	150RGX01		0.1									5039227	●	5910849	●	5910971	●
	150RGX02		0.2	5039235	●	5910864	●	5910997	●								
	200RGX	2.00	0.05	2.7	2.00	5039243	●	5910732	●	5910930	●						
	200RGX01		0.1			5039250	●	5910856	●	5910989	●						
	200RGX02		0.2			5039268	●	5910872	●	5911003	●						
	300RGX		0.05			5039276	●	5910724	●	5910948	●						
	300RGX02	3.00	0.2			5039284	●	5910880	●	5911011	●						

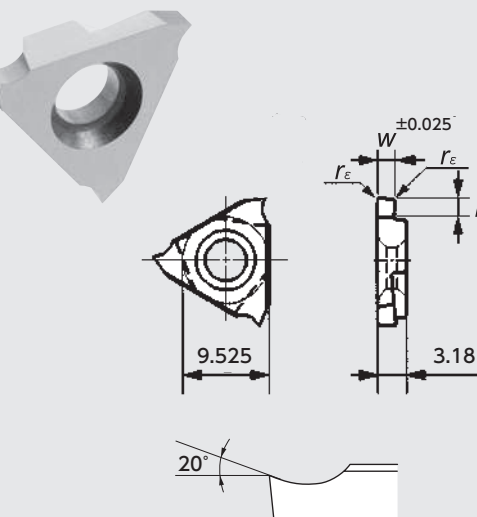● GTMH32-E

Shape	Item Number	Dimensions (mm)				PVD Coated Carbide				
		w	L	r _ε	Max Depth of cut	ZM3				
						R	Stock	L	Stock	
 <p>● Right-Hand style shown</p>	GTMH32033^R/_LE	0.33	0.6	0.03	0.3	5108766	●	5109046	●	
	043^R/_LE	0.43	1.2			5108758	●	5109038	●	
	053^R/_LE	0.53				5108774	●	5109020	●	
	075^R/_LE	0.75				5108790	●	5109012	●	
	077^R/_LE	0.77				5920574	●	5965264	●	
	095^R/_LE	0.95	5108808			●	5109004	●		
	097^R/_LE	0.97	5919980			●	5965272	●		
	100^R/_LE	1.00	2.0			1.6	5108816	●	5108998	●
	103^R/_LE	1.03					5965298	●	5965306	●
	120^R/_LE	1.20					5108824	●	5108980	●
	125^R/_LE	1.25		5373360	●					
	140^R/_LE	1.40		0.05	2.7		5108782	●	5108907	●
	145RE	1.45					5231667	●		
	150^R/_LE	1.50	3.0	2.7	5108899	●	5108972	●		
	175RE	1.75			5919998	●				
	180^R/_LE	1.80			5108881	●	5108964	●		
	200^R/_LE	2.00			5108873	●	5108956	●		
	225^R/_LE	2.25			5108865	●	5108949	●		
	250^R/_LE	2.50			5108857	●	5108931	●		
	275^R/_LE	2.75			5108840	●	5108923	●		
300^R/_LE	3.00	5108832			●	5108915	●			
100^R/_LE01	1.00	2.0	0.1	1.6	5109079	●	5109087	●		
120^R/_LE01	1.20				5109277	●	5109251	●		
150^R/_LE01	1.50				3.0	2.7	5109061	●	5109269	●
200^R/_LE01	2.00						5109053	●	5109244	●

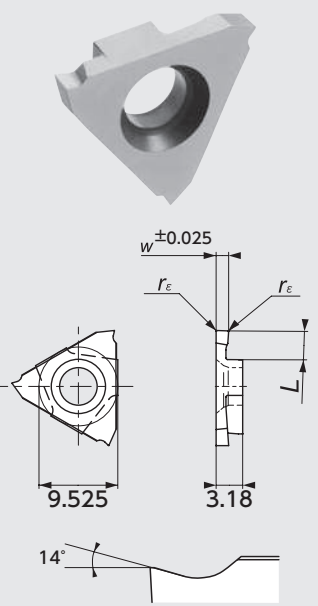
● GTMX32-T

Shape	Item Number	Dimensions (mm)				PVD Coated Carbide							
		w	L	r _e	Max Depth of cut	QM3				DT4			
						R	Stock	L	Stock	R	Stock	L	Stock
 <p>● Right-Hand style shown</p>	GTMX32030^R/L	0.30	0.6	0.05	0.25	5510110	●			5847967	●		
	033^R/L	0.33				5510102	●						
	043^R/L	0.43	1.2	0.05	0.9	5510094	●			5847983	●		
	050^R/L	0.50				5493895	●			5847991	●		
	053^R/L	0.53				5510086	●						
	065^R/L	0.65				5510078	●			5849013	●		
	075^R/L	0.75	2.0	0.05	1.6	5493903	●	5510540	●	5848999	●	5848981	●
	080^R/L	0.80				5510060	●			5848965	●		
	095^R/L	0.95				5493911	●	5510581	●	5848882	●	5848874	●
	100^R/L	1.00				5493929	●			5848866	●		
	110^R/L	1.10				5510052	●						
	120^R/L	1.20				5493937	●			5848841	●		
	125^R/L	1.25				5510045	●			5848833	●		
	130^R/L	1.30				5510037	●			5848825	●		
	140^R/L	1.40				5510029	●			5848817	●		
	145^R/L	1.45				5510011	●						
	150^R/L	1.50	5493945	●	5510672	●	5848791	●	5848783	●			
	160^R/L	1.60	5510003	●			5848775	●					
	175^R/L	1.75	3.0	0.05	2.7	5510243	●			5848767	●		
	180^R/L	1.80				5510250	●			5848759	●		
	200^R/L	2.00				5510227	●	5510425	●	5848742	●	5848734	●
	250^R/L	2.50				5510219	●	5510417	●	5848726	●	5848718	●
	300^R/L	3.00	5510235	●			5848700	●					
	100^R/L T01	1.00	2.0	0.1	1.6	5510136	●			5848692	●		
	120^R/L T01	1.20				5510128	●			5848684	●		
	150^R/L T01	1.50	3.0	0.2	2.7	5510482	●			5848676	●		
	200^R/L T01	2.00				5510433	●	5510441	●	5848668	●	5848650	●
	250^R/L T01	2.50				5523204	●			5848627	●		
	150^R/L T02	1.50	3.0	0.2	2.7	5523196	●			5848643	●		
	200^R/L T02	2.00				5523188	●			5848635	●		
250^R/L T02	2.50	5523170				●			5848619	●			
300^R/L T02	3.00	5523162				●			5848601	●			

- New Products
- Tool Materials / Selection Guide
- Micrograin Carbide, BIDE/MCS, PCD, PVD Coated Carbide, CBN and Ceramics
- Insert Item List
- General Turning Toolholders
- Unique Swiss Tooling
- Grooving / Side Turning
- Threading
- Shaper
- ID Tooling
- Application Introduction
- Endmills
- Rotating Tools
- Information
- Index

Grooving / Side Turning

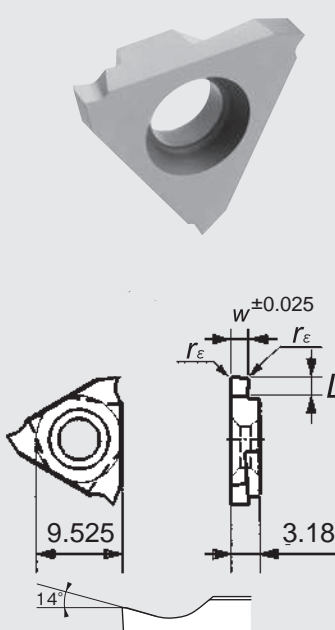
● GTMH32-VT Mirror finish

Shape	Item Number	Dimensions (mm)				PVD Coated Carbide			
		w	L	r _e	Max Depth of cut	VM1			
						R	Stock	L	Stock
 <p>● Right-Hand style shown</p>	GTMH32033^{R/L}VT M	0.33	0.6		0.25	5359484	●		
	043^{R/L}VT M	0.43	1.2		0.9	5359500	●		
	053^{R/L}VT M	0.53				5359526	●		
	065^{R/L}VT M	0.65				5359542	●		
	075^{R/L}VT M	0.75				5359567	●		
	080^{R/L}VT M	0.80				5359609	●		
	085^{R/L}VT M	0.85				5359633	●		
	095^{R/L}VT M	0.95	2.0	0.0	1.6	5359658	●		
	100^{R/L}VT M	1.00				5359674	●		
	110^{R/L}VT M	1.10				5359690	●		
	120^{R/L}VT M	1.20				5359716	●		
	130^{R/L}VT M	1.30				5359732	●		
	140^{R/L}VT M	1.40				5359757	●		
	150^{R/L}VT M	1.50				5359773	●		
	200^{R/L}VT M	2.00		3.0		2.7	5360532	●	


■ Side turning instruction for GTMH-GX / GTMX-T / GTMH-VT

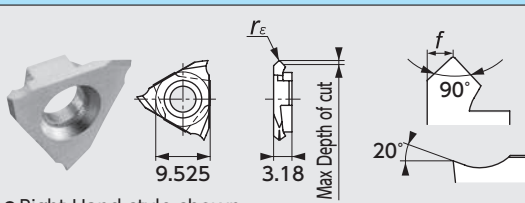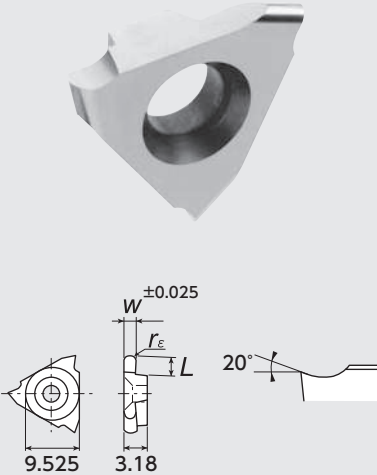- ① To perform side turning with an insert whose groove width is greater than 0.43 set side turning feed rate to 0.03mm/rev or smaller.
- ② When performing side turning with an insert whose groove width is greater than 0.43 and the feed rate is over 0.03mm/rev (0.1mm/rev max), it is likely that chips will damage grooved sides. In this case, please perform grooving in two or more passes to make room for chips before performing side turning.

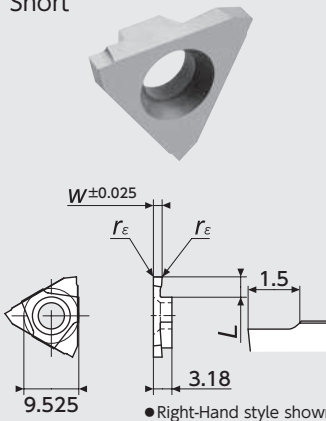



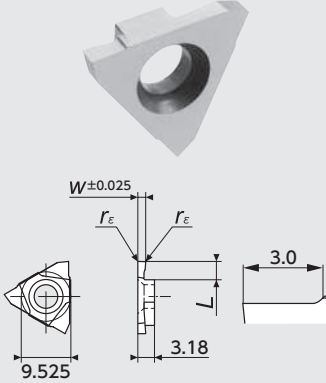
● GTMX32-V90 (90 Degree V-style)

Shape	Item Number	Edge Geometry	Dimensions (mm)			PVD Coated Carbide			
			r _e	f	Max Depth of cut	TM4			
						R	Stock	L	Stock
 <p>● Right-Hand style shown</p>	GTMX32V90R005	90°	0.05	0.5	0.35	5773940	●		
	V90R010	90°	0.1	1.0	0.7	5773957	●		

● GTMH32 (Full radius style)

Shape	Item Number	Dimensions (mm)				PVD Coated Carbide			
		w	L	r _ε	Max Depth of cut	ZM3			
						R	Stock	L	Stock
 <p>● Right-Hand style shown</p>	GTMH32050^R/_LE025	0.50	1.2	0.25	0.9	5446125	●		
	070^R/_LE035	0.70	2.0	0.35	1.6	5446141	●		
	100^R/_LE05	1.00		0.50		5160759	●		
	150^R/_LE075	1.50	0.75	5501200		●			
	200^R/_LE10	2.00	3.0	1.00	2.7	5160775	●		
	250^R/_LE125	2.50		1.25		5921671	●		
	300^R/_LE15	3.00		1.50		5436720	●		

● GTMH • X32 (Flat top chipbreaker)



Shape	Item Number	Dimensions (mm)				PVD Coated Carbide				Carbide			
		w	L	r _ε	Max Depth of cut	ZM3				KM1			
						R	Stock	L	Stock	R	Stock	L	Stock
Short  <p>● Right-Hand style shown</p>	GTMX32100^R/_LSS	1.00	2.0	0.05	1.6	5523345	●						
	150^R/_LSS	1.50	3.0			5523337	●						
	200^R/_LSS	2.00				5523329	●						
	Mirror finish GTMH32100^R/_LSSH 	1.00	2.0	0.05	1.6				5599394	●			
	150^R/_LSSH 	1.50	3.0			5599386	●						
	200^R/_LSSH 	2.00				5599378	●						
Long  <p>● Right-Hand style shown</p>	GTMX32100^R/_LLS	1.00	2.0	0.05	1.6	5523295	●						
	150^R/_LLS	1.50	3.0			5523303	●						
	200^R/_LLS	2.00				5523311	●						

Grooving / Side Turning

NGT Series

NGTN

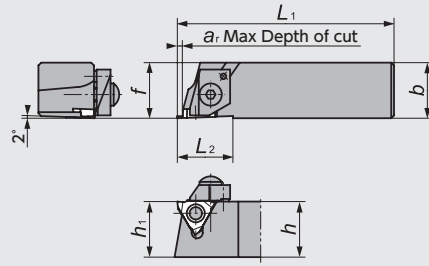Clamp-on
No-Offset





● Right-Hand style shown

Figure-1

NGTB

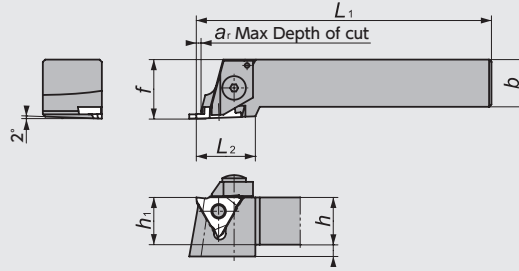Clamp-on
With Offset





● Right-Hand style shown

Figure-2

NGTA

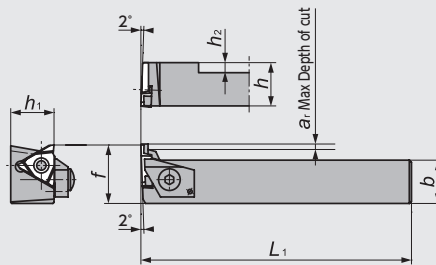Clamp-on



● Left-Hand style shown
☆ Takes Right-hand insert

Figure-3

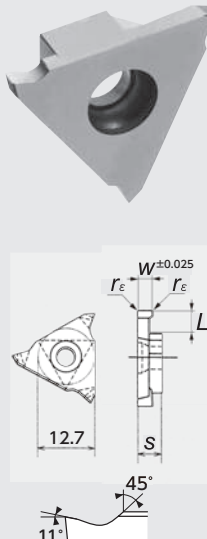
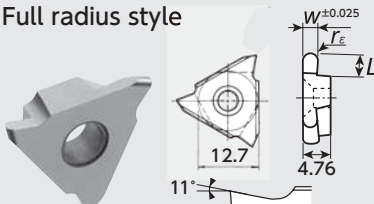
NGT Series - Toolholders

Figure	Code No.		Item Number	Stock		Dimensions (mm)								Groove Width Range (mm) w	Gage insert	Spare Parts			
	R	L		R	L	h	b	L ₁	h ₁	f	L ₂	a	h ₂			Clamp	Clamp Bolt	Spring	Wrench
1	5501994	5554241	NGTN ^{R/L} 161643-20	●	●									2.00-3.49	GTMA43 GTMT43 H27	CPR/L5S	AOS-5*25	ASG-5	LW-2.5
	5534136	5222112	161643-35	●	●	16	16	78	16	16	20	4.5	9	3.50-5.50					
2	5239900	5239843	NGTB ^{R/L} 161643-00S	●	●								3.0	1.00-2.49	GTMA43 GTMT43 H27	CPR/L5	AOS-5*25	ASG-5	LW-2.5
	5949615	5210901	161643-20S	●	●	16	16	100	16	20			4.5	2.00-3.49					
	5806096	5222021	161643-35S	●	●									3.50-5.50					
	5239850	5239868	202043-00S	●	●								3.0	1.00-2.49					
	5550041	5553367	202043-20S	●	●	20	20	125	20	25			4.5	2.00-3.49					
	5553375	5222039	202043-35S	●	●						25			3.50-5.50					
	5239876	5239892	252543-00S	●	●								3.5	1.00-2.49					
	5550058	5550066	252543-20S	●	●	25		150	25					2.00-3.49					
	5550074	5550082	252543-35S	●	●			25		30			5.5	3.50-5.50					
	5553433	5553441	322543-20S	●	●									2.00-3.49					
5222013	5222047	322543-35S	●	●	32		170	32					3.50-5.50						
3	5004155	NGTA ^{R/L} 161643-00S	●	●	16	16	100	16	23	—	3.0	4	1.00-2.49	GTMA43 GTMT43 H27	CPR/L5S*	AOS-5*20	ASG-5	LW-2.5	
	5884903	202043-00S	●	●	20	20	125	20	27	—	3.0	—	※1						CPR/L6*

※1 Would be changed by insert
※Left-Hand clamp with should be used with right-hand holder
Right-Hand clamp with should be used with left-hand holder

GTT/NGT Series - Inserts

● GTMT43/GTMA43

Shape	Item Number	Dimensions (mm)					PVD Coated Carbide							
		w	L	r _ε	s	Max Depth of cut	QM3				DM4			
							R	Stock	L	Stock	R	Stock	L	Stock
 <p>● Right-Hand style shown</p>	GTMT43145 ^R _L	1.45	3.5	0.2	3.0	5238076	●	5237912	●	5846852	●	5846860	●	
	150 ^R _L	1.50				5238084	●	5237920	●	5846837	●	5846845	●	
	175 ^R _L	1.75				5238092	●	5237938	●	5846811	●	5846829	●	
	185 ^R _L	1.85				5238100	●	5237946	●	5846795	●	5846803	●	
	200 ^R _L	2.00				5238118	●	5237953	●	5846779	●	5846787	●	
	230 ^R _L	2.30				5238126	●	5237961	●	5846753	●	5846761	●	
	250 ^R _L	2.50	4.76	0.3	4.3	5238134	●			5846746	●			
	265 ^R _L	2.65				5238142	●			5846910	●			
	280 ^R _L	2.80				5238159	●	5237904	●	5846902	●	5846738	●	
	300 ^R _L	3.00				5238167	●	5237987	●	5846894	●	5846720	●	
	330 ^R _L	3.30				5238175	●	5237995	●					
	350 ^R _L	3.50	5.5	0.4	5.76	5238183	●	5238001	●	5846704	●	5846712	●	
	400 ^R _L	4.00				5238191	●	5238019	●	5846688	●	5846696	●	
	430 ^R _L	4.30												
	450 ^R _L	4.50				5238233	●	5238035	●	5846639	●	5846670	●	
	500 ^R _L	5.00												
	550 ^R _L	5.50												
Full radius style  <p>● Right-Hand style shown</p>	GTMA43200 ^R _L 10R	2.00	3.5	1.0	3.0	5437918	●							
	300 ^R _L 15R	3.00	5.5	1.5	4.5	5437926	●							
	400 ^R _L 20R	4.00		2.0		5437934	●							

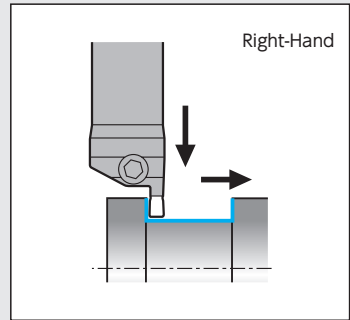
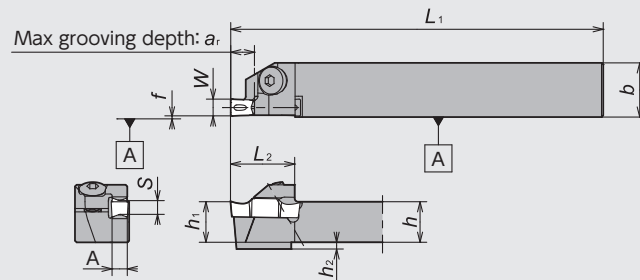
- New Products
- Tool Materials / Selection Guide
- Micrograin Carbide, PCBN, PCD, CBN and Ceramics
- Micrograin Carbide, PVD Coated Carbide
- Insert Item List
- General Turning Toolholders
- Unique Swiss Tooling
- Grooving / Side Turning
- Threading
- Shaper
- ID Tooling
- Application Introduction
- Endmills
- Rotating Tools
- Information
- Index

Grooving / Side Turning

GTW (SCRUM DUO) Series

GTWP

Side Turning Capable
For Swiss Machine





● Right-Hand style shown

Figure-1

GTWP

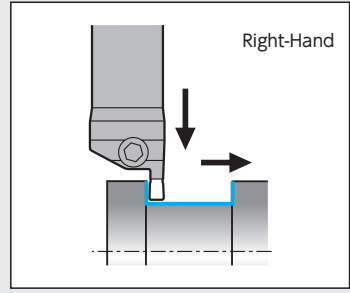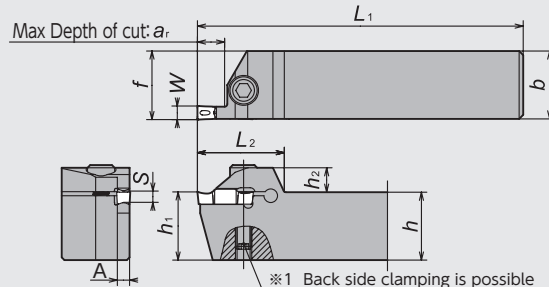Side Turning Capable
For Mono-shank style



Recommended tightening torque 7.0[N · m]
● Right-Hand style shown

Figure-2

GTW Series - Toolholders


Figure	Code No.		Item Number	Stock		Groove Width (mm) w	Max Depth of cut ar	Dimensions (mm)										Seat Size S	Gage insert	Spare Parts		
	R	L		R	L			h	b	h ₁	h ₂	f	L ₁	L ₂	A	Clamp Bolt	Wrench			Wrench ^{※1}		
1	5875125		GTWP ^{※1} 1016-3D07	●	●	3	7	10		12	2				19	2.6	D	GWPO300	AOB-5*14	LW-3S	—	
	5849054	5852280	1216-3D07	●	●		7	12		12	0			19.5								
	5849070	5852306	1616-3D09	●	●		9	16		16	0			22								
	5875133		1016-4E07	●	●	4	7	10		12	2			19	3.5	E	GWPO400	AOB-5*14				
	5849088	5852314	1216-4E07	●	●		7	12	16	12	0			19.5								
	5849096	5852322	1616-4E09	●	●		9	16		16	0			22								
	5875141		1016-5F07	●	●	5	7	10		12	2			19	4.5	F	GWPO500	AOB-5*14				
	5849104	5852355	1216-5F07	●	●		7	12		12	0			19.5								
	5849112	5852371	1616-5F09	●	●		9	16		16	0			22								
	5893565		1020-6G07	●	●	6	7	10	20	10	2			22	5.3	G	GWPO600	AOB-5*14				
5893573		1220-6G07	●	●	7		12	20	12	0			22.5									
5893581	5893599	1620-6G09	●	●	9		16	20	16	0			25									
2	5849120	5852397	GTWP ^{※1} 2020K-3D10	●	●	3	10	20	20	20	8	20.2	125	29	2.6	D	GWPO300	CS0520W	LW-4	LW-2.5		
	5849138	5852405	2525M-3D10	●	●		10	25	25	25	9	25.2	150	32								
	5849146	5852421	2020K-3D20	●	●		20	20	20	20	8	20.2	125	41								
	5849153	5852439	2525M-3D20	●	●	20	25	25	25	9	25.2	150	44	3.5	E	GWPO400	CS0520W	LW-4	LW-2.5			
	5849161	5852447	2020K-4E10	●	●	10	20	20	20	8	20.3	125	29									
	5849179	5852454	2525M-4E10	●	●	10	25	25	25	9	25.3	150	32									
	5849187	5852470	2020K-4E20	●	●	20	20	20	20	8	20.3	125	41	4.5	F	GWPO500	CS0520W	LW-4	LW-2.5			
	5849195	5852488	2525M-4E20	●	●	20	25	25	25	9	25.3	150	44									
	5849203	5852496	2020K-5F10	●	●	10	20	20	20	8	20.3	125	29									
	5849211	5852512	2525M-5F10	●	●	5	10	25	25	25	9	25.3	150	32	5.3	G	GWPO600	CS0520W	LW-4	LW-2.5		
	5849229	5852520	2020K-5F20	●	●		20	20	20	20	8	20.3	125	41								
	5849237	5852538	2525M-5F20	●	●		20	25	25	25	9	25.3	150	44								
	5849245	5852546	2020K-6G12	●	●	6	12	20	20	20	8	20.35	125	34	5.3	G	GWPO600	CS0520W	LW-4	LW-2.5		
	5849252	5852553	2525M-6G12	●	●		12	25	25	25	9	25.35	150	37								
	5849260	5852561	2020K-6G25	●	●		20	20	20	20	8	20.35	125	49								
	5849278	5852587	2525M-6G25	●	●	25	25	25	25	9	25.35	150	52				CS0625W	LW-5	LW-3			

※1 Back side clamping wrench is not included

※Do not tighten clamp screw without installing insert as it may damage the insert pocket.

GKW (SCRUM DUO) Series

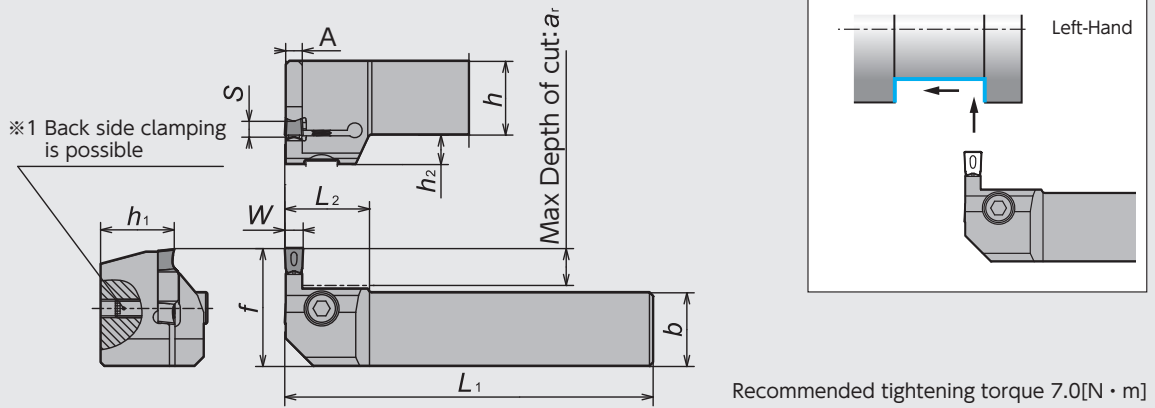GKWP



GKW Series - Toolholders

Code No.		Item Number	Stock		Groove Width (mm) W	Max Depth of cut a_r	Dimensions (mm)							Seat Size S	Gage insert 	Spare Parts			
R	L		R	L			h	b	h ₁	h ₂	f	L ₁	L ₂			A	Clamp Bolt	Wrench	Wrench #1
	5893607	GKWP 2020K-3D10	●		3	10						2.6	D	GWPO300	CS0520W	LW-4	LW-2.5		
	5893615	2020K-4E10	●		4		20	20	20	8	32	125	23	3.5				E	GWPO400
	5893623	2020K-5F10	●		5									4.5				F	GWPO500
	5893631	2020K-6G12	●		6	12								5.3				G	GWPO600

※1 Back side clamping wrench is not included
※Do not tighten clamp screw without installing insert as it may damage the insert pocket.

GTW/GKW Series - Inserts

Shape	Item Number	Dimensions (mm)					Seat Size S	PVD Coated Carbide			
		W		r_e	M	L		DM4	Stock		
		Groove Width	Tolerance								
<p>GWPG: Outside ground GWPM: Full-molded</p> <ul style="list-style-type: none"> ● Excellent chip control ● Best for side turning 	GW 	GWPG300N02D-GW	3.0	±0.025	0.2	2.5	20.6	D	5848023	●	
		300N04D-GW			0.4				5848031	●	
		GWPG400N02E-GW	4.0		0.2	3.4		E	5848064	●	
		400N04E-GW			0.4				5848072	●	
		400N08E-GW			0.8				5852868	●	
		GWPG500N02F-GW	5.0		0.2	4.3		F	5848106	●	
	500N04F-GW	0.4		5848114	●						
	500N08F-GW	0.8		5852876	●						
	GWPG600N02G-GW	6.0	0.2	5.2	25.6	G	5848148	●			
	600N04G-GW		0.4				5848155	●			
	600N08G-GW		0.8				5852900	●			
	<ul style="list-style-type: none"> ● Less tool pressure design 	GW 	GWPM300N04D-GW	3.0	±0.05	0.4	20.6	D	5848171	●	
400N04E-GW			4.0	3.4		E			5848197	●	
500N04F-GW			5.0	4.3		F		5848213	●		
600N04G-GW			6.0	5.2		25.6		G	5848239	●	
		GV 	GWPG300N02D-GV	3.0	±0.025	0.2	2.5	20.6	D	5848262	●
			300N04D-GV			0.4				5848270	●
			GWPG400N02E-GV	4.0		0.2	3.4		E	5848353	●
			400N04E-GV			0.4				5848361	●
	GWPG500N02F-GV		5.0	0.2		4.3	F		5848395	●	
	500N04F-GV			0.4					5848403	●	
	GWPG600N02G-GV		6.0	0.2		5.2	25.6	G	5848437	●	
	600N04G-GV			0.4					5848445	●	

Grooving / Side Turning

GTV/GKV Series

GTV


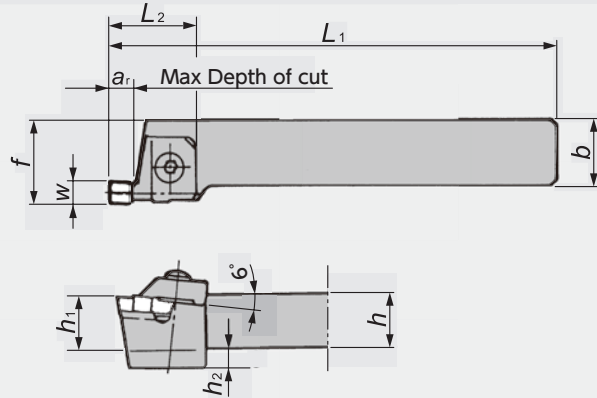


Figure-1

●Right-Hand style shown

GKV


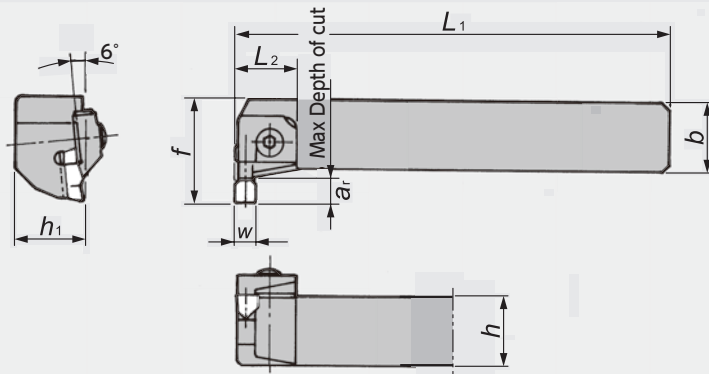








Figure-2

●Right-Hand style shown

GTV/GKV Series - Toolholders

Figure	Code No.		Item Number	Stock		Dimensions (mm)							Groove Width Range (mm) w	Gage insert 	Spare Parts						
	R	L		R	L	h	b	L ₁	h ₁	f	L ₂	a _r			h ₂	Clamp 	Clamp Bolt 	Spring 	Wrench 		
1	5765920		GTV[®]16-3N	●		16	16	100	16	20	25	11	9		GEV300N(04) GEV350N(04) H31	CVR/L3SN	AOB-5C	ASG-5	LW-3		
	5778980		20-3N	●		20	20	125	20	25	32					0	3.00 } 3.50	CVR/L3N	AOB-6C	ASG-6	LW-4
	5801667	5801675	25-3N	●	●	25	25	150	25	30	32						4.00 } 5.90	CVR/L4SN	AOB-5C	ASG-5	LW-3
	5657739	5657747	16-4N	●	●	16	16	100	16	20	25		0			6.00 } 7.90	CVR/L4N	AOB-6C	ASG-6	LW-4	
	5657754	5657762	20-4N	●	●	20	20	125	20	25	32						8.00 } 9.00				CVR/L6
	5657770	5657788	25-4N	●	●	25	25	150	25	30	32		9			4.00 } 5.90	CVR/L8	AOB-6C	ASG-6	LW-4	
	5657796	5657804	20-6	●	●	20	20	125	20	25	32						6.00 } 7.90				CVR/L4N
	5609193	5611397	25-6	●	●	25	25	150	25	30	32						8.00 } 9.00				CVR/L6
	5657812		20-8	●		20	20	125	20	25	32		11			—	GEV H31 GTV GVGN H31	CVR/L8	AOB-6C	ASG-6	LW-4
5657697	5657705	25-8	●	●	25	25	150	25	30	32	4.00 } 5.90	CVR/L4N									
5657820	5657838	GKV[®]20-4N	●	●	20	20	125	20	33	32	6.00 } 7.90	CVR/L6									
5657846	5657853	25-4N	●	●	25	25	150	25	38	32	8.00 } 9.00	CVR/L8									
5657861		20-6	●		20	20	125	20	33	32	11	—	GEV H31 GTV GVGN H31	CVR/L4N	AOB-6C	ASG-6	LW-4				
5657713	5657721	25-6	●	●	25	25	150	25	38	32				4.00 } 5.90				CVR/L6			
		20-8			20	20	125	20	33	32				6.00 } 7.90				CVR/L8			
		25-8			25	25	150	25	38	32	11	—	GEV H31 GTV GVGN H31	CVR/L4N	AOB-6C	ASG-6	LW-4				
		25-8			25	25	150	25	38	32				8.00 } 9.00				CVR/L8			

※Left-Hand clamp with should be used with right-hand holder
Right-Hand clamp with should be used with left-hand holder

■ GTV/GKV Series - Inserts

● GTV

Shape	Item Number	Dimensions (mm)			PVD Coated Carbide	
		w	S	r _ε	QM3	Stock
	GTV400N	4.0	8.5	0.15	5027610	●
	400N04			0.4	5046727	●
	GTV600N	6.0	8.5	0.15	5027602	●
	600N04			0.4	5046735	●

● GEV

Shape	Item Number	Dimensions (mm)			PVD Coated Carbide	
		w	S	r _ε	QM3	Stock
	GEV300N	3.0	5.2	0.2	5027586	●
	300N04			0.4	5048392	●
	GEV350N04	3.5		0.4	5053616	●
	GEV400N	4.0	8.5	0.2	5046818	●
	400N04			0.4	5035233	●
	GEV450N04	4.5		0.4	5227517	●
	GEV500N	5.0	8.5	0.2	5046800	●
	500N04			0.4	5035225	●
	GEV550N04	5.5		0.4	5255385	●
	GEV600N	6.0	8.5	0.2	5082961	●
	600N04			0.4	5042189	●
	GEV650N04	6.5		0.4	5064191	●
	GEV700N04	7.0		0.4	5037080	●
	GEV750N04	7.5		0.4	5255393	●
GEV800N04	8.0		0.4	5255401	●	

● GVGN

Shape	Item Number	Dimensions (mm)			Ceramics	
		w	S	r _ε	HC2	Stock
<p>without chipbreaker</p>	GVGN20400N	4.0	8.5	0.2		
	20500N	5.0				
	20600N	6.0				
	20700N	7.0				
	20800N	8.0				
	20900N	9.0				

※The ceramics grade inserts are manufactured on a production-to-order basis

Grooving / Side Turning

TWG Series

TWG

Side Turning Capable
Up to 1.5mm doc.


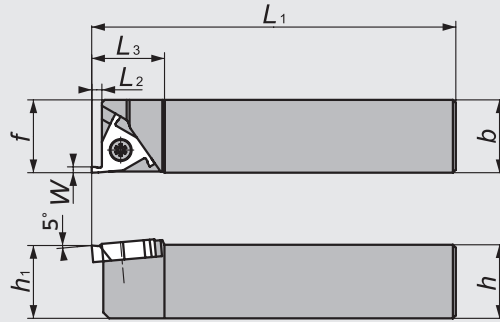


Figure-1

● Right-Hand style shown

TWG


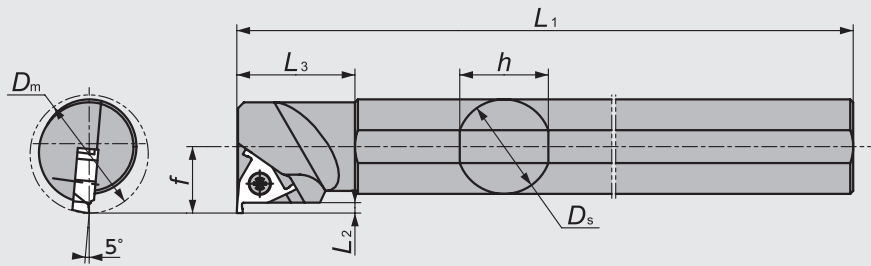


Figure-2

● Right-Hand style shown
☆ Takes Left-hand insert

TWG Series - Toolholders

Figure	Code No.		Item Number	Stock		Dimensions (mm)							Gage insert	Spare Parts							
	R	L		R	L	h	D _s	D _m	b	L ₁	h ₁	f		L ₂	L ₃	Clamp Screw	Wrench				
1	5794649		TWG ^{R/L} 2012X	★		12										TWG	FSS25-5.0*10	RLR-20S			
	5859350		2016X	★		16			20	120	16	20							FSS10-5.0*14	LLR-20S	
	5714332	5720511	2020K	●	●	20					20			3.5	25						
	5714233	5720503	2525K	●	●	25			25	125	25	25								FSS10-5.0*14	RLR-20S
2	5722541		S32S-TWGR38	●		30	32	38		250	40	20.5			TWG	FSS10-5.0*14	RLR-20S				
	5722533		S40T-TWGR46	●		38	40	46		300	40	24.5		3.5				40			

TWG Series - Inserts

Shape	Item Number	Dimensions (mm)				PVD Coated Carbide			
		w	L	r _e	Max Depth of cut	TM1			
						R	Stock	L	Stock
	TWG20 ^{R/L} 005	2.0	(3.5)	0.05	3.0	5714340	●	5720040	●
	020			0.2		5714357	●	5720057	●
	TWG25 ^{R/L} 010	2.5		0.1		5714365	●	5720065	●
	030			0.3		5714373	●	5720073	●
	TWG30 ^{R/L} 010	3.0		0.1		5714381	●	5720081	●
	030			0.3		5714399	●	5720099	●

● Right-Hand style shown

MEMO

NTK

New Products

Tool Materials / Selection Guide

BIDEMCS, PCD, CBN and Ceramics

Micrograin Carbide, PVD Coated Carbide

Insert Item List

General Turning Toolholders

Unique Swiss Tooling

Grooving / Side Turning

Threading

Shaper

ID Tooling

Application Introduction

Endmills

Rotating Tools

Information

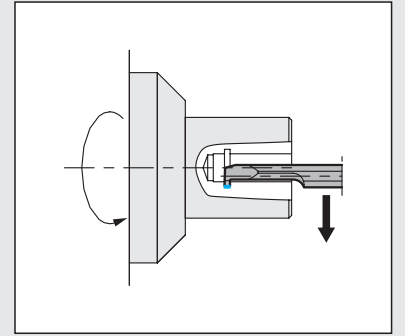
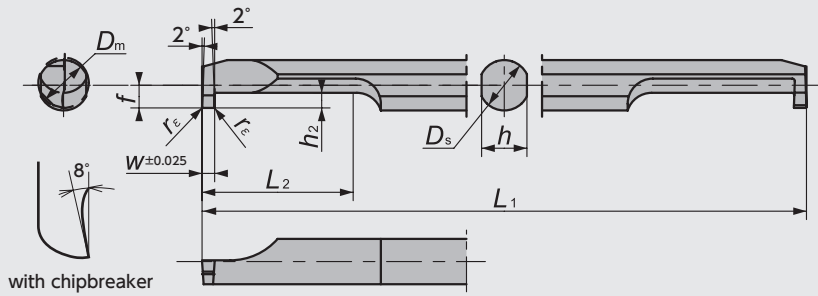
Index

Grooving / Side Turning

SBG Series (ID Grooving)

SBG

Minimum Bore Diameter 3.0mm



Type	Item Number	Min Bore Dia. (mm) D_m	Dimensions (mm)								PVD Coated Carbide	
			w	D_s	L_1	L_2	f	h	h_2	r_ϵ	ZM3	Stock
Short type	SBG030050RB-S	3.0	0.50	3.0	50	4.5	1.3	2.7	0.8	0.05	5815782	●
	030075RB-S		0.75								5815808	●
	030100RB-S		1.00								5815816	●
	030150RB-S		1.50								5815824	●
	SBG040050RB-S	4.0	0.50	4.0	60	6	1.8	3.6	1.0	0.05	5815832	●
	040075RB-S		0.75								5815840	●
	040100RB-S		1.00								5815857	●
	040150RB-S		1.50								5815865	●
	SBG050050RB-S	5.0	0.50	5.0	70	7.5	2.3	4.5	1.2	0.05	5815881	●
	050100RB-S		1.00								5815899	●
	050150RB-S		1.50								5815907	●
	050200RB-S		2.00								5815915	●
	SBG060100RB-S	6.0	1.00	6.0	80	7.5	2.8	5.4	1.8	0.05	5815931	●
	060150RB-S		1.50								5815949	●
	060200RB-S		2.00								5815956	●
	SBG080100RB-S	8.0	1.00	8.0	80	8.5	3.8	7.3	2.2	0.05	5815964	●
080150RB-S	1.50		5815980								●	
080200RB-S	2.00		5815998								●	
Regular type	SBG030050RB	3.0	0.50	3.0	50	9	1.3	2.7	0.8	0.05	5652821	●
	030075RB		0.75								5652839	●
	030100RB		1.00								5652847	●
	SBG040050RB	4.0	0.50	4.0	60	12	1.8	3.6	1.0	0.05	5652797	●
	040075RB		0.75								5652805	●
	040100RB		1.00								5652813	●
	SBG050050RB	5.0	0.50	5.0	70	20	2.3	4.5	1.2	0.05	5652854	●
	050100RB		1.00								5652862	●
	050150RB		1.50								5652870	●
	SBG060100RB	6.0	1.00	6.0	80	20	2.8	5.4	1.8	0.05	5704846	●
	060150RB		1.50								5704838	●
	060200RB		2.00								5704820	●
	SBG080100RB	8.0	1.00	8.0	80	20	3.8	7.3	2.2	0.05	5704895	●
	080150RB		1.50								5704903	●
080200RB	2.00		5704911								●	


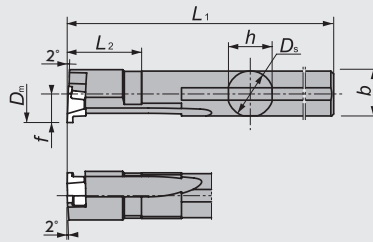
Sleeves ⇒K8

※Caution: Due to the tolerance, it might not fit into the holder which is made by other company.

BG Series (ID Grooving)

S-BG (Mogul Bar)

Minimum Bore Diameter 10.0mm





● Right-Hand style shown
☆ Takes Left-hand insert

Figure-1

BG

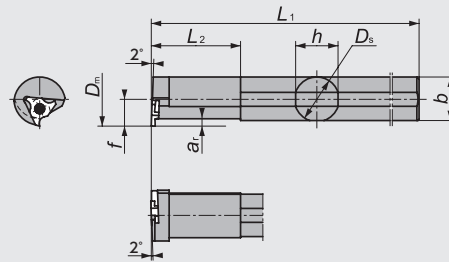Minimum Bore Diameter 10.0mm



● Right-Hand style shown
☆ Takes Left-hand insert

Figure-2

BG Series - Toolholders

Figure	Code No.		Item Number	Stock		Min Bore Dia. (mm) D _m	Max Depth of cut a _r	Dimensions (mm)						Groove Width Range (mm) w	Gage insert	Spare Parts	
	R	L		R	L			D _s	h	b	L ₁	f	L ₂			Clamp Screw	Wrench
1	5854500		S08H-BG^{R/L}10D10	●		10.0	1.0	8	7.7	7.85	120	5.0	20	0.50 ~ 2.00	GTG10	LR-S-2.5*6.8	CLR-15S (A)
	5854518		S10K-BG^{R/L}10D12	●		12.0	1.0	10	9.6	9.8	120	6.0	25				
2	5711585		BG^{R/L}08-00S	●		10.0	1.0	8	7.0	7.5	125	5.0	20	0.50 ~ 2.00	GTG10	LR-S-2.5*6.8	CLR-15S (A)
	5711593		08-10S	●		10.0	1.0	8	7.0	7.5	125	5.0	20	1.50 ~ 2.00			
	5711601		10-00S	●		12.0	1.0	10	9.0	9.5	150	6.0	25	0.50 ~ 2.00			
	5711619		10-10S	●		12.0	1.0	10	9.0	9.5	150	6.0	25	1.50 ~ 2.00			
	5711627		12-00S	●		14.0	2.0	12	11.0	11.5	180	7.0	30	1.00 ~ 2.00	GTG14	LR-S-3*7.8	RLR-20S (B)
	5711635		12-12S	●		14.0	2.0	12	11.0	11.5	180	7.0	30	1.75 ~ 2.00			
	5711643		14-00S	●		16.0	2.0	14	13.0	13.5	180	8.0	35	1.00 ~ 2.00			
	5711650		14-12S	●		16.0	2.0	14	13.0	13.5	180	8.0	35	1.75 ~ 2.00			
	5536362		16	●		20.0	3.0	16	15.0	15.5	200	10.0	40	1.50 ~ 2.00	GTG20	LR-S-3*7.8	RLR-20S (B)
	5435433		20	●		25.0	3.0	20	19.0	19.5	200	12.0	40				

BG Series - Inserts


Shape	Item Number	Dimensions (mm)						PVD Coated Carbide					
		w	Max Depth of cut	L	r _e	d ₁	TM4	Stock	ZM3	Stock	QM3	Stock	
<p>● Left-Hand style shown</p>	GTG10050FL005	0.50	1.0	1.2	0.05	5.56	5853130	●					
	10075FL005	0.75					5853114	●					
	10100FL005	1.00					5853098	●					
	10150FL005	1.50					5853080	●					
	10200FL005	2.00					5853072	●					
	GTG10050FL00	0.50					1.0	1.2	0.05	5.56			5514088
	10065FL00	0.65			5514104	●							
	10075FL00	0.75			5376835	●							
	10100FL00	1.00			5376843	●							
	10150FL00	1.50			5376850	●							
10200FL01	2.00			5357884	●								
GTG14100FL00	1.00	2.0	2.2	0.05	7.94			5376868	●				
14150FL00	1.50			0.05			5376876	●					
14200FL01	2.00			0.1			5376884	●					
GTG20150FL	1.50	3.0	3.2	0.2	9.525					5396239	●		
20200FL	2.00									5376991	●		

Grooving / Side Turning

GKV Series (ID Grooving)

GKV

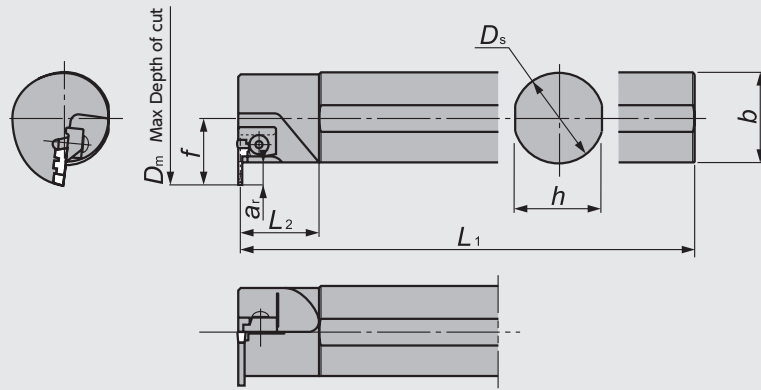Minimum Bore Diameter 30.0mm



● Right-Hand style shown

GKV Series - Toolholders

Code No.	Item Number	Stock		Min Bore Dia. (mm) D_m	Dimensions (mm)								Groove Width Range (mm) w	Gage insert	Spare Parts				
		R	L		D_s	h	b	L_1	f	L_2	a_r	Clamp			Clamp Bolt	Spring	Wrench		
5255567	GKV^{R/L}3230-3	●		30	32	30	31	200	21	50	5.5	3.00	GEV	CVL/R3SN ※	AOB-5C	ASG-5	LW-3		
5255559	3240-3	●		40	32	30	31	250	23	50	7.5	3.50							
5255542	4055-3	●		55	40	38	39	300	29	35	9.5								

※ Left-Hand clamp with should be used with right-hand holder
Right-Hand clamp with should be used with left-hand holder


GKV Series - Inserts

Shape	Item Number	Dimensions (mm)			PVD Coated Carbide	
		w	S	r_ϵ	QM3	Stock
	GEV300N	3.0	5.2	0.2	5027586	●
	300N04			0.4	5048392	●
	GEV350N04	3.5	0.4	5053616	●	

SFG Series (ID Face Grooving)

SFG

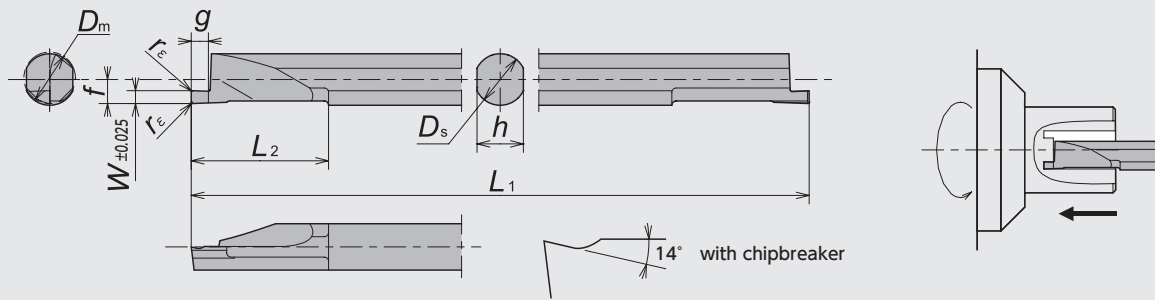Minimum Bore Diameter 6.0mm



Item Number	Min Bore Dia. (mm) D_m	Dimensions (mm)								PVD Coated Carbide	
		W	D_s	L_1	L_2	g	f	h	r_ϵ	TM4	Stock
SFG060R100B	6.0	1.00	6.0	16.0	16.0	1.5	2.8	5.4	0.05	5813837	●
060R150B		1.50				2.0				5813845	●
060R200B		2.00				3.0				5813852	●
SFG080R100B	8.0	1.00	8.0	80	16.0	1.5	3.8	7.3	0.05	5813878	●
080R150B		1.50				2.0				5813886	●
080R200B		2.00				3.0				5813894	●
080R300B		3.00				3.0				5813902	●

Sleeves ⇒K8

※Caution: Due to the tolerance, it might not fit into the holder which is made by other company.

Grooving / Side Turning

FGV Series

CH-FGV


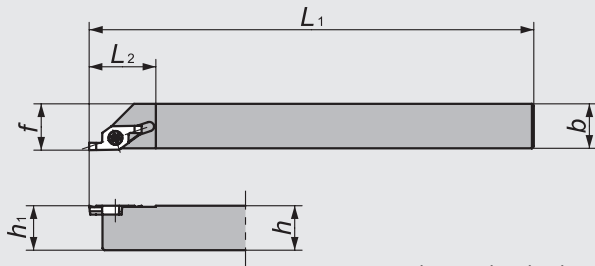


Figure-1

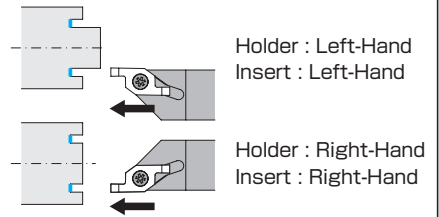● Right-Hand style shown



Only right hand holder is available when using FBV Insert

FGV

For Gang-style machine


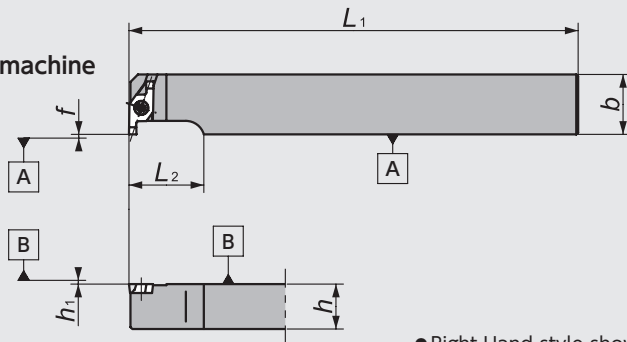


Figure-2

● Right-Hand style shown
☆ Takes Left-hand insert



Holder : Right-Hand
Insert : Left-Hand

DS-FGV


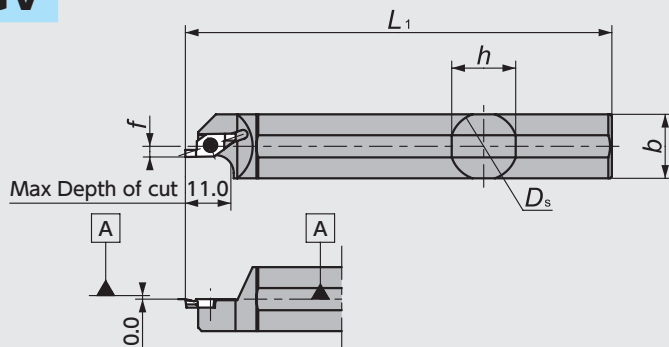


Figure-3

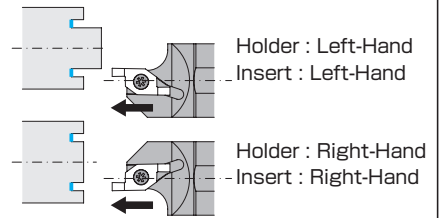● Right-Hand with FGV style shown



Only right hand holder is available when using FBV Insert


FGV Series - Toolholders

Figure	Code No.		Item Number	Stock		Dimensions (mm)						Gage insert	Spare Parts		
	R	L		R	L	D_s	h	b	L_1	h_1	f		L_2	Clamp Screw	Wrench
1	5691068	5691076	CH-FGV ^{R/L} 1010	●	●	—	10	10	120	10	10.5	18	FGV FBV H39	LRIS-2.5×7	CLR-15S
	5691084	5691100	1212	●	●	—	12	12		12	12.5				
	5691118	5691134	1616	●	●	—	16	16		16	16.5				
2	5691035	—	FGV ^{R/L} 1016	●	—	—	10	16	120	0.0	0.0	20	FGV ^{R/L} H39	LRIS-2.5×7	CLR-15S
	5691043	—	1216	●	—	—	12								
	5691050	—	1616	●	—	—	16								
3	5841861	5772439	DS-FGV ^{R/L} 16-012*	●	●	16	15	15	80	—	3.0	—	FGV FBV H39	LRIS-2.5×7	CLR-15S
	5690938	5690946	19	●	●	19.05	18	18							
	5690953	5690961	20	●	●	20	19	19							
	5690979	5690987	22*	●	●	22	21	21							
	5950381	5950373	22M*	●	●	22	21	21							
	5690995	5691001	25	●	●	25.4	24.5	24.5							
	5918958	5952593	25-MET	●	●	25	24	24							

*Compatible with 16mm / 22mm round shank DS Series holders DS-Sleeve ⇒G103


FGV Series - Inserts

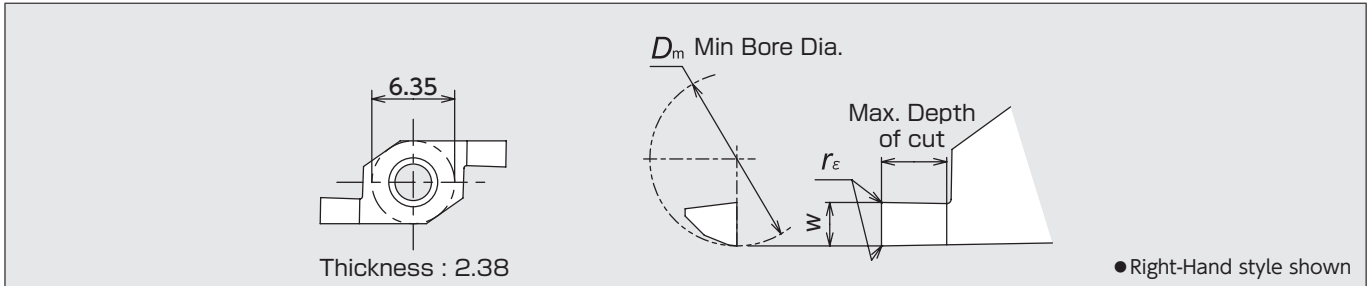FGV



Shape	Item Number	Min Bore Dia. (mm) D_m	Dimensions (mm)			PVD Coated Carbide	
			w	r_ϵ	Max Depth of cut	TM4	Stock
Right-Hand style shown	FGV100RB00D6 100RB05D6	6.0	1.0	0.00	1.5	5704580	●
				0.05		5704606	●
	1.5		0.00	2.0	5704614	●	
			0.05		5704622	●	
	2.0		0.00	3.0	5704630	●	
			0.05		5704648	●	
Left-Hand style shown	FGV100LB00D6 100LB05D6	6.0	1.0	0.00	1.5	5704572	●
				0.05		5704564	●
	1.5		0.00	2.0	5704556	●	
			0.05		5704549	●	
	2.0		0.00	3.0	5704531	●	
			0.05		5704523	●	


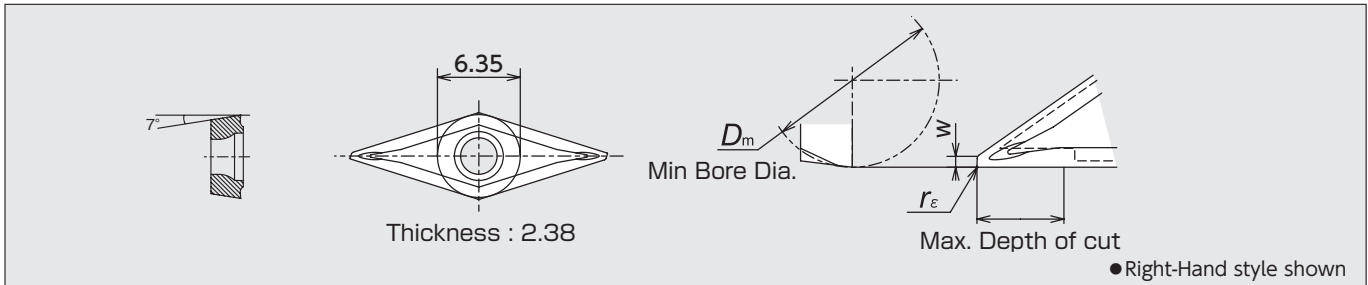
FBV




Shape	Item Number	Min Bore Dia. (mm) D_m	Dimensions (mm)			PVD Coated Carbide	
			w	r_ϵ	Max Depth of cut	TM4	Stock
Right-Hand style shown	FBV40R05D8AM3	8.0	0.5	0.05	4.0	5697453	●
	40R15D8AM3			0.15		5697461	●

Note : Only CH-FGVR and DS-FGVR can take FBV Right hand Insert.

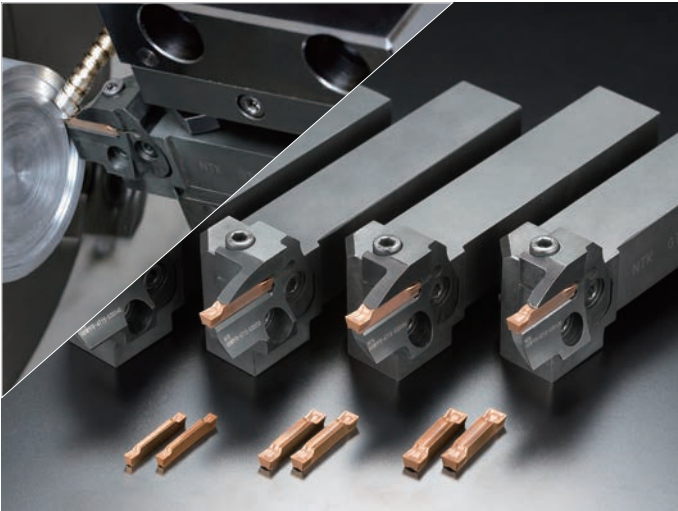SCRUM DUO BLADE - Carbide Face Grooving Tool



Unique S-shape design




Features





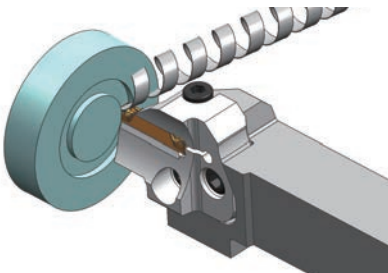- **New GT Chipbreaker designed for face-grooving**
- **The best rigidity in a Modular system**
- **Excellent chip-control and great finish**

Excellent Chip Control

• Grooving

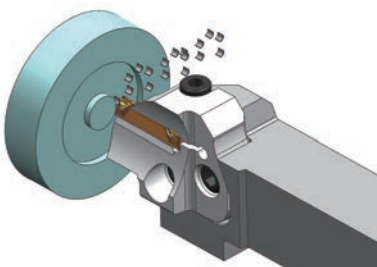


- **Excellent chip control and superior surface finish**
- **Good chip control without a peck cycle**










	NTK:GT chipbreaker	Competitor
Chip		 Tangled chips during deep grooving
Surface finish		 Scratches inside bottom

Material : SCM415, $V_c=150\text{m/min}$, $f=0.1\text{mm/rev}$, $\Phi 50$ diameter, 1.0mm depth, No step feed, WET
 Insert : GWPFM500N04-GT DM4 Holder : GBWPFR-5T15-050120

• Side-turning




- **Excellent chip control for side-turning process**
- **Shiny surface finish**

		feed (mm/rev)		
		0.05	0.1	0.2
Depth of cut (mm)	3.0			
	1.0			
	0.2			

Material : SCM415, $V_c=150\text{m/min}$, WET
 Insert : GWPFM500N04-GT DM4 Holder : GBWPFR-5T15-050120

SCRUM DUO BLADE Series

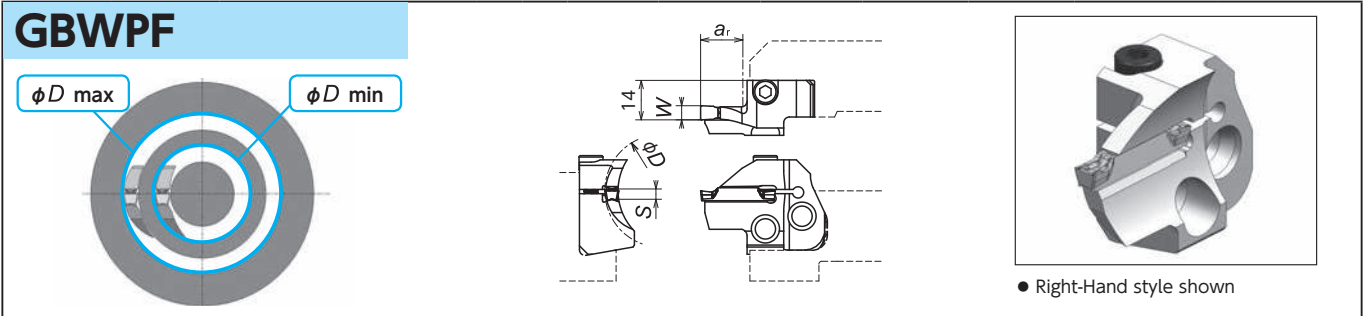
Blade



Code No.		Blade Number	Stock		Groove Width W (mm)	Face grooving OD		Max. Grooving depth a _r	Seat Size S	Gage insert	Clamp Bolt
R	L		R	L		φD min	φD max				
5963335	5963491	GBWPF 1/2 -3T13-029035	●	●	3	29	35	13	C	GWPFM300	CS0515
5963343	5963509	-3T13-035045	●	●		35	45				
5963350	5963517	-3T15-045060	●	●		45	60				
5963368	5963525	-3T15-060100	●	●		60	100				
5963376	5963533	-3T15-100250	●	●	4	100	250	15	C	GWPFM400	CS0515
5963392	5963558	-4T15-030040	●	●		30	40				
5963426	5963566	-4T15-040060	●	●		40	60				
5963434	5963574	-4T15-060120	●	●		60	120				
5963442	5963582	-4T15-120300	●	●	5	120	300	15	C	GWPFM500	CS0515
5963707	5963715	-5T15-030050	●	●		30	50				
5963459	5963608	-5T15-050120	●	●		50	120				
5963467	5963616	-5T15-120999	●	●		120	∞				
5963475	5963632	-6T15-035080	●	●	6	35	80	15	C	GWPFM600	CS0515
5963483	5963640	-6T15-080999	●	●		80	∞				


※Do not tighten clamp screw without installing insert as it may damage the insert pocket.

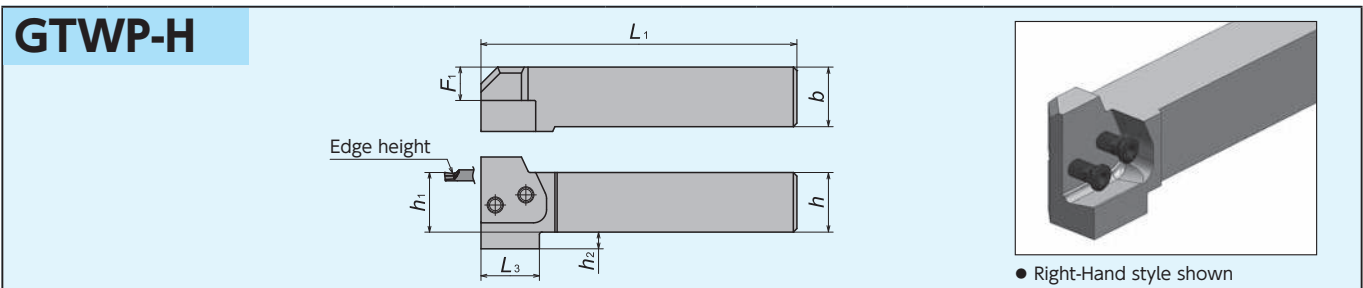Toolholders Body (0° Straight style)



Code No.		Holder Number	Stock		Dimensions (mm)							Gage insert	Spare Parts	
R	L		R	L	h	b	h ₁	L ₁	F ₁	h ₂	L ₃		Clamp Screw	Wrench
5923784	5923792	GTWP 1/2 2020-H	●	●	20	20	20	107.5	9	8	28.5	GBWPF 1/2	FSI28-6.0 * 18	LW-4
5923800	5923818	1/2 2525-H	●	●	25	25	25	132.5	14	7	24.5			
5963657	5963673	1/2 3232-H	●	●	32	32	32	152.5	21	-	-			

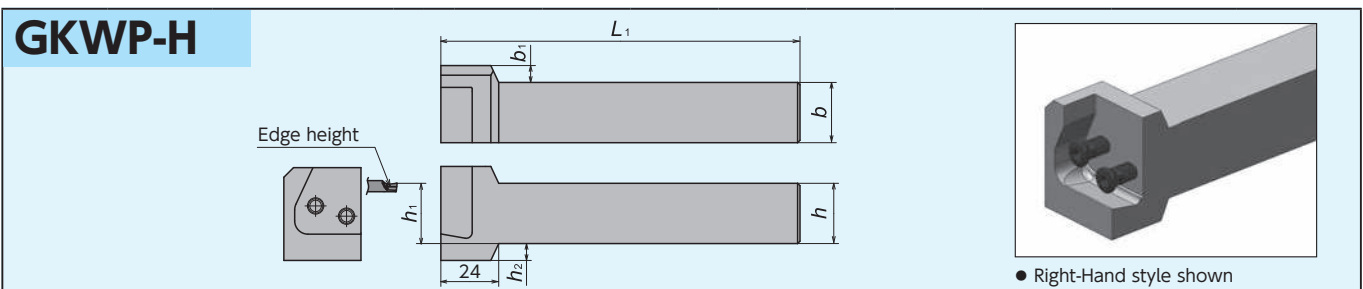Toolholders Body (90° L- style)




Code No.		Holder Number	Stock		Dimensions (mm)							Gage insert	Spare Parts	
R	L		R	L	h	b	h ₁	L ₁	b ₁	h ₂	Clamp Screw		Wrench	
5923826	5923834	GKWP 1/2 2020-H	●	●	20	20	20	124	12	12	GBWPF 1/2	FSI28-6.0 * 18	LW-4	
5923842	5923859	1/2 2525-H	●	●	25	25	25	149	7	7				
5963681	5963699	1/2 3232-H	●	●	32	32	32	169	-	-				

New Products
 Tool Materials / Selection Guide
 Micrograin Carbide, BIDE/MCS, PCD, CBN and Ceramics
 PVD/CVD-coated Carbide
 Insert Item List
 General Turning Toolholders
 Unique Swiss Tooling
 Grooving / Side Turning
 Threading
 Shaper
 ID Tooling
 Application Introduction
 Endmills
 Rotating Tools
 Information
 Index

SCRUM DUO BLADE Series - Inserts

Shape	Item Number	Dimensions (mm)				Seat Size S	PVD Coated Carbide	
		W	r_ϵ (mm)	M (mm)	L (mm)		DM4	Stock
	GWPFM300N02-GT	3.0	0.2	2.2	24.5	C	5963251	●
	GWPFM300N04-GT		0.4				5963269	●
	GWPFM400N04-GT	4.0	0.4	3.2			5963277	●
	GWPFM400N08-GT		0.8				5963285	●
	GWPFM500N04-GT	5.0	0.4	3.7			5963293	●
	GWPFM500N08-GT		0.8				5963301	●
	GWPFM600N04-GT	6.0	0.4	4.7			5963319	●
	GWPFM600N08-GT		0.8				5963327	●

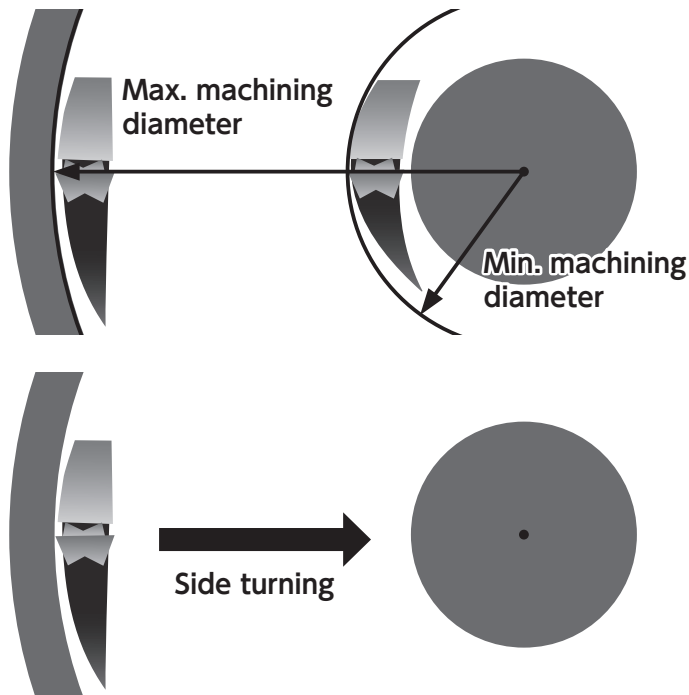Guidelines



- Choose a blade so that your first target grooving max. OD is between the max. OD and min. OD of the blade.


- To make the groove wide, side turn from outside to inside (direction to the center of the work piece)

Combination of toolholder and blade for Face Grooving


GTWP-H

Straight style toolholder


Right-hand system



Clockwise rotation (M4 command)




Toolholder



GTWP R-H




Blade




GBWPF R

* Right-hand toolholder takes Right-hand blade.

Left-hand system



Counter clockwise rotation (M3 command)




Toolholder



GTWP L-H



Blade




GBWPF L

* Left-hand toolholder takes Left-hand blade.

GKWP-H

L-style toolholder


Right-hand system



Counter clockwise rotation (M3 command)




Toolholder



GKWP R-H




Blade



GBWPF L

* Right-hand toolholder takes Left-hand blade.

Left-hand system



Clockwise rotation (M4 command)




Toolholder



GKWP L-H



Blade






GBWPF R

* Left-hand toolholder takes Right-hand blade.

Grooving / Side Turning

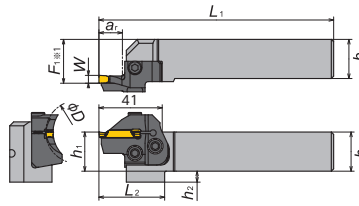Combination (0° Straight style holder and GBWPFR Blade)






●Right-Hand style shown

Right-hand toolholder takes Right-hand blade.

Hand	Groove Width W (mm)	Face grooving OD		Max.grooving depth a _r (mm)	Holder Number	Blade Number	Dimensions (mm)							Gage insert
		φD min (mm)	φD max (mm)				h	b	L ₁	h ₁	F ₁	L ₂	h ₂	
R	3	29	35	13	GTWPR2020-H	GBWPFR-3T13-029035	20	20	125	20	23	42.5	8	GWPFM300
		35	45			-3T13-035045								
		45	60			-3T15-045060								
		60	100			-3T15-060100								
		100	250			-3T15-100250								
	4	30	40	15		-4T15-030040								
		40	60			-4T15-040060								
		60	120			-4T15-060120								
	5	120	300	-4T15-120300										
		30	50	15		-5T15-030050								
		50	120		-5T15-050120									
		120	∞		-5T15-120999									
	35	80	15		-6T15-035080									
	80	∞		-6T15-080999										
	3	29	35	13	GTWPR2525-H	-3T13-029035	25	25	150	25	28	38.5	7	GWPFM300
		35	45			-3T13-035045								
		45	60			-3T15-045060								
		60	100			-3T15-060100								
		100	250			-3T15-100250								
	4	30	40	15		-4T15-030040								
		40	60			-4T15-040060								
		60	120			-4T15-060120								
	5	120	300	-4T15-120300										
		30	50	15		-5T15-030050								
50		120	-5T15-050120											
120		∞	-5T15-120999											
35	80	15	-6T15-035080											
80	∞		-6T15-080999											
3	29	35	13	GTWPR3232-H	-3T13-029035	32	32	170	32	35	-	-	GWPFM300	
	35	45			-3T13-035045									
	45	60			-3T15-045060									
	60	100			-3T15-060100									
	100	250			-3T15-100250									
4	30	40	15		-4T15-030040									
	40	60			-4T15-040060									
	60	120			-4T15-060120									
5	120	300	-4T15-120300											
	30	50	15		-5T15-030050									
	50	120		-5T15-050120										
	120	∞		-5T15-120999										
35	80	15		-6T15-035080										
80	∞		-6T15-080999											

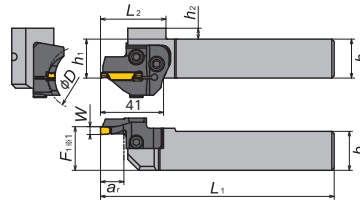Combination (0° Straight style holder and GBWPFL Blade)






●Left-Hand style shown

Left-hand toolholder takes Left-hand blade.

Hand	Groove Width W (mm)	Face grooving OD		Max.grooving depth a _r (mm)	Holder Number	Blade Number	Dimensions (mm)							Gage insert	
		ϕD min (mm)	ϕD max (mm)				h	b	L ₁	h ₁	F ₁	L ₂	h ₂		
L	3	29	35	13	GTWPL2020-H	GBWPFL-3T13-029035	20	20	125	20	23	42.5	8	GWPFM300	
		35	45			-3T13-035045									
		45	60			-3T15-045060									
		60	100			-3T15-060100									
		100	250			-3T15-100250									
	4	30	40	15		-4T15-030040									
		40	60			-4T15-040060									
		60	120			-4T15-060120									
	5	120	300	-4T15-120300											
		30	50	15		-5T15-030050									
		50	120		-5T15-050120										
	120	∞	-5T15-120999												
	6	35	80	15	-6T15-035080										
		80	∞		-6T15-080999										
	L	3	29	35	13	GTWPL2525-H	-3T13-029035	25	25	150	25	28	38.5	7	GWPFM300
			35	45			-3T13-035045								
			45	60			-3T15-045060								
			60	100			-3T15-060100								
			100	250			-3T15-100250								
		4	30	40	15		-4T15-030040								
			40	60			-4T15-040060								
			60	120			-4T15-060120								
		5	120	300	-4T15-120300										
			30	50	15		-5T15-030050								
50			120	-5T15-050120											
120		∞	-5T15-120999												
6		35	80	15	-6T15-035080										
		80	∞		-6T15-080999										
L		3	29	35	13	GTWPL3232-H	-3T13-029035	32	32	170	32	35	-	-	GWPFM300
	35		45	-3T13-035045											
	45		60	-3T15-045060											
	60		100	-3T15-060100											
	100		250	-3T15-100250											
	4	30	40	15	-4T15-030040										
		40	60		-4T15-040060										
		60	120		-4T15-060120										
	5	120	300	-4T15-120300											
		30	50	15	-5T15-030050										
		50	120		-5T15-050120										
	120	∞	-5T15-120999												
	6	35	80	15	-6T15-035080										
		80	∞		-6T15-080999										

Grooving / Side Turning

Combination (90° L style holder and GBWPFL Blade)






● Right-Hand style shown

Right-hand toolholder takes Left-hand blade.

Hand	Groove Width W (mm)	Face grooving OD		Max.grooving depth a. (mm)	Holder Number	Blade Number	Dimensions (mm)							Gage insert	
		φD min (mm)	φD max (mm)				h	b	L ₁	h ₁	F ₁	L ₂	h ₂		
R	3	29	35	13	GKWPR2020-H	GBWPFL-3T13-029035	20	20	125	20	37.5	12	8	GWPFM300	
		35	45			-3T13-035045									
		45	60			-3T15-045060									
		60	100			-3T15-060100									
		100	250			-3T15-100250									
	4	30	40	15		-4T15-030040									
		40	60			-4T15-040060									
		60	120			-4T15-060120									
	5	120	300	-4T15-120300											
		30	50	15		-5T15-030050									
		50	120		-5T15-050120										
	120	∞	-5T15-120999												
	6	35	80	15	-6T15-035080										
		80	∞		-6T15-080999										
	R	3	29	35	13	GKWPR2525-H	-3T13-029035	25	25	150	25	42.5	7	7	GWPFM300
			35	45			-3T13-035045								
			45	60			-3T15-045060								
			60	100			-3T15-060100								
			100	250			-3T15-100250								
		4	30	40	15		-4T15-030040								
			40	60			-4T15-040060								
			60	120			-4T15-060120								
		5	120	300	-4T15-120300										
			30	50	15		-5T15-030050								
50			120	-5T15-050120											
120		∞	-5T15-120999												
6		35	80	15	-6T15-035080										
		80	∞		-6T15-080999										
R		3	29	35	13	GKWPR3232-H	-3T13-029035	32	32	170	32	49.5	-	-	GWPFM300
	35		45	-3T13-035045											
	45		60	-3T15-045060											
	60		100	-3T15-060100											
	100		250	-3T15-100250											
	4	30	40	15	-4T15-030040										
		40	60		-4T15-040060										
		60	120		-4T15-060120										
	5	120	300	-4T15-120300											
		30	50	15	-5T15-030050										
		50	120		-5T15-050120										
	120	∞	-5T15-120999												
	6	35	80	15	-6T15-035080										
		80	∞		-6T15-080999										

Combination (90° L style holder and GBWPFR Blade)



●Left-Hand style shown

Left-hand toolholder takes Right-hand blade.

Hand	Groove Width W (mm)	Face grooving OD		Max.grooving depth a (mm)	Holder Number	Blade Number	Dimensions (mm)							Gage insert		
		φD min (mm)	φD max (mm)				h	b	L ₁	h ₁	F ₁	L ₂	h ₂			
L	3	29	35	13	GKWPL2020-H	GBWPFR-3T13-029035	20	20	125	20	37.5	12	8	GWPFM300		
		35	45			-3T13-035045										
		45	60			-3T15-045060										
		60	100			-3T15-060100										
		100	250			-3T15-100250										
	4	30	40	15		-4T15-030040										
		40	60			-4T15-040060										
		60	120			-4T15-060120										
	5	30	50	15		-5T15-030050										
		50	120			-5T15-050120										
		120	∞		-5T15-120999											
	6	35	80	15	-6T15-035080											
		80	∞		-6T15-080999											
	L	3	29	35	13	GKWPL2525-H	-3T13-029035	25	25	150	25	42.5	7	7	GWPFM300	
			35	45			-3T13-035045									
			45	60			-3T15-045060									
			60	100			-3T15-060100									
			100	250			-3T15-100250									
		4	30	40	15		-4T15-030040									
			40	60			-4T15-040060									
			60	120			-4T15-060120									
		5	30	50	15		-5T15-030050									
			50	120			-5T15-050120									
			120	∞		-5T15-120999										
		6	35	80	15	-6T15-035080										
			80	∞		-6T15-080999										
		L	3	29	35	13	GKWPL3232-H	-3T13-029035	32	32	170	32	49.5	-	-	GWPFM300
				35	45			-3T13-035045								
	45			60	-3T15-045060											
	60			100	-3T15-060100											
	100			250	-3T15-100250											
	4		30	40	15	-4T15-030040										
			40	60		-4T15-040060										
			60	120		-4T15-060120										
	5		30	50	15	-5T15-030050										
			50	120		-5T15-050120										
120			∞	-5T15-120999												
6	35		80	15	-6T15-035080											
	80		∞		-6T15-080999											

Grooving / Side Turning

GFV/GSV Series (Face Grooving)

GFV


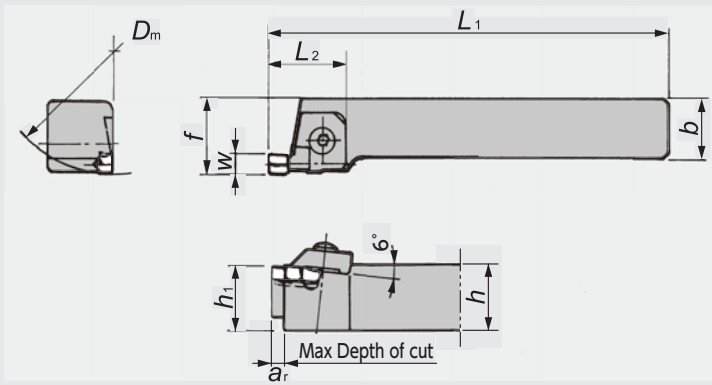


Figure-1

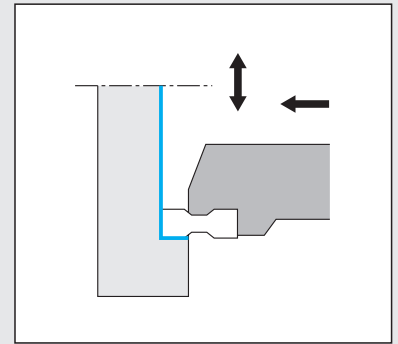

●Right-Hand style shown

GSV


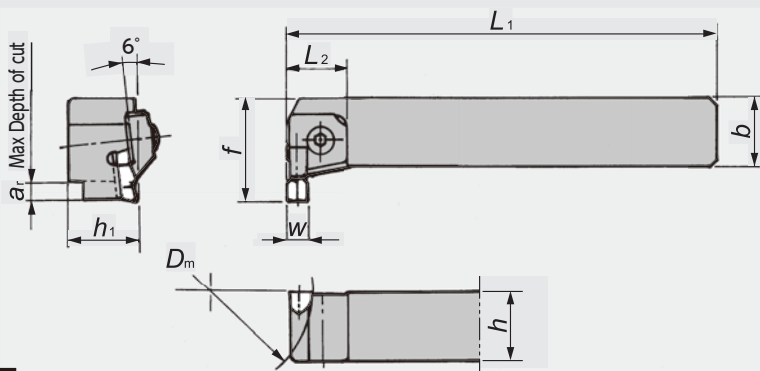


Figure-2

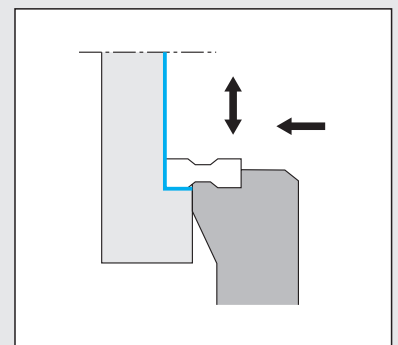

●Right-Hand style shown

GFV/GSV Series - Toolholders

Figure	Code No.		Item Number	Stock		Dimensions (mm)							Groove Width (mm) w	Gage insert	Spare Parts				
	R	L		R	L	h	b	L ₁	h ₁	f	L ₂	a _r			D _m	Clamp	Clamp Bolt	Spring	Wrench
1	5657887	5657895	GFV ^R /L20-6	●	●	20	20	125	20	25	32	6	38	6.0	GFV	CVR/L6	AOB-6C	ASG-6	LW-4
	5655220	5657903	25-6	●	●	25	25	150	25	30									
2	5657911	5657929	GSV ^R /L20-6	●	●	20	20	125	20	33	23.5	6	38	6.0	GFV	CVR/L6 ※	AOB-6C	ASG-6	LW-4
	5645965	5657937	25-6	●	●	25	25	150	25	38									

※Left-Hand clamp with should be used with right-hand holder
Right-Hand clamp with should be used with left-hand holder

GFV/GSV Series - Inserts

Shape	Item Number	Dimensions (mm)		PVD Coated Carbide	
		w	r _ε	QM3	Stock
	GFV600N	6.0	0.15	5027594	●
	600N04		0.4	5068218	●

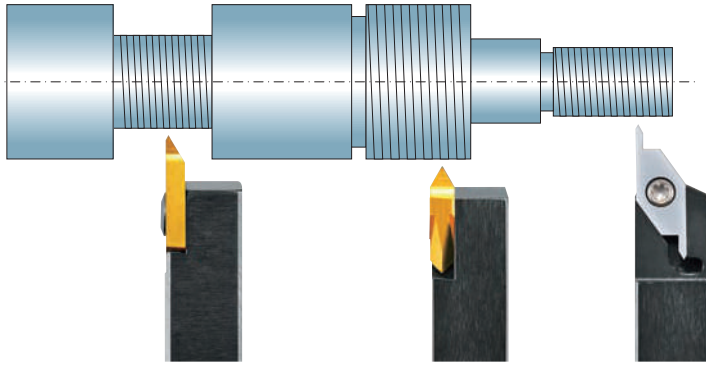
I






Threading





● Threading Tools	I 2
● Recommended Cutting Conditions	I 3
● Tools and Thread Standards	I 4
● Tool List	I 10
CSV series	I 10
TTPS series	I 11
TTP series	I 12
TTMH series	I 14
SBT series	I 16
TMN series	I 17
Thread Whirling	I 18

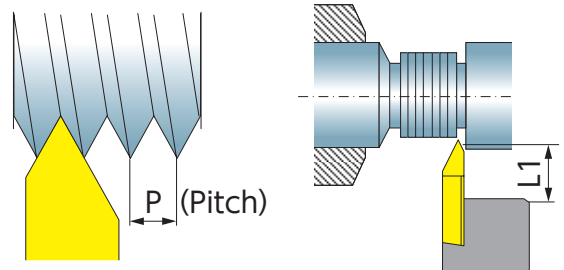
NTK Threading Tools - Product Lines








Insert	CSV → I 10	TTPS → I 11
	CSV	CTPS
Holder	 → I 10	 → I 11
Profile	60°	60°
Pitch	0.2 ~ 0.5mm	0.2 ~ 1.5mm
L1	3.0mm	5.0mm

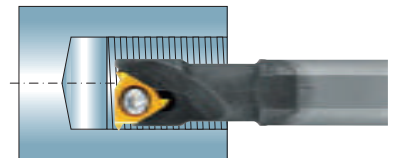

Insert	TTP → I 13			
	TTP	TTP-OH2	DS-TTP	CH-TTP
Holder	 → I 12	 → I 12	 → I 12	 → I 12
Profile	60° / 55°			
Pitch	0.2 ~ 2.0mm			
L1	5.5mm			



Insert	TTMH32 → I 15		
	STTN	DS-STT	NTTB
Holder	 → I 14	 → I 14	 → I 14
Profile	60°		
Pitch	0.8 ~ 3.0mm		
L1	4.0mm	3.0mm	4.0mm

Insert	SBT → I 16	TMN → I 17
	NBH	TGC / HN
Holder	 → K8	 → I 17
Profile	60°	60°
Pitch	0.5 ~ 1.75mm	0.4 ~ 0.75mm
L1	0.6 ~ 1.8mm	0.7 ~ 1.0mm





Recommended Cutting Conditions





Threading

Work Material		High Temperature Alloys	Titanium Alloys	Cobalt Chrome Alloys	Stainless Steels		Alloy Steels	Carbon Steels
					Hard to cut	Free cutting		
Common Name		Inconel Hastelloy MP35N	Ti-6Al-4V	ASTM F-75	SUS304 SUS440C	SUS303 SUS430F	SCr / SCM	S10C ~ S55C
Grade	1st choice	VM1		VM1 / ZM3		QM3		
	2nd choice	ZM3		QM3		VM1 / ZM3		
Cutting Speed (m/min)		20 40 70	30 60 80	40 70 100	50 90 180	50 90 150		


*Unless your machine is equipped with high speed threading program, please set the feed rate to 2000 mm/min or lower to prevent making incomplete threads

Infeed Threading Method

	Features	
	Advantage	Disadvantage
 <p>Radial Infeed</p>	<ul style="list-style-type: none"> ● Most popular and easiest method ● Easy to change parameter ● Uniform wear on both sides of insert 	<ul style="list-style-type: none"> ● Chip evacuation ● Vibration due to higher cutting force ● Ineffective for large pitch threading
 <p>Flank Infeed</p>	<ul style="list-style-type: none"> ● 2nd most popular and easy method ● Effective for larger pitch and gummy material thanks to lower cutting force ● Excellent chip evacuation 	<ul style="list-style-type: none"> ● Larger flank wear on right side of the insert ● Difficult to change cutting depth per cut
 <p>Modified Flank Infeed</p>	<ul style="list-style-type: none"> ● Reduce flank wear on right side ● Effective for larger pitch and gummy material thanks to lower cutting force ● Excellent chip evacuation 	<ul style="list-style-type: none"> ● Difficult to program ● Difficult to change cutting depth per cut
 <p>Incremental Infeed</p>	<ul style="list-style-type: none"> ● Uniform flank wear ● Effective for larger pitch and gummy material thanks to lower cutting force 	<ul style="list-style-type: none"> ● Difficult to program ● Difficult to change cutting depth per cut ● Chip evacuation

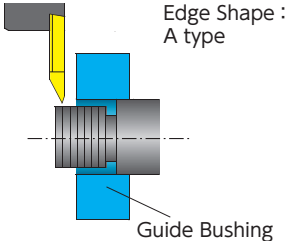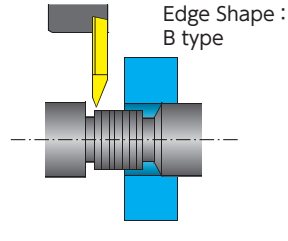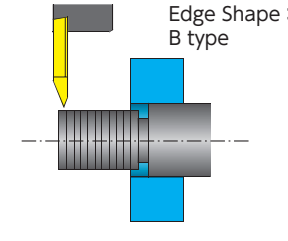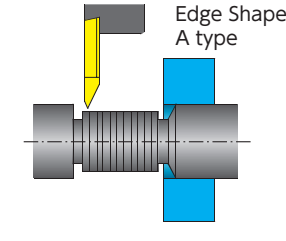Right Hand Toolholders				Left Hand Toolholders			
 <p>Edge Shape : A type</p>		 <p>Edge Shape : B type</p>		 <p>Edge Shape : B type</p>		 <p>Edge Shape : A type</p>	
Guide Bushing							
Toolholder	TTPR	Toolholder	TTPR	Toolholder	TTPL	Toolholder	TTPL
Insert	TTP..FR..A	Insert	TTP..FR..B	Insert	TTP..FL..B	Insert	TTP..FL..A

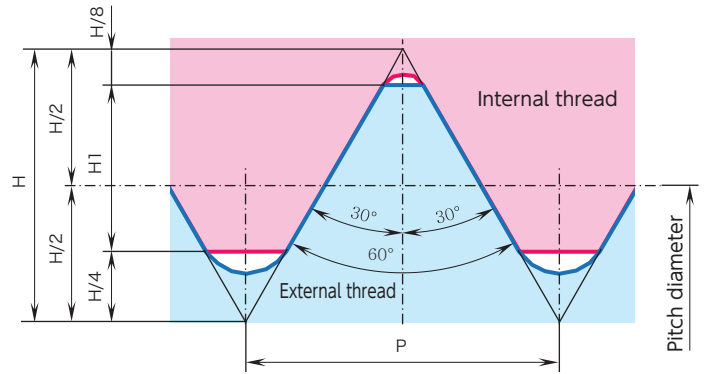Tools and Thread Standards



ISO Metric (M)

External thread

Coarse	Fine	Applicable inserts			
		CSVT	TTPS	TTP	TTMH
	M1x0.2	CSVT11F ^R _L P60-035 ^A / _B	TTPS60F ^R _L 4 ^A / _B	TTP60F ^R _L 4 ^A / _B (S)	—
M1x0.25	M2x0.25	CSVT11F ^R _L P60-035 ^A / _B	TTPS60F ^R _L 4 ^A / _B	TTP60F ^R _L 4 ^A / _B (S)	—
	M3x0.35	CSVT11F ^R _L P60-035 ^A / _B	TTPS60F ^R _L 4 ^A / _B	TTP60F ^R _L 4 ^A / _B (S)	—
M2x0.4		CSVT11F ^R _L P60-035 ^A / _B	TTPS60F ^R _L 8 ^A / _B	TTP60F ^R _L 8 ^A / _B (S)	—
M3x0.5	M4x0.5	CSVT11F ^R _L P60-035 ^A / _B	TTPS60F ^R _L 8 ^A / _B	TTP60F ^R _L 8 ^A / _B (S)	—
M4x0.7		—	TTPS60F ^R _L 8 ^A / _B	TTP60F ^R _L 8 ^A / _B (S)	—
	M6x0.75	—	TTPS60F ^R _L 8 ^A / _B	TTP60F ^R _L 8 ^A / _B (S)	—
M5x0.8		—	TTPS60F ^R _L -N	TTP60F ^R _L -N(S)	TTMH3260R010
M6x1.0		—	TTPS60F ^R _L -N	TTP60F ^R _L -N(S)	TTMH3260R010
M8x1.25		—	TTPS60F ^R _L -N	TTP60F ^R _L -N(S)	TTMH3260R015
M10x1.5	M12x1.5	—	—	TTP60F ^R _L -N02	TTMH3260R020
M12x1.75		—	—	TTP60F ^R _L -N02	TTMH3260R020
M16x2.0	M20x2.0	—	—	TTP60F ^R _L -N02	TTMH3260R025
M20x2.5		—	—	—	TTMH3260R025
M24x3.0	M30x3.0	—	—	—	TTMH3260R025

Internal thread

Coarse	Fine	Applicable inserts
	M3x0.35	SBT025M3R
M2x0.4		—
M3x0.5		SBT025M3R
	M4x0.5	SBT030M4R(B)
M4x0.7		SBT030M4R(B)
	M6x0.75	SBT040M6RB
M5x0.8		SBT035M5RB
M6x1.0		SBT040M6RB
M8x1.25		SBT050M8RB
M10x1.5	M12x1.5	SBT060M10RB
M12x1.75		SBT060M10RB

Recommended Depth of Cut (DOC) for Diameter (mm)

ISO Metric (M)

External thread

CSVT

Item Number	Edge radius	Pitch	Total DOC	No. of pass	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
CSVT11F ^R _L P60-035A(B)	0.03 Max	0.20	0.25	4	0.08	0.07	0.06	0.04																		
		0.25	0.32	5	0.09	0.07	0.07	0.05	0.04																	
		0.35	0.48	6	0.12	0.10	0.09	0.07	0.06	0.04																
		0.40	0.55	6	0.15	0.12	0.10	0.08	0.06	0.04																
		0.50	0.70	7	0.16	0.14	0.12	0.10	0.08	0.06	0.04															

TTP/TTPS

Item Number	Edge radius	Pitch	Total DOC	No. of pass	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
TTP60F ^R _L 2 ^A / _B TTP(S)60F ^R _L 4 ^A / _B	0.05 Max Flat	0.20	0.22	4	0.07	0.06	0.05	0.04																	
		0.25	0.29	5	0.08	0.07	0.06	0.04	0.04																
		0.35	0.44	5	0.14	0.11	0.09	0.06	0.04																
TTP(S)60F ^R _L 8 ^A / _B	R0.05	0.40	0.50	6	0.13	0.10	0.09	0.08	0.06	0.04															
		0.50	0.66	6	0.20	0.16	0.12	0.08	0.06	0.04															
		0.70	0.96	7	0.22	0.20	0.18	0.14	0.10	0.08	0.04														
		0.75	1.04	8	0.22	0.20	0.20	0.14	0.10	0.08	0.06	0.04													
TTP(S)60F ^R _L -N	R0.1	0.80	1.01	8	0.25	0.20	0.16	0.12	0.10	0.08	0.06	0.04													
		1.00	1.32	8	0.30	0.24	0.20	0.18	0.16	0.12	0.08	0.04													
		1.25	1.69	9	0.31	0.30	0.30	0.24	0.18	0.14	0.10	0.08	0.04												
TTP60F ^R _L -N02	R0.20	1.50	1.87	10	0.33	0.32	0.28	0.24	0.20	0.16	0.12	0.10	0.08	0.04											
		1.75	2.25	11	0.36	0.35	0.32	0.28	0.24	0.20	0.16	0.12	0.10	0.08	0.04										
		2.00	2.63	12	0.36	0.34	0.32	0.30	0.28	0.26	0.22	0.18	0.14	0.12	0.07	0.04									

TTMH

Item Number	Edge radius	Pitch	Total DOC	No. of pass	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
TTMH3260R010	R0.1	0.80	1.01	8	0.25	0.20	0.16	0.12	0.10	0.08	0.06	0.04													
		1.00	1.32	8	0.30	0.24	0.20	0.18	0.16	0.12	0.08	0.04													
TTMH3260R015	R0.15	1.25	1.59	9	0.33	0.30	0.26	0.20	0.16	0.12	0.10	0.08	0.04												
TTMH3260R020	R0.20	1.50	1.90	10	0.36	0.32	0.28	0.24	0.20	0.16	0.12	0.10	0.08	0.04											
		1.75	2.25	11	0.36	0.35	0.32	0.28	0.24	0.20	0.16	0.12	0.10	0.08	0.04										
TTMH3260R025	R0.25	2.00	2.53	12	0.36	0.36	0.32	0.30	0.28	0.24	0.20	0.16	0.12	0.09	0.06	0.04									
		2.50	3.29	14	0.45	0.40	0.40	0.36	0.32	0.28	0.24	0.20	0.16	0.14	0.12	0.10	0.08	0.04							
		3.00	4.05	15	0.50	0.50	0.45	0.40	0.36	0.32	0.30	0.28	0.24	0.20	0.18	0.12	0.10	0.08	0.04						


Internal thread

SBT

Item Number	Edge radius	Pitch	Total DOC	No. of pass	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
SBT025M3R	0.05 Max Flat	0.35	0.37	6	0.11	0.09	0.07	0.05	0.03	0.02															
		0.50	0.56	7	0.12	0.12	0.10	0.08	0.07	0.05	0.02														
SBT030M4R(B)	0.05 Max Flat	0.70	0.82	9	0.14	0.14	0.12	0.12	0.10	0.08	0.06	0.04	0.02												
SBT035M5RB		0.80	0.95	10	0.14	0.14	0.14	0.12	0.12	0.10	0.08	0.06	0.03	0.02											
SBT040M6RB		1.00	1.20	12	0.14	0.14	0.14	0.12	0.12	0.12	0.12	0.10	0.08	0.06	0.04	0.02									
SBT050M8RB	R0.05	1.25	1.52	15	0.14	0.14	0.14	0.12	0.12	0.12	0.12	0.12	0.10	0.10	0.10	0.08	0.06	0.04	0.02						
SBT060M10RB		1.50	1.85	18	0.15	0.14	0.14	0.14	0.12	0.12	0.12	0.12	0.12	0.12	0.10	0.10	0.10	0.10	0.08	0.08	0.06	0.04	0.02		
		1.75	2.17	20	0.15	0.14	0.14	0.14	0.14	0.14	0.12	0.12	0.12	0.12	0.12	0.12	0.10	0.10	0.10	0.10	0.08	0.08	0.08	0.06	0.04

Tools and Thread Standards

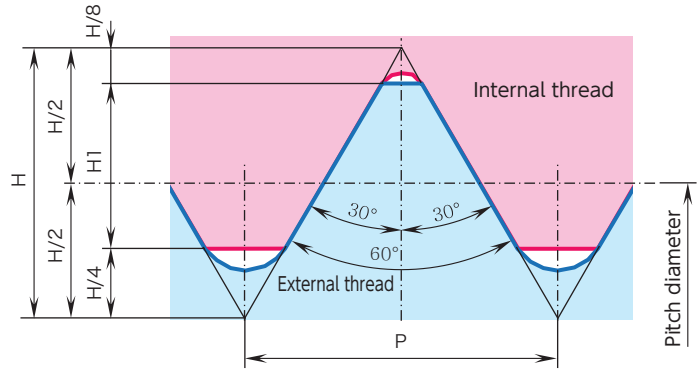American Unified (UNC/UNF)



External thread

Coarse (UNC)		Fine (UNF)		Pitch (mm)	Applicable inserts		
Nominal designation of thread	(Reference)	Nominal designation of thread	(Reference)		CSVT	TTP/TTPS	TTMH
		No.0-80 UNF	0.0600-80 UNF	0.3175	CSVT11F $\frac{R_L}{L}$ P60-035 $\frac{A_B}{B}$	TTP(S)60F $\frac{R_L}{L}$ 4 $\frac{A_B}{B}$	-
		No.1-72 UNF	0.0730-72 UNF	0.3528	CSVT11F $\frac{R_L}{L}$ P60-035 $\frac{A_B}{B}$	TTP(S)60F $\frac{R_L}{L}$ 4 $\frac{A_B}{B}$	-
No.1-64 UNC	0.0730-64 UNC	No.2-64 UNF	0.0860-64 UNF	0.3969	CSVT11F $\frac{R_L}{L}$ P60-035 $\frac{A_B}{B}$	TTP(S)60F $\frac{R_L}{L}$ 4 $\frac{A_B}{B}$	-
No.2-56 UNC	0.0860-56 UNC	No.3-56 UNF	0.0990-56 UNF	0.4536	CSVT11F $\frac{R_L}{L}$ P60-035 $\frac{A_B}{B}$	TTP(S)60F $\frac{R_L}{L}$ 8 $\frac{A_B}{B}$	-
No.3-48 UNC	0.0990-56 UNC	No.4-48 UNF	0.1120-48 UNF	0.5292	CSVT11F $\frac{R_L}{L}$ P60-035 $\frac{A_B}{B}$	TTP(S)60F $\frac{R_L}{L}$ 8 $\frac{A_B}{B}$	-
		No.5-44 UNF	0.1250-44 UNF	0.5773	-	TTP(S)60F $\frac{R_L}{L}$ 8 $\frac{A_B}{B}$	-
No.4-40 UNC	0.1120-40 UNC	No.6-40 UNF	0.1380-40 UNF	0.6350	-	TTP(S)60F $\frac{R_L}{L}$ 8 $\frac{A_B}{B}$	-
No.5-40 UNC	0.1250-40 UNC			0.6350	-	TTP(S)60F $\frac{R_L}{L}$ 8 $\frac{A_B}{B}$	-
		No.8-36 UNF	0.1640-36 UNF	0.7056	-	TTP(S)60F $\frac{R_L}{L}$ 8 $\frac{A_B}{B}$	-
No.6-32 UNC	0.1380-32 UNC	No.10-32 UNF	0.1900-32 UNF	0.7938	-	TTP(S)60F $\frac{R_L}{L}$ -N(S)	TTMH3260R010
No.8-32 UNC	0.1640-32 UNC			0.7938	-	TTP(S)60F $\frac{R_L}{L}$ -N(S)	TTMH3260R010
		No.12-28 UNF	0.2160-28 UNF	0.9071	-	TTP(S)60F $\frac{R_L}{L}$ -N(S)	TTMH3260R010
		1/4-28 UNF	0.2500-28 UNF	0.9071	-	TTP(S)60F $\frac{R_L}{L}$ -N(S)	TTMH3260R010
No.10-24 UNC	0.1900-24 UNC	5/16-24 UNF	0.3125-24 UNF	1.0583	-	TTP(S)60F $\frac{R_L}{L}$ -N(S)	TTMH3260R010
No.12-24 UNC	0.2160-24 UNC	3/8-24 UNF	0.3750-24 UNF	1.0583	-	TTP(S)60F $\frac{R_L}{L}$ -N(S)	TTMH3260R010
1/4-20 UNC	0.2500-20 UNC	7/16-20 UNF	0.4375-20 UNF	1.2700	-	TTP(S)60F $\frac{R_L}{L}$ -N(S)	TTMH3260R015
		1/2-20 UNF	0.5000-20 UNF	1.2700	-	TTP(S)60F $\frac{R_L}{L}$ -N(S)	TTMH3260R015
5/16-18 UNC	0.3125-18 UNC	9/16-18 UNF	0.5625-18 UNF	1.4111	-	TTP(S)60F $\frac{R_L}{L}$ -N(S)	TTMH3260R015
		5/8-18 UNF	0.6250-18 UNF	1.4111	-	TTP(S)60F $\frac{R_L}{L}$ -N(S)	TTMH3260R015
3/8-16 UNC	0.3750-16 UNC	3/4-16 UNF	0.7500-16 UNF	1.5875	-	TTP60F $\frac{R_L}{L}$ -N02	TTMH3260R020
7/16-14 UNC	0.4375-14 UNC	7/8-14 UNF	0.8750-14 UNF	1.8143	-	TTP60F $\frac{R_L}{L}$ -N02	TTMH3260R020
1/2-13 UNC	0.5000-13 UNC			1.9538	-	TTP60F $\frac{R_L}{L}$ -N02	TTMH3260R020
9/16-12 UNC	0.5625-12 UNC	1-12 UNF	1.0000-12 UNF	2.1167	-	TTP60F $\frac{R_L}{L}$ -N02	TTMH3260R025
		1 1/8-12 UNF	1.1250-12 UNF	2.1167	-	TTP60F $\frac{R_L}{L}$ -N02	TTMH3260R025
		1 1/4-12 UNF	1.2500-12 UNF	2.1167	-	TTP60F $\frac{R_L}{L}$ -N02	TTMH3260R025
		1 3/8-12 UNF	1.3750-12 UNF	2.1167	-	TTP60F $\frac{R_L}{L}$ -N02	TTMH3260R025
		1 1/2-12 UNF	1.5000-12 UNF	2.1167	-	TTP60F $\frac{R_L}{L}$ -N02	TTMH3260R025
5/8-11 UNC	0.6250-11 UNC			2.3091	-	-	TTMH3260R025
3/4-10 UNC	0.7500-10 UNC			2.5400	-	-	TTMH3260R025
7/8-9 UNC	0.8750-9 UNC			2.8222	-	-	TTMH3260R025

Internal thread

Coarse (UNC)		Fine (UNF)		Pitch (mm)	Pilot Bore Dia.	Applicable inserts
Nominal designation of thread	(Reference)	Nominal designation of thread	(Reference)			
No.8-32 UNC	0.1640-32 UNC	No.8-36 UNF	0.1640-36 UNF	0.7056	3.51	SBT030M4R(B)
				0.7938	3.42	SBT030M4R(B)
		No.10-32 UNF	0.1900-32 UNF	0.7938	4.07	SBT035M5RB
		No.12-28 UNF	0.2160-28 UNF	0.9071	4.61	SBT040M6RB
		1/4-28 UNF	0.2500-28 UNF	0.9071	5.47	SBT040M6RB
No.10-24 UNC	0.1900-24 UNC			1.0583	3.83	SBT035M5RB
No.12-24 UNC	0.2160-24 UNC			1.0583	4.47	SBT035M5RB
		5/16-24 UNF	0.3125-24 UNF	1.0583	6.91	SBT050M8RB
		3/8-24 UNF	0.3750-24 UNF	1.0583	8.51	SBT060M10RB
1/4-20 UNC	0.2500-20 UNC			1.2700	5.12	SBT040M6RB
		7/16-20 UNF	0.4375-20 UNF	1.2700	9.88	SBT060M10RB
		1/2-20 UNF	0.5000-20 UNF	1.2700	11.47	SBT060M10RB
5/16-18 UNC	0.3125-18 UNC			1.4111	6.57	SBT050M8RB
		9/16-18 UNF	0.5625-18 UNF	1.4111	12.9	SBT060M10RB
		5/8-18 UNF	0.6250-18 UNF	1.4111	14.5	SBT060M10RB
3/8-16 UNC	0.3750-16 UNC			1.5875	7.98	SBT060M10RB
		3/4-16 UNF	0.7500-16 UNF	1.5875	17.5	SBT060M10RB

Recommended Depth of Cut (DOC) for Diameter (mm)

American Unified (UNC/UNF)

External thread

CSVT

Item Number	Edge radius	Pitch	Total DOC	No. of pass	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
CSVT11FRP60 -035A(B)	0.03 Max	80	0.43	6	0.10	0.10	0.08	0.06	0.05	0.04																
		72	0.48	6	0.12	0.10	0.09	0.07	0.06	0.04																
		64	0.55	6	0.14	0.13	0.10	0.08	0.06	0.04																
		56	0.63	7	0.14	0.12	0.10	0.09	0.08	0.06	0.04															
		48	0.75	7	0.16	0.16	0.14	0.11	0.08	0.06	0.04															

TTP/TTPS

Item Number	Edge radius	Pitch	Total DOC	No. of pass	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
TTP60F ^R _L 2 ^A / _B TTP(S)60F ^R _L 4 ^A / _B	0.05 Max Flat	80	0.39	5	0.11	0.10	0.08	0.06	0.04																	
		72	0.45	5	0.13	0.13	0.09	0.06	0.04																	
		64	0.51	6	0.13	0.11	0.10	0.07	0.06	0.04																
TTP(S)60F ^R _L 8 ^A / _B	R0.05	56	0.59	6	0.16	0.14	0.11	0.08	0.06	0.04																
		48	0.70	6	0.20	0.16	0.14	0.09	0.07	0.04																
		44	0.77	7	0.20	0.16	0.13	0.10	0.08	0.06	0.04															
		40	0.86	7	0.20	0.18	0.16	0.12	0.10	0.06	0.04															
TTP(S)60F ^R _L -N	R0.1	32	1.00	8	0.24	0.20	0.16	0.12	0.10	0.08	0.06	0.04														
		28	1.17	8	0.26	0.23	0.19	0.15	0.12	0.10	0.08	0.04														
		24	1.40	9	0.28	0.24	0.22	0.18	0.14	0.12	0.10	0.08	0.04													
		20	1.72	9	0.32	0.29	0.27	0.24	0.20	0.16	0.12	0.08	0.04													
TTP60F ^R _L -N02	R0.2	18	1.94	10	0.34	0.30	0.28	0.26	0.22	0.18	0.14	0.10	0.08	0.04												
		16	2.01	10	0.35	0.34	0.30	0.26	0.22	0.18	0.14	0.10	0.08	0.04												
		14	2.35	11	0.36	0.35	0.32	0.30	0.26	0.22	0.18	0.14	0.10	0.08	0.04											
		13	2.56	12	0.36	0.34	0.32	0.30	0.26	0.22	0.20	0.18	0.16	0.10	0.08	0.04										
		12	2.81	13	0.36	0.35	0.32	0.30	0.28	0.26	0.24	0.20	0.16	0.12	0.10	0.08	0.04									

TTMH

Item Number	Edge radius	Pitch	Total DOC	No. of pass	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
TTMH3260R010	R0.1	32	1.00	8	0.24	0.20	0.16	0.12	0.10	0.08	0.06	0.04													
		28	1.17	8	0.26	0.23	0.19	0.15	0.12	0.10	0.08	0.04													
		24	1.40	9	0.28	0.24	0.22	0.18	0.14	0.12	0.10	0.08	0.04												
TTMH3260R015	R0.15	20	1.62	9	0.32	0.28	0.24	0.20	0.18	0.16	0.12	0.08	0.04												
		18	1.84	10	0.32	0.30	0.28	0.24	0.20	0.16	0.12	0.10	0.08	0.04											
TTMH3260R020	R0.2	16	2.01	10	0.35	0.34	0.30	0.26	0.22	0.18	0.14	0.10	0.08	0.04											
		14	2.35	11	0.36	0.35	0.32	0.30	0.26	0.22	0.18	0.14	0.10	0.08	0.04										
		13	2.56	12	0.36	0.34	0.32	0.30	0.26	0.22	0.20	0.18	0.16	0.10	0.08	0.04									
TTMH3260R025	R0.25	12	2.71	12	0.36	0.35	0.33	0.31	0.29	0.25	0.22	0.20	0.16	0.12	0.08	0.04									
		11	3.00	13	0.40	0.36	0.34	0.30	0.28	0.26	0.24	0.22	0.20	0.16	0.12	0.08	0.04								
		10	3.35	14	0.43	0.40	0.40	0.36	0.32	0.28	0.24	0.20	0.18	0.16	0.14	0.12	0.08	0.04							
		9	3.78	15	0.45	0.43	0.41	0.39	0.36	0.32	0.28	0.24	0.20	0.18	0.16	0.14	0.10	0.08	0.04						

Internal thread


SBT

Item Number	Edge radius	Pitch	Total DOC	No. of pass	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
SBT030M4R(B)	0.05 Max Flat	36	0.83	9	0.14	0.14	0.12	0.11	0.10	0.08	0.06	0.04	0.02												
SBT030M4R(B) SBT035M5RB	0.05 Max Flat	32	0.94	10	0.14	0.14	0.13	0.12	0.11	0.10	0.08	0.06	0.04	0.02											
SBT040M6RB	R0.05	28	1.08	12	0.14	0.14	0.12	0.12	0.11	0.10	0.09	0.08	0.07	0.05	0.04	0.02									
SBT035M5RB	0.05 Max Flat	24	1.29	13	0.14	0.14	0.14	0.12	0.12	0.12	0.12	0.10	0.09	0.08	0.06	0.04	0.02								
SBT050M8RB SBT060M10RB	R0.05	24	1.27	13	0.14	0.14	0.14	0.12	0.12	0.12	0.10	0.10	0.09	0.08	0.06	0.04	0.02								
SBT060M10RB	R0.05	20	1.55	15	0.14	0.14	0.14	0.14	0.12	0.12	0.12	0.12	0.10	0.10	0.10	0.09	0.06	0.04	0.02						
SBT050M8RB SBT060M10RB	R0.05	18	1.73	17	0.14	0.14	0.14	0.14	0.12	0.12	0.12	0.12	0.10	0.10	0.10	0.10	0.09	0.08	0.06	0.04	0.02				
SBT060M10RB	R0.05	16	1.96	19	0.14	0.14	0.14	0.14	0.12	0.12	0.12	0.12	0.12	0.10	0.10	0.10	0.10	0.10	0.10	0.08	0.06	0.04	0.02		

Tools and Thread Standards


American Tapered Pipe (NPT)

Nominal designation of thread	(Reference)	Pitch (mm)	Applicable inserts
NPT 1/16	27	0.941	TTP(S)60F ^R /L8 ^A /B
NPT 1/8	27	0.941	
NPT 1/4	18	1.411	
NPT 3/8	18	1.411	

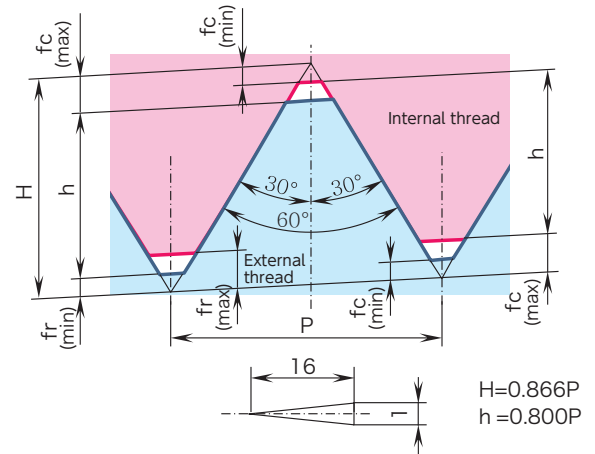


Parallel Pipe (G, BSPP)

Nominal designation of thread	(Reference)	Pitch (mm)	Applicable inserts
G 1/16	28	0.9071	TTP55F ^R /L8 ^A /B
G 1/8	28	0.9071	
G 1/4	19	1.3368	
G 3/8	19	1.3368	

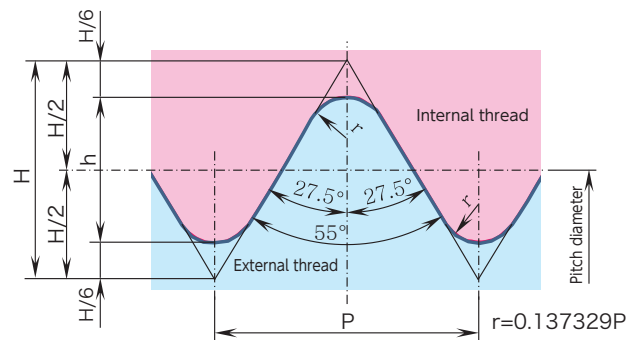


Tapered Pipe (R, BSPT)

Nominal designation of thread	(Reference)	Pitch (mm)	Applicable inserts
R(PT) 1/16	28	0.9071	TTP55F ^R /L8 ^A /B
R(PT) 1/8	28	0.9071	
R(PT) 1/4	19	1.3368	
R(PT) 3/8	19	1.3368	

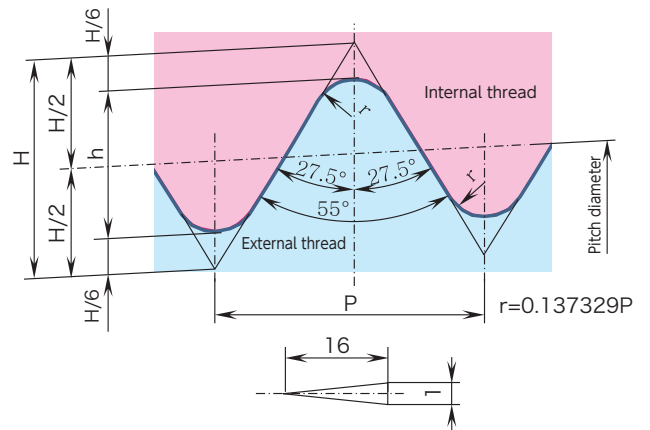

Whitworth (BSW)

Nominal designation of thread	(Reference)	Pitch (mm)	Applicable inserts
W 1/8	40	0.64	TTP55F ^R /L8 ^A /B
W 3/16	24	1.06	
W 1/4	20	1.27	
W 5/16	18	1.41	
W 3/8	16	1.59	

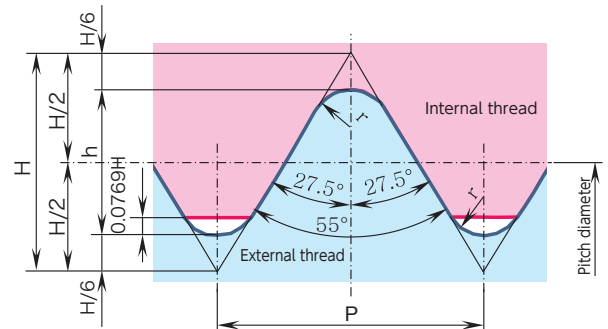

Recommended Depth of Cut (DOC) for Diameter (mm)

American Tapered Pipe (NPT)

Item Number	Edge radius	Nominal designation of thread	Pitch	Total DOC	No. of pass	1	2	3	4	5	6	7	8	9	10
TTP(S)60F ^R / _L 8 ^A / _B	R0.05	NPT 1/16	27	0.64	6	0.18	0.16	0.12	0.08	0.06	0.04				
		NPT 1/8	27	0.64	6	0.18	0.16	0.12	0.08	0.06	0.04				
		NPT 1/4	18	1.28	8	0.26	0.24	0.20	0.18	0.16	0.12	0.08	0.04		
		NPT 3/8	18	1.28	8	0.26	0.24	0.20	0.18	0.16	0.12	0.08	0.04		

Parallel Pipe (G, BSPP)

Item Number	Edge radius	Nominal designation of thread	Pitch	Total DOC	No. of pass	1	2	3	4	5	6	7	8	9	10
TTP55F ^R / _L 8 ^A / _B	R0.05	G 1/16	28	0.67	6	0.20	0.16	0.12	0.09	0.06	0.04				
		G 1/8	28	0.67	6	0.20	0.16	0.12	0.09	0.06	0.04				
		G 1/4	19	1.01	8	0.25	0.20	0.16	0.12	0.10	0.08	0.06	0.04		
		G 3/8	19	1.01	8	0.25	0.20	0.16	0.12	0.10	0.08	0.06	0.04		

Tapered Pipe (R, BSPT)

Item Number	Edge radius	Nominal designation of thread	Pitch	Total DOC	No. of pass	1	2	3	4	5	6	7	8	9	10
TTP55F ^R / _L 8 ^A / _B	R0.05	R(PT) 1/16	28	0.67	6	0.20	0.16	0.12	0.09	0.06	0.04				
		R(PT) 1/8	28	0.67	6	0.20	0.16	0.12	0.09	0.06	0.04				
		R(PT) 1/4	19	1.01	8	0.25	0.20	0.16	0.12	0.10	0.08	0.06	0.04		
		R(PT) 3/8	19	1.01	8	0.25	0.20	0.16	0.12	0.10	0.08	0.06	0.04		

Whitworth (BSW)

Item Number	Edge radius	Nominal designation of thread	Pitch	Total DOC	No. of pass	1	2	3	4	5	6	7	8	9	10
TTP55F ^R / _L 8 ^A / _B	R0.05	W 1/8	40	0.45	5	0.13	0.13	0.09	0.06	0.04					
		W 3/16	24	0.79	7	0.20	0.16	0.14	0.11	0.08	0.06	0.04			
		W 1/4	20	0.96	8	0.20	0.18	0.16	0.14	0.10	0.08	0.06	0.04		
		W 5/16	18	1.07	8	0.25	0.22	0.18	0.14	0.10	0.08	0.06	0.04		
		W 3/8	16	1.21	8	0.26	0.23	0.20	0.16	0.13	0.11	0.08	0.04		

Threading

CSV Series Best for up to 5mm diameter material

CSV

For Cam-style machine

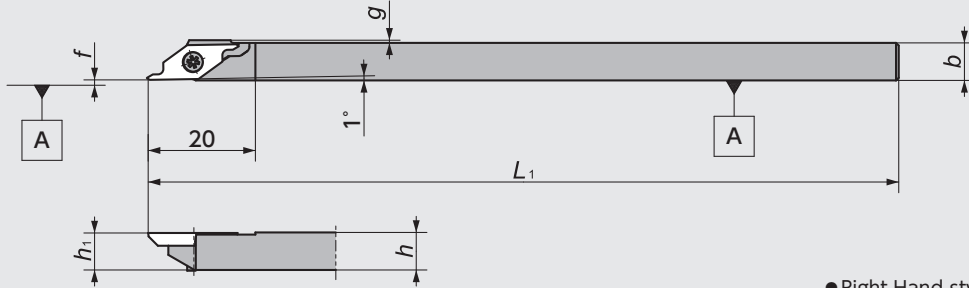


Figure-1

● Right-Hand style shown

CSV-NC

For Gang-style machine

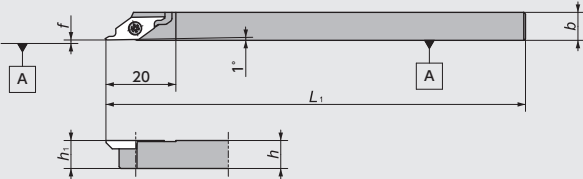


Figure-2

● Right-Hand style shown

CSV-NC-F

For Gang-style machine

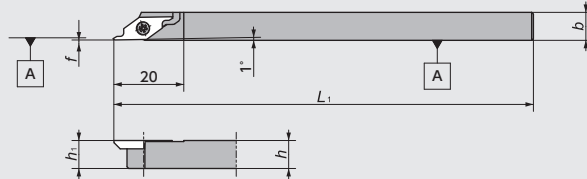





Figure-3



● Right-Hand style shown

CSV Series - Toolholders

Figure	Code No.		Item Number	Stock		Dimensions (mm)					Gage insert 	Spare Parts		
	R	L		R	L	h	b	L ₁	h ₁	f		g	Clamp Screw 	Wrench 
1	5492962		CSV _{R/L} 07GX	●		7	7	85	7	0.1	0.5	CSVT	LRIS-2.5*7	CLR-15S
	5303169	5303193	07	●	●			140						
	5492954		08GX	●		8	8	85	8					
	5303151	5303201	08	●	●									
	5303136		095	●		9.5	9.5	140	9.5					
	5303144	5303177	10	●	●	10	10		10					
	5474770		12GX	●		12	12	85	12					
5327929		12	●				140							
2	5514062	5514070	CSV _{R/L} 08NC	●	●	8	8	120	8	0.1		CSVT	LRIS-2.5*7	CLR-15S
	5563010		10GXNC	●		10	10	85	10					
	5477492	5477542	10NC	●	●			120						
	5477534	5477500	12NC	●	●	12	12		12					
3	5789615		CSV _{R/L} 08NC-F	●		8	8	120	8	0.0~0.1	—	CSVT	LRIS-2.5*7	CLR-15S


☆All the inserts can use the same toolholder CSV series → G94

CSV Series - Inserts Mirror finish




Shape	Item Number	Chip-breaker	Dimensions (mm)		Thread Type	PVD Coated Carbide			
			r _e	Pitch		VM1			
						R	Stock	L	Stock
<Type-A>  Thickness 2.38 ● Right-Hand style shown	CSV11F _{R/L} P60-035A	No	RO.03MAX	0.2 ~ 0.5		5344874	●	5386909	●
<Type-B>  Thickness 2.38 ● Right-Hand style shown	CSV11F _{R/L} P60-035B					5344882	●	5386917	●

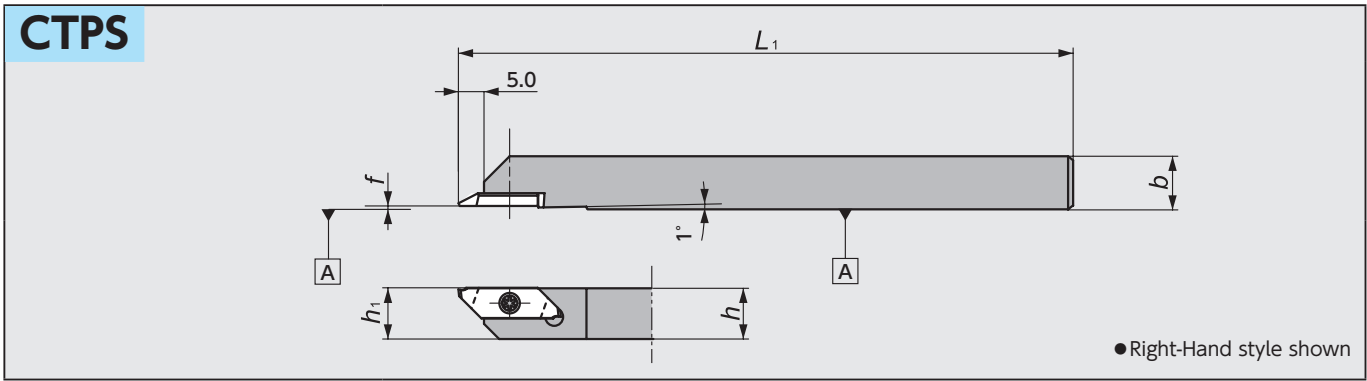☆All angles shown are obtained when insert is set in the holder

CTPS Series






CTPS Series - Toolholders

Code No.	Item Number	Stock		Dimensions (mm)				Gage insert 	Spare Parts		
		R	L	h	b	L ₁	h ₁		f	Clamp Screw 	Wrench 
5346572	CTPS_RL 10	●		10	10	120	10	0.0	TTPS	LRIS-2.5*7	CLR-15S
5397187	12	●		12	12		12				

☆All the inserts can use the same toolholder CTPS series → G98

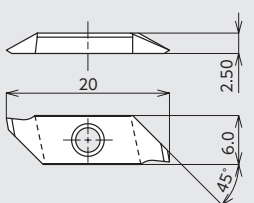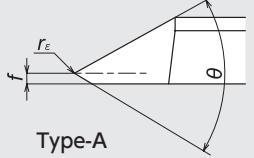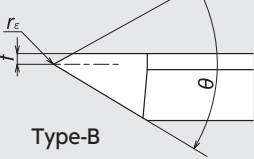CTPS Series - Inserts

Shape	Item Number	Dimensions (mm)				Thread Type Pitch	PVD Coated Carbide			
		Type	θ	f	r _ε		ZM3	Stock	VM1	Stock
	TTPS60FR4A	A		0.4	(0.05) MAX Flat	0.2 ~ 0.75	5346648	●	5362710	●
	60FR4B	B					5346663	●	5362728	●
	60FR8A	A	60°	0.8	(0.05)	0.4~1.25	5346689	●	5362744	●
	60FR8B	B					5346671	●	5362736	●
	60FR-N	N		1.25	(0.1)	1.0~1.5	5346655	●	5362751	●

●Right-Hand style shown

☆All angles shown are obtained when insert is set in the holder

New Products
 Tool Materials / Selection Guide
 Micrograin Carbide, BIDE/MCS, PCD, PVD/CVD-coated Carbide, CBN and Ceramics
 Insert Item List
 General Turning Toolholders
 Unique Swiss Tooling
 Grooving / Side Turning
 Threading
 Shaper
 ID Tooling
 Application Introduction
 Endmills
 Rotating Tools
 Information
 Index

Threading

TTP Series

TTP


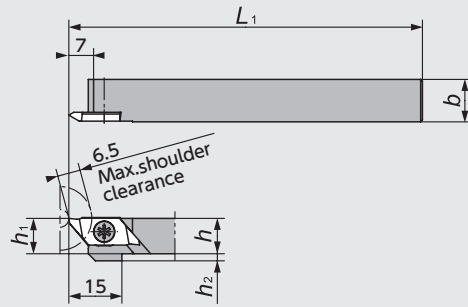


Figure-1

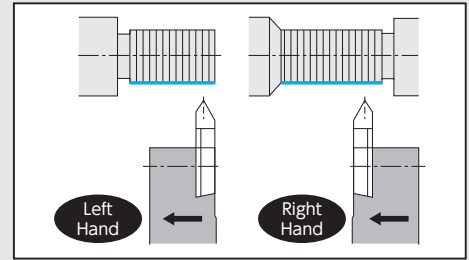

● Right-Hand style shown

TTP-OH2


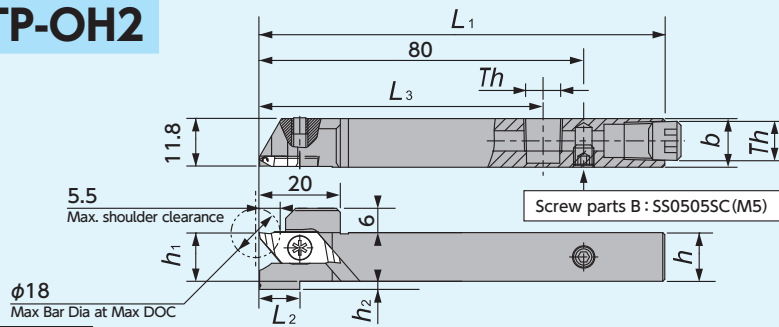


Figure-2

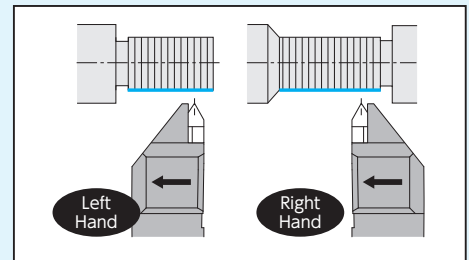

Th(screw parts [A])
1212/1616size : SPR1/8(Rc1/8)

● Right-Hand style shown

TTP-F

Shift Holder

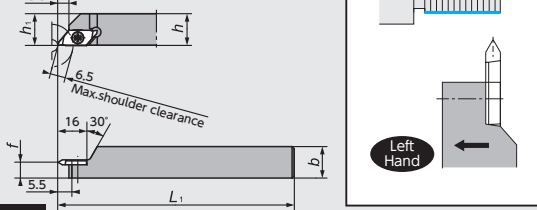


Figure-3

● Left-Hand style shown

TTP




Figure-4

● Right-Hand style shown

DS-TTP

(DS Holder)

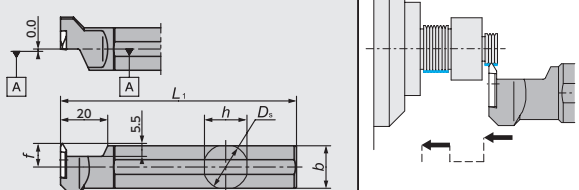


Figure-5

● Left-Hand style shown
☆ Takes Right-hand insert

CH-TTP

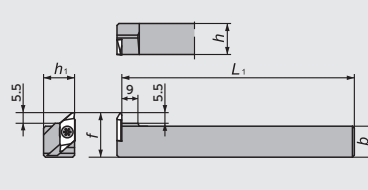


Figure-6




● Left-Hand style shown
☆ Takes Right-hand insert

TTP Series - Toolholders

Figure	Code No.		Item Number	Stock		Dimensions (mm)						Gage insert	Spare Parts		
	R	L		R	L	Ds	h	b	L1	h1	f		h2	Clamp Screw	Wrench
1	5146238	5146220	TTP ^φ L08	●	●	-	8	10	120	8	-	0	TTP I 13	LRIS-4*10PW (A)	CLR-15S (A)
	5145693	5145685	10	●	●		10								
	5459854	5503024	12GX	●	●		12	12	85	12					
	5145701	5145719	12	●	●		120								
	5459862	5459870	16H	●	●		16	16	100	16					
	5191234	5267190	16	●	●		120								
	5459573	5459581	20F	●	●	20	20	80	20			LRIS-4*10 (B)	LLR-25S-20*65 (B)		

















※Compatible with 16mm / 22mm round shank DS Series holders. DS-Sleeve G103

TTP Series - Toolholders

Figure	Code No.		Item Number	Stock		Dimensions (mm)								Gage insert 	Spare Parts		
	R	L		R	L	D _s	h	b	L ₁	h ₁	f	h ₂	L ₂		L ₃	Clamp Screw 	Wrench 
2	5061882	5061890	TTP^{R/L}12H-OH2	●	●	—	12	12	100	12	—	2	10	70	TTP I 13	LRIS-4*12PW	CLR-15S
	5062229	5062237	TTP^{R/L}16X-OH2	●	●	—	16	16	120	16	—	0	—	70			
3	5978150		TTPL12-F06		●	—	12	12	120	12	6	—	—	—	TTP I 13	LRIS-4*6 (B)	LLR-25S (B)
	5978168		TTPL16-F08		●	—	16	16	120	16	8	—	—	—			
4	5989959	5989942	TTP^{R/L}20K-25	●	●	—	20	20	125	20	—	—	—	—	TTP I 13	LRIS-4*10 (B)	LLR-25S (B)
	5989975	5989967	TTP^{R/L}25M-30	●	●	—	25	25	150	25	—	—	—	—			
5	5782149		DS-TTP^{R/L}16F*		●	16.00	15	15	80	—	10.0	—	—	TTP I 13	LRIS-4*10 (B)	LLR-25S-20*65 (B)	
	5278270		19		●	19.05	18	18	120								
	5278296		20		●	20.00	19	19									
	5324033		22*		●	22.00	21	21									
	5830641		25MET		●	25.00	24	24									150
	5317151		25		●	25.40	24	24									150
6	5885090		CH-TTP^{R/L}16		●	—	16	16	120	16	23	—	—	TTP I 13	LRIS-4*10 (B)	LLR-25S (B)	
	5885108		20		●	—	20	20	20	27	—	—	—				

*Compatible with 16mm / 22mm round shank DS Series holders. DS-Sleeve **G103**

TTP Series - Inserts

Shape	Item Number	Dimensions (mm)			Thread Type		Carbide		PVD Coated Carbide				
		θ	f	r _e	Pitch	TPI	KM1	Stock	ZM3	Stock	QM3	Stock	
Right-Hand 	TTP60FR2A	60°	0.2	(0.05) MAX Flat	0.2~0.35				5892278	●			
	60FR4A								5145602	●	5234216	●	
	60FR4AS 		0.4			0.2~0.75		5578158	●				
	60FR8A					0.4~1.25		5145537	●	5337340	●		
	60FR8AS 	0.8	(R0.05)				5578117	●					
	TTP55FR8A			55°			48~16		5145495	●			
	Type-B 	TTP60FR2B	60°	0.2	(0.05) MAX Flat	0.2~0.35				5892302	●		
		60FR4B								5145586	●	5601315	●
		60FR4BS 		0.4			0.2~0.75		5578133	●			
		60FR8B					0.4~1.25		5145529	●	5506472	●	
		60FR8BS 	0.8	(R0.05)				5578091	●				
		TTP55FR8B			55°			48~16		5145487	●		
Type-N 	TTP60FR-N	60°	1.25	(R0.1)	1.0~1.5				5145560	●	5474630	●	
	60FR-NS 								5578067	●			
	60FR-N02				(R0.2)	1.5~2.0			5626247	●	5626254	●	
Left-Hand 	TTP60FL2A	60°	0.2	(0.05) MAX Flat	0.2~0.35				5892286	●			
	60FL4A								5145594	●	5601307	●	
	60FL4AS 		0.4			0.2~0.75		5578174	●				
	60FL8A					0.4~1.25		5145545	●	5601273	●		
	60FL8AS 	0.8	(R0.05)				5578125	●					
	TTP55FL8A			55°			48~16		5145503	●			
	Type-B 	TTP60FL2B	60°	0.2	(0.05) MAX Flat	0.2~0.35				5912555	●		
		60FL4B								5145578	●	5601299	●
		60FL4BS 		0.4			0.2~0.75		5578141	●			
		60FL8B					0.4~1.25		5145511	●	5503438	●	
		60FL8BS 	0.8	(R0.05)				5578109	●				
		TTP55FL8B			55°			48~16		5145479	●		
	Type-N 	TTP60FL-N	60°	1.25	(R0.1)	1.0~1.5				5145552	●	5601265	●
		60FL-NS 								5578083	●		
		60FL-N02				(R0.2)	1.5~2.0			5626270	●	5626262	●

STTN Series

STTN

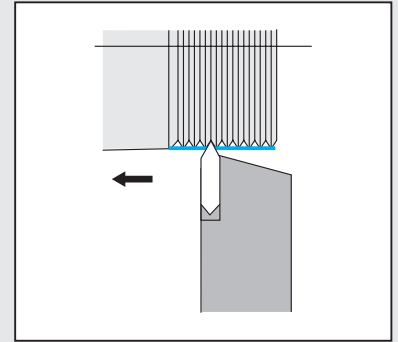
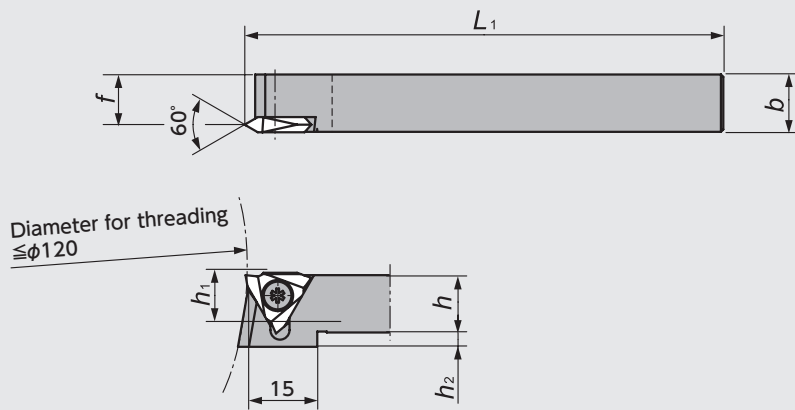


Figure-1

● Right-Hand style shown

NTTB

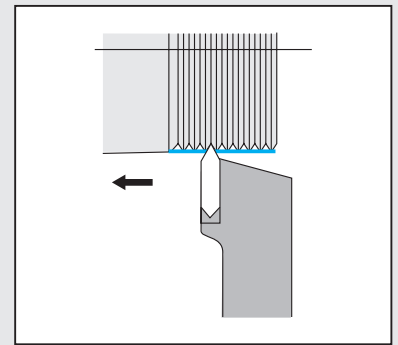
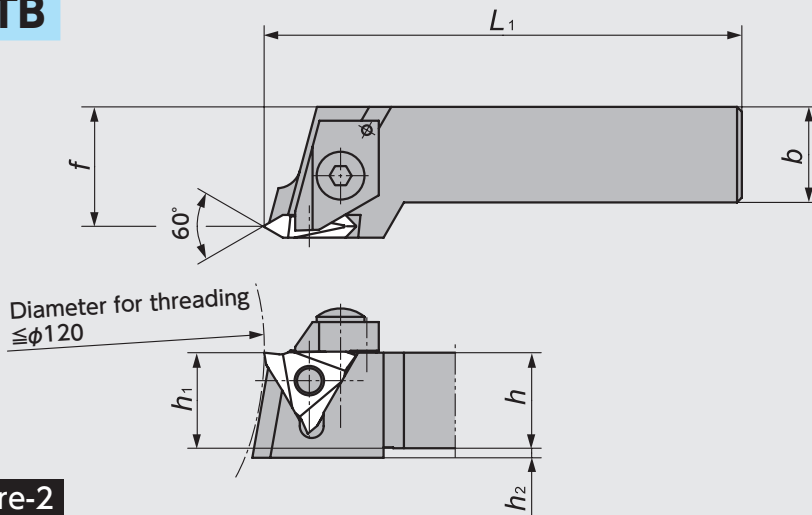


Figure-2

● Right-Hand style shown

DS-STT

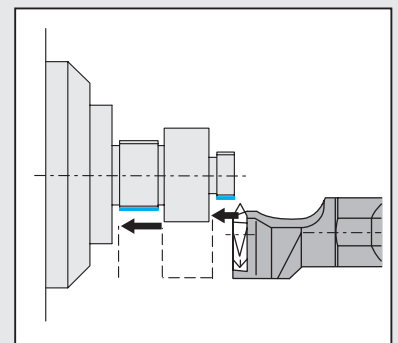
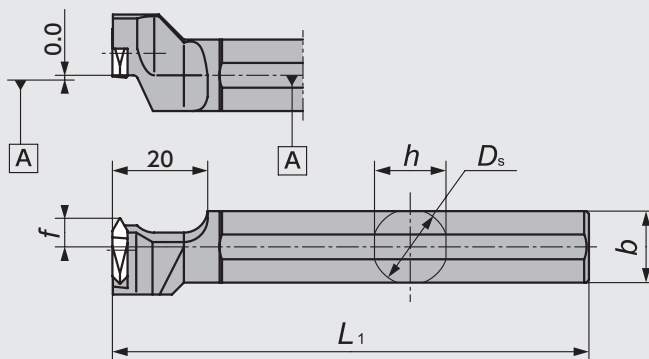


Figure-3


● Left-Hand style shown
☆ Takes Right-hand insert

STTN Series - Toolholders

Figure	Code No.		Item Number	Stock		Dimensions (mm)							Gage insert	Spare Parts				
	R	L		R	L	D_s	h	b	L_1	h_1	f	h_2		Clamp	Clamp Bolt	Spring	Clamp Screw	Wrench
1	5630405		STTN [®] 101032	●			10	10		10	8.5		TTMH	—	—	—	LR-S-4*9	RLR-20S (A)
	5827662		121232	●	—				80			5.0						
	5834817		121232-K	●			12	12		12	10.5							
2	5262530		NTTB [®] 161632	●		—	16	16	120	16	20.0	4.0	TTMH	CPR/L5	AOS-5*25	ASG-5	—	LW-2.5 (B)
	5262548		202032	●			20	20	140	20	25.0	0.0						
3		5348552	DS-STT [®] 14F	●		14.000	13	13	80				TTMH	—	—	—	LR-S-4*9	RLR-20S (A)
		5348099	15H	●		15.875			100	—	6.0	—						
		5341508	16X*	●		16.000	15	15	95									

*Compatible with 16mm round shank DS Series holders. DS-Sleeve → G104

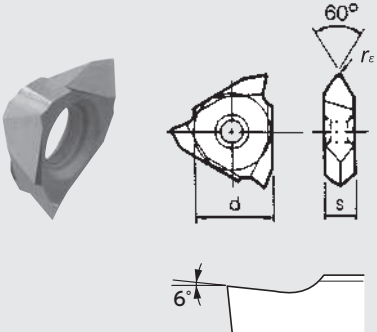STTN Series - Inserts

Shape	Item Number	Dimensions (mm)			Thread Type	PVD Coated Carbide	
		d	s	r_e	Pitch	ZM3	Stock
 <p>●Right-Hand style shown</p>	TTMH3260R010			0.10	0.8~3.0	5120928	●
	3260R015	9.525	3.18	0.15	1.0~3.0	5211826	●
	3260R020			0.20	1.5~3.0	5105697	●

SBT Series ID Threading

SBT Minimum Bore Diameter 2.5mm


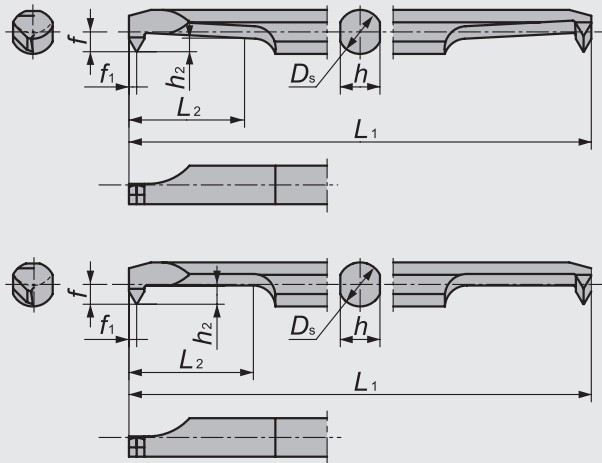



Figure-1

Figure-2




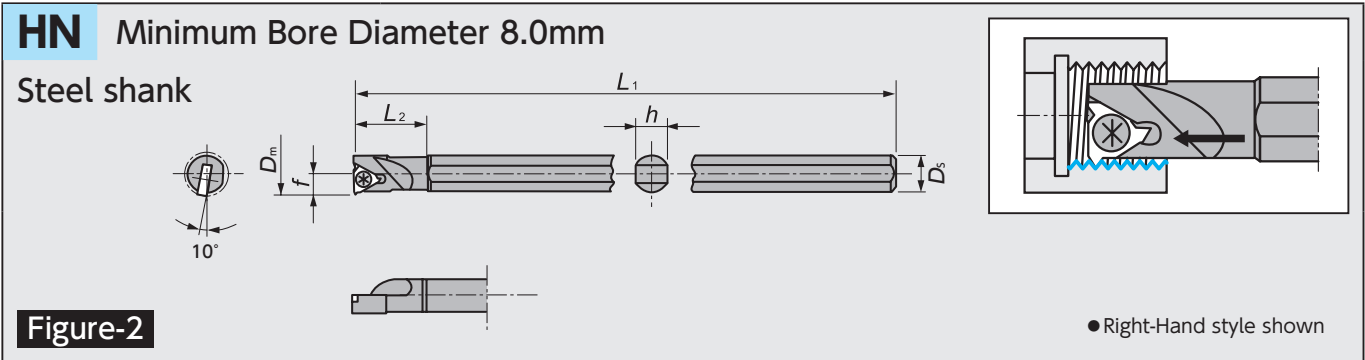
● Right-Hand style shown

Figure	Item Number	Min Bore Dia. chipbreaker	Dimensions (mm)								Thread Type				Recommended Thread Type		PVD Coated Carbide		
			D_s	L_2	h_2	L_1	f	f_1	h	r_ϵ	Metric Thread		UNC/UNF Thread		Metric Thread	UNC Thread	ZM3	Stock	
											Nominal designation of thread	Pitch (mm)	Nominal designation of thread	TPI	Nominal designation of thread				
1	SBT025M3R	2.5	2.5	5.4	0.6	50	1.1	0.4	2.3	0.05 max Flat	M3	0.5	—	—	M3×0.5	—	5784459	●	
	030M4R	3.0	3.0	7.5	0.8	50	1.3	0.5	2.7	0.05 max Flat	M4 ~	0.5~0.8	No.8-32UNC~	36~32	M4×0.7	No.8-32UNC	5784467	●	
	030M4RB	3.0	3.0	7.5	0.8	50	1.3	0.5	2.7	0.05 max Flat	M4 ~	0.5~0.8	No.8-32UNC~	36~32	M4×0.7	No.8-32UNC	5658018	●	
	035M5RB	3.5	Yes	3.5	8.5	1.0	60	1.55	0.55	3.2	0.05 max Flat	M4.5 ~	0.5~1.0	No.10-24UNC~	32~24	M5×0.8	No.10-24UNC No.12-24UNC	5658117	●
	040M6RB	4.0		4.0	10.5	1.2	60	1.8	0.7	3.6	R0.05	M5.5 ~	0.75~1.25	No.12-24UNC~	28~20	M6×1.0	1/4-20UNC	5658000	●
2	SBT050M8RB	5.0	5.0	15.8	1.5	70	2.3	0.8	4.5	R0.05	M7 ~	0.75~1.5	1/4-28UNF~	28~18	M8×1.25	5/16-18UNC	5657994	●	
	060M10RB	6.0	Yes	6.0	18.4	1.8	80	2.8	0.95	5.4	R0.05	M8 ~	0.75~1.75	5/16-24UNF~	28~16	M10×1.5	3/8-16UNC	5685870	●

※Caution: Due to the tolerance, it might not fit into the holder which is made by other company.

Sleeves → K8

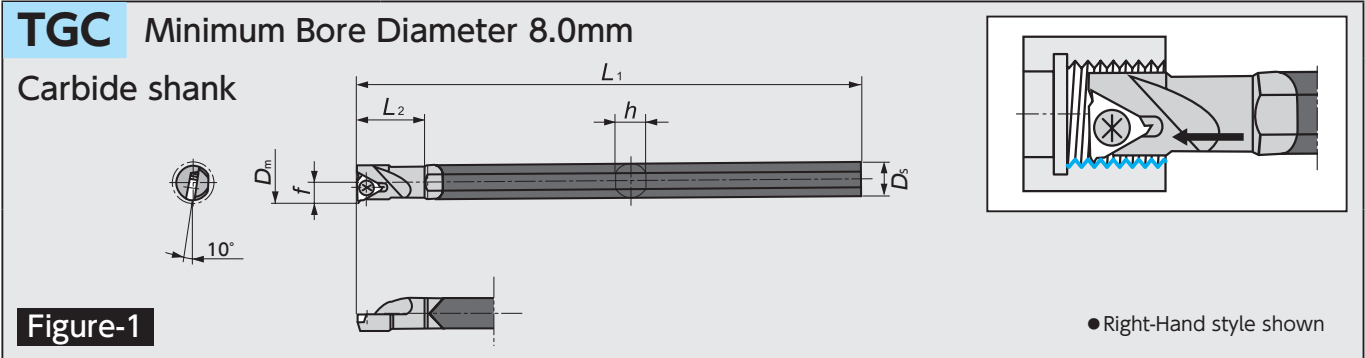TMN Series ID Threading



TMN Series - Toolholders

Figure	Code No.	Item Number	Stock	Min Bore Dia. (mm) D_m	Dimensions (mm)					Gage insert	Spare Parts	
					D_s	h	L_1	f	L_2		Clamp Screw	Wrench
1	5455092	TGC10T06H161R	●	8.0	6	5.5	100	3.8	13.0		LR-S-2 * 4.4	CLR-13S
	5455084	08K162R	●	10.0	8	7.0	125	4.7	17.0		LR-S-2 * 5.5	
	5455076	10M163R	●	12.0	10	9.0	150	6.0	20.0		LRIS-2.2 * 6	
2	5845177	HN59Z-0028	●	8.0	6	5.5	100	3.8	13.0		LR-S-2 * 4.4	CLR-13S
	5845193	-0029	●	10.0	8	7.0	125	4.7	17.0		LR-S-2 * 5.5	
	5845185	-0030	●	12.0	10	9.0	150	6.0	20.0		LRIS-2.2 * 6	

TMN Series - Inserts

Shape	Item Number	Dimensions (mm)			Thread Type		PVD Coated Carbide	
		ϕd	s	r_e	Recommended Pitch	Pitch	ZM3	Stock
<p>● Right-Hand style shown</p>	TMN06FR03	3.97	1.59	0.03	0.5	0.4 ~ 0.75	5228044	●
	08FR03	4.76	2.38				5293642	●
	09FR03	5.56					5484647	●

Thread Whirling





Features

WATCH ON
New Double-lead video is on [YouTube](#)



- NTK's unique patented design technology makes precise and correct inserts possible the first time, *without any redesign or remanufacturing even if it is a multiple-lead thread*
- The sharper cutting edges produce a better surface finish and longer tool life than competitor's inserts

Form Double-lead or Multiple-lead with Single Pass

	Double-lead threads	Triple-lead threads
Work	Bone screw	Worm gear
Work material	Ti-6Al-4V ELI	brass
Work appearance		
Insert appearance		
Major Dia.	φ 4.0mm	φ 7.0mm
Minor Dia.	φ 2.4mm	φ 4.7mm
Lead [Pitch×No. of Lead]	3.42mm (1.71mm×2)	4.9mm (1.63mm×3)

- Can reduce cycle time by more than half
- NTK can achieve what other competitors cannot

Double-lead Bone Screw Process Example

- 1 1st thread whirl at taper part
- 2 Rotate the bar 180° and whirl the 2nd thread on same part as **1**
- 3 Thread whirl whole straight part
- 4 Thread whirl at very last part to get two-exits, after back of bar has been backed up a half lead (one pitch) and rotated 180°

Special Item Capability

- Even though almost all bone screw shapes are special, NTK thread whirling inserts can make the correct shape of thread the first time, without any redesign or remanufacturing
- Inserts will be delivered in 5 weeks after the order is received
- Within a 3 week time period, expedite delivery is available with an expedite fee
- Basically NTK thread whirling inserts are ground with topping and coated

Recommended Cutting Conditions

No. of teeth		9	6	4	
Conditions					
Main spindle	RPM	10 - 40	10 - 25	7 - 15	Faster RPM reduces machining time
Whirling cutter	RPM	1500 - 4000			
Feed Rate		Same as thread-lead			
Bar stock	φ	~φ10.0 *		~φ5.0	* For cutter with φ12mm ID
Work Material		Ti-6Al-4V ELI / SUS316 / Titanium			

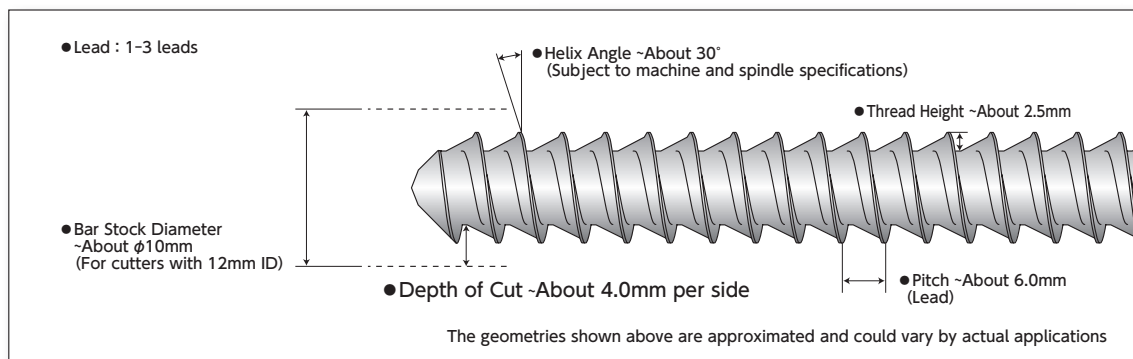
- Formula for calculating thread whirling process time

$$T \text{ (Seconds)} = \frac{60 \times \text{Thread length}}{\text{Main spindle rpm} \times \text{Feed rate (Thread lead)}}$$

Ex.) Double lead / 50mm length / 2.54 lead (2×1.27 pitch) / 30 rpm

$$T \text{ (Seconds)} = \frac{60 \times 50}{30 \times 2.54} = 40 \text{ Seconds}$$



Applicable Thread Geometry (Approximated)





Thread Whirling System




Type 1




Type 2
Quick-change



Type 3
Quick-change



Machine make	Model	Location	Spindle make	Spindle model	Helix angle	NTK Thread whirling system	Stock	No. of tooth	ϕD_m (mm)	Type	ϕD_s	P.C.D.	Mount adapter bolt								
CITIZEN	M-32-VIII	Gang	CITIZEN	BTW-4000	0° - 15°	TWC9C0746HP1	●	9	$\phi 12$	1	$\phi 46$	$\phi 35$	M3								
	L20/L20E/L20X	Gang		BTW-3000 BTW-3100	0° - 15°																
	L32/L32X			BTW-3100	0° - 15°																
	D25	Gang		CITIZEN	BTW-6000	$\pm 25^\circ$	TWC9C1040HP1 TWC6C1040HP1 TWC9C1040HP1-D16	●	9	$\phi 12$	1	$\phi 33$	$\phi 40$	M3 (Provided with spindle)							
	L32X														BTW-5000	$\pm 25^\circ$					
	L20X																0° - 15°				
	M16														BTW-2000	$\pm 25^\circ$					
	A20																				
	A32																				
	L20/L20X																				
	L32/L32X																				
	M20				BTW-1000	$\pm 25^\circ$															
	M32		+20° - -25°																		
	C32						$\pm 25^\circ$														
	L20																				
	M20	CITIZEN	CITIZEN	LTR0170 LTR0128/LTR0168 MSW105 KSW110	$\pm 15^\circ$	TWC9C1037P2	●	9	$\phi 12$	2	$\phi 37$	$\phi 30.5$	CS0310(M3)								
	C12/16													Gang							
	M12/16													Turret							
	M12/16III																				
	M20/32III	Gang	LTR0183	$\pm 15^\circ$	TWC9J1040P2	9	$\phi 12$	2	$\phi 40$	$\phi 32.5$	H-M4 × 12										
L20																					
M20/32	Turret	LTR0169	$\pm 15^\circ$	TWC6P1620HP1-D9	6	$\phi 9$	1	$\phi 32$	$\phi 26$	M4 (Provided with spindle)											
M20/32																					
K16	Attachment	PCM	GSW-101	$\pm 15^\circ$	TWC9P1340P2	●	9	$\phi 12$	2	$\phi 40$	$\phi 32.5$	M4 (Provided with spindle)									
L20	Gang		LSW-101-L20	$\pm 10^\circ$																	
M12/16	Turret		MSW-101																		
M20/M32			KSW-101																		
STAR	SW-12	Attachment	STAR	10159	$\pm 20^\circ$	TWC4S1433HP1	●	4	$\phi 8$	7	$\phi 38$	$\phi 27$	CS0310(M3)								
	ECAS-12/20			54178	$\pm 10^\circ$																
	SB-20R			0M171	-20° - 0°																
	SR-20J/20R III 20R IV/32J II			68172	-20° - 0°																
	SR-38			10172	$\pm 10^\circ$																
	ECAS-20T			59172	-20° - 0°																
	ECAS-32T	58171	$\pm 20^\circ$	TWC9S1640P2	●	9	$\phi 12$	3	$\phi 40$	$\phi 33$	CS04148S(M4)										
	SV-38	43156	$\pm 20^\circ$																		
	SV-12	45172	$\pm 10^\circ$																		
	SV-20/SV-20R	42173	$\pm 10^\circ$																		
	SV-32	43172	$\pm 10^\circ$																		
	SV-38R	43156	$\pm 20^\circ$																		
	BH20/BH38	Turret	TSUGAMI									3263-Y481	$\pm 10^\circ$	TWC9TS2252P2	●	9	$\phi 12$	3	$\phi 52$	$\phi 42$	CS0515(M5)
	BS20	Attachment										3214-Y1371	$\pm 10^\circ$	TWC9TS20550P2		9	$\phi 16$	3	$\phi 50$	$\phi 40$	CS0515(M5)
SS20/SS26/SS32 B0265/B0266-II B0325/B0326-II	Attachment	TSUGAMI		3268-Y450 3268-Y451	0° - 10°	TWC9TS2244HP1	●	9	$\phi 12$	4	$\phi 52$	$\phi 44$	CS0520(M5)								
				3281-Y450 3281-Y451	0° - 20°	TWC9TS1944HP1	●	9	$\phi 12$	4	$\phi 52$	$\phi 44$	CS0520(M5)								
S205/S206	Attachment	TSUGAMI		3220-Y6540 3220-Y6541	0° - 25°	TWC9TS1644HP1	●	9	$\phi 12$	4	$\phi 52$	$\phi 44$	CS0515(M5)								
B0123/B0124/B0125/ B0126-II/III B0203/B0204/B0205/ B0205/B0206-II/III					0° - 30°	TWC9TS1044HP1	●	9	$\phi 12$	4	$\phi 52$	$\phi 44$	CS0515(M5)								
				SS20/SS26/SS32		3268-Y271	0° - 10°	TWC9TS1952P2BK	9	$\phi 12$	4	$\phi 52$	$\phi 38$	CS0515(M5)							
0° - 20°					TWC9TS1652P2BK		9	$\phi 12$	4	$\phi 52$	$\phi 38$	CS0515(M5)									
SS207/SS267/SS327	-	Using B-axis			0° - 15°	TWC4TS3010HP1	●	4	$\phi 7$	5	$\phi 10$	For single-corner inserts only									

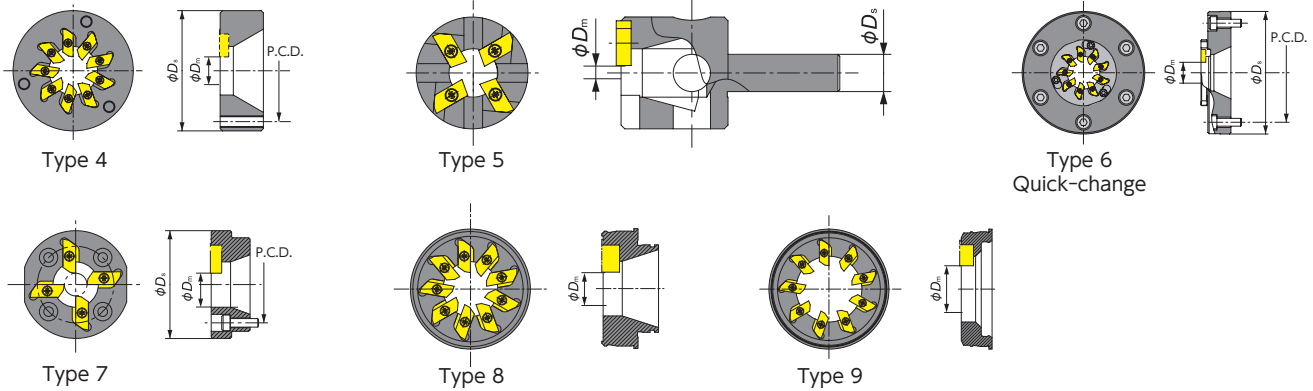

Machine make	Model	Location	Spindle make	Spindle model	Helix angle	NTK Thread whirling system	Stock	No. of tooth	ϕD_m (mm)	Type	ϕD_s	P.C.D.	Mount adapter bolt
TORNOS	DECO 10/10a	Attachment	TORNOS	224-1900	$\pm 15^\circ$	TWC6TO11542HP1		6	$\phi 12$	4	$\phi 42$	$\phi 32$	CS0410(M4)
	Evo DECO 10/10			242-1900									
	DECO 13a/13e			226-1900									
	Evo DECO 16/10			243-1900									
	Swiss ST26			246-1900	$\pm 15^\circ$	TWC9TO10540P2		9	$\phi 12$	3	$\phi 40$	$\phi 31$	CS0410(M4)
	DECO 20a			223-1900									
	DECO 26a			225-1900									
	Sigma 20			234-2750									
Sigma 32	236-2750	$\pm 25^\circ$	TWC9TO12050P2-D18		9	$\phi 18$	3	$\phi 50$	$\phi 40$	CS0410(M4)			
HASEGAWA	JS-1W	—	HASEGAWA	—	$0^\circ - 20^\circ$	TWC9HA22594P2		9	$\phi 16$	6	$\phi 94$	$\phi 76$	CS0620(M6)
Various Machines			WTO	42BJ	-22° ※1	TWC9WT42BJ20D12RH※2	●	9	$\phi 12$	8	—	—	—
				54BJ	30°	TWC9WT54BJ30D12RH※2	●	9	$\phi 12$	9	—	—	—
					30°	TWC9WT54BJ25D22RH※2	●	9	$\phi 22$	9	—	—	—

※1 Would be changed by spindle
 ※2 Designed for 6.5mm thickness inserts

■ Spare Insert Holder (Cartridge)

Item number	No. of tooth	ϕD_m (mm)	Compatible cutters
TWC6HP2	6	12	For Type 2 and Type 3*
TWC9HP2	9	12	For Type 2 and Type 3*
TWC9HP2-D16	9	12	For Type 6


Note: Insert holder comes with insert screws and wrench
 Insert holder mounting screw is not included
 *Cannot be used for TWC9TS20550P2, TWC9TO12050P2-D18 and TWC9HA22594P2

■ Spare Parts

Description		Item number
Insert Screw	For 4mm thick inserts	FSI17-2.2×6.0
	For 6.5mm thick inserts	FSI24-2.2×7.9
Wrench		T-07
Insert Holder Mounting Bolt		CS0309-TW

NTK's Unique Attachment System

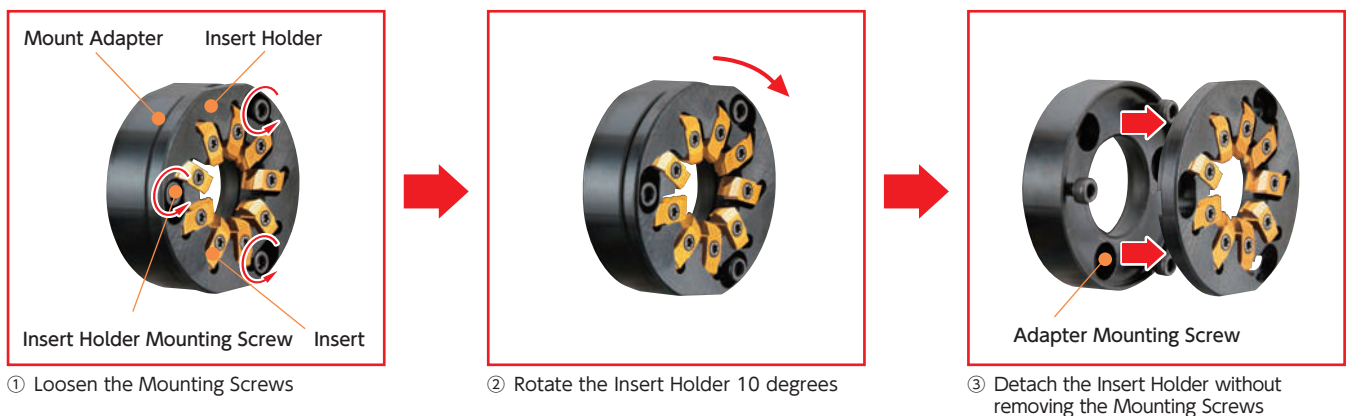NTK's whirling insert holder can be attached and detached without removing mounting screws




① Loosen the Mounting Screws

② Rotate the Insert Holder 10 degrees

③ Detach the Insert Holder without removing the Mounting Screws

Basic Insert Grade


ZM3



- ZM3 is our basic grade for NTK thread whirling
- ZM3 offers excellent surface finish
- NTK can make inserts with other coatings to meet customers demands


NTK Experiences and Solutions Example

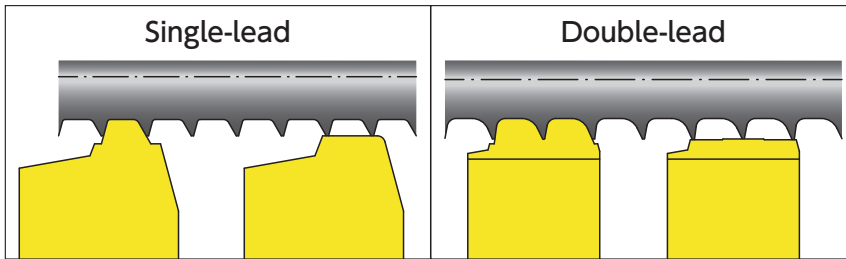For absolute flat on OD



- Two insert combination brings absolute flat on OD to meet the drawing

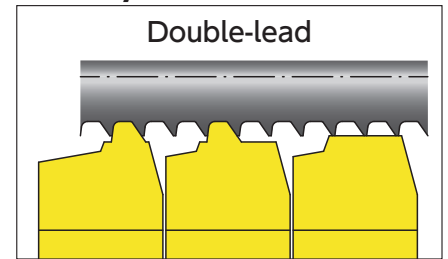For tiny thread




- NTK's Thread Whirling system can machine small diameter multi-lead screws to spec, with lower tool pressure, by using several types of specially designed and accurately ground inserts on the cutter.


Standard Thread Whirling Inserts (two-sided) for Medical ISO Style Threads

4mm thickness insert


(Note: Must use Thread whirling cutters with 12mm ϕ Dm dimension. See page U18-19 to find ϕ Dm for each cutter.)




ISO5835 HA



ISO5835 HB




ISO9268 HC





ISO9268 HD


Item number	ISO Standard	d_1	d_5	P	e	r_4	r_5	α	β	Metric dimensions		
										Supposition material Dia.	Coated Carbide	
TW5835-HA1.5-D12	ISO5835	HA1.5	1.5 ⁰ _{0.15}	1.1 ⁰ _{0.1}	0.5	0.1	0.3	0.1	35°	3°	ϕ 8	●
TW5835-HA2.0-D12		HA2.0	2.0 ⁰ _{0.15}	1.3 ⁰ _{0.1}	0.6	0.1	0.4	0.1	35°	3°		●
TW5835-HA2.7-D12		HA2.7	2.7 ⁰ _{0.15}	1.9 ⁰ _{0.15}	1	0.1	0.6	0.2	35°	3°		●
TW5835-HA3.5-D12		HA3.5	3.5 ⁰ _{0.15}	2.4 ⁰ _{0.15}	1.25	0.1	0.8	0.2	35°	3°		●
TW5835-HA4.0-D12		HA4.0	4.0 ⁰ _{0.15}	2.9 ⁰ _{0.15}	1.5	0.1	0.8	0.2	35°	3°		●
TW5835-HA4.5-D12		HA4.5	4.5 ⁰ _{0.15}	3.0 ⁰ _{0.15}	1.75	0.1	1	0.3	35°	3°		●
TW5835-HA5.0-D12		HA5.0	5.0 ⁰ _{0.15}	3.5 ⁰ _{0.15}	1.75	0.1	1	0.3	35°	3°		●
TW5835-HB4.0-D12	ISO5835	HB4.0	4.0 ⁰ _{0.15}	1.9 ⁰ _{0.15}	1.75	0.1	0.8	0.3	25°	5°	ϕ 8	●
TW5835-HB6.5-D12		HB6.5	6.5 ⁰ _{0.15}	3.0 ⁰ _{0.15}	2.75	0.2	1.2	0.8	25°	5°	ϕ 10	●
TW9268-HC2.9-D12	ISO9268	HC2.9	2.79 to 2.9	2.03 to 2.18	1.06	0.1max	—	—	—	—	ϕ 8	
TW9268-HC3.5-D12		HC3.5	3.43 to 3.53	2.51 to 2.64	1.27	0.1max	—	—	—	—		
TW9268-HC3.9-D12		HC3.9	3.78 to 3.91	2.77 to 2.92	1.27	0.1max	—	—	—	—		
TW9268-HC4.2-D12		HC4.2	4.09 to 4.22	2.95 to 3.25	1.27	0.1max	—	—	—	—		
TW9268-HD4.0-D12		HD4.0	4.0±0.03	2.92±0.03	1.59	0.1	—	—	45°	10°		
TW9268-HD4.5-D12		HD4.5	4.5±0.03	2.92±0.03	2.18	0.1	—	—	45°	10°		

Application Examples

Double-lead Bone Screw			
Work Material : Ti-6Al-4v ELI			
Bar Stock Dia.	φ9.5	Number of start	2
Major Dia.	φ4.0	Helix Angle	28.5°
Minor Dia.	φ2.5	Hand of thread	Right
Cutting condition			
Main Spindle Speed (rpm)	15	Speed of whirling cutter (rpm)	3,500
Lead = Feed (mm/rev)	5.5	Result	OK
NTK Thread Whirling		Dramatically improved productivity	
Competitor's Thread Whirling		Cannot complete with single pass. Requires feeding stock multiple times and two passes for threading each time.	
NTK thread whirling succeeded in double lead screw machining when one of the major thread whirling suppliers has failed many times.			

Double-lead Bone Screw			
Work Material : Ti-6Al-4v ELI			
Bar Stock Dia.	φ8.9	Number of start	2
Major Dia.	φ4.57	Helix Angle	23.0°
Minor Dia.	φ3.05	Hand of thread	Right
Cutting condition			
Main Spindle Speed (rpm)	12	Speed of whirling cutter (rpm)	2,500
Lead = Feed (mm/rev)	5.08	Result	OK
NTK Thread Whirling		Dramatically improved productivity	
Competitor's Thread Whirling		Cannot complete with single pass. Requires feeding stock multiple times and two passes for threading each time.	
The customer could not get perfect double lead thread form in single pass from other manufacturers. NTK got perfect thread form with a single pass on first trial saving cycle time.			

Double-lead Bone Screw			
Work Material : Ti-6Al-4v ELI			
Bar Stock Dia.	φ6.35	Number of start	2
Major Dia.	φ3.0	Helix Angle	15.4°
Minor Dia.	φ2.1	Hand of thread	Right
Cutting condition			
Main Spindle Speed (rpm)	11	Speed of whirling cutter (rpm)	2,200
Lead = Feed (mm/rev)	2.2	Result	OK
NTK Thread Whirling		Dramatically improved productivity	
Competitor's Thread Whirling		Cannot complete with single pass. Requires feeding stock multiple times and two passes for threading each time.	
Customer was concerned with stock rigidity and long cycle time. NTK applied three geometry inserts to achieve single pass machining, in dramatically short time. The up-sharp cutting edges and low cutting pressure produced "excellent" surface finish.			


Single-lead Bone Screw			
Work Material : 316SS			
Bar Stock Dia.	φ8.0	Number of start	1
Major Dia.	φ3.45	Helix Angle	7.5°
Minor Dia.	φ2.67	Hand of thread	Right
Cutting condition			
Main Spindle Speed (rpm)	23	Speed of whirling cutter (rpm)	2,000
Pitch = Feed (mm/rev)	1.24	Result	OK
NTK Thread Whirling		2600 pcs	
Competitor's Thread Whirling		1000 pcs	
Some thread whirling manufacturers offer 6-teeth or 12-teeth systems, too many teeth cause chip packing issues and more tool pressure. Fewer teeth means greater cycle time. NTK concluded that 9-teeth is the best configuration. Our customers can run 1.5 times faster and get longer tool life.			

Single-lead Bone Screw			
Work Material : Ti-6Al-4v ELI			
Bar Stock Dia.	φ5.0	Number of start	1
Major Dia.	φ2.3	Helix Angle	5.3°
Minor Dia.	φ1.7	Hand of thread	Right
Cutting condition			
Main Spindle Speed (rpm)	30	Speed of whirling cutter (rpm)	3,100
Pitch = Feed (mm/rev)	0.58	Result	OK
NTK Thread Whirling		2200 pcs	
This thread is up to 32 mm length with a small pitch. Cycle time could be increased with a single-point threading tool. NTK's inserts, designed for lower tool pressure, ran 2,200 pcs/corner at 30 rpm of bar stock (F10,800). It only took 110 seconds to finish a 32 mm length thread.			

Triple-lead Worm Gear			
Work Material : Brass			
Bar Stock Dia.	φ8.0	Number of start	3
Major Dia.	φ7.0	Helix Angle	14.6°
Minor Dia.	φ4.7	Hand of thread	Left
Cutting condition			
Main Spindle Speed (rpm)	20	Speed of whirling cutter (rpm)	3,500
Lead = Feed (mm/rev)	4.8	Result	OK
Multi-lead threads, common in the Worm Gear industry are made by a forming or cutting process. The large helix angle is difficult to machine with single-point threading. NTK now makes thread whirling inserts for multi-lead threads. Cycle time is reduced with a one pass process and thread form dimensions are stable with the low tool pressure.			

MEMO

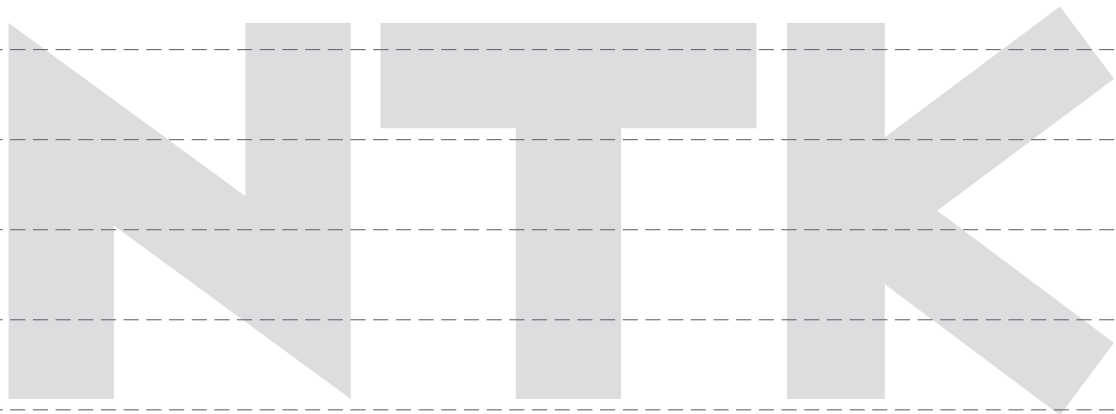New Products
Tool Materials / Selection Guide
BIDEMCS, PCD, CBN and Ceramics
Micrograin Carbide, PVD/CVD-Coated Carbide
Insert Item List
General Turning Toolholders
Unique Swiss Tooling
Grooving / Side Turning
Threading
Shaper
ID Tooling
Application Introduction
Endmills
Rotating Tools
Information
Index



J



Shaper

Index

Information

Rotating Tools

Endmills

Application Introduction

ID Tooling

Shaper

Threading

Grooving / Side Turning

Unique Swiss Tooling

General Turning Toolholders

Insert Item List

Micrograin Carbide, PVD Coated Carbide

BIDEMCS, PCD, CBN and Ceramics

Tool Materials / Selection Guide

New Products


SHAPER DUO



Hexalobular Socket



Hexagon Socket




Square Socket



- Now available for Hexalobular(6-lobe) Socket
- Perfect fit for back spindle of Swiss machine
- Achieves good corner edge sharpness


- Less tool pressure than Rotary-Broaching
- Easy to adjust for correct dimension
- Economical double-ended insert bar (Except for Hexalobular)

Comparison Chart of Hexalobular Socket Machining

	Tool Pressure	Cycle Time	Tool Cost	High speed spindle	Program	
Shaper Duo 	◎	◎	◎	Not necessary	Simple	<ul style="list-style-type: none"> ● No high speed spindle needed ● A lot less cycle time
End milling	○	×	△	Necessary	Complicated	<ul style="list-style-type: none"> ● Need high speed spindle ● Time consuming process

- Small diameter endmill driven by high-speed spindle is popular way to create Hexalobular(6-lobe) socket. It has some flexibility but needs high speed spindle unit and it is a time consuming process.
- SHAPER DUO can make Hexalobular(6-lobe) socket faster and simpler.


Comparison Chart of HEX Socket Machining

	Tool Pressure	Cycle Time	Flexibility	Tool Cost	
Shaper Duo 	◎	△ * Can be off-set by over-wrapping operation	○	◎	<ul style="list-style-type: none"> ● Less tool pressure-especially on small diameter parts ● One size can cover several socket sizes
Broach Tool	△	○	×	△	<ul style="list-style-type: none"> ● Need to have tools for each socket size

- Rotary-broach is an efficient way for Hexagon socket. But tool pressure is high and often it pushes part too hard.
- SHAPER DUO system enables less tool pressure and provides better tolerance with less cost.


Process Chart

① Center drilling




Make a center hole which is smaller than pilot hole drill.

② Drilling (Pilot hole)




Select a drill with same or smaller (0 ~ -0.1mm) dia. as AF and machine a bit deeper because burrs may cause chipping on shaper insert

③ Shaper tool




Machine socket rotating 60 degrees 6 times

④ Chamfering



Chamfer with the same pilot hole drill as ①

⑤ Deburring



Finish and deburr with the same drill as in process②
☆Reduce cutting conditions due to heavy interruption

SHAPER DUO Process Chart -Hexalobular-

Holder => K9

Socket Size	Tool	Pilot bore Dia. (mm)	Starting "X" position (mm)	Number of passes			Estimated cycle time *		
				Final "X" position (mm)	Roughing pass 0.025mm	Finishing pass 0.005mm	ISO10664 Standard depth of Hexalobular hole (mm)	Whole process ①-⑤	Process④ Shaper
T6	SSP050N25T06	1.15	1.14	1.75	13	1	1.82	51 sec	23.2 sec
T7	SSP050N31T07	1.38	1.35	2.06	15	1	2.44	59 sec	28.2 sec
T8	SSP050N36T08	1.62	1.59	2.40	17	1	3.05	67 sec	33.8 sec
T10	SSP050N41T10	1.92	1.89	2.80	19	1	3.56	75 sec	39.5 sec
T15	SSP050N43T15	2.30	2.29	3.35	22	1	3.81	84 sec	46.2 sec
T20	SSP050N46T20	2.71	2.69	3.95	26	1	4.07	94 sec	55.4 sec
T25	SSP050N50T25	3.13	3.09	4.50	29	1	4.45	105 sec	63.8 sec
T27	SSP050N55T27	3.52	3.51	5.07	32	1	4.70	115 sec	71.8 sec
T30	SSP050N55T30	3.91	3.89	5.60	35	1	4.95	125 sec	80.2 sec

* Using Carbide drill

* Shaper cutting conditions

Feed : 3000 mm/min

DOC : 0.025 mm (Roughing), 0.005 mm (Finishing)

SHAPER DUO Process Chart -Hexagonal-

Holder => K9

HEX Standard	Tool	Pilot bore Dia. (mm)	Starting "X" position (mm)	Number of passes			Estimated cycle time *		
				Final "X" position (mm)	Roughing pass 0.025mm	Finishing pass 0.005mm	ISO 2936 standard depth of Hex hole (mm)	Whole process ①-⑤	Process④ Shaper
HEX 1.5	SSP020N1130H	1.5	1.47	1.73	6	1	2	39 sec	14 sec
HEX 2.0	SSP020N1430H	2.0	1.95	2.31	8	1	2.5	44 sec	16 sec
HEX 2.5	SSP030N1940H	2.5	2.48	2.89	9	1	3	50 sec	20 sec
HEX 3.0	SSP030N1940H	3.0	2.95	3.46	11	1	3.5	55 sec	23 sec
HEX 4.0	SSP040N2450H	4.0	3.96	4.62	14	1	5	73 sec	33 sec
HEX 5.0	SSP050N3260H	5.0	4.96	5.77	17	1	6	90 sec	46 sec
HEX 6.0	SSP060N42120H	6.0	5.97	6.93	20	1	8	117 sec	63 sec
HEX 8.0	SSP080N62160H	8.0	7.98	9.24	26	1	10	155 sec	92 sec

* Pilot bore diameter is same or smaller(0-0.1mm) as AF.

* Using Carbide drill

* Shaper cutting conditions

Feed : 3000 mm/min

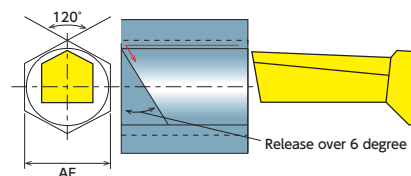
DOC : 0.025 mm (Roughing), 0.005 mm (Finishing)

Recommended Cutting Conditions

Feed : 3000 mm/min


DOC : Roughing ... 0.025 mm + Finishing ... 0.005 mm

Program Example → J6 · J7



Sleeves → K8 · K9

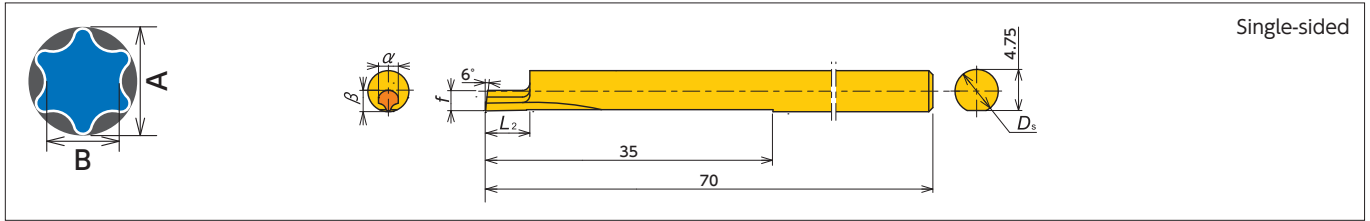Insert Bar -Hexalobular-




Single-sided

Item Number	Socket Size	Hexalobular Socket			D_s (mm)	L_2 (mm)	α (mm)	β (mm)	f (mm)	Pilot Bore Dia (mm)	Coated Carbide
		#	A (mm)	B (mm)							TM4
SSP050N25T06	T6	6	1.75	1.27	$\phi 5$	2.5	1.08	1.09	2.4	$\phi 1.15$	●
SSP050N31T07	T7	-	-	-	$\phi 5$	3.1	1.27	1.29	2.4	$\phi 1.38$	●
SSP050N36T08	T8	8	2.4	1.75	$\phi 5$	3.6	1.48	1.50	2.4	$\phi 1.62$	●
SSP050N41T10	T10	10	2.8	2.05	$\phi 5$	4.1	1.67	1.70	2.4	$\phi 1.92$	●
SSP050N43T15	T15	15	3.35	2.4	$\phi 5$	4.3	2.04	2.10	2.4	$\phi 2.30$	●
SSP050N46T20	T20	20	3.95	2.85	$\phi 5$	4.6	2.41	2.50	2.4	$\phi 2.71$	●
SSP050N50T25	T25	25	4.5	3.25	$\phi 5$	5.0	2.78	2.90	2.4	$\phi 3.13$	●
SSP050N55T27	T27	-	-	-	$\phi 5$	5.5	3.15	3.30	2.4	$\phi 3.52$	●
SSP050N55T30	T30	30	5.6	4.05	$\phi 5$	5.5	3.52	3.70	2.4	$\phi 3.91$	●

※Caution: Due to the tolerance, it might not fit into the holder which is made by other company.

Sleeves →K8 · K9

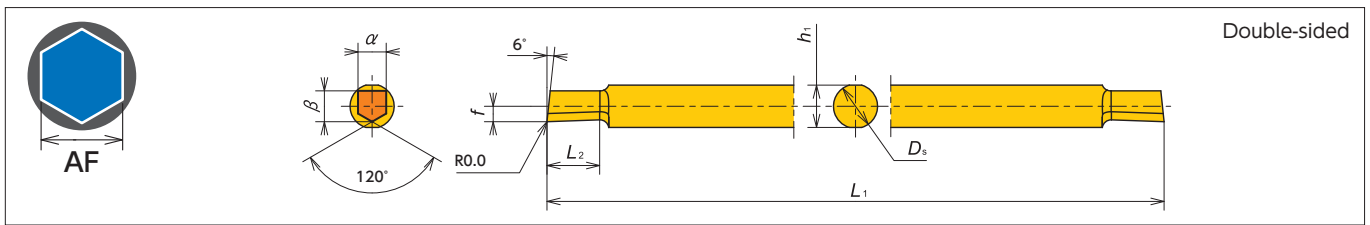Insert Bar -Hexagon-




Double-sided

Item Number	Base AF (mm)	HEX Standard size range (mm)	AF range (mm)	D_s (mm)	L_1 (mm)	L_2 (mm)	h_1 (mm)	α (mm)	β (mm)	f (mm)	Coated Carbide
											TM4
SSP020N1130H	HEX 1.5	HEX 1.5 - 2.0	1.4 - 2.0	$\phi 2$	50	3.0	1.8	1.1	0.8	0.40	●
SSP020N1430H	HEX 2.0	HEX 2.0 - 2.5	1.9 - 2.6	$\phi 2$	50	3.0	1.8	1.4	1.1	0.55	●
SSP030N1940H	HEX 3.0	HEX 2.5 - 3.5	2.4 - 3.6	$\phi 3$	50	4.0	2.8	1.9	1.6	0.8	●
SSP040N2450H	HEX 4.0	HEX 3.5 - 4.5	3.4 - 4.6	$\phi 4$	60	5.0	3.8	2.4	2.6	1.3	●
SSP050N3260H	HEX 5.0	HEX 4.5 - 6.0	4.4 - 6.2	$\phi 5$	70	6.0	4.8	3.2	3.4	1.70	●
SSP060N42120H	HEX 6.0	HEX 6.0 - 8.0	5.9 - 8.2	$\phi 6$	80	12.0	5.6	4.2	4.0	2.00	●
SSP080N62160H	HEX 8.0	HEX 8.0 - 12.0	7.9 - 12.2	$\phi 8$	80	16.0	7.6	6.2	4.7	2.35	●

※Caution: Due to the tolerance, it might not fit into the holder which is made by other company.

Sleeves →K8 · K9

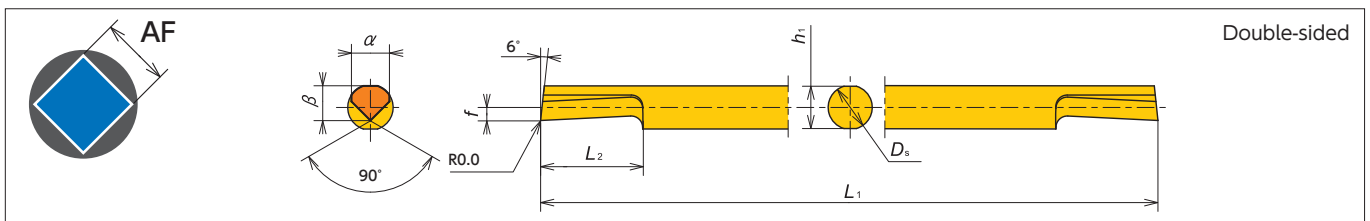Insert Bar -Square-



Double-sided

Item Number	Base AF (mm)	AF range (mm)	D_s (mm)	L_1 (mm)	L_2 (mm)	h_1 (mm)	α (mm)	β (mm)	f (mm)	Coated Carbide
										TM4
SSP020N1740S	2.0	1.9 - 2.3	$\phi 2.0$	50	4.0	1.8	1.70	1.60	0.70	●
SSP025N1940S	2.5	2.2 - 2.6	$\phi 2.5$	50	4.0	2.3	1.95	1.80	0.65	●
SSP030N2260S	3.0	2.5 - 3.0	$\phi 3.0$	50	6.0	2.8	2.20	2.05	0.65	●
SSP035N2760S	3.5	2.9 - 3.7	$\phi 3.5$	60	6.0	3.3	2.70	2.25	0.60	●
SSP040N3380S	4.0	3.6 - 4.6	$\phi 4.0$	60	8.0	3.8	3.35	3.05	1.15	●
SSP050N39100S	5.0	4.5 - 5.4	$\phi 5.0$	70	10.0	4.8	3.90	3.95	1.55	●
SSP060N47120S	6.0	5.3 - 6.6	$\phi 6.0$	80	12.0	5.6	4.75	4.50	1.70	●
SSP080N58160S	8.0	6.5 - 8.1	$\phi 8.0$	80	16.0	7.6	5.80	5.50	1.70	●

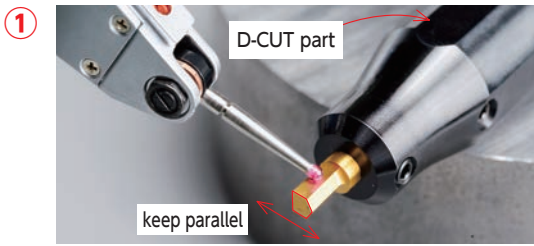
※Caution: Due to the tolerance, it might not fit into the holder which is made by other company.

Sleeves →K8 · K9

● : Stock

SHAPER DUO Set-up Instructions - Hexagonal

Outside machine





- Set the insert bar in the sleeve and check the parallelism of the flat portion of the sleeve and the insert bar.
- Minimize the overhang of the insert.

Inside machine



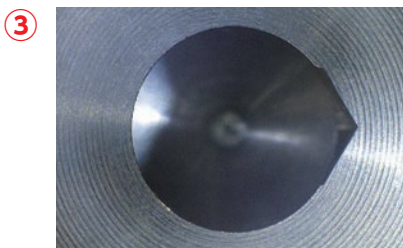
- Set the sleeve into the tool post and make sure the sleeve is set parallel.
- Minimize sleeve overhang.





- Increase the number of machining passes with smaller depth of cut if the insert chips with large depth of cut. (0.025mm×5pass is recommended)
No chamfering process is required for measuring purpose.
- Measure the length of both [a] and [b] with comparator or magnifier.
- Adjust centerline height by rotating the sleeve until you get the same length for [a] and [b]. (The difference should be less than 0.02mm)
*If the straight is not seen with increased passes, please reset the insert and the sleeve.
Please make sure both the insert and the sleeve are set up correctly.

4 Machine Hexagonal shape

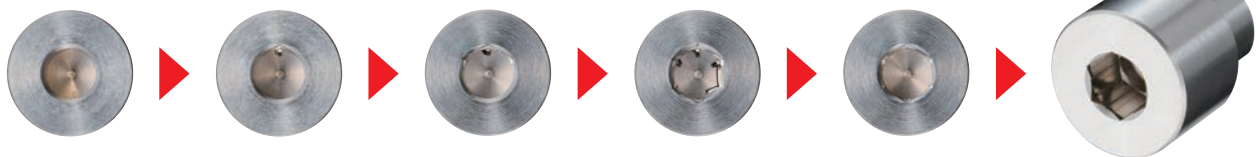- Run full HEX machining program.



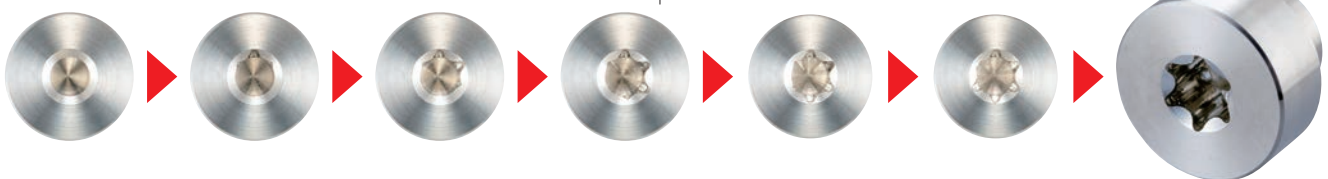For Hexalobular machining Basically same as Hexagonal socket



Hexagon Socket Programming Code Examples from Machine Builders in Metric

Hex socket size : Hex 3.0mm, AF(Final "X" position) 3.46mm, Depth 3.5mm
Pilot drill diameter : 3.0mm **Starting "X" position** : 2.95mm (see chart on J3)
Insert : SSP030N1940N TM4
Parameters : Feed 3000mm/min, DOC(Roughing) 0.025mm, (Finishing) 0.005mm

■ Programming tips

● Make a program considering final " X " position.

- #1 Final "X" position : 3.46mm (AF)
- #2 Finishing position of roughing : $3.46 - 0.01$ (Finishing) = 3.45mm
- #3 Calculate total DOC for roughing : $3.45 - 3.0$ (Pilot hole) = 0.45mm
- #4 Determine number of cuts : $0.45 \div 0.05$ (DOC for Dia.) = 9.0 + 2 (round down to whole number and add "2" for program adjustment)
 → Roughing sequence runs 11 times
- #5 Set starting point : $3.45 - (0.05 \times (11 - 1)) = 2.95\text{mm}$: must subtract by "1" for program adjustment

■ CITIZEN

Main Program Sequence

```
M25
M78 S0 .....I
Shaper T****
G50 U1.6 .....II
G0 X2.95 Z-2.0 T** .....III
M98 P2100 L11 .....IV
M98 P2200 .....V
```

```
M78 S60 .....I
G0 X2.95 Z-2.0
M98 P2100 L11
M98 P2200 } <a>
```

Repeat <a> program sequence 4 more times to complete the cuts at S120, S180, S240, S300 (represents 120°, 180°, 240°, 300°).

```
M20
G0 Z-2.0
G50 U-1.6
G0 U0 W0 T0
M1
```

■ STAR

Main Program Sequence

```
M25
Shaper T****
G50 U1.6 .....II
M8
G0 X2.95 Z-2.0 C0 T** .....I, III
M98 P2100 L11 .....IV
M98 P2200 .....V
```

```
G0 C60.0 .....I
G0 X2.95 Z-2.0
M98 P2100 L11
M98 P2200 } <a>
```

Repeat <a> program sequence 4 more times to complete the cuts at C120.0, C180.0, C240.0, C300.0 (represents 120°, 180°, 240°, 300°).

```
G0 Z-2.0
G50 U-1.6
G0 T0
G28 W0
M1
```

■ TSUGAMI

Main Program Sequence

```
M105
M150
G28 H0 .....I
M182
Shaper T****
G50 U1.6 .....II
G0 X2.95 Z2.0 T** .....III
M98 P2100 L11 .....IV
M98 P2200 .....V
M183
```

```
G0 C60 .....I
M182
G0 X2.95 Z2.0
M98 P2100 L11
M98 P2200 } <a>
```

Repeat <a> program sequence 4 more times to complete the cuts at C120, C180, C240, C300 (represents 120°, 180°, 240°, 300°).

```
M151
G0 Z2.0
G50 U-1.6
G0 U0 W0 T0
M1
```

Sub-Program Sequence #1 for Roughing

```
N2100
G4 U0.02 .....A
G98 G1 Z3.5 F3000 .....B
G4 U0.02
U-0.2 W-0.018 .....C
G4 U0.02
G0 Z-2.0
G4 U0.02
U0.25 .....D
M99
```

Sub-Program Sequence #1 for Roughing

```
O2100
G4 U0.02 .....A
G98 G1 Z3.5 F3000 .....B
G4 U0.02
U-0.2 W-0.018 .....C
G4 U0.02
G0 Z-2.0
G4 U0.02
U0.25 .....D
M99
```

Sub-Program Sequence #1 for Roughing

```
O2100
G4 U0.02 .....A
G98 G1 Z-3.5 F3000 .....B
G4 U0.02
U-0.2 W0.018 .....C
G4 U0.02
G0 Z2.0
G4 U0.02
U0.25 .....D
M99
```

Sub-Program Sequence #2 for Finishing

```
N2200
G98 G1 X3.46 Z-2.0 F1000 .....E
G4 U0.02
Z3.5 F3000
G4 U0.02
U-0.2 W-0.018
G4 U0.02
G0 Z-2.0
M99
```

Sub-Program Sequence #2 for Finishing

```
O2200
G98 G1 X3.46 Z-2.0 F1000 .....E
G4 U0.02
Z3.5 F3000
G4 U0.02
U-0.2 W-0.018
G4 U0.02
G0 Z-2.0
M99
```

Sub-Program Sequence #2 for Finishing

```
O2200
G98 G1 X3.46 Z2.0 F1000 .....E
G4 U0.02
Z-3.5 F3000
G4 U0.02
U-0.2 W0.018
G4 U0.02
G0 Z2.0
M99
```

- I. Index the sub-spindle 6 times in 60 degree increments.
- II. Specify the coordinate system shift command (in X axis direction) for the tool. [2 x f, where f is tool dimension located in catalog].
 - A positive direction shift is recommended for easier programming.
- III. Execute the positioning of the tool.
 - X position should be smaller than pilot drill diameter.
 - Z position should be offset 2.0 mm from material to achieve program feed rate.
- IV. Go to the Sub-Program #1.
 - Sequence runs 11 times. First cutting point X2.95 and final cutting point X3.45, with 0.05 DOC (for diameter) each time.

- A. Specify dwell time. This allows the program and machine to stay synchronized.
- B. Cut into part 3.5mm. F3000 is recommended feed to be used for most materials; including Titanium Alloy and Stainless Steel.
- C. This code backs off the tool with an angle greater than 6 degrees (10 degrees used in example). See page J3.
- D. Return to the X position + 0.05mm (the DOC for diameter).
- V. Go to the Sub-Program #2, for finishing sequence.
- E. Finishing operation with 0.005mm DOC (X 3.46) is recommended for better surface finish.

Hexalobular Socket Programming Code Examples from Machine Builders in Metric

Hexalobular socket size : Hexalobular T15 (depth : 3.81mm)

Pilot drill diameter : 2.3mm

Insert : SSP050N43T15 TM4

Parameters : Feed 3000mm/min, DOC(Roughing) 0.025mm, (Finishing) 0.005mm

■ Programming tips

● **Make a program considering final “ X ” position.**

- #1 Final “ X ” position : 3.35mm(A)
- #2 Finishing position of roughing : 3.35–0.01 (Finishing) = 3.34mm
- #3 Calculate total DOC for roughing : 3.34–2.3 (Pilot hole) = 1.04mm
- #4 Determine number of cuts : $1.04 \div 0.05$ (DOC for Dia) = 20.8 + 2 (round down to whole number and add “2” for program adjustment)
→ Roughing sequence runs 22 times
- #5 Set starting point : $3.34 - (0.05 \times (22 - 1)) = 2.29\text{mm}$: must subtract by “1” for program adjustment

■ CITIZEN

Main Program Sequence

```
M25
M78 S0 .....I
Shaper T****
G50 U4.8 .....II
G0 X2.29 Z-2.0 T** .....III
M98 P2100 L22 .....IV
M98 P2200 .....V
```

```
M78 S60 .....I
G0 X2.29 Z-2.0
M98 P2100 L22
M98 P2200 } <a>
```

Repeat <a> program sequence 4 more times to complete the cuts at S120, S180, S240, S300 (represents 120°, 180°, 240°, 300°).

```
M20
G0 Z-2.0
G50 U-4.8
G0 U0 W0 T0
M1
```

■ STAR

Main Program Sequence

```
M25
Shaper T****
G50 U4.8 .....II
M8
G0 X2.29 Z-2.0 C0 T** .....I, III
M98 P2100 L22 .....IV
M98 P2200 .....V
```

```
G0 C60.0 .....I
G0 X2.29 Z-2.0
M98 P2100 L22
M98 P2200 } <a>
```

Repeat <a> program sequence 4 more times to complete the cuts at C120.0, C180.0, C240.0, C300.0 (represents 120°, 180°, 240°, 300°).

```
G0 Z-2.0
G50 U-4.8
G0 T0
G28 W0
M1
```

■ TSUGAMI

Main Program Sequence

```
M105
M150
G28 H0 .....I
M182
Shaper T****
G50 U4.8 .....II
G0 X2.29 Z2.0 T** .....III
M98 P2100 L22 .....IV
M98 P2200 .....V
M183
```

```
G0 C60 .....I
M182
G0 X2.29 Z2.0
M98 P2100 L22
M98 P2200
M183 } <a>
```

Repeat <a> program sequence 4 more times to complete the cuts at C120, C180, C240, C300 (represents 120°, 180°, 240°, 300°).

```
M151
G0 Z2.0
G50 U-4.8
G0 U0 W0 T0
M1
```

Sub-Program Sequence #1 for Roughing

```
N2100
G4 U0.02 .....A
G98 G1 Z3.81 F3000 .....B
G4 U0.02
U-0.2 W-0.018 .....C
G4 U0.02
G0 Z-2.0
G4 U0.02
U0.25 .....D
M99
```

Sub-Program Sequence #1 for Roughing

```
O2100
G4 U0.02 .....A
G98 G1 Z3.81 F3000 .....B
G4 U0.02
U-0.2 W-0.018 .....C
G4 U0.02
G0 Z-2.0
G4 U0.02
U0.25 .....D
M99
```

Sub-Program Sequence #1 for Roughing

```
O2100
G4 U0.02 .....A
G98 G1 Z-3.81 F3000 .....B
G4 U0.02
U-0.2 W0.018 .....C
G4 U0.02
G0 Z2.0
G4 U0.02
U0.25 .....D
M99
```

Sub-Program Sequence #2 for Finishing

```
N2200
G98 G1 X3.35 Z-2.0 F1000 .....E
G4 U0.02
Z3.81 F3000
G4 U0.02
U-0.2 W-0.018
G4 U0.02
G0 Z-2.0
M99
```

Sub-Program Sequence #2 for Finishing

```
O2200
G98 G1 X3.35 Z-2.0 F1000 .....E
G4 U0.02
Z3.81 F3000
G4 U0.02
U-0.2 W-0.018
G4 U0.02
G0 Z-2.0
M99
```

Sub-Program Sequence #2 for Finishing

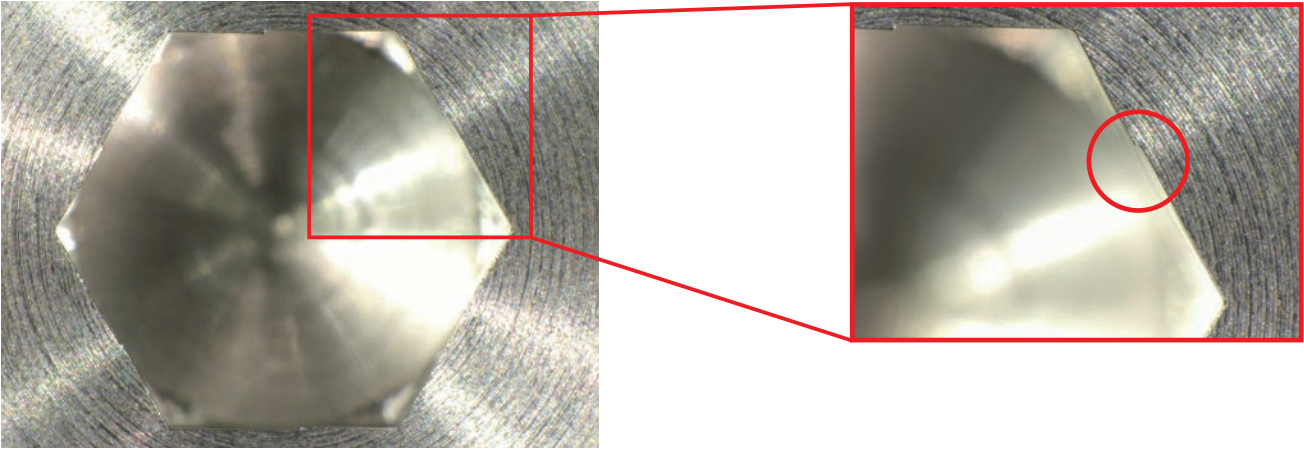
```
O2200
G98 G1 X3.35 Z2.0 F1000 .....E
G4 U0.02
Z-3.81 F3000
G4 U0.02
U-0.2 W0.018
G4 U0.02
G0 Z2.0
M99
```

- I. Index the sub-spindle 6 times in 60 degree increments.
- II. Specify the coordinate system shift command (in X axis direction) for the tool. [2 x f, where f is tool dimension located in catalog].
 - A positive direction shift is recommended for easier programming.
- III. Execute the positioning of the tool.
 - X position should be smaller than pilot drill diameter.
 - Z position should be offset 2.0 mm from material to achieve program feed rate.
- IV. Go to the Sub-Program #1.
 - Sequence runs 22 times. First cutting point X2.29 and final cutting point X3.34, with 0.05 DOC (for diameter) each time.

- A. Specify dwell time. This allows the program and machine to stay synchronized.
- B. Cut into part 3.81mm. F3000 is recommended feed to be used for most materials; including Titanium Alloy and Stainless Steel.
- C. This code backs off the tool with an angle greater than 6 degrees (10 degrees used in example). See page J3.
- D. Return to the X position + 0.05mm (the DOC for diameter).
- V. Go to the Sub-Program #2, for finishing sequence.
- E. Finishing operation with 0.005mm DOC (X 3.35) is recommended for better surface finish.

SHAPER DUO Troubleshooting


■ Problem: Step on sides



Cause: Incorrect tool set-up
(Center-line shift)

Solution: Machine one angle and make sure both [a] and [b] lengths are identical, rotating the sleeve if necessary

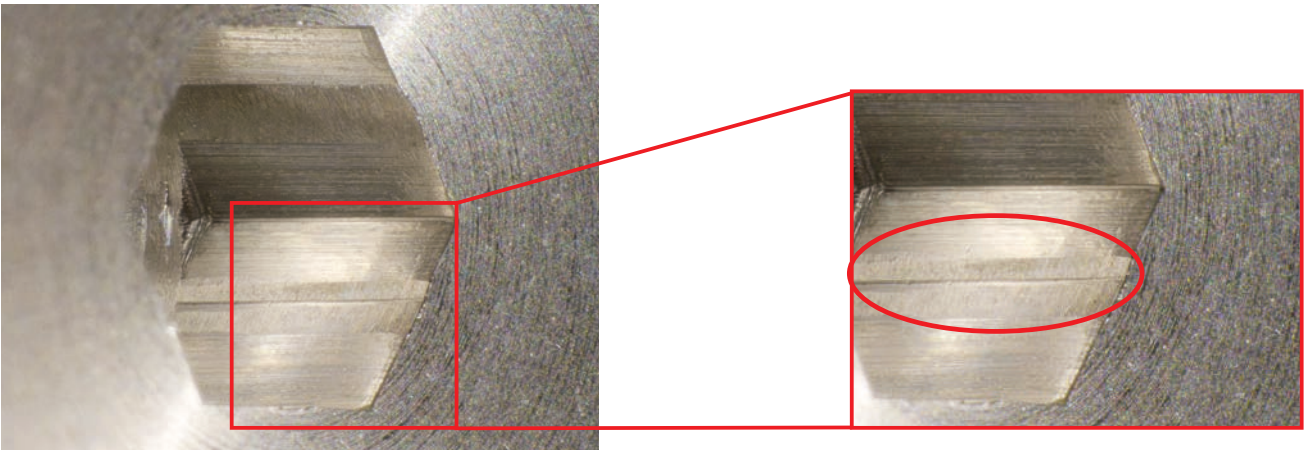■ Problem: Wall dented



Cause: Pilot hole remaining
Solution: Need pilot hole tool's offset

■ Problem: Wall tapered

Solution: ● Smaller depth of cut
● Less tool overhang

■ Problem: Chuck is slipping / Insert chipped

Solution: ● Run at 3000 mm/min feed rate
● Smaller depth of cut

- 3000 mm/min feed rate can cover most materials including Titanium alloy and Stainless steel.
- Too slow or too fast of a feed rate may cause excessive tool pressure for the workpiece and tool.

K



ID Tooling

● ID Tooling Tools	K2
● Recommended Cutting Conditions	K4
● Tool List	K6
LBM Series	K6
STICK DUO	K8
STICK DUO SPLASH	K12
STICK DUO HYPER	K18
Mogul Bar Series	K22
Boring Bar Adaptors	K33
Multi Clamp Toolholders Series	K34

NTK ID Tooling - Product Lines















Solid Series

Application	Shape	Coolant Through	Amount of Overhang (L/D)	Min Bore Dia. (mm)												
				1	1.5	2	2.5	3	3.5	4	5	6	7	8	9	
ID Boring	LBM →K7		~ 3	●	●	●	●	●								
	SBF →K11	●	~ 5			●	●	●	●	●	●	●		●		
	SHF →K21	●	~ 5			●	●	●	●	●	●					
ID Back Turning	SBB →K10	●	~ 5					●		●						
ID Grooving	SBG →H34		~ 1.5 ~ 3					●		●	●	●		●		
ID Threading	SBT →I 16		~ 2.5				●	●	●	●	●	●				
Shaper	SSP Hexalobular/Hexagon/ Square Socket →J4		~ 2		●	●	●	●	●	●	●	●	●	●	●	

Multi Clamp Series

Application	Shape	Coolant Through	Amount of Overhang (L/D)		Min Bore Dia. (mm)										
			Steel shank	Carbide shank	10	12	16	20	25	33	40	42	50	63	
ID Boring	S-□CLN (80°Diamond) →K34		~ 3								●	●		●	●
	S-□DUN (55°Diamond) →K35		~ 3									●	●		
	S-□SKN (Square) →K36		~ 3										●		
	S-□WLN (Trigon) →K37		~ 3							●	●		●		


Indexable Series

Application	Shape	Coolant Through	Amount of Overhang (L/D)		Min Bore Dia. (mm)														
			Steel shank	Carbide shank	5	6	7	8	10	12	14	16	18	20	25	30	40	55	
ID Boring	S-MBR  →K24	●	~5		●														
	C-MBR  →K25	●		~7	●														
	S-SEXR  →K26	●	~5			●													
	C-SEXR  →K26	●		~7		●													
	S-SCLC/P  →K28	●	~5				●	●	●	●	●			●					
	C-SCLC/P  →K28	●		~7			●	●	●	●	●			●					
	S-STUC/P  →K30	●	~5					●	●	●	●			●					
	C-STUC/P  →K30	●		~7				●	●	●	●			●					
	ID Back Turning	C-MSBR  →K25			~7		●		●										
		C-STZP  →K32	●		~7					●	●	●		●					
ID Grooving	BG  →H35		~3						●	●	●	●		●	●				
	GKV  →H36		~3													●	●	●	
ID Threading	HN  →I 17		~3				●	●	●										
	TGC  →I 17			~7			●	●	●										

Recommended Insert Grade and Cutting Conditions


Work Material	Grade			Cutting Speed (m/min)			
	Feed Rate(mm/rev)						
	LBM	STICK DUO	MOGUL BAR				
Common Name	JIS	GB	AISI/ASTM	~ φ3	φ2.2 ~ φ6.2	φ5 ~	
Low Carbon Steel	S10C } S30C	10 } 30	1010 } 1030	VM1 · ZM3 0.03 (0.006 ~ 0.03)	ZM3 · TM4 0.05 (0.02 ~ 0.06)	TM4 0.08 (0.03 ~ 0.15)	50 100 150
Carbon Steel	S45C } S55C	45 } 55	1045 } 1055	VM1 · ZM3 0.03 (0.005 ~ 0.03)	ZM3 · TM4 0.05 (0.01 ~ 0.06)	TM4 0.06 (0.03 ~ 0.12)	50 80 120
Alloy Steel	SCr415 } SCr440	15Cr } 40Cr	5140				
Stainless Steel (Austenitic)	SUS303	Y1Cr18Ni9	303	VM1 · ZM3 0.03 (0.005 ~ 0.03)	ZM3 · TM4 0.05 (0.01 ~ 0.07)	ST4 0.06 (0.03 ~ 0.12)	50 80 120
Stainless Steel (Austenitic)	SUS304 SUS316 SUS316L	0Cr18Ni9 0Cr17Ni12Mo2 00Cr17Ni14Mo2	304 316 316L	VM1 · ZM3 0.02 (0.005 ~ 0.03)	ZM3 · DT4 0.03 (0.01 ~ 0.06)	ST4 0.05 (0.03 ~ 0.12)	40 70 100
Stainless Steel (Ferritic)	SUS430 SUS430F	1Cr17 Y1Cr17	430 430F				
Stainless Steel (Martensitic) (Precipitation hardenic)	SUS440C SUS630	9Cr18 11Cr17 9Cr18Mo	440C	VM1 · ZM3 0.02 (0.005 ~ 0.03)	DT4 · TM4 0.03 (0.01 ~ 0.05)	ST4 0.05 (0.03 ~ 0.1)	30 50 70
Sulfur free cutting steel Sulfur complex free cutting steel	SUM22 SUM23 SUM24L	Y15	1213 1215 12L14	VM1 · ZM3 0.03 (0.006 ~ 0.03)	ZM3 · TM4 0.05 (0.02 ~ 0.1)	TM4 0.06 (0.03 ~ 0.15)	50 100 150
Electromagnetic soft iron	SUY-0 SUY-1 SUY-2			VM1 · ZM3 0.03 (0.005 ~ 0.03)	ZM3 · TM4 0.05 (0.01 ~ 0.07)	QM3 0.06 (0.03 ~ 0.12)	200 300 350
Electromagnetic stainless				VM1 · ZM3 0.02 (0.005 ~ 0.03)	ZM3 · DT4 0.03 (0.01 ~ 0.05)	QM3 0.05 (0.03 ~ 0.1)	40 60 80
High-carbon chromium bearing steel	SUJ2	GCr5	52100	VM1 · ZM3 0.02 (0.005 ~ 0.03)	ZM3 · DT4 0.03 (0.01 ~ 0.05)	TM4 · ZM3 0.05 (0.03 ~ 0.1)	40 60 80
Titanium alloy	6AL-4V 6AL-4VELI			VM1 0.02 (0.005 ~ 0.03)	TM4 · DT4 0.04 (0.02 ~ 0.05)	TM4 · DT4 0.06 (0.03 ~ 0.1)	30 50 70
Aluminum alloy	A5052 A6061 A7025	5A02 7A09	5052 7175	VM1 0.03 (0.01 ~ 0.05)	ZM3 · TM4 0.06 (0.02 ~ 0.1)	KM1 · PD1 0.1 (0.03 ~ 0.15)	Carbide 50 100 200 PCD 100 200 350

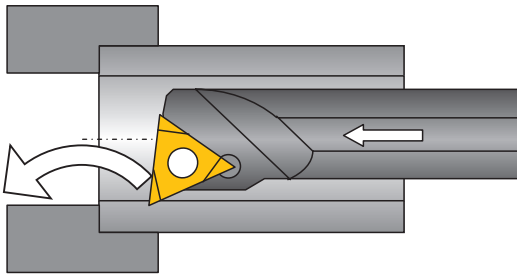Through hole




For chip control : chips can be evacuated forward


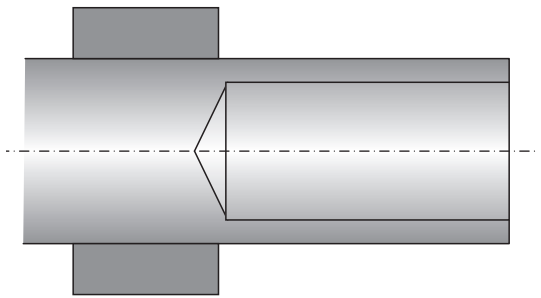
Blind hole



Blind hole due to bar stock

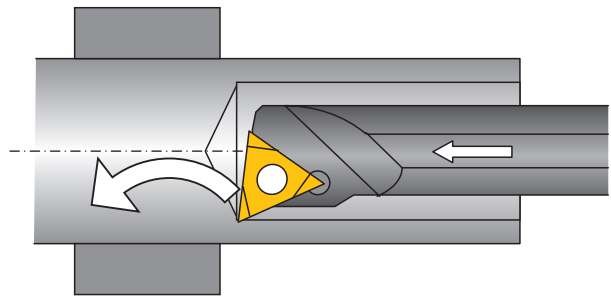

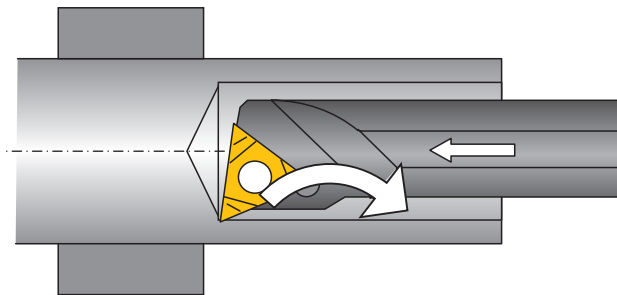Typical inserts direct flow chips forward. Then packed chips damage and break cutting edge



F05, F1, and FG chipbreakers will direct chips backwards and eliminate chipping on inserts

*Note: Use right-hand inserts with F05, F1 and FG chipbreaker for right-hand boring bars

Tool List

LBM Series Minimum bore diameter 1.0mm~ 3.0mm

LBMA/LBMA-S

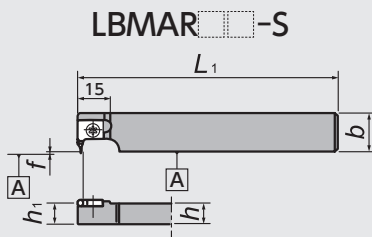


Figure-1




Figure-2




Figure-3

● Right-Hand style shown

CH-LBM


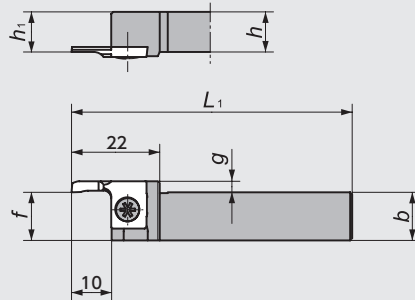


Figure-4



● Left-Hand style shown

DS-LBMB

(DS Holder)


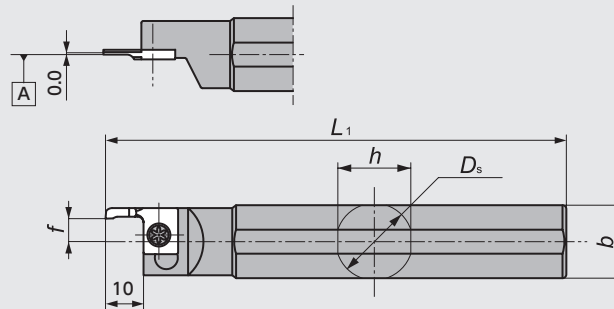


Figure-5



● Left-Hand style shown

LBM Series - Toolholders

Figure	Code No.	Item Number	Stock	Dimensions (mm)						Gage insert	Spare Parts	
				D_s	h	b	L_1	h_1	f		Clamp Screw	Wrench
1	5571435	LBMAR10SGX	●	—	10	18	85	10	0.0	Short Type K7	LRIS-4*10PW	CLR-15S (A)
	5486311	R10S	●	—	10		120	10				
	5486329	R12S	●	—	12		120	12				
2	5383476	LBMAR08	●	—	8	21.5	120	8	0.0	Short Type K7	LRIS-4*10	CLR-15S (A)
	5359849	R10	●	—	10			10				
	5362199	R12	●	—	12			12				
	5378278	R16	●	—	16			16				
3	5359831	LBMAR10-F	●	—	10	10.0	120	10	10.0*4	Short Type K7	LRIS-4*12PW	CLR-15S (A)
4	5659164	CH-LBML1012H	●	—	10	12	100*3	10	*1	Short Type K7	LRIS-4*10PW	CLR-15S (A)
	5659172	L1212H	●	—	12			12				
5	5359856	DS-LBMBL14F	●	14.000	13	13	80*3	—	*2	Short Type K7	LRIS-4*10PW	CLR-15S (A)
	5359914	L15H	●	15.875	15	15	100*3	—				
	5359906	L16X*5	●	16.000			95*3	—				
	5359898	L19	●	19.050	18	18	—	—				
	5359880	L20	●	20.000	19	19	120*3	—				
	5359872	L22*5	●	22.000	21	21	—	—				
	5483441	L25-MET	●	25.000	24	24	—	—				
	5393905	L25	●	25.400			150*3	—				

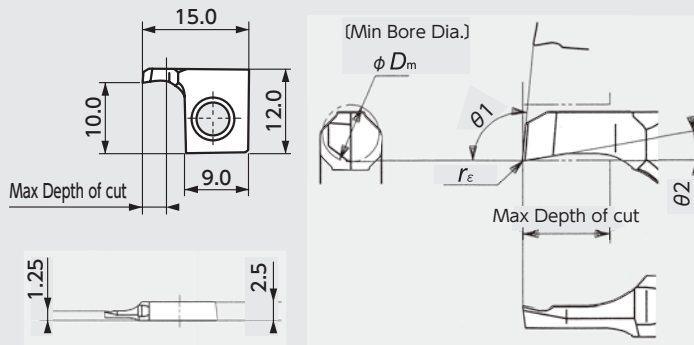
- *1 With an insert having the min. machining diameter of $\phi 3 \rightarrow 12.75\text{mm}$ With an insert having any min. machining diameter than $\phi 3 \rightarrow 12.75\text{mm}$
- *2 With an insert having the min. machining diameter of $\phi 3 \rightarrow 6.35\text{mm}$ With an insert having any min. machining diameter than $\phi 3 \rightarrow 6.75\text{mm}$
- *3 With a short type insert mounted, the over all length(L_1) becomes reduced by approx. 4.0mm
- *4 With a short type insert mounted, f dimension becomes reduced by approx. 4.0mm
- *5 Compatible with 16mm / 22mm round shank DS Series holders. DS-Sleeve⇒

LBMD-S

Short type

Mirror finish

with chipbreaker



LBMD2335FLPB05S shown

LBMD1020FLPB05S

LBMD1430FLPB05S

LBMD1730FLPB05S

LBMD2035FLPB05S

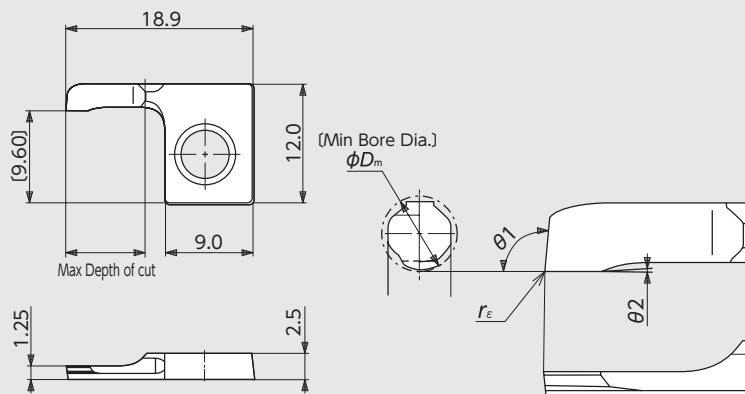


LBM

Long type


Mirror finish

without chipbreaker




LBMC3080FLP05 shown

<Min. Bore Diameter 2.0mm>



<Min. Bore Diameter 1.0mm>



LBM Series - Inserts Mirror finish

Insert type	Item Number	Chip-breaker	Min Bore Dia. ϕD_m	Max. Depth of Cut	Dimensions (mm)			PVD Coated Carbide			
					$\theta 1$	$\theta 2$	r_ϵ	ZM3	Stock	VM1	Stock
Short type	LBMD1020FLVBS	Yes	$\phi 1.0$	2.0	95°	10°	0.00		5638150	●	
	1020FLPB05S						0.05		5486592	●	
	LBMD1430FLVBS		$\phi 1.4$	3.0			0.00		5529169	●	
	1430FLPB05S						0.05		5486600	●	
	LBMD1730FLVBS		$\phi 1.7$	3.0			0.00		5638143	●	
	1730FLPB05S						0.05		5486618	●	
	LBMD2035FLVBS		$\phi 2.0$	3.5			0.00		5638135	●	
	2035FLPB05S						0.05		5486626	●	
LBMD2335FLVBS	$\phi 2.3$	3.5	0.00		5638127	●					
2335FLPB05S			0.05		5486634	●					
Long type	LBMD1020FLVB	Yes	$\phi 1.0$	2.0	95°	10°	0.00		5433222	●	
	1020FLPB05						0.05		5433214	●	
	LBMD2060FLVB	No	$\phi 2.0$	6.0	105°		0.00		5421888	●	
	2060FLPB05						0.05		5421896	●	
	LBME2060FLV	Yes	$\phi 2.0$	6.0	105°		0.00		5421920	●	
	2060FLP05						0.05		5421938	●	
	2060FLVB	No	$\phi 2.0$	6.0	105°		0.00		5421904	●	
	2060FLPB05						0.05		5421912	●	
	LBMC3080FLV	Yes	$\phi 3.0$	8.0	95°	2°	0.00	5372834	●	5359799	●
	3080FLP05						0.05	5372826	●	5359807	●
	LBM3080FLVB	No	$\phi 3.0$	8.0	95°		0.00		5368030	●	
	3080FLPB05						0.05		5368048	●	
LBMC3080FLVB	Yes	$\phi 3.0$	8.0	95°		0.00	5372842	●	5359815	●	
3080FLPB05						0.05	5372859	●	5359823	●	

Tool List

STICK DUO - Sleeves for ID machining -

NBH Shank diameter ϕ 15.875 ~ 19.05

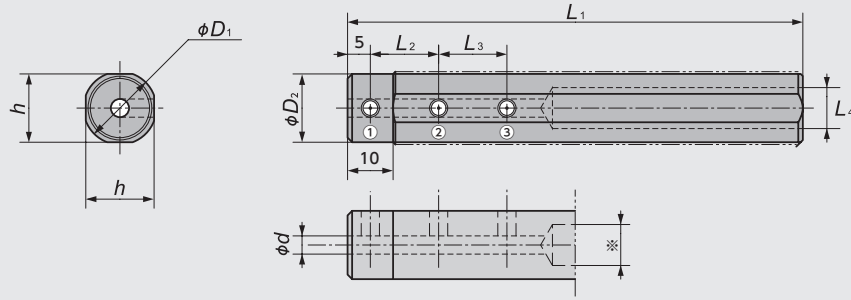


Figure-1

NBH Shank diameter ϕ 20.0 ~ 32.0

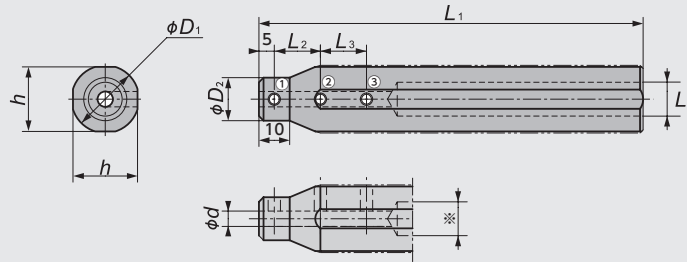


Figure-2

Figure	Code No.	Item Number	Stock	Dimensions (mm)								Clamp Screw			Wrench											
				ϕd	ϕD_1	ϕD_2	h	L_1	L_2	L_3	L_4	①	②	③												
1	5631403	NBH02015H	●	2.0	15.875	15	15	100	10	10	9.0	SS0406F	SS0406F	—	LW-2											
	5702915	02515H	●	2.5																						
	5631411	03015H	●	3.0																						
	5586110	03515H	●	3.5																						
	5586128	04015H	●	4.0																						
	5585997	04515H	●	4.5																						
	5585989	05015H	●	5.0																						
	5585971	06015H	●	6.0																						
	5585963	08015H	●	8.0																						
	5631429	NBH02016H	●	2.0												16	15	15	100	10	10	9.0	SS0406F	SS0406F	—	LW-2
	5702899	02516H	●	2.5																						
	5631437	03016H	●	3.0																						
5586102	03516H	●	3.5																							
5586094	04016H	●	4.0																							
5586086	04516H	●	4.5																							
5586078	05016H	●	5.0																							
5586060	06016H	●	6.0																							
5774195	07016H	●	7.0																							
5586052	08016H	●	8.0																							
5631445	NBH02019K	●	2.0	19.05	18	18	125	10	10	11.0	SS0408F	SS0408F	—	LW-2												
5702907	02519K	●	2.5																							
5631452	03019K	●	3.0																							
5586045	03519K	●	3.5																							
5586037	04019K	●	4.0																							
5586029	04519K	●	4.5																							
5586011	05019K	●	5.0																							
5586003	06019K	●	6.0																							
5774203	07019K	●	7.0																							
5586227	08019K	●	8.0																							
5586219	10019K	●	10.0																							



Figure	Code No.	Item Number	Stock	Dimensions (mm)								Clamp Screw			Wrench
				ϕd	ϕD_1	ϕD_2	h	L_1	L_2	L_3	L_4	①	②	③	
2	5631460	NBH02020K	●	2.0	20	11	19	125	15	15	11.0	SS0404F	SS0404F	SS0406F	LW-2
	5702881	02520K	●	2.5											
	5631478	03020K	●	3.0											
	5586201	03520K	●	3.5											
	5586185	04020K	●	4.0											
	5586177	04520K	●	4.5											
	5586169	05020K	●	5.0											
	5586151	06020K	●	6.0											
	5774211	07020K	●	7.0											
	5586144	08020K	●	8.0											
	5586136	10020K	●	10.0											
	5914742	12020K	●	12.0											
	5631486	NBH02022K	●	2.0	22	11	21	125	15	15	11.0	SS0404F	SS0406F	SS0406F	LW-2
	5702873	02522K	●	2.5											
	5631494	03022K	●	3.0											
	5586326	03522K	●	3.5											
	5586318	04022K	●	4.0											
	5586300	04522K	●	4.5											
	5586292	05022K	●	5.0											
	5586284	06022K	●	6.0											
	5774229	07022K	●	7.0											
	5586276	08022K	●	8.0											
	5586268	10022K	●	10.0											
	5631502	12022K	●	12.0											
	5631510	NBH02023K	●	2.0	23	11	21	125	15	15	11.0	SS0404F	SS0406F	SS0406F	LW-2
	5702857	02523K	●	2.5											
	5631528	03023K	●	3.0											
	5586250	03523K	●	3.5											
	5651336	04023K	●	4.0											
	5586243	04523K	●	4.5											
	5631536	05023K	●	5.0											
	5631544	06023K	●	6.0											
	5631551	08023K	●	8.0											
	5631569	10023K	●	10.0											
	5631577	12023K	●	12.0											
	5631585	NBH02025K-MET	●	2.0	25	11	24	125	15	15	11.0	SS0404F	SS0408F	SS0408F	LW-2
	5704283	02525K-MET	●	2.5											
	5631593	03025K-MET	●	3.0											
	5631601	03525K-MET	●	3.5											
	5651328	04025K-MET	●	4.0											
	5631619	04525K-MET	●	4.5											
	5631627	05025K-MET	●	5.0											
	5631635	06025K-MET	●	6.0											
	5774252	07025K-MET	●	7.0											
	5631643	08025K-MET	●	8.0											
	5631650	10025K-MET	●	10.0											
	5631668	12025K-MET	●	12.0											
	5631676	NBH02025K	●	2.0	25.4	11	24	125	15	15	11.0	SS0404F	SS0408F	SS0408F	LW-2
	5702865	02525K	●	2.5											
	5631684	03025K	●	3.0											
	5586235	03525K	●	3.5											
	5586383	04025K	●	4.0											
	5586375	04525K	●	4.5											
	5586367	05025K	●	5.0											
	5586359	06025K	●	6.0											
	5774260	07025K	●	7.0											
	5586342	08025K	●	8.0											
	5586334	10025K	●	10.0											
	5631692	12025K	●	12.0											
	5939475	NBH04532K	●	4.5	32.0	13	30	125	20.0	20.0	11.0	SS0404F	SS0408F	SS0408F	LW-2
	5939483	05032K	●	5.0											
	5939491	06032K	●	6.0											
	5939509	07032K	●	7.0											
	5939525	08032K	●	8.0											
	5939533	10032K	●	10.0											
	5939467	12032K	●	12.0											
	5939459	14032K	●	14.0											
	5939442	16032K	●	16.0											
											18.0				

- New Products
- Tool Materials / Selection Guide
- BIDEMCS, PCD, CBN and Ceramics
- Micrograin Carbide / PVD-Coated Carbide
- Insert Item List
- General Turning Toolholders
- Unique Swiss Tooling
- Grooving / Side Turning
- Threading
- Shaper
- ID Tooling
- Application Introduction
- Endmills
- Rotating Tools
- Information
- Index


Tool List

Bars for STICK DUO


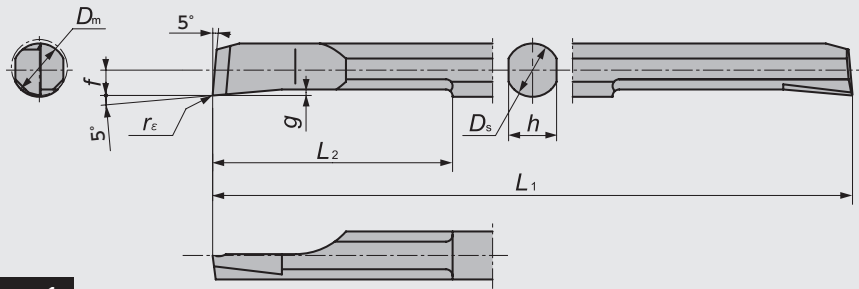
SBFS-S Chips can be evacuated forward




S.FS-S type



SBFB-F Evacuate chips backward


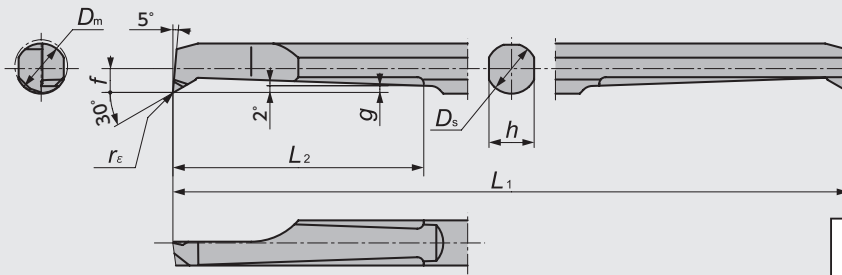


S.FB-F type



SBFS-H Flat type (without chipbreaker)

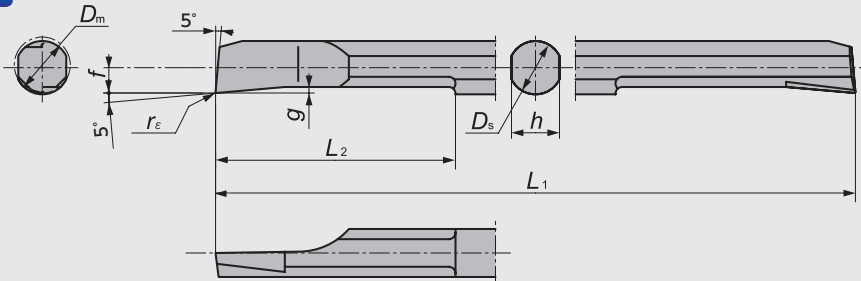
Mirror finish



SBB Series (ID Back Turning)

SBB (Minimum Bore Diameter 3.0mm)

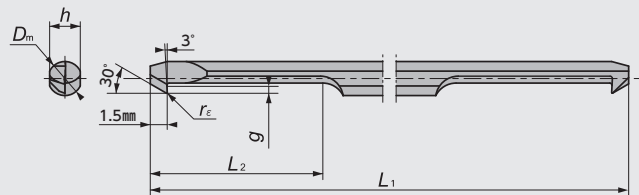Short type
two-sided



Long type
single-sided


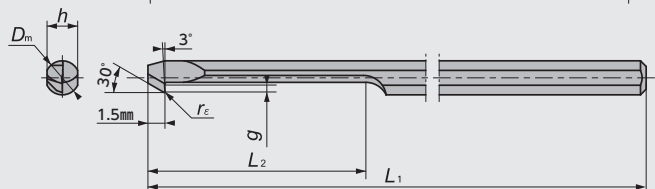

















Figure-4


Figure	Item Number	Min Bore Dia. (mm) D_m	Chip-breaker	Dimensions (mm)							PVD Coated Carbide			
				D_s	L_1	L_2	f	h	g	r_ϵ	DT4	Stock	ZM3	Stock
1	SBFS020R005S	2.2	Yes	2	50	10	0.9	1.8	0.25	0.05	5882907	●	5654975	●
	025R005S	2.7		2.5	50	12.5	1.15	2.3	0.30	0.05	5882881	●	5685995	●
	025R015S										0.15	5882873	●	5685987
	030R005S	3.2		3	50	15	1.4	2.7	0.40	0.05	5882865	●	5640891	●
	030R015S										0.15	5882857	●	5649165
	035R005S	3.7		3.5	60	17.5	1.65	3.2	0.40	0.05	5882840	●	5685888	●
	035R015S										0.15	5882832	●	5685979
	040R005S	4.2		4	60	20	1.9	3.6	0.45	0.05	5882824	●	5640867	●
	040R015S										0.15	5882816	●	5649140
	050R005S	5.2		5	70	25	2.4	4.5	0.50	0.05	5882808	●	5654983	●
	050R015S										0.15	5882790	●	5654991
	060R005S	6.2		6	80	30	2.9	5.4	0.60	0.05	5882782	●	5704861	●
060R015S	0.15		5882766								●	5704853	●	
2	SBFB020R005F	2.2	Yes	2	50	8	0.95	1.8	0.25	0.05	5882758	●	5658026	●
	025R005F	2.7		2.5	50	12.5	1.2	2.3	0.30	0.05	5882741	●	5685920	●
	025R015F										0.15	5882733	●	5685912
	030R005F	3.2		3	50	15	1.4	2.7	0.45	0.05	5882725	●	5640883	●
	030R015F										0.15	5882717	●	5649173
	035R005F	3.7		3.5	60	17.5	1.65	3.2	0.50	0.05	5882709	●	5685904	●
	035R015F										0.15	5882691	●	5685896
	040R005F	4.2		4	60	20	1.9	3.6	0.50	0.05	5882683	●	5640875	●
	040R015F										0.15	5882675	●	5649157
	050R005F	5.2		5	70	25	2.4	4.5	0.70	0.05	5882667	●	5655006	●
	050R015F										0.15	5882659	●	5655014
	060R005F	6.2		6	80	30	2.9	5.4	0.90	0.05	5882634	●	5704796	●
060R015F	0.15		5882626								●	5704812	●	
3	SBFS020R005H 	2.2	No	2	50	10	0.9	1.8	0.25	0.05			5674866	●
	025R005H 	2.7		2.5	50	12.5	1.15	2.3	0.30	0.05			5685961	●
	025R015H 										0.15			5685953
	030R005H 	3.2		3	50	15	1.4	2.7	0.40	0.05			5674874	●
	030R015H 										0.15			5674882
	035R005H 	3.7		3.5	60	17.5	1.65	3.2	0.40	0.05			5685946	●
	035R015H 										0.15			5685938
	040R005H 	4.2		4	60	20	1.9	3.6	0.45	0.05			5674890	●
	040R015H 										0.15			5674908
	050R005H 	5.2		5	70	25	2.4	4.5	0.50	0.05			5674924	●
	050R015H 										0.15			5674940
	060R005H 	6.2		6	80	30	2.9	5.4	0.60	0.05			5705207	●
060R015H 	0.15											5705199	●	
080R005H 	8.2	8	80	30	3.9	7.3	0.80	0.05			5705850	●		
080R015H 									0.15			5705843	●	
4 Short Type	SBB030RB005-S	3.0	Yes	3	50	15	1.3	2.7	0.50	0.05			5917067	●
	030RB010-S									0.1			5917042	●
	040RB005-S									0.05			5917414	●
	040RB015-S									0.15			5917372	●
4 Long Type	SBB030RB005	3.0	Yes	3	50	19	1.3	2.7	0.50	0.05			5917059	●
	030RB010									0.1			5917034	●
	040RB005									0.05			5917380	●
	040RB015									0.15			5917364	●

*Caution: Due to the tolerance, it might not fit into the holder which is made by other company.

- New Products
- Tool Materials / Selection Guide
- PCD, PCBN and Ceramics
- BIDEMCS, PCD, Micrograin Carbide, PVD-Coated Carbide, CBN and Ceramics
- Insert Item List
- General Turning Toolholders
- Swiss Tooling
- Unique Swiss Tooling
- Grooving / Side Turning
- Threading
- Shaper
- ID Tooling
- Application Introduction
- Endmills
- Rotating Tools
- Information
- Index

STICK DUO SPLASH

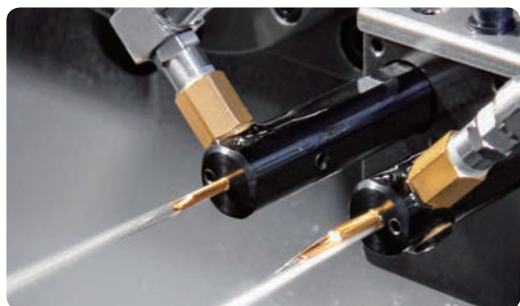- Coolant through sleeves for ID Boring with Adjustable Overhang Mechanism -




Choose from 2 coolant directions

I) For Blind hole	II) For Through hole
Just rotated 180 degrees	

No chip problems

STICK DUO SPLASH	External coolant
<i>No chip inside hole</i>	<i>Chip packed</i>
Material : SCM435 Insert bar : SHFS040R005S Hole depth : 15mm Pilot hole : $\phi 5.1 \times 28.0\text{mm L}$ Coolant Pressure : 5MPa	

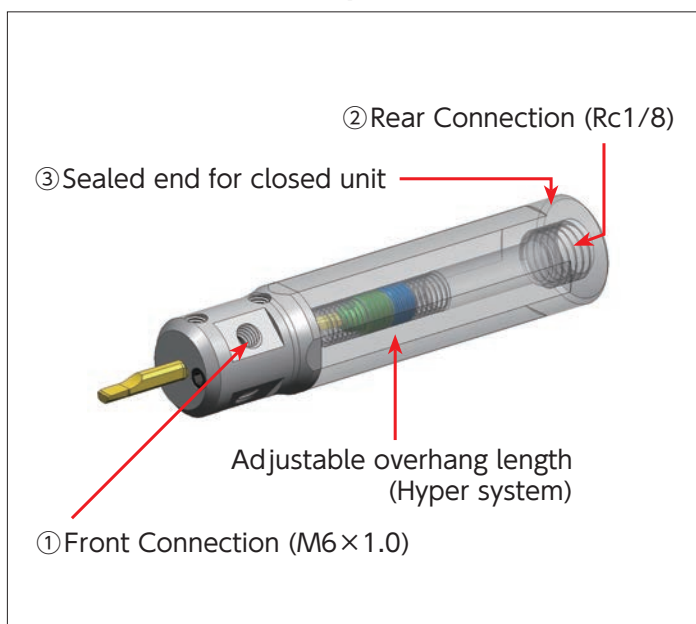
3 coolant connection options



① Front Connection example



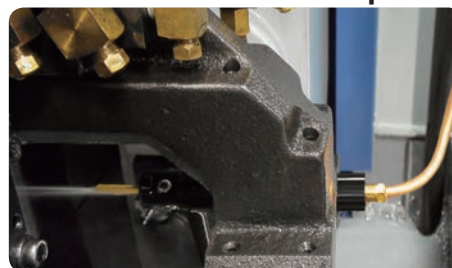② Rear Connection example



STICK DUO SPLASH - Stick Duo Hyper with Coolant through -

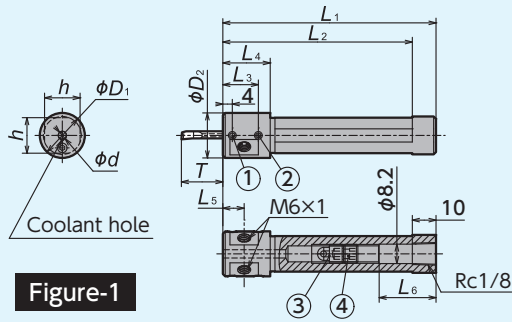


Figure-1


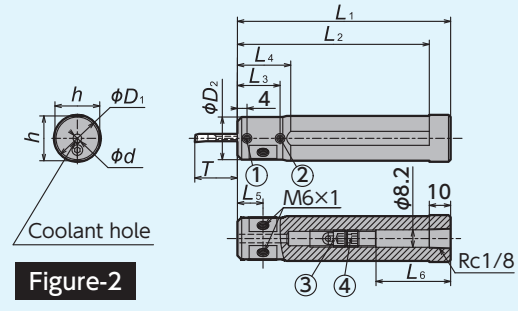


Figure-2

Figure	Code No.	Stock	Item Number	Dimensions (mm)										Overhang Length of Bar T (mm)	
				ϕd	ϕD_1	ϕD_2	h	L_1	L_2	L_3	L_4	L_5	L_6	Min.	Max.
1	5893011	●	HY-NBH02016G-OH	2	16	19	15	90	80	15	19	9.5	29	5	18
	5893029	●	02516G-OH	2.5									30	6.3	19.5
	5893037	●	03016G-OH	3									31	7.5	21
	5893045	●	03516G-OH	3.5						23	8.8	24.5			
	5893052	●	04016G-OH	4						24	10	28			
	5893060	●	05016G-OH	5						16	12.5	35			
2	5893078	●	HY-NBH02019J-OH	2	19.05	19.05	18	110	100	15	—	9.5	49	5	18
	5893086	●	02519J-OH	2.5									50	6.3	19.5
	5893094	●	03019J-OH	3									51	7.5	21
	5893102	●	03519J-OH	3.5						43	8.8	24.5			
	5893136	●	04019J-OH	4						44	10	28			
	5893144	●	05019J-OH	5						36	12.5	35			
	5967922	●	06019J-OH	6	28.5	15	42								
	5893151	●	HY-NBH02020J-OH	2	20	20	19	110	100	15	—	9.5	49	5	18
	5893169	●	02520J-OH	2.5									50	6.3	19.5
	5893177	●	03020J-OH	3									51	7.5	21
	5893185	●	03520J-OH	3.5						43	8.8	24.5			
	5893193	●	04020J-OH	4						44	10	28			
	5893201	●	05020J-OH	5						36	12.5	35			
	5967930	●	06020J-OH	6	28.5	15	42								
	5893219	●	HY-NBH02022X-OH	2	22	20	21	120	110	15	25	9.5	59	5	18
	5893227	●	02522X-OH	2.5									60	6.3	19.5
	5893235	●	03022X-OH	3									61	7.5	21
	5893243	●	03522X-OH	3.5						53	8.8	24.5			
	5893250	●	04022X-OH	4						54	10	28			
	5893268	●	05022X-OH	5						46	12.5	35			
	5967948	●	06022X-OH	6	28.5	15	42								
	5893276	●	HY-NBH02025.0K-OH	2	25.0	20	24	125	115	15	25	9.5	64	5	18
	5893284	●	02525.0K-OH	2.5									65	6.3	19.5
	5893292	●	03025.0K-OH	3									66	7.5	21
	5893300	●	03525.0K-OH	3.5						58	8.8	24.5			
	5893318	●	04025.0K-OH	4						59	10	28			
	5893326	●	05025.0K-OH	5						51	12.5	35			
	5967955	●	06025.0K-OH	6	28.5	15	42								
	5893334	●	HY-NBH02025.4K-OH	2	25.4	20	24	125	115	15	25	9.5	64	5	18
	5893367	●	02525.4K-OH	2.5									65	6.3	19.5
5893375	●	03025.4K-OH	3	66									7.5	21	
5893383	●	03525.4K-OH	3.5	58						8.8	24.5				
5893391	●	04025.4K-OH	4	59						10	28				
5893409	●	05025.4K-OH	5	51						12.5	35				
5967963	●	06025.4K-OH	6	28.5	15	42									


Parts for STICK DUO SPLASH

Item Number	Clamp Screw		Overhang Adjustment		
	①	②	③	④	⑤
HY-NBH ... -OH	SS04045FS	SS0406F	SS0811R-OH	SS0806F-OH (Through hole)	SS0806F
	M6 Screw		Wrench		
	⑥		for ①②	for ③④⑤	for ⑥
	SS0605SC		LW-2	LW-4×104	LW-3

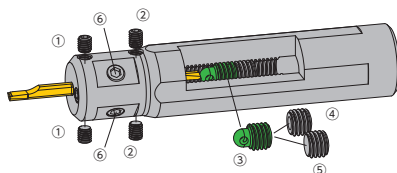

Quick-change Coolant Components

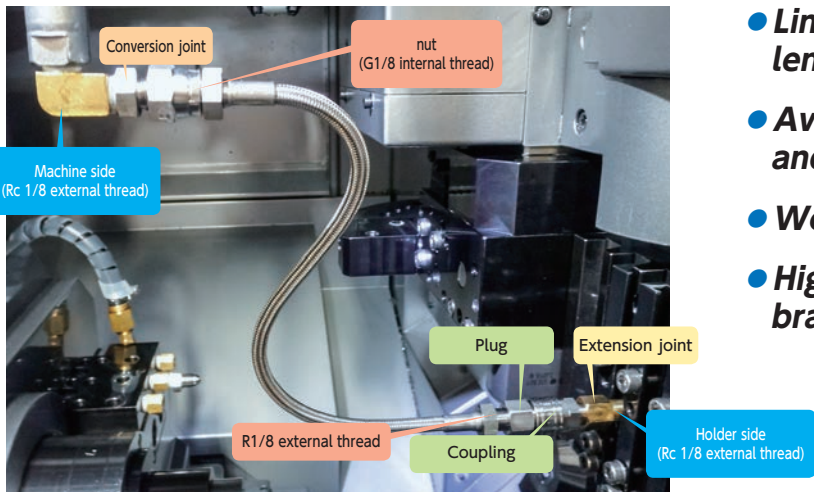Coolant hose for connecting with R1/8




Ex. of connecting ①

- Line up a wide range of coolant hose length
- Available for 2 types of coupling and conversion joint
- Working pressure MAX. 20.6 MPa
- High quality flexible stainless steel braided hose

Ex. of connecting ①

Parts	P/N
Conversion joint	JOINT-ST-R1/8
hose	HOSE-R1/8-CN-400
Plug	PLUG-RC1/8
Coupling	COUP-R1/8
Extension joint	SCJ-R1/8-RC1/8-L

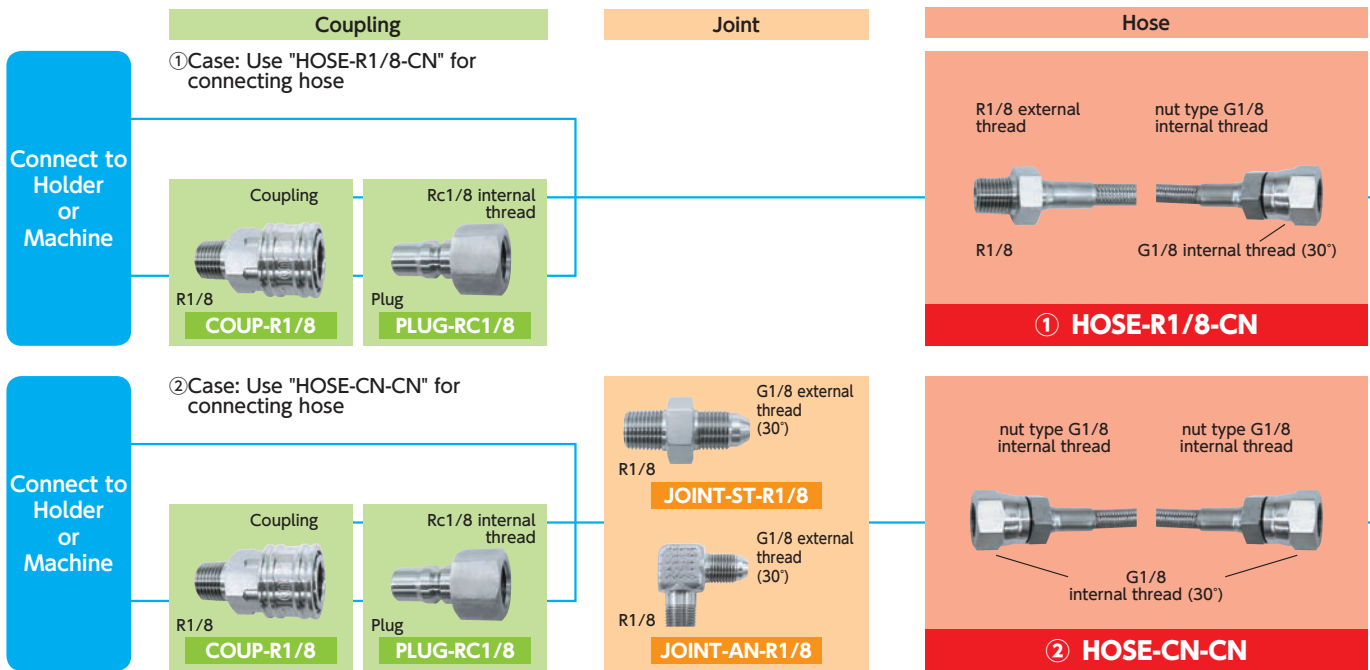Chart for connecting coolant components



Hose

Shape	P/N	Dimensions (mm)		Working pressure MAX.	Working pressure MIN.
		L			
① R1/8 External thread + nut: G1/8 internal thread	HOSE-R1/8-CN-200	200		20.6	50
	HOSE-R1/8-CN-250	250		20.6	50
	HOSE-R1/8-CN-300	300		20.6	50
	HOSE-R1/8-CN-400	400		20.6	50
	HOSE-R1/8-CN-500	500		20.6	50
	HOSE-R1/8-CN-800	800		20.6	50
② Both side: nut G1/8 internal thread	HOSE-CN-CN-200	200		20.6	50
	HOSE-CN-CN-250	250		20.6	50
	HOSE-CN-CN-300	300		20.6	50
	HOSE-CN-CN-400	400		20.6	50
	HOSE-CN-CN-500	500		20.6	50
	HOSE-CN-CN-800	800		20.6	50



R1/8 External thread
Fix by rotating hose



nut G1/8 internal thread
Fix by rotating nut (No need to rotate hose)



Conversion / Extension Joint

	Stock	Spare parts	Dimensions (mm)					
			T ₁	T ₂	L ₁ ※1	L ₂	B	d
	●	SCJ-M6-RC1/8-L	M6	Rc1/8 (PT1/8)	16	15	13	2.5
	●	SCJ-R1/8-M10-L	Rc1/8 (PT1/8)	M10×1	16	12	13	4.5
	●	SCJ-R1/8-RC1/8-L	Rc1/8 (PT1/8)	Rc1/8 (PT1/8)	16	15	13	4.5
	●	SCJ-R1/8-NPT1/8-L	Rc1/8 (PT1/8)	NPT1/8	16	15	13	4.5
	●	SCJ-M6-M10	M6×1	M10×1	6	15	12	2.5
	●	SCJ-M6-RC1/8	M6×1	Rc1/8 (PT1/8)	6	15	13	2.5
	●	SCJ-M6-NPT1/8	M6×1	NPT1/8	6	15	13	2.5
	●	SCJ-M8-RC1/8	M8×1	Rc1/8 (PT1/8)	6	15	13	3.5
	●	SCJ-R1/8-M10	Rc1/8 (PT1/8)	M10×1	10	15	12	4.5
	●	SCJ-R1/8-NPT1/8	Rc1/8 (PT1/8)	NPT1/8	10	15	13	4.5

※1 To prevent hitting the coolant connecting part of holder from the gang tool post, "L1" dimension length is set longer.
NPT: ANSI/ASME B.1.20...1-1983(National Taper Pipe)

Joint

G1/8 external thread (30°) R1/8
JOINT-ST-R1/8

G1/8 external thread (30°) R1/8
JOINT-AN-R1/8

Coupling

Rc1/8 internal thread Plug
PLUG-RC1/8

Coupling R1/8
COUP-R1/8

Connect to Holder or Machine

Suitable use of Coupling and Joint

- Detach Hose frequently
⇒ Coupling is suitable
- Less detach Hose
⇒ Joint is suitable

G1/8 external thread (30°) R1/8
JOINT-ST-R1/8

G1/8 external thread (30°) R1/8
JOINT-AN-R1/8

Rc1/8 internal thread Plug
PLUG-RC1/8

Coupling R1/8
COUP-R1/8

Connect to Holder or Machine

Conversion joint (nut G1/8 internal thread)

Parts	Straight style	L style
P/N	JOINT-ST-R1/8	JOINT-AN-R1/8
Working pressure MAX.	20.6	20.6
Shape		

※Screw standard will be different in both sides of straight and L style screw part. Please use the same screw standard when connecting to hose or one touch coupler.


Coupling

Parts	Plug	Coupling
P/N	PLUG-RC1/8	COUP-R1/8
Working pressure MAX.	7.5	7.5
Shape		

Tool List

Quick-change Coolant Components

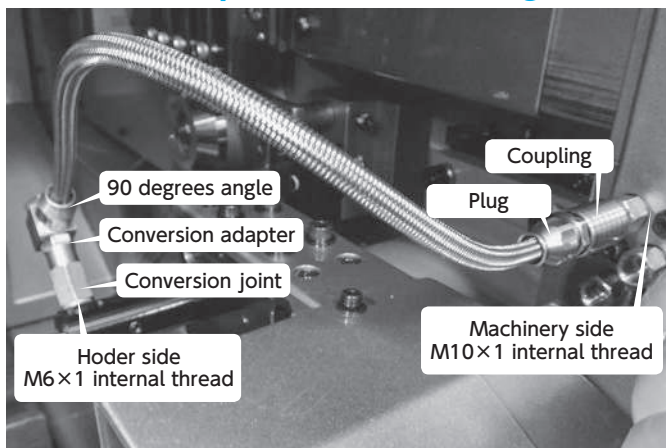Coolant hose by HEB for connecting M10×1, M8×1, G1/8




- Hose length 300mm
- Coupling by HEB
- Working pressure MAX. 20MPa

Ex. of connecting

Parts	P/N
Coupling	COUP-M10*1
Hose	HOSE-AN-M8*1
Conversion adapter	M8×1-M10×1
Conversion joint	SCJ-M6-M10

Ex. of connecting

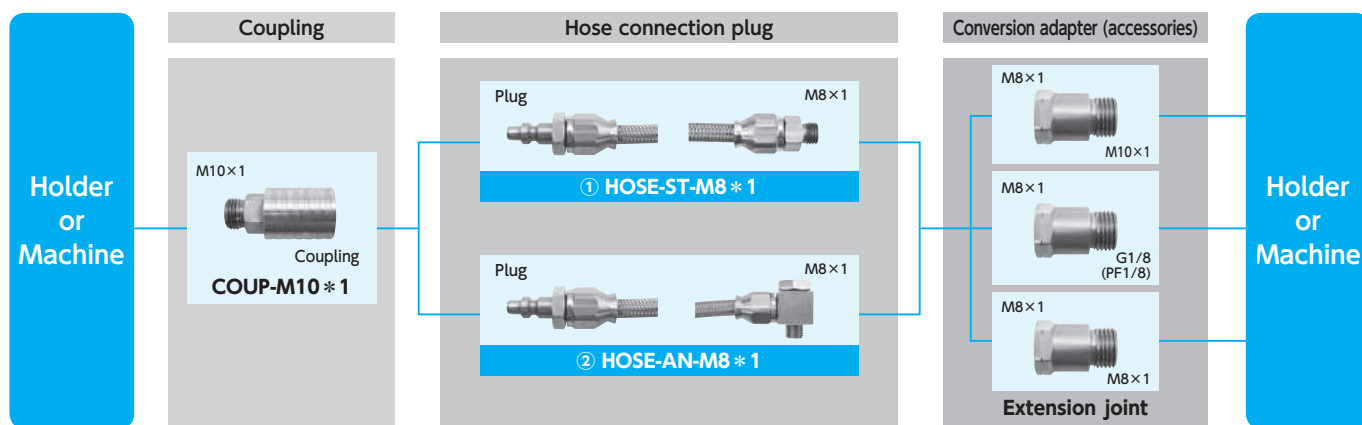
Ex. of coolant hose connection



Hose set with plug

Shape	Code No.	部品品番	Adapter (Th)			Working pressure MAX. (MPa)
			①	②	③	
① Straight type 	5894290	HOSE-ST-M8*1	M10×1	G1/8 (PF1/8)	—	20
② 90 degrees angle type 	5894282	HOSE-AN-M8*1	M10×1	G1/8 (PF1/8)	M8×1	

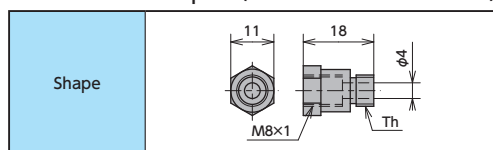Conversion Adapter (Accessories of Hose Set)



Coupling

Parts	Coupling
Part No.	COUP-M10*1
Code No.	5894308

MEMO

NTK

New Products

Tool Materials / Selection Guide

BIDEMCS, PCD, CBN and Ceramics

Micrograin Carbide, PVD Coated Carbide

Insert Item List

General Turning Toolholders

Unique Swiss Tooling

Grooving / Side Turning

Threading

Shaper

ID Tooling

Application Introduction

Endmills

Rotating Tools

Information

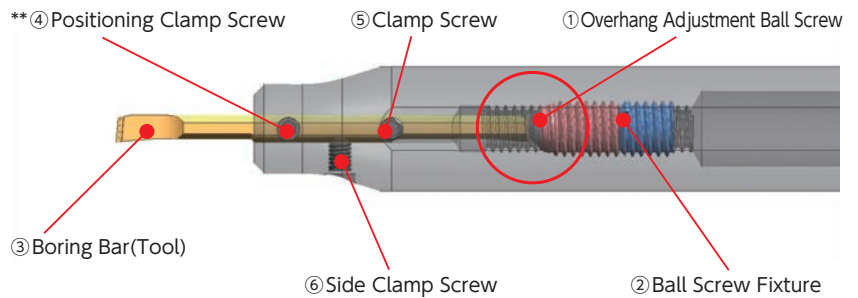
Index

STICK DUO HYPER


- Sleeves for ID Boring with Adjustable Overhang Mechanism -




Can Index boring bars like inserts



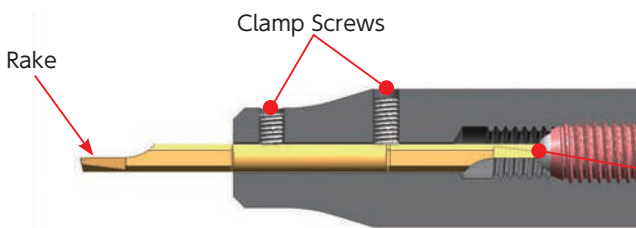Installation Procedure for STICK DUO Hyper



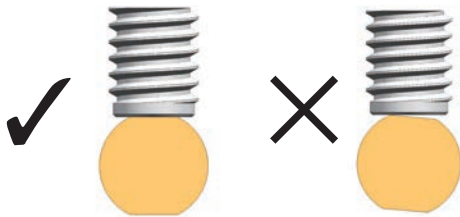Caution: Improper installation dramatically increases the chance of chipping cutting edge




Improper clamping of boring bar causes unstable centerline height and offset

- ① Position the overhang adjustment ball screw to determine overhang amount
- ② Slide the ball screw fixture to secure the ball screw location
- ③ Insert a boring bar (tool)
 - Note: Make sure to insert the boring bar correctly so that the rake face is toward the side where the clamp screws are located
- ④ Secure the boring bar by tightening the positioning clamp screw ▶ Recommended Clamping Torque: 2.0N·m
 - ** Make sure to clamp the boring bar so that the flat surface of the bar makes proper contact with clamp screws
- ⑤ Secure the boring bar by tightening the remaining clamp screws ▶ Recommended Clamping Torque: 2.0N·m
- ⑥ Even if 4 and 5 cannot be performed due to tool clearance and layout, the tool can be used by only securing the side clamp screw

Once the initial setup is complete, repeat the above procedures 3 thru 5 for each index

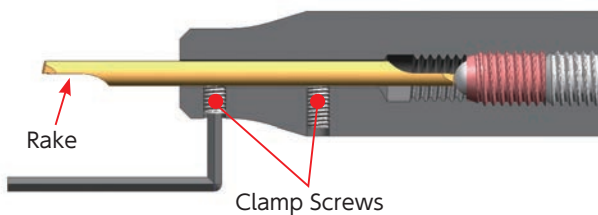
When the tool is installed upside down



Toolholder must be installed so that clamp screws and rake of the tool face toward the same side

STICK DUO HYPER - Sleeves for ID machining -

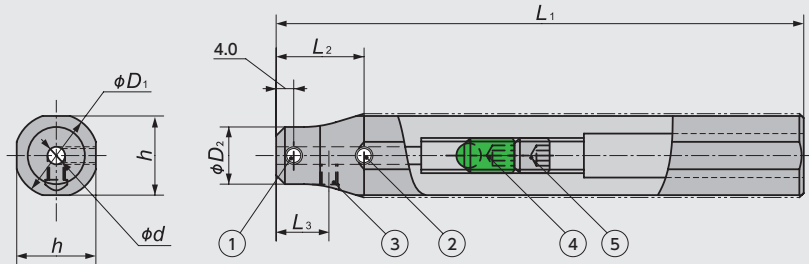HY-NBH



Please refer to ϕd to find correct-size inserts (bars)

Code No.	Item Number	Stock	Dimensions (mm)							Clamp Screw		
			ϕd	ϕD_1	ϕD_2	h	L_1	L_2	L_3	①	②	③
5709894	HY-NBH02016H	●	2.0	16	11	15	100	15	9.5	SS04045FS	SS0406F	SS0404F
5709902	02516H	●	2.5		11.5							
5709910	03016H	●	3.0		12							
5709936	03516H	●	3.5		12.5							
5709944	04016H	●	4.0		13							
5709951	05016H	●	5.0		14							
5709969	HY-NBH02019K	●	2.0	19.05	11	18	125	15	9.5	SS04045FS	SS0406F	SS0404F
5709977	02519K	●	2.5		11.5							
5709985	03019K	●	3.0		12							
5709993	03519K	●	3.5		12.5							
5710009	04019K	●	4.0		13							
5710017	05019K	●	5.0		14							
5712708	HY-NBH02020K	●	2.0	20	11	19	125	15	9.5	SS04045FS	SS0406F	SS0404F
5712716	02520K	●	2.5		11.5							
5712724	03020K	●	3.0		12							
5712740	03520K	●	3.5		12.5							
5712757	04020K	●	4.0		13							
5712765	05020K	●	5.0		14							
5712773	HY-NBH02022K	●	2.0	22	11	21	125	15	9.5	SS04045FS	SS0406F	SS0404F
5712799	02522K	●	2.5		11.5							
5712831	03022K	●	3.0		12							
5712856	03522K	●	3.5		12.5							
5712872	04022K	●	4.0		13							
5712914	05022K	●	5.0		14							
5712732	HY-NBH02025K-MET	●	2.0	25	11	24	125	15	9.5	SS04045FS	SS0406F	SS0404F
5712823	02525K-MET	●	2.5		11.5							
5712849	03025K-MET	●	3.0		12							
5712864	03525K-MET	●	3.5		12.5							
5712898	04025K-MET	●	4.0		13							
5712922	05025K-MET	●	5.0		14							
5713003	HY-NBH02025K	●	2.0	25.4	11	24	125	15	9.5	SS04045FS	SS0406F	SS0404F
5713029	02525K	●	2.5		11.5							
5713045	03025K	●	3.0		12							
5713060	03525K	●	3.5		12.5							
5713086	04025K	●	4.0		13							
5713102	05025K	●	5.0		14							



Spare Parts

Item Number	Overhang Adjustment		Wrench	
	④	⑤	for ①②③	for ④⑤
HY-NBH ... K	SS0812R	SS0808F	LW-2	LW-4×104

Tool List

Bars for STICK DUO SPLASH / STICK DUO HYPER

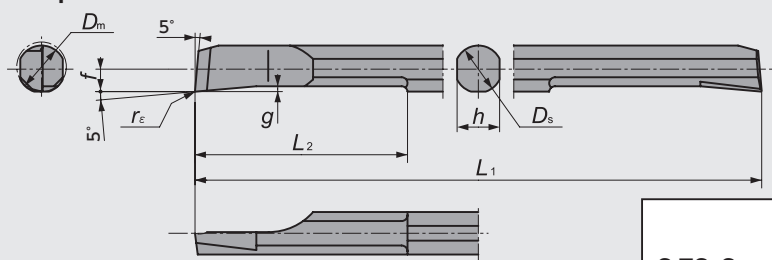SHFS-S Chips can be evacuated forward





S.FS-S type

Chipbreaker for sharp cutting

Figure-1

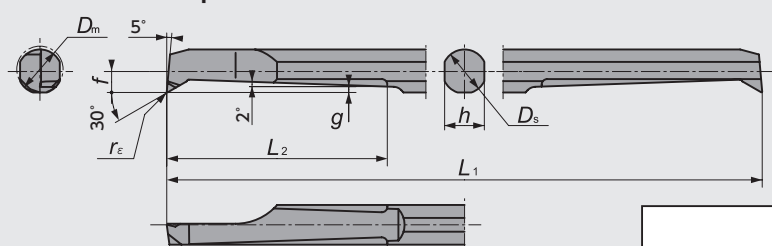SHFB-F Evacuate chips backward



S.FB-F type

Back taper
Wide area of chip pocket

Figure-2

SHFS-H Flat type (without chipbreaker)

Mirror finish




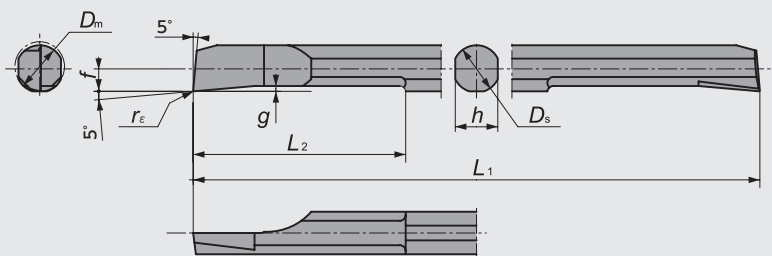


Figure-3

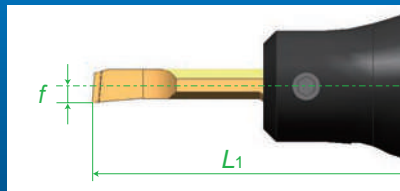
Tolerance of SHFS-S/SHFB-F/SHFS-H bars



Offset f : $\pm 0.015\text{mm}$
Tool Length L_1 : $\pm 0.02\text{mm}$



Centerline Y : $+0.05/-0\text{mm}$

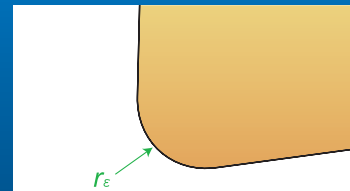

Corner r_ϵ : $\pm 0.015\text{mm}$

Repeatability of (STICK DUO SPLASH) with (SHFS) bars (STICK DUO Hyper) with (SHFB) bars

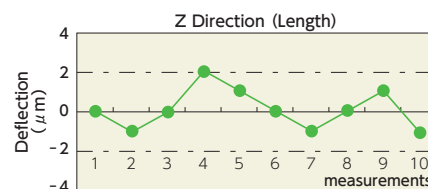
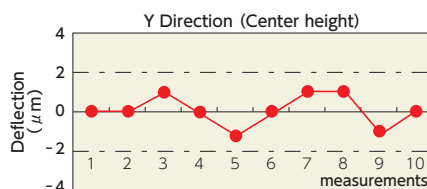
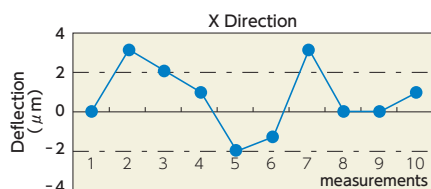













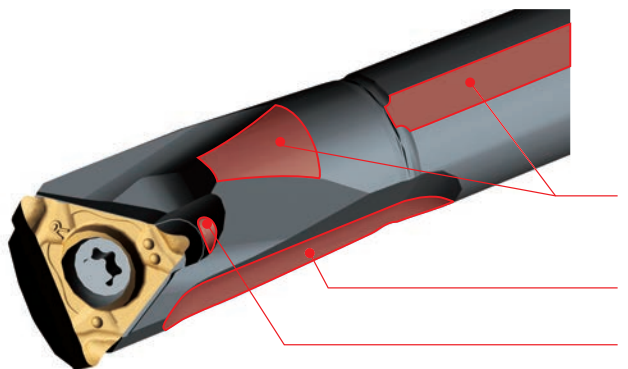
Figure	Item Number	Min Bore Dia. (mm) D_m	Chip-breaker	Dimensions (mm)							PVD Coated Carbide	
				D_s	L_1	L_2	f	h	g	r_e	TM4	Stock
1	SHFS020R005S	2.2	Yes	2	50	10	0.9	1.8	0.25	0.05	5709548	●
	025R005S	2.7		2.5	50	12.5	1.15	2.3	0.30	0.05	5709563	●
	025R015S									0.15	5709571	●
	030R005S	3.2		3	50	15	1.4	2.7	0.40	0.05	5709589	●
	030R015S									0.15	5709597	●
	035R005S	3.7		3.5	60	17.5	1.65	3.2	0.40	0.05	5709605	●
	035R015S									0.15	5709613	●
	040R005S	4.2		4	60	20	1.9	3.6	0.45	0.05	5709621	●
	040R015S									0.15	5709639	●
	050R005S	5.2		5	70	25	2.4	4.5	0.50	0.05	5709647	●
050R015S	0.15		5709654							●		
2	SHFB020R005F	2.2	Yes	2	50	8	0.95	1.8	0.25	0.05	5709779	●
	025R005F	2.7		2.5	50	12.5	1.2	2.3	0.30	0.05	5709787	●
	025R015F									0.15	5709795	●
	030R005F	3.2		3	50	15	1.4	2.7	0.45	0.05	5709803	●
	030R015F									0.15	5709811	●
	035R005F	3.7		3.5	60	17.5	1.65	3.2	0.50	0.05	5709829	●
	035R015F									0.15	5709837	●
	040R005F	4.2		4	60	20	1.9	3.6	0.50	0.05	5709845	●
	040R015F									0.15	5709852	●
	050R005F	5.2		5	70	25	2.4	4.5	0.70	0.05	5709860	●
050R015F	0.15		5709878							●		
3	SHFS020R005H 	2.2	No	2	50	10	0.9	1.8	0.25	0.05	5709662	●
	025R005H 	2.7		2.5	50	12.5	1.15	2.3	0.30	0.05	5709670	●
	025R015H 									0.15	5709688	●
	030R005H 	3.2		3	50	15	1.4	2.7	0.40	0.05	5709696	●
	030R015H 									0.15	5709704	●
	035R005H 	3.7		3.5	60	17.5	1.65	3.2	0.40	0.05	5709712	●
	035R015H 									0.15	5709720	●
	040R005H 	4.2		4	60	20	1.9	3.6	0.45	0.05	5709738	●
	040R015H 									0.15	5709746	●
	050R005H 	5.2		5	70	25	2.4	4.5	0.50	0.05	5709753	●
050R015H 	0.15		5709761							●		

※Caution: Due to the tolerance, it might not fit into the holder which is made by other company.

- New Products
- Tool Materials / Selection Guide
- PCD, CBN and Ceramics
- Micrograin Carbide, BIDE/MCS, PCD
- PVD Coated Carbide
- Insert Item List
- General Turning Toolholders
- General Turning Toolholders
- Unique Swiss Tooling
- Grooving / Side Turning
- Threading
- Shaper
- ID Tooling
- Application Introduction
- Endmills
- Rotating Tools
- Information
- Index

Mogul Bar

High rigidity boring bars



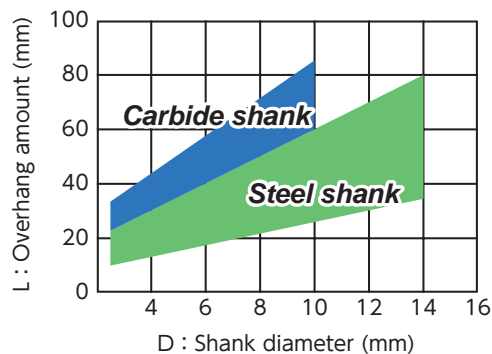
Features

- **High rigidity + Minimal flat widths**
Reduce vibration
- **Large clearance for improved chip evacuation**
- **All Mogul Bar boring bars are coolant through**

Recommended amount of overhang

Steel Shank $L/D \leq 5$

Carbide Shank $L/D \leq 7$




L : Overhang
D : Shank diameter

[Cutting condition example]

Work materials: Alloy steel, stainless

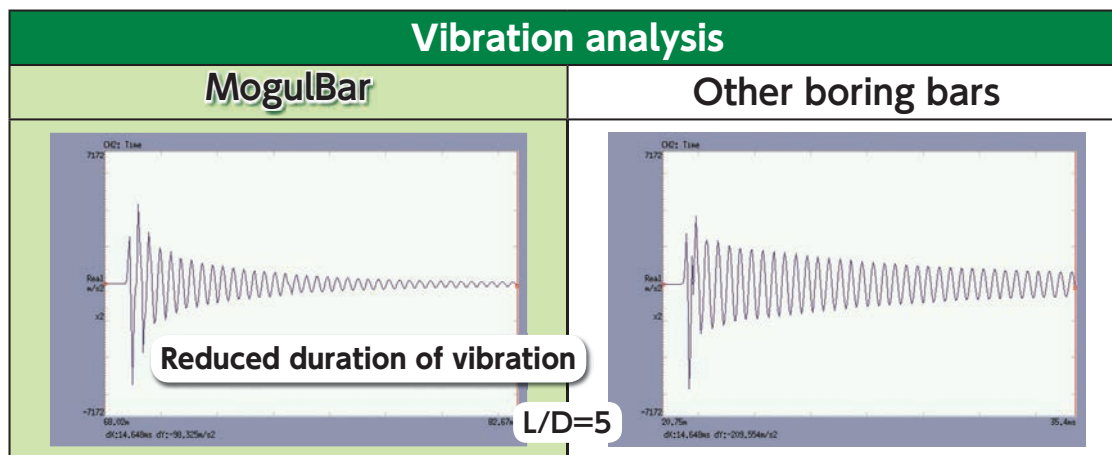$V_c=80\text{m/min}$ $f=0.05 \sim 0.1\text{mm/rev}$ $a_p=0.1 \sim 0.5\text{mm(DOC)}$ WET



Note: Assuming a 100N load is applied. An equal amount of force was applied to both bars for vibration analysis.

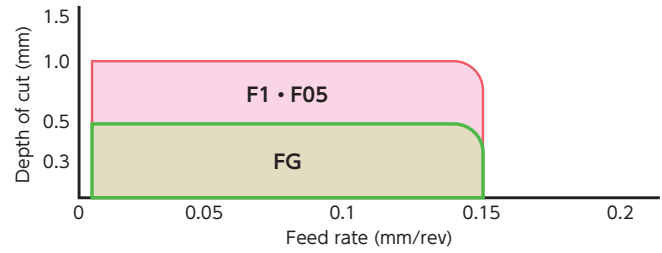
Boring bar used in above analysis: S08H-STUPR09D10-OH

F Chipbreakers - Evacuate chips BACKWARD

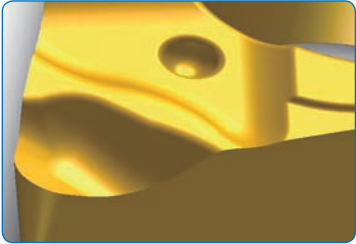







- F chipbreakers allow chips to evacuate backward
- Combination of the F-chipbreakers and Mogul Bar delivers the best performance



Recommended Cutting Condition Range





F Chipbreakers - Features

	DOC (mm)	Feed(mm/rev)	
		0.05	0.1
FG Chipbreaker <ul style="list-style-type: none"> ● Best for finishing ● Works for small DOC (0.5mm or less) ● High rake angle 	0.1		
	0.3		
F1/F05 Chipbreakers <ul style="list-style-type: none"> ● Cover wide condition range ● Ground chipbreaker 	0.5		
Note: Right-hand inserts with FG and F1 chipbreakers should be used with right-hand holders		[Cutting condition example] SCM435 Diameter : ϕ 12.0 $V_c=80\text{m/min}$ Depth of Bore : 20mm Wet Holder : S10K-STUPR11D12-OH Insert : TPGH110304	



Tool List

Mogul Bar for 75° Diamond (MBL style)

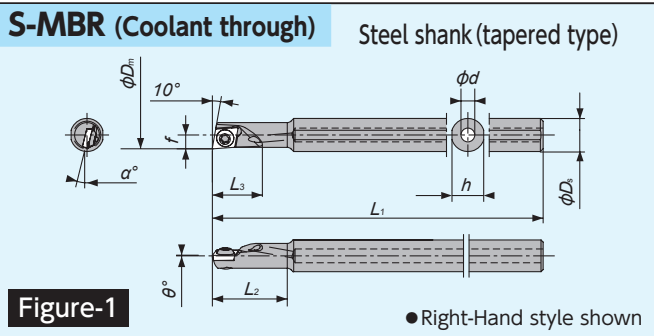Minimum Bore Diameter 5.0mm



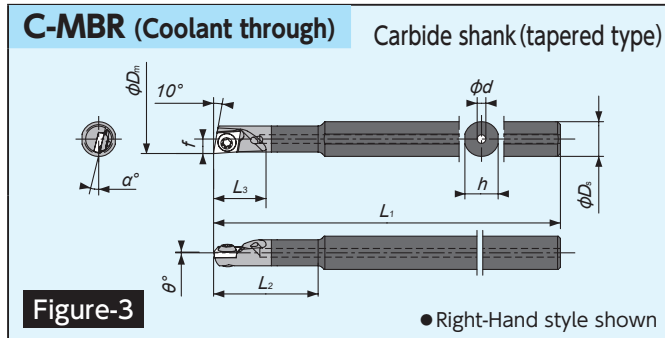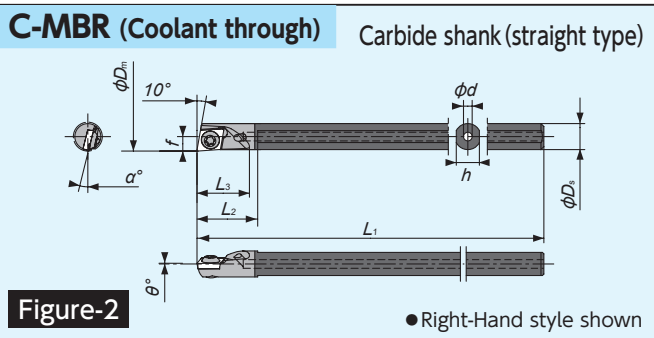
F1 chipbreakers evacuates chips BACKWARD (S-STUC style shown)



MBL style - Toolholders

Figure	Code No.	Item Number	Stock	Min Bore Dia. (mm) D_m	Dimensions (mm)								Std. corner radius (mm) r_ϵ	Gage insert	Spare Parts		
					ϕD_s	h	L_1	f	L_2	L_3	ϕd	θ			α	Clamp Screw	Wrench
1	5789888	S06F-MBRD05-OH	●	5.0	6.0	5.7				13.5		2.5			MBL	LR-5-2*3.5	CLR-13S
2	5789896	C045F-MBRD05-OH	●		4.5	4.0	80	2.5	-	9.0		1.5	0° -13°	0.15			
3	5789904	C06F-MBRD05-OH	●		6.0	5.7											

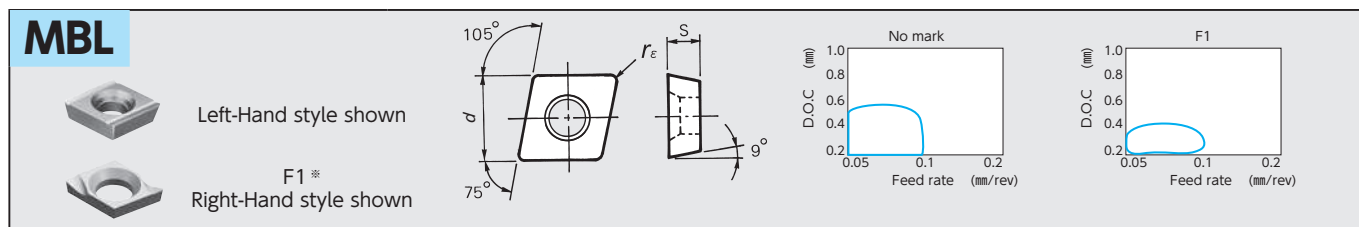MBL style - Insert



Item Number	Dimensions (mm)			PVD Coated Carbide							
	d	s	r_ϵ	ST4	Stock	ZM3	Stock	TM4	Stock	QM3	Stock
MBL005FL	3.6	1.0	0.05			5161252	●	5696018	●	5036884	●
MBL015FL			0.15			5161245	●	5696026	●	5168000	●
MBL005FRF1*	3.6	1.0	0.05	5038872	●			5789763	●	5036892	●
MBL015FRF1*			0.15	5038955	●			5789771	●	5933858	●

*F1 chipbreaker, right-hand inserts fit to right-hand toolholder
Note : F1 chipbreaker evacuates chips BACKWARD

Standard Bar for 75° Diamond (MBL style) Minimum Bore Diameter 5.0mm

C-MBR

Carbide shank (straight type)


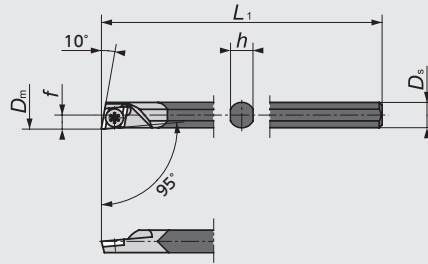


Figure-1



● Right-Hand style shown

C-MBR

Carbide shank (tapered type)


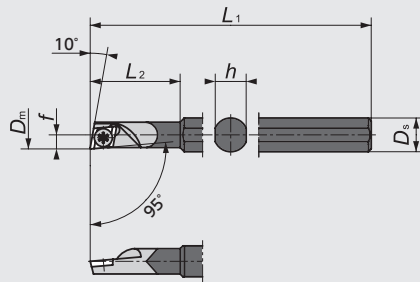


Figure-2



● Right-Hand style shown

C-MSBR

Carbide shank (straight type)


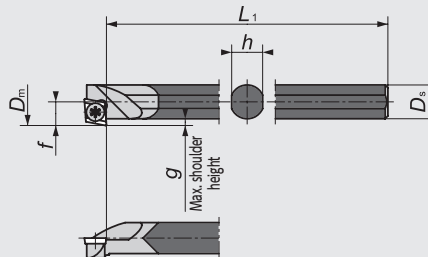


Figure-3



● Right-Hand style shown


MBL style - Toolholders

Figure	Code No.	Item Number	Stock	Min Bore Dia. (mm) D_m	Max. shoulder height (mm) g	Dimensions (mm)※					Gage insert	Spare Parts	
						D_s	h	L_1	f	L_2		Clamp Screw	Wrench
1	5610175	C045F-MBR	●	5.0	—	4.5	4.0	80	2.5	—	MBL	LR-S-2 * 3.5	CLR-13S
2	5162706	C06F-MBR	●	5.0	—	6.0	5.5	80	2.5	18			
3	5161054	C04J-MSBR	●	5.7	1.0	4.0	3.5	110	3.2	—			
	5161047	C06J-MSBR	●	7.7		6.0	5.5		4.2	—			

* Std. corner radius $r_\epsilon = 0.15\text{mm}$

MBL style - Insert




MBL



Left-Hand style shown

Right-Hand style shown

F1※



Item Number	Dimensions (mm)			PVD Coated Carbide							
	d	s	r_ϵ	ST4	Stock	ZM3	Stock	TM4	Stock	QM3	Stock
MBL005FL	3.6	1.0	0.05			5161252	●	5696018	●	5036884	●
MBL015FL			0.15			5161245	●	5696026	●	5168000	●
MBL005FRF1※	3.6	1.0	0.05	5038872	●			5789763	●	5036892	●
MBL015FRF1※			0.15	5038955	●			5789771	●	5933858	●

※F1 chipbreaker, right-hand inserts fit to right-hand toolholder
Note : F1 chipbreaker evacuates chips BACKWARD

Mogul Bar for 75° Diamond (ERGP style)

Minimum Bore Diameter 6.0mm

S-SEXR (Coolant through)

Steel shank
(tapered type)

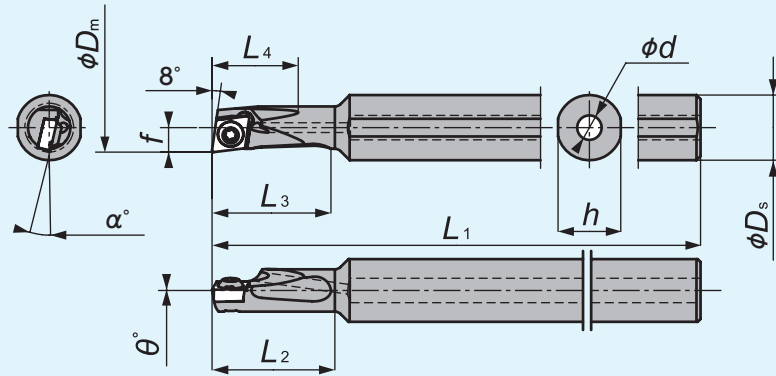


Figure-1

● Right-Hand style shown

C-SEXR (Coolant through)

Carbide shank
(straight type)

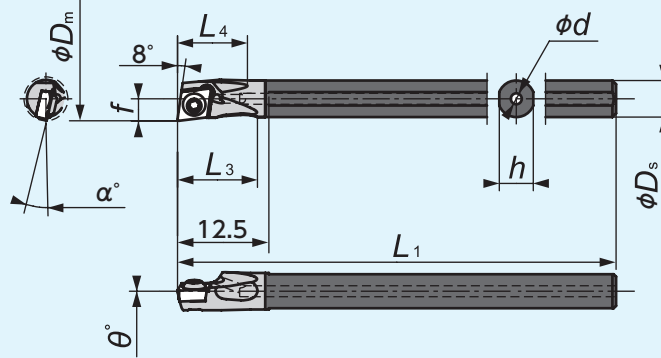


Figure-2

● Right-Hand style shown

C-SEXR (Coolant through)

Carbide shank
(tapered type)

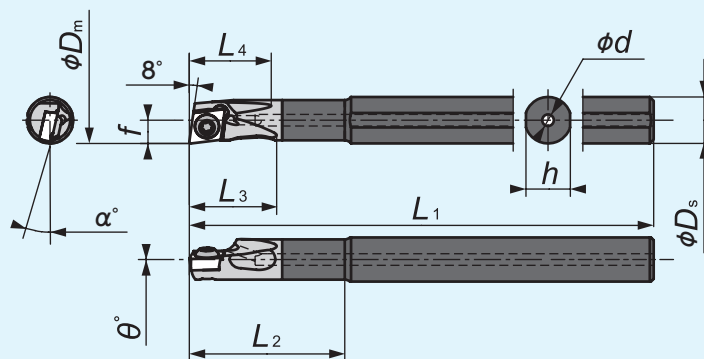


Figure-3

● Right-Hand style shown

Tool List

Mogul Bar for 80° Diamond (CC/CP style)

Minimum Bore Diameter 7.0mm

S-SCLP (C) (Coolant through)

Steel shank

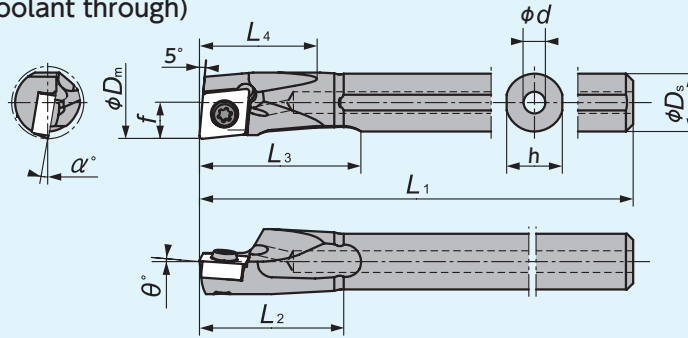


Figure-1

● Right-Hand style shown

C-SCLP (C) (Coolant through)

Carbide shank

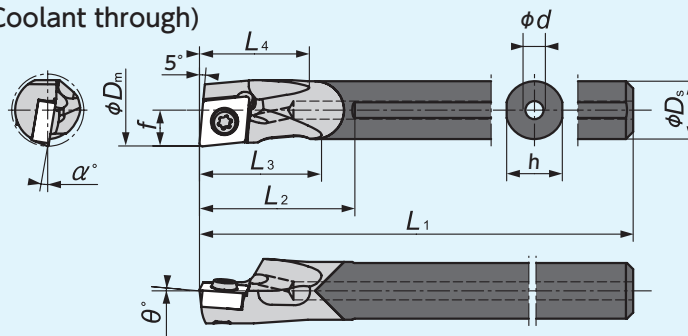


Figure-2

● Right-Hand style shown

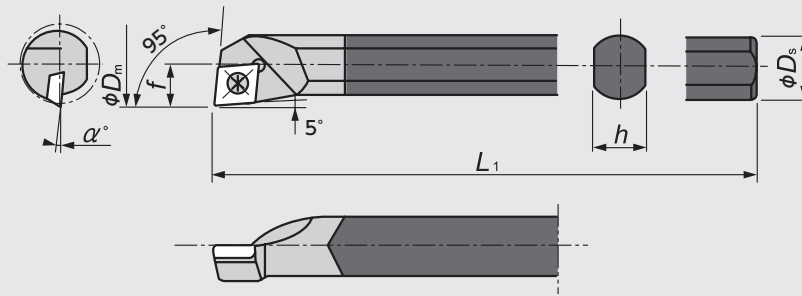
CC/CP style - Toolholders

Figure	Code No.		Item Number	Stock		Min Bore Dia. (mm) ϕD_m	Dimensions (mm)										Std. corner radius (mm)	Gage insert	Spare Parts	
	R	L		R	L		ϕD_s	h	L_1	f	L_2	L_3	L_4	ϕd	θ	α			Clamp Screw	Wrench
1	5770029		S06F-SCLP $\frac{R}{L}$ 04D07-OH	●		7.0	6.0	5.75	80	3.5	14	17	12	2.5		-9°	0.2	CPOO0401 E41	LR-S-2*3.7	CLR-13S (A)
	5770037		S07G-SCLP $\frac{R}{L}$ 04D08-OH	●		8.0	7.0	6.75	90	4.0	16	19.5	13.5	3.0	+5°	-7°				
	5770045		S08H-SCLP $\frac{R}{L}$ 06D10-OH	●		10.0	8.0	7.7	100	5.0	20	22	16	3.0		-10°	0.4	CPOO0602 E41	LR-S-2.5*6	CLR-15S (A)
	5770052		S08H-SCLC $\frac{R}{L}$ 06D10-OH	●		10.0	8.0	7.7	100	5.0	20	22	16	3.0		-13°	0.4	CCOO0602 E39~40	LRIS-2.5*5	CLR-15S (A)
	5770060		S10K-SCLC $\frac{R}{L}$ 06D12-OH	●		12.0	10.0	9.6	125	6.0	24	27.5	20	3.5		-11°				
	5770078		S12M-SCLC $\frac{R}{L}$ 06D14-OH	●		14.0	12.0	11.5	150	7.0	28	32.5	23	4.0	0°	-9°				
	5770086		S16Q-SCLC $\frac{R}{L}$ 09D18-OH	●		18.0	16.0	15.4	180	9.0	36	42.5	30	5.0		-10°		CCOO09T3 E39~40	LRIS-4*8	LLR-25S-20*6.5 (B)
2	5770136		C06H-SCLP $\frac{R}{L}$ 04D07-OH	●	●	7.0	6.0	5.75	100	3.5	15.5	11.5	12	2.0		-9°	0.2	CPOO0401 E41	LR-S-2*3.7	CLR-13S (A)
	5800495		C07J-SCLP $\frac{R}{L}$ 04D08-OH	●		8.0	7.0	6.75	110	4.0	17.5	13	13.5	2.0	+5°	-7°				
	5770169		C08K-SCLP $\frac{R}{L}$ 06D10-OH	●	●	10.0	8.0	7.7	125	5.0	21.5	16.5	15	2.5		-10°	0.4	CPOO0602 E41	LR-S-2.5*6	CLR-15S (A)
	5800503		C08K-SCLC $\frac{R}{L}$ 06D10-OH	●		10.0	8.0	7.7	125	5.0	21.5	16.5	15	2.5		-13°	0.4	CCOO0602 E39~40	LRIS-2.5*5	CLR-15S (A)
	5770185		C10M-SCLC $\frac{R}{L}$ 06D12-OH	●	●	12.0	10.0	9.6	150	6.0	25	20	19.5	2.5	0°	-11°				
	5770193		C12M-SCLC $\frac{R}{L}$ 06D14-OH	●		14.0	12.0	11.5	150	7.0	29	23.5	22.5	3.0		-9°				
	5800511		C12M-SCLC $\frac{R}{L}$ 06D14-OH	●		14.0	12.0	11.5	150	7.0	29	23.5	22.5	3.0		-9°				
5770201		C12M-SCLC $\frac{R}{L}$ 06D14-OH	●		14.0	12.0	11.5	150	7.0	29	23.5	22.5	3.0		-9°					

Standard Bar for 80° Diamond (CP style) Minimum Bore Diameter 8.0mm





C-SCLP

Carbide shank



● Right-Hand style shown

CP style - Toolholders

Code No.	Item Number	Stock	Min Bore Dia. (mm) ϕD_m	Dimensions (mm)							Gage insert 	Spare Parts	
				ϕD_s	h	b	L_1	f	L_2	α		Clamp Screw 	Wrench (A)  (B) 
5853288	C06J-SCLPR-04-N	●	8.0	6.0	5.2		110	4.0		-6°	CP000401 E41	LR-S-2*4.4	CLR-13S (A)
5853296	C08K-SCLPR-06-N	●	10.0	8.0	7.0	—	125	5.0	—	-10°	CP000602 E41	LR-S-2.5*5.5	CLR-15S (A)
5853304	C10M-SCLPR-08-N	●	12.0	10.0	9.0		150	6.0		-6°	CPGH0802 E41	LR-S-3*6.2	RLR-20S (B)

Tool List

Mogul Bar for 60° Triangle (TC/TP style)

Minimum Bore Diameter 8.0mm

S-STUC (P) (Coolant through)

Steel shank


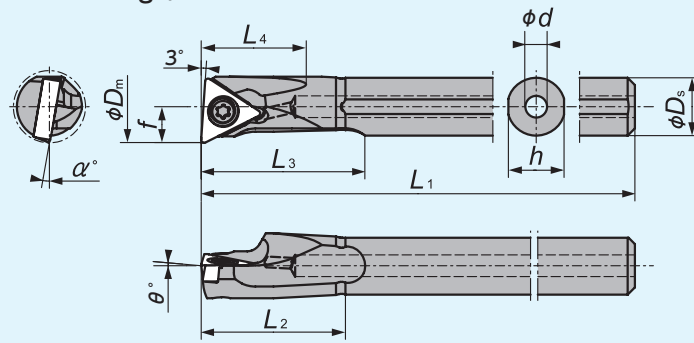


Figure-1

● Right-Hand style shown

C-STUC (P) (Coolant through)

Carbide shank


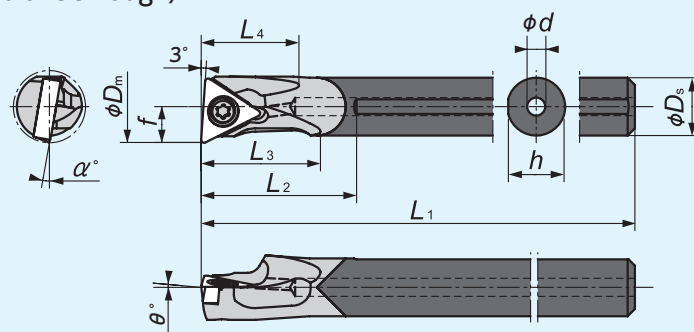


Figure-2

● Right-Hand style shown

TC/TP style - Toolholders


Figure	Code No.		Item Number	Stock		Min Bore Dia. (mm)	Dimensions (mm)										Std. corner radius (mm)	Gage insert	Spare Parts	
	R	L		R	L		ϕD_m	ϕD_s	h	L_1	f	L_2	L_3	L_4	ϕd	θ			α	Clamp Screw
1	5769971		S07G-STUC $\frac{1}{2}$ L06D08-OH	●		8.0	7.0	6.75	90	4.0	16.0	19.5	12.5	2.5	0°	-11°	0.2	TC $\circ\circ$ 0601 E46	LR-S-2*4.4	CLR-13S (A)
	5769989		S08H-STUP $\frac{1}{2}$ L09D10-OH	●		10.0	8.0	7.7	100	5.0	20.0	22.5	14.5	3.0		-10°		TP $\circ\circ$ 0902 E32~33.47	LR-S-2.5*4.8	CLR-15S (A)
	5769997		S10K-STUP $\frac{1}{2}$ L11D12-OH	●		12.0	10.0	9.6	125	6.0	24.0	27.5	18.5	3.5		-7.5°		TP $\circ\circ$ 1103 E32~33.47	LR-S-3*5.8	RLR-20S (B)
	5770003		S12M-STUP $\frac{1}{2}$ L11D14-OH	●		14.0	12.0	11.5	150	7.0	28.0	32.5	22	4.0	+5°	-5°	0.4			
	5770011		S16Q-STUP $\frac{1}{2}$ L11D18-OH	●		18.0	16.0	15.4	180	9.0	32.0	42.5	28.5	5.0		-3°				
	5886817		S20Q-STUPR11D22-OH	●		22.0	20.0	19.4	180	11	40	46	38	5.0		-3°				
2	5770094 (R)		C07J-STUC $\frac{1}{2}$ L06D08-OH	●	●	8.0	7.0	6.75	110	4.0	17.5	13.0	12.5	2.0	0°	-11°	0.2	TC $\circ\circ$ 0601 E46	LR-S-2*4.4	CLR-13S (A)
	5800529 (L)																			
	5770102 (R)		C08K-STUP $\frac{1}{2}$ L09D10-OH	●	●	10.0	8.0	7.7	125	5.0	21.5	16.5	14.5	2.5		-10°		TP $\circ\circ$ 0902 E32~33.47	LR-S-2.5*4.8	CLR-15S (A)
	5800537 (L)																			
	5770110 (R)		C10M-STUP $\frac{1}{2}$ L11D12-OH	●	●	12.0	10.0	9.6	150	6.0	25.0	20.0	17.5	2.5	+5°	-7.5°	0.4	TP $\circ\circ$ 1103 E32~33.47	LR-S-3*5.8	RLR-20S (B)
	5800545 (L)																			
	5770128		C12M-STUP $\frac{1}{2}$ L11D14-OH	●		14.0	12.0	11.5	150	7.0	29.0	23.0	21.5	3.0		-5°				
5821814		C16Q-STUP $\frac{1}{2}$ L11D18-OH	●		18.0	16.0	15.4	180	9.0	37.0	29.0	28.0	4.0		-3°					

Standard Bar for 60° Triangle (TC/TP style)

Minimum Bore Diameter 8.0mm

C-STUC(P)

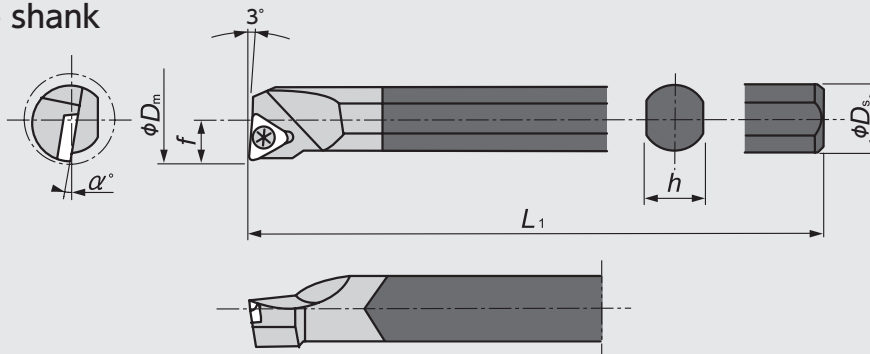Carbide shank



● Right-Hand style shown

TC/TP style - Toolholders



Code No.	Item Number	Stock	Min Bore Dia. (mm) ϕD_m	Dimensions (mm)*								Gage insert	Spare Parts	
				ϕD_s	h	b	L_1	f	L_2	g	α		Clamp Screw	Wrench
R		R												
5853247	C06J-STUCR-06-N	●	8.0	6.0	5.2		110	4.0			-10°	TC○○0601 E46	LR-S-2*3.7	CLR-13S
5853262	C08K-STUPR-08-N	●	10.0	8.0	7.0	—	125	5.0	—	—	-10°	TP○○0802 E47	LR-S-2*5.5	
5853270	C10M-STUPR-09-N	●	12.0	10.0	9.0		150	6.0			-7°	TP○○0902 E32~33•47	LR-S-2.5*6	CLR-15S

* Std. corner radius $r_e=0.2\text{mm}$

Anti-vibration boring bar for internal backturning "C-STZP" type

Prevent chattering with higher rigidity toolholder design
Higher rigidity toolholder offers max. machining length L/D ≤ 7

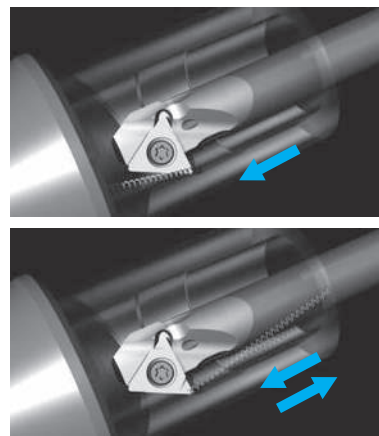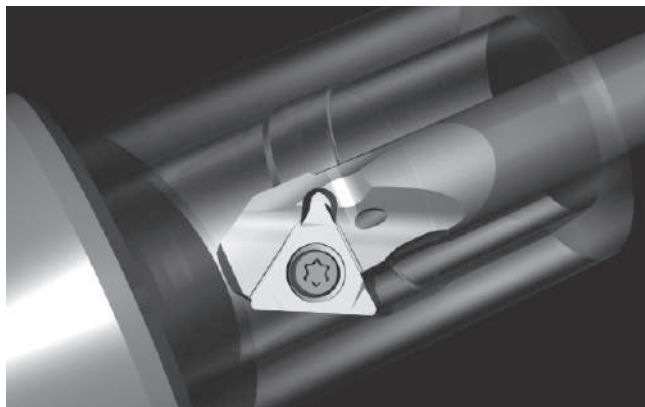Both machining directions are available





Mogul Bar for 60° Triangle (TC/TP style)

Minimum Bore Diameter 10.0mm

C-STZP (C)

(Coolant through)

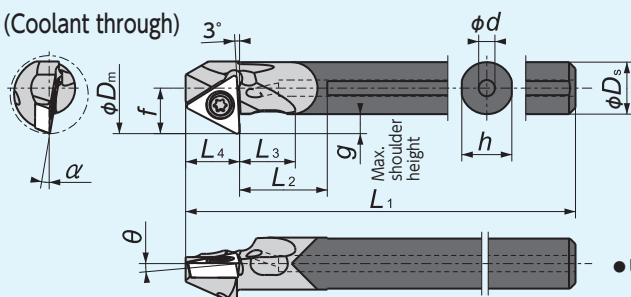Carbide shank



● Right-Hand style shown

- Use right-hand inserts for machining backward
- Use left-hand inserts for machining forward



Figure-1

Standard Bar for 60° Triangle (TC/TP style)

Minimum Bore Diameter 10.0mm

B-STZ

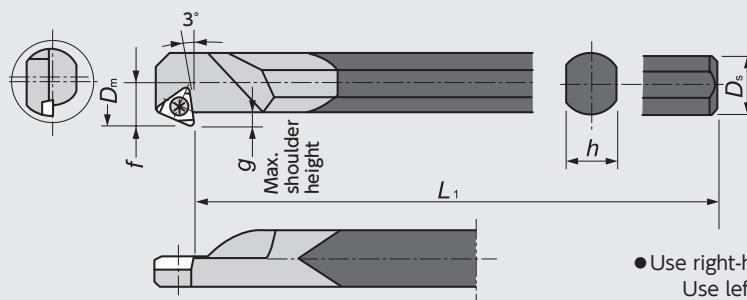Carbide shank



● Right-Hand style shown


- Use right-hand inserts for machining backward
- Use left-hand inserts for machining forward

Figure-2

TC/TP style - Toolholders

Figure	Code No.	Item Number	Stock	Min Bore Dia. (mm) ϕD_m	Max. shoulder height (mm) g	Dimensions (mm)										Std. corner radius (mm)	Gage insert	Spare Parts	
						ϕD_s	h	L ₁	f	L ₂	L ₃	L ₄	ϕd	θ	α			Clamp Screw	Wrench
1	5842851	C06H-STZCR06D10-OH	●	10.0	2.5	6.0	5.8	100	5.5	10.5	6	6	2.0	0°	-10°	0.2	TC000601 E46	LR-S-2*4.4	CLR-13S
	5842869	C08K-STZPRO9D12-OH	●	12.0	3.0	8.0	7.7	125	7.0	13.5	8.5	8.3	2.5	+5°	-10°	0.4	TPO00902 E32~33*47	LR-S-2.5*4.8	CLR-15S
	5842877	C10M-STZPRO9D14-OH	●	14.0		10.0	9.6	150	8.0	18.5	12	8.3	2.5		-7°				
	5842885	C12N-STZPR11D175-OH	●	17.5	4.5	12.0	11.5	150	10.5	22	14.5	9.6	3.0	-5°		TPO01103 E32~33*47	LR-S-3*5.8	RLR-20S	
2	5852819	B06J-STZCR-06-N	●	10.0	2.5	6.0	5.2	110	5.5							0.2	TC000601 E46	LR-S-2*4.4	CLR-13S
	5852801	B12Q-STZPR-09-N	●	16.0	3.0	12.0	11.0	180	9.0							0.2	TPO00902 E32~33*47	LR-S-2.5*6.8	CLR-15S

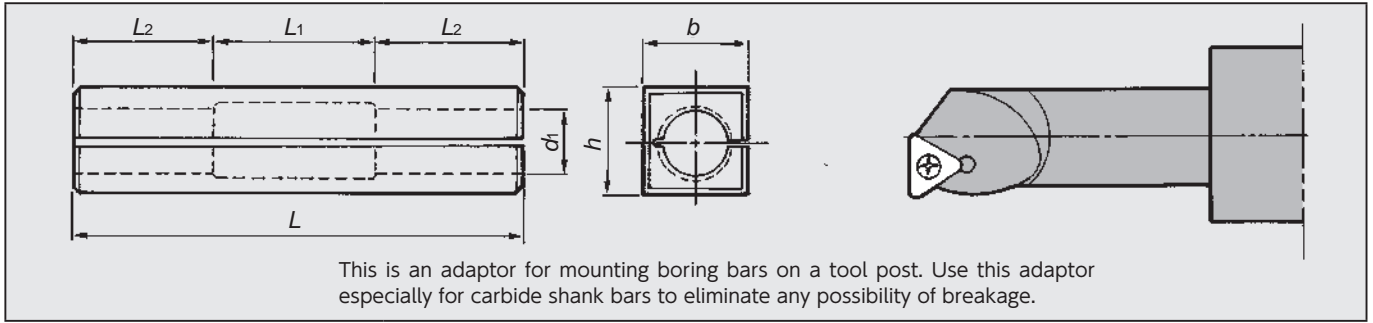Boring bar adaptors.



Code No.	Adaptor P/N	Stock	Dimensions (mm)						Applicable holder
			h_1	b	L	L_1	L_2	d_1	
5764204	S06-H	●	20	20	60	20	20	6	For shank of $\phi 6$
5580717	S08-H	●	20	20	60	20	20	8	For shank of $\phi 8$
5632286	S10-H	●	20	20	60	20	20	10	For shank of $\phi 10$
5758198	S12-H	●	25	25	70	20	25	12	For shank of $\phi 12$

Tool List

Multi-Clamp Toolholders for CN..Inserts

Minimum Bore Diameter 33.0mm

S-TCLN


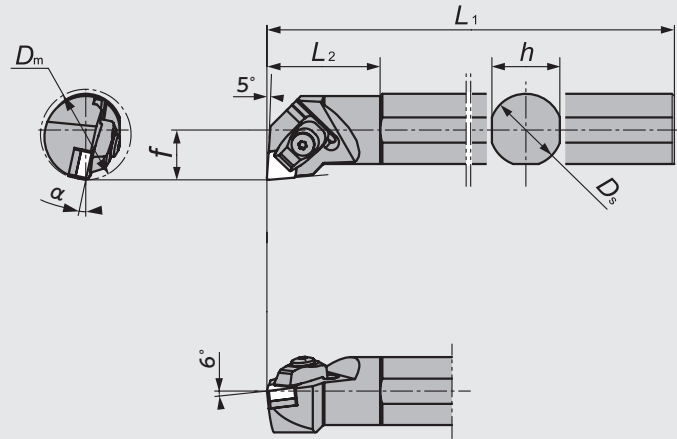
Clamp-on

S-WCLN

Double-Clamp

S-HCLN

Dimple-Clamp



● Right-Hand style shown

CN..Inserts - Toolholders

Code No.		Item Number	Stock		Min Bore Dia. (mm)	Dimensions (mm) *						Clamp	Shim	Clamp Screw	Shim Screw	Wrench (for Clamp Screw)	Wrench (for Shim Screw)	Spring
R	L		R	L		D _s	h	L ₁	f	L ₂	α							
5701685	5701693	S25R-TCLN $\frac{R}{L}$ 12	●	●	33	25	24	200	17	40	14	TC6CN Clamp-on	ACN423	A0S-6 * 26W	FSS16-3.0 * 8	LLR-T20	LLR-T10	ASGL6-D
5701701	5701719	S32S-TCLN $\frac{R}{L}$ 12	●	●	40	32	30	250	22	50	12							
5701727	5701735	S40T-TCLN $\frac{R}{L}$ 12	●	●	50	40	38	300	27	60	10							
5701743	5701750	S50U-TCLN $\frac{R}{L}$ 12	●	●	63	50	47	350	35	65	8							
5682646	5682653	S25R-WCLN $\frac{R}{L}$ 12	●	●	33	25	24	200	17	40	14	DC6CN Double-Clamp	ACN423	A0S-6 * 26W	FSS16-3.0 * 8	LLR-T20	LLR-T10	ASGL6-D
5682661	5682679	S32S-WCLN $\frac{R}{L}$ 12	●	●	40	32	30	250	22	50	12							
5682687	5682695	S40T-WCLN $\frac{R}{L}$ 12	●	●	50	40	38	300	27	60	10							
5682703	5682711	S50U-WCLN $\frac{R}{L}$ 12	●	●	63	50	47	350	35	65	8							
5701180	5701198	S25R-HCLN $\frac{R}{L}$ 12	●	●	33	25	24	200	17	40	14	HC6CN Dimple-Clamp	—	A0S-6 * 26W	—	LLR-T20	—	ASGL6-D
5701206	5701214	S32S-HCLN $\frac{R}{L}$ 12	●	●	40	32	30	250	22	50	12							
5701222	5701230	S40T-HCLN $\frac{R}{L}$ 12	●	●	50	40	38	300	27	60	10							
5701248	5701255	S50U-HCLN $\frac{R}{L}$ 12	●	●	63	50	47	350	35	65	8							

※ Std. corner radius $r_e=0.8\text{mm}$

CN..Inserts

Item Number	Inserts	Listed on pages
S-TCKLN $\frac{R}{L}$...	CNON1204	E7
S-WCLN $\frac{R}{L}$...	CNOA1204	E6 • 20 • 21 • 36
S-HCLN $\frac{R}{L}$...	CNOX1207	E7

Multi Clamp Toolholders

Three clamping configurations available with one toolholder just by changing a clamp

Multi Clamp Toolholders for DN..Inserts Minimum Bore Diameter 42.0mm

S-WDUN
Double-Clamp

S-HDUN
Dimple-Clamp

● Right-Hand style shown

DN..Inserts - Toolholders

Code No.		Item Number	Stock		Min Bore Dia. (mm) D _m	Dimensions (mm) *						Clamp	Shim	Clamp Screw	Shim Screw	Wrench (for Clamp Screw)	Wrench (for Shim Screw)	Spring
R	L		R	L		D _s	h	L ₁	f	L ₂	α							
5682794	5682802	S32S-WDUN R _L 15	●	●	42	32	30	250	22	50	12	DC6DN Double-Clamp	ADN423	A05-6 * 26W	FSS16-3.0 * 8	LLR-T20	LLR-T10	ASGL6-D
5701545	5701560	S40T-WDUN R _L 15	●	●	50	40	38	300	27	60	10			A05-6 * 30W				
5701354	5701362	S32S-HDUN R _L 15	●	●	42	32	30	250	22	50	12	HC6DN Dimple-Clamp	—	A05-6 * 26W	LLR-T20	—	ASGL6-D	
5701370	5701388	S40T-HDUN R _L 15	●	●	50	40	38	300	27	60	10		A05-6 * 30W					

* Std. corner radius $r_e = 0.8\text{mm}$

DN..Inserts

Item Number	Inserts	Listed on pages
S-WDUN R _L ...	DN○A1504	E8 • 22 • 23 • 36
S-HDUN R _L ...	DN○X1507	E8

Multi Clamp Toolholders

Three clamping configurations available with one toolholder just by changing a clamp

Multi Clamp Toolholders for SN..Inserts

Minimum Bore Diameter 50.0mm

S-TSKN


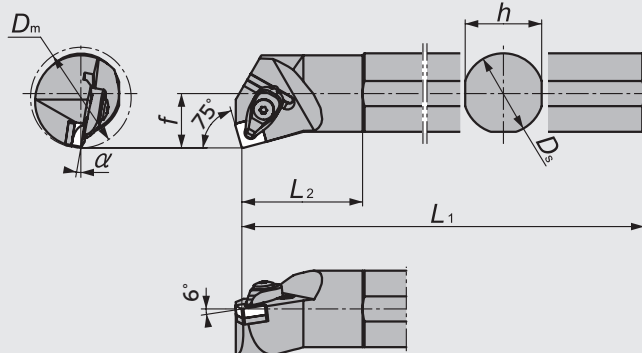
Clamp-on

S-WSKN

Double-Clamp

S-HSKN

Dimple-Clamp



● Right-Hand style shown

SN..Inserts - Toolholders

Code No.		Item Number	Stock		Min Bore Dia. (mm) D_m	Dimensions (mm)						Clamp	Shim	Clamp Screw	Shim Screw	Wrench (for Clamp Screw)	Wrench (for Shim Screw)	Spring
R	L		R	L		D_s	h	L_1	f	L_2	α							
5701800	5701818	S40T-TSKN $\frac{1}{4}$ 12	●	●	50	40	38	300	27	60	10	TC6CN Clamp-on	ASN423	A05-6*30W	FSS16-3.0*8	LLR-T20	LLR-T10	ASGL6-D
5682950	5682968	S40T-WSKN $\frac{1}{4}$ 12	●	●	50	40	38	300	27	60	10	DC6CN Double-Clamp	ASN423	A05-6*30W	FSS16-3.0*8	LLR-T20	LLR-T10	ASGL6-D
5701529	5701537	S40T-HSKN $\frac{1}{4}$ 12	●	●	50	40	38	300	27	60	10	HC6CN Dimple-Clamp	—	A05-6*30W	—	LLR-T20	—	ASGL6-D

※ Std. corner radius $r_e = 0.8\text{mm}$



SN..Inserts

Item Number	Inserts	Listed on pages
S-TSKN $\frac{1}{4}$...	SNON1204	E10 • 11 • 24 • 37
S-WSKN $\frac{1}{4}$...	SNOA1204	E10 • 11 • 24 • 37
S-HSKN $\frac{1}{4}$...	SNOX1207	E11

Multi Clamp Toolholders

Three clamping configurations available with one toolholder just by changing a clamp

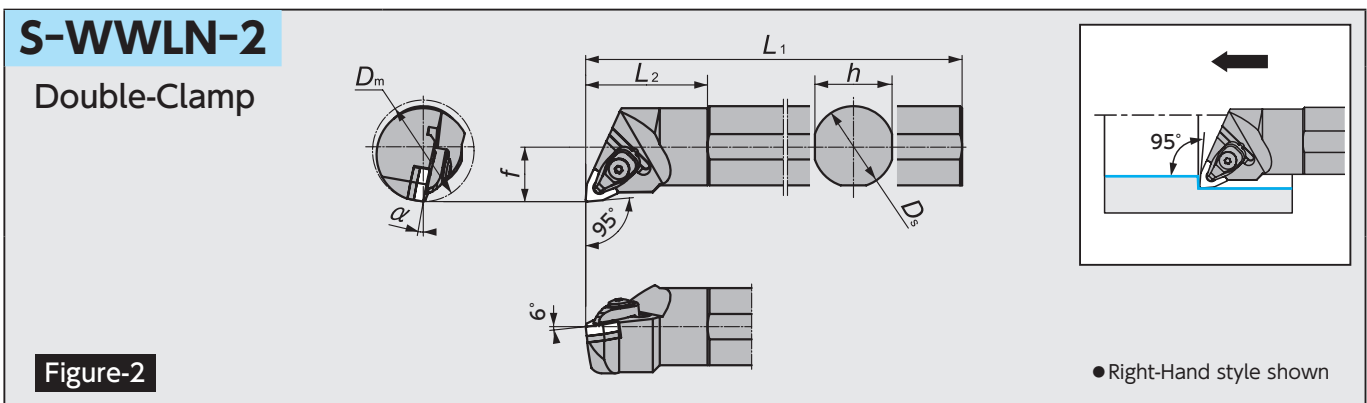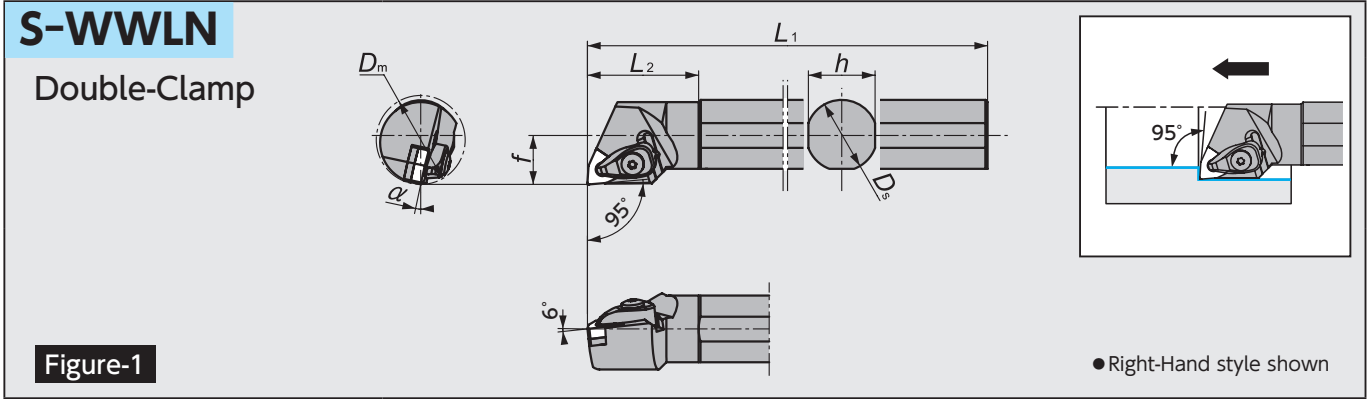Multi Clamp Toolholders for WN..Inserts Minimum Bore Diameter 33.0mm




WN..Inserts - Toolholders

Figure	Code No.		Item Number	Stock		Min Bore Dia. (mm) D _m	Dimensions (mm)※						Clamp	Shim	Clamp Screw	Shim Screw	Wrench (for Clamp Screw)	Wrench (for Shim Screw)	Spring
	R	L		R	L		D _s	h	L ₁	f	L ₂	α							
1	5683032	5683040	S25R-WWLN R _L 08	●	●	33	25	24	200	17	40	14	DC6CN Double-Clamp	AWN423-W	A0S-6*26W	FSS16-3.0*8	LLR-T20	LLR-T10	ASGL6-D
	5683057	5683065	S32S-WWLN R _L 08	●	●	40	32	30	250	22	50	12			A0S-6*30W				
	5683073	5683081	S40T-WWLN R _L 08	●	●	50	40	38	300	27	60	10							
2	5701594	5701602	S40T-WWLN R _L 08-2	●	●	50	40	38	300	27	60	10							


※ Std. corner radius $r_e = 0.8\text{mm}$

SN..Inserts

Item Number	Inserts	Listed on pages
S-WWLN R _L ...	WN○A0804 	E14 • 38

MEMO

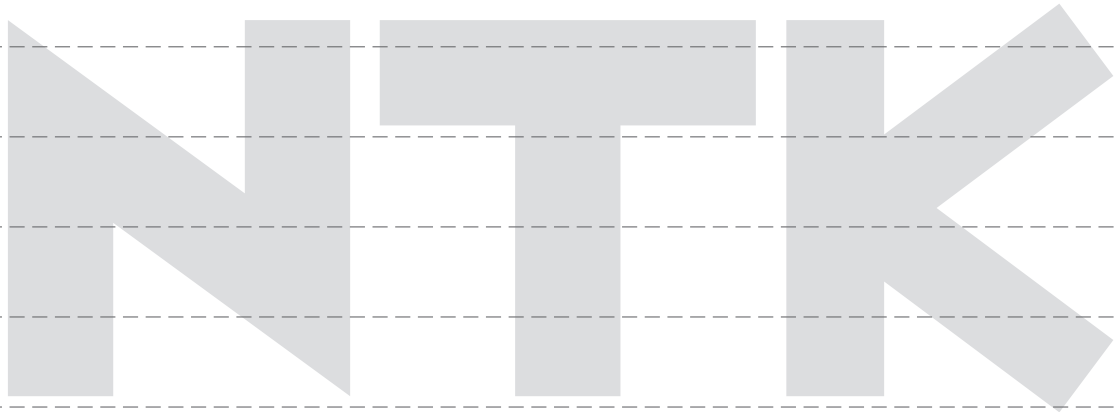New Products
Tool Materials / Selection Guide
BIDEMCS, PCD, CBN and Ceramics
Micrograin Carbide, PVD/Coated Carbide
Insert Item List
General Turning Toolholders
Unique Swiss Tooling
Grooving / Side Turning
Threading
Shaper
ID Tooling
Application Introduction
Endmills
Rotating Tools
Information
Index



L



Application Introduction

- **Machining HRSA Materials with BIDEMICS and Ceramics** L2
Guidelines for Machining HRSA Materials L4
- **Machining Mill Rolls with NTK Ceramics and CBNs** L24
- **Machining Poly-V Pulley Profiles** L32
- **Machining Tube Scarfing** L34


Machining HRSA Materials with BIDE MICS and Ceramics

Solutions for the Aerospace & Energy Industries

BIDE MICS - Game Changer

- 480m/min Speed Capability
- Double tool life at whisker's speed range

JX1



Features

- Up to 480m/min speed capability
- Much longer tool life at Whisker ceramics' speed range
- Superior surface finish vs. Whisker ceramics

Work Materials

- Inco 718 • 718 Plus
- Powdered metal
- Inco 625 • Rene

→C2

JP2



Features

- 10 to 15x speed capability vs. carbide
- Better wear resistance and notching resistance than CBNs
- Superior surface finish to Carbide or CBN

Work Materials

- Inco 718 • 718 Plus
- Powdered metal • Inco 625 • Rene

→C2

SX7

Features

- Can run at same cutting condition as whisker ceramics
- Best grade for high-speed milling

Work Materials

- Inco 718 • Inco 625
- Waspaloy • Udimet 720

→C15



SX3


Features

- Excellent wear resistance and toughness. Wide range of HRSA machining applications: Roughing with scale - semi finishing turning.
- Able to machine even the newest generation of HRSA work materials (like Rene) as well as most common HRSA materials; such as Inconel 718.

Work Materials

- Inco 718 • 718 Plus
- Powdered metal • Inco 625
- Rene

→C14




SiAlON - Workhorse

- Durable for scale to semi-finish machining



New Products
Tool Materials / Selection Guide
BIDE MICS, PCBN, CBN and Ceramics
Micrograin Carbide, PVD/Coated Carbide
Insert Item List
General Turning Toolholders
Unique Swiss Tooling
Grooving / Side Turning
Threading
Shaper
ID Tooling
Application Introduction
Endmills
Rotating Tools
Information
Index

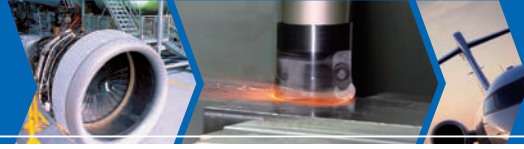
WATCH ON
YouTube



Application Guidance →L4
Milling Guidance →N4

Turning Guidance →L6
Grooving Guidance →A17

JX3



Features

- Added toughness in BIDE MICS
- Same speed capability as JX1

Work Materials

- Inco 718 • 718 Plus • Powdered metal
- Inco 625 • Rene

→C2

WA5/WA1



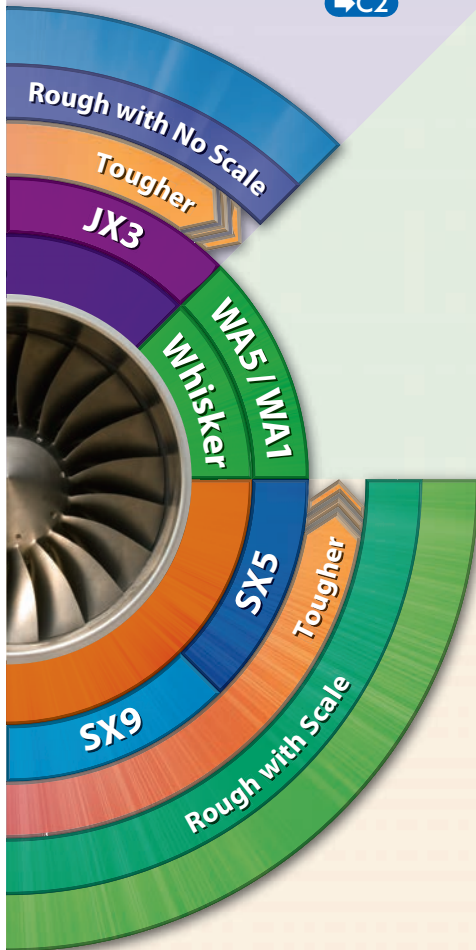
Features

- Better flank wear resistance compared to SiALON ceramics
- Better notching resistance compared to competitor's whisker ceramics

Work Materials

- Inco 718 • Inco 625

→C16



Whisker - Versatile Player

- Productivity and reliability

SX5



Features

- Best grade for scale and interruptions
- Best grade for machining high-cobalt alloys

Work Materials

- Waspaloy • Udimet 720
- 718 Plus • Rene 41

※ Production by order.

SX9

Features

- Extreme toughness makes higher feed and heavier DOC machining possible
- Best grade for machining Inco 718 with scale

→C15

Work Materials

- Inco 718 • Inco 706
- Inco 713 • Rene




Guidelines for Machining HRSA Materials

Insert Grade

Category	Grade	Attributes	Applications						
			Scale	No scale	Profiling	Finishing	Grooving	Milling	End milling
BIDEMICS	JX1	Special grade with higher speed and longer tool life potential		●	●	●	●		
	JP2	Special grade for finish turning				●			
	JX3	Added toughness in BIDEMICS		●	●	●	●		
Whisker	WA1	General versatile grade for turning		●	●		●		
SiAION	SX3	Best balance of toughness and hardness	●	●	●		●	●	
	SX5	Best grade for Waspaloy with scale	●				●		
	SX7	Versatile grade for turning and milling	●	●	●		●	●	
	SX9	Best grade for scale of Inco718	●	●	●			●	●


● 1st Choice ● 2nd Choice

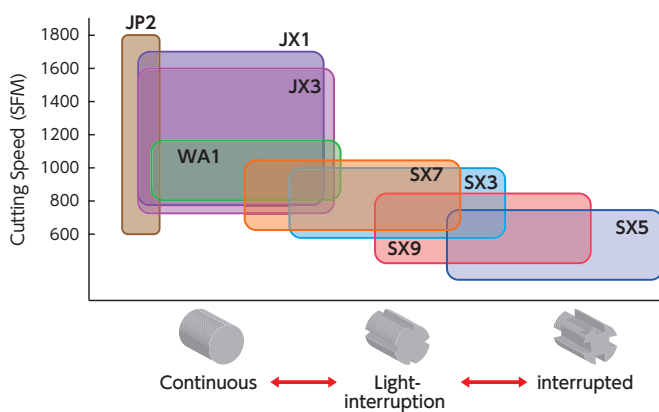Grade Map



Grade	Rough with Scale	Rough	Semi-Finishing	Finishing
BIDEMICS JP2			██████████	██████████
BIDEMICS JX1		██████████	██████████	██████████
BIDEMICS JX3		██████████	██████████	██████████
Whisker WA1	██████████	██████████	██████████	██████████
SiAION SX7		██████████	██████████	██████████
SiAION SX3		██████████	██████████	██████████
SiAION SX9	██████████	██████████	██████████	██████████
SiAION SX5		██████████	██████████	██████████

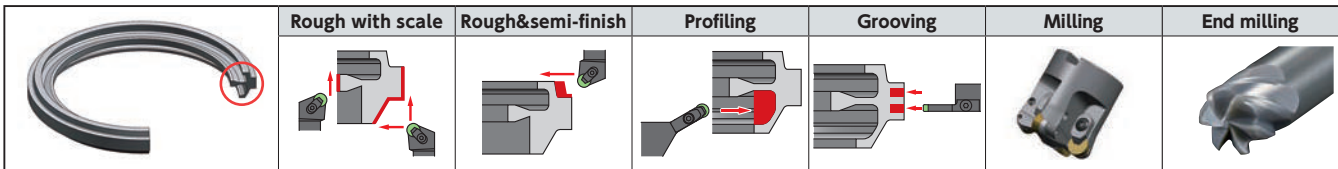Applications



Applications

Application	Grade	Work material	Cutting speed (m/min)						Feed (mm/rev)					Depth of cut (mm)					Coolant
			180	240	300	360	420	480	0.1	0.2	0.3	0.4	0.5	0.5	1.0	1.5	2.0	2.5	
 Rough with Scale	SX5	Waspaloy	200(180-240)						0.3(0.2-0.35)					2.0(1.0-5.0)					WET
	SX9	Inco718	200(180-240)						0.3(0.2-0.35)					2.0(1.0-5.0)					WET
	SX3	Overall	240(180-270)						0.2(0.1-0.22)					2.0(1.0-5.0)					WET
 Rough no Scale	JX1 JX3	Overall	210-390(180-480)						0.2(0.13-0.28)					1.7(1.0-2.5)					WET
	SX9 SX3 SX7	Overall	210(180-270)						0.2(0.15-0.3)					2.0(1.0-2.5)					WET
	WA1	Overall	240(180-300)						0.2(0.12-0.25)					1.7(1.0-2.5)					WET
	JX1 JX3	Overall	210-450(180-480)						0.2(0.1-0.25)					1.5(1.0-2.0)					WET
 Profiling & Semi-Finish	SX3 SX7	Overall	240(180-270)						0.2(0.12-0.25)					1.5(1.0-2.0)					WET
	WA1	Overall	240(180-330)						0.2(0.1-0.25)					1.5(1.0-2.0)					WET
	JP2	Overall	210-480(180-510)						0.1(0.05-0.18)					0.25(0.13-0.76)					WET
 Grooving	JX1 JX3	Overall	360(180-480)						0.07(0.05-0.1)					When using SX7/SX3/SX5, increase feed rates 100% vs. Whisker Ceramics					WET
	SX5	Waspaloy	210(180-240)						0.15(0.07-0.17)										WET
	SX3 SX7	Overall	230(180-270)						1.1(0.07-0.15)										WET
	WA1	Overall	240(180-330)						0.07(0.05-0.1)										WET
Application	Grade	Work material	Cutting speed (m/min)						Feed (mm/t)					Depth of cut (mm)					Coolant
			450	600	750	900	1000	1200	0.05	0.07	0.1	0.12	0.15	0.5	1.0	1.5	2.0	2.5	
 Milling	SX3 SX7	Overall	810(600-1200)						0.1(0.07-0.12)					1.7(1.0-2.5)					DRY
	SX9	Overall	750(450-1000)						0.12(0.1-0.15)					2.0(1.0-2.5)					DRY
 End milling	SX9	Overall	600(300-1000)						0.02-0.03										DRY

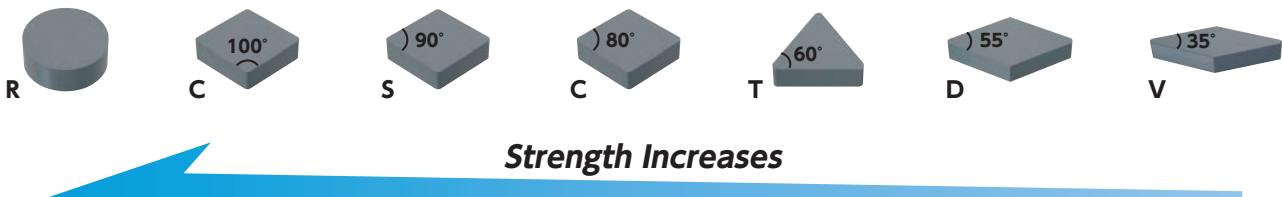
Guidelines For Success

Keys to successful machining of HRSA Materials

- NTK's BIDE MICS and ceramics deliver extremely high productivity to heat resistant alloy machining
- BIDE MICS offer excellent flank wear resistance and SiALON ceramics provide exceptional notch wear resistance
- BIDE MICS enable ultra high-speed machining with outstanding surface finishes
- Stable machining can be performed by optimizing cutting conditions and tooling

Use strong insert shapes

Maximize geometry for strength productivity.



Use largest nose radius

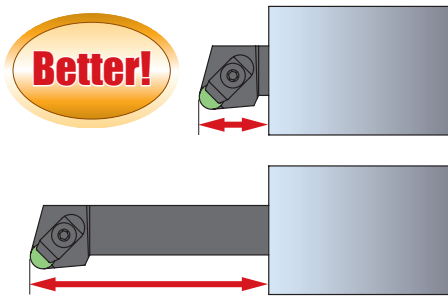
Maximize insert nose radius for strength and longer tool life.

Take into account that the larger the nose radius the greater the tool pressure.

Typical application machining heat resistant alloys use a RNGN1207 insert for roughing and CNGA1204 style for finishing.


Minimize overhang

Too much overhang may cause chatter or insert breakage.



Pre-chamfering

Pre-chamfering the part reduces the potential for insert chipping or breaking upon the entry or exit point of work material.



No dwelling

Inserts wear out when rubbing the part instead of cutting.

Coolant

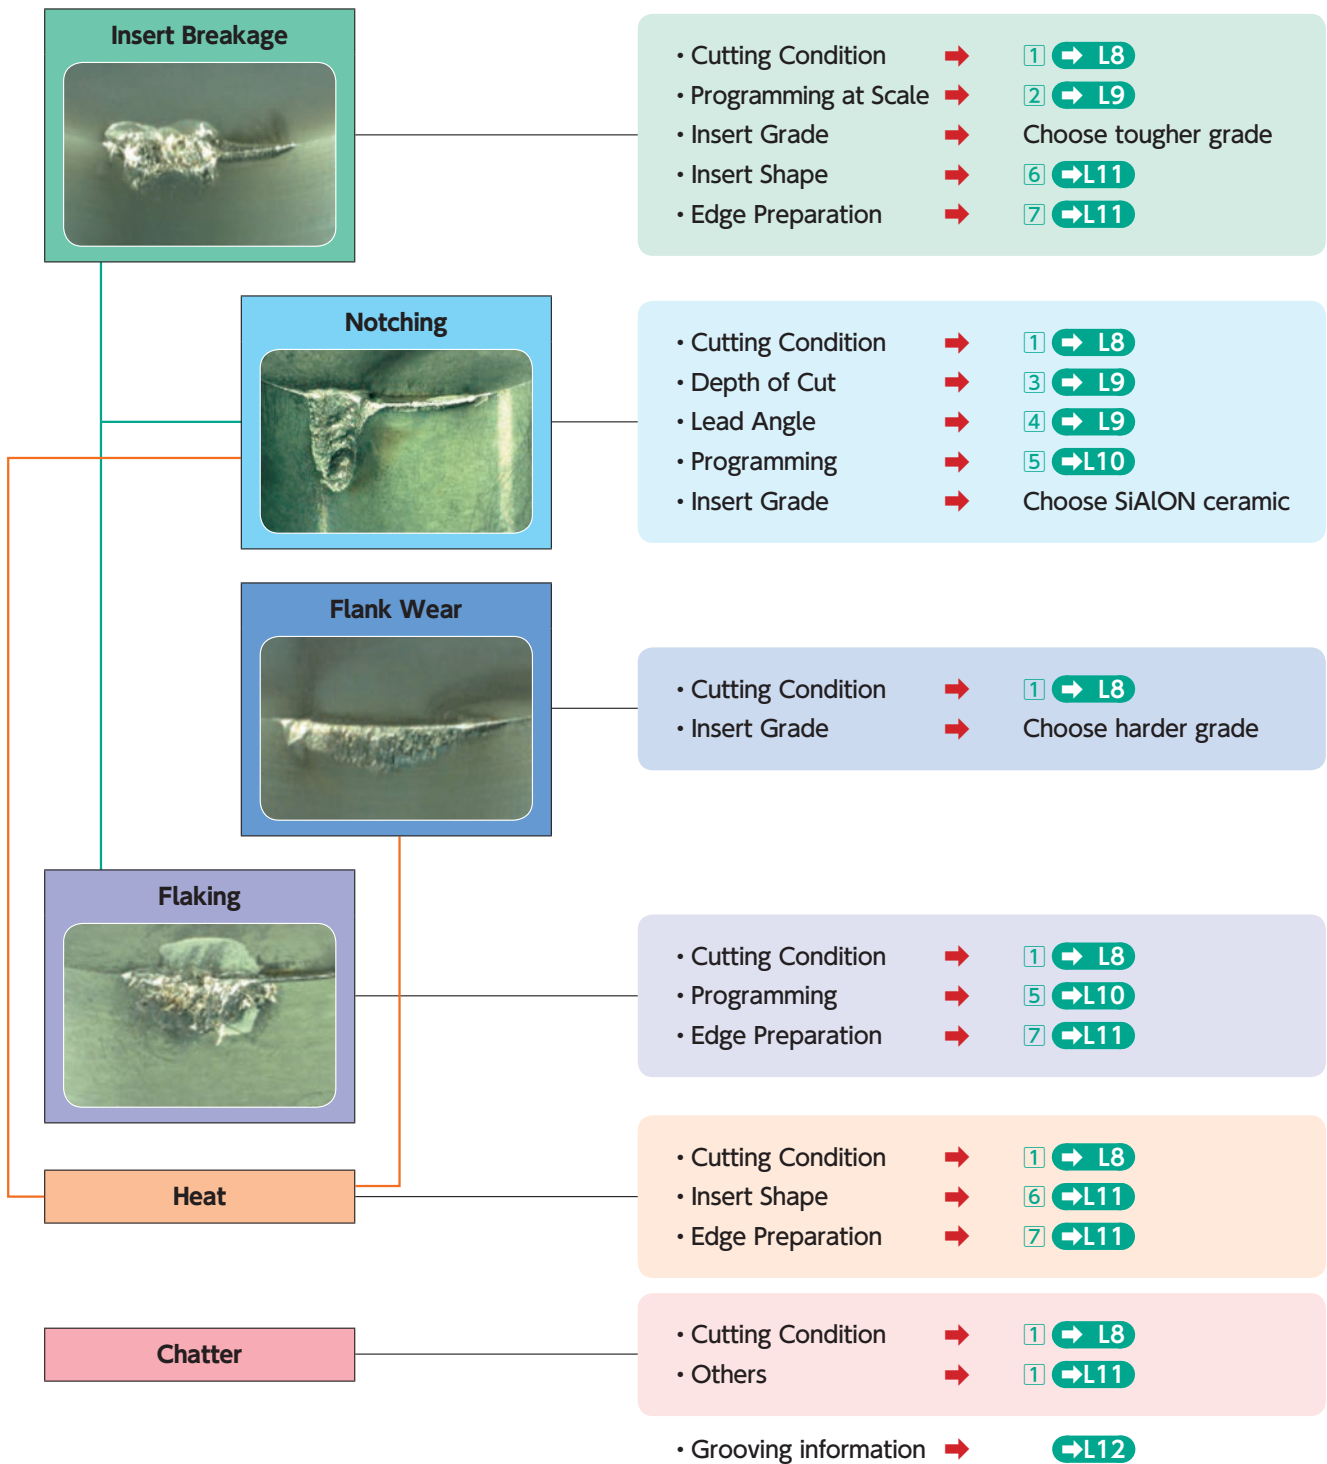
When turning with BIDE MICS, SiALON and Whisker a flood coolant condition should be used

In some cases where a high interruption is encountered it may be best to shut off the coolant No coolant should be used while milling with SX3, SX7 and SX9.

Edge preparations

Typical HRSA machining requires the insert cutting edge to be sharp. Using a slight T-land or honed edge is also effective to reduce notching, flaking and built up edge.


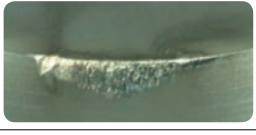
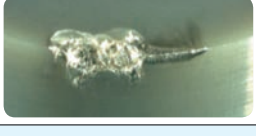
Troubleshooting



Guidelines for Machining HRSA Materials

Troubleshooting (continued)

1 Cutting Conditions & Parameters Adjustment

		Cutting speed (m/min)		Feed rate (mm/rev)		Grade attribute		
		SiAlON	BIDEMICS	SiAlON	BIDEMICS	BIDEMICS	SiAlON	Whisker
	Notching		↗ [a]	↗ [b]		●	●	
	Flank wear	↘ [c]		↗ [d]		●	● SX3 SX7	●
	Breakage			↘	↘	●	●	
Heat		↘	↘	↘	↘	—	—	—
Chatter		↗	↗	↘	↘	—	—	—

● 1st Choice ● 2nd Choice

Test Results

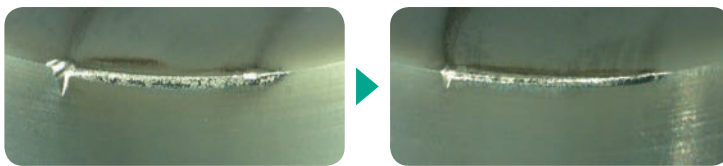
[a] **WA1** : Increase cutting speed



100m/min

500m/min


[b] **SX7 • SX3 • SX9 • SX5** : Increase feed rate



0.2mm/rev

0.4mm/rev

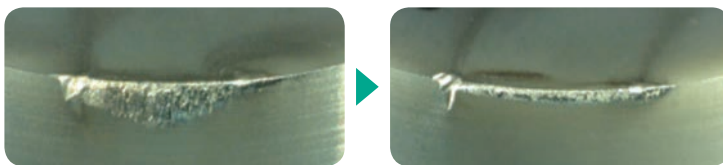[c] **SX7 • SX3 • SX9 • SX5** : Decrease cutting speed




400m/min

100m/min

[d] **SX7 • SX3 • SX9 • SX5** : Increase feed rate

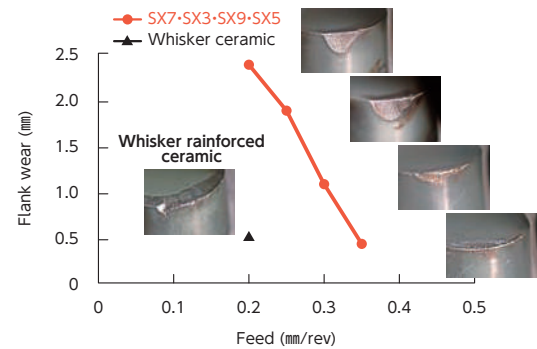Feed rate increased decreases wear amount of SiAlON



Cutting condition

Work material : Inco718 Cutting Speed : 250m/min
 Insert shape : RGN120700 Depth of Cut : 2.0mm
 WET

In some cases, in order to increase the wear resistance of **SX7 & SX3 & SX9 & SX5**, the feed must be increased. By increasing the feed and utilizing the toughness of **SX7 & SX3 & SX9 & SX5**, the inserts are off the part sooner causing less wear. Increasing the feed also decreases cycle time and improves productivity and profitability.

Note : Speed and feed rates shown are recorded test data and should not be thought of as recommended cutting conditions.

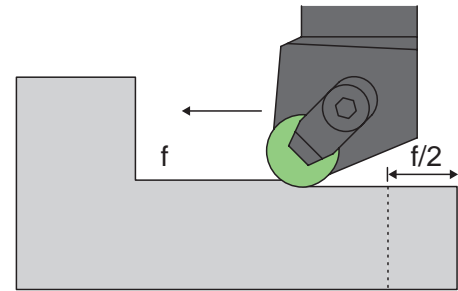
Note : Be careful to reduce the feed rate by 25%, when going into a corner.

■ Troubleshooting (continued)

2 Scale machining

When the insert breakage happens at the beginning of cutting scale, it might be caused by too high cutting speeds & feeds

Knowing the hardness of the work material before the cutting begins may make all the difference between success or failure. Many times on the shop floor the operator does not know the part hardness. If this information is not known, then more time is needed in the testing procedure trying to find the optimum speed and feed range. As the material hardness increases, speed should decrease. Also, parts that have a forged scale work surface require a 25% speed and feed reduction until the scale is gone. This type of programming change will reduce the potential of notching as a failure mode.




3 Depth of Cut

Depth of Cut Notching

This mode of insert failure is typical when machining heat resistant alloys. It must be controlled to prevent a catastrophic failure of the insert's cutting edge. The following information should help to minimize this problem.

Depth of Cut

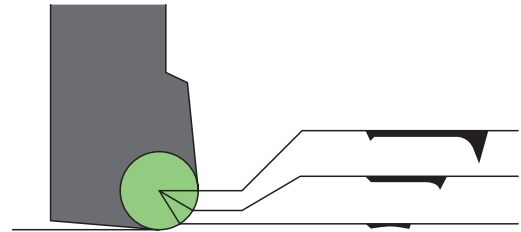Prime consideration should be given to the effect of depth of cut upon insert tool life. There is a direct relationship between the insert radius size and the maximum depth of cut which should be taken. See the chart below for recommendations.



■ Recommended Depth of Cut Range (mm)

Round insert	Maximum DOC	*Insert radius	Maximum DOC
φ 6.35	1.5...Less	0.8	0.2...Less
φ 9.525	2.3...Less	1.2	0.3...Less
φ 12.70	3.2...Less	1.6	0.4...Less
φ 25.40	6.4...Less	2.4	0.6...Less
*OPTIMUM DOC. IS 5-15% OF THE INSERT DIAMETER *BASED ON 0° LEAD ANGLE			

4 Lead Angle

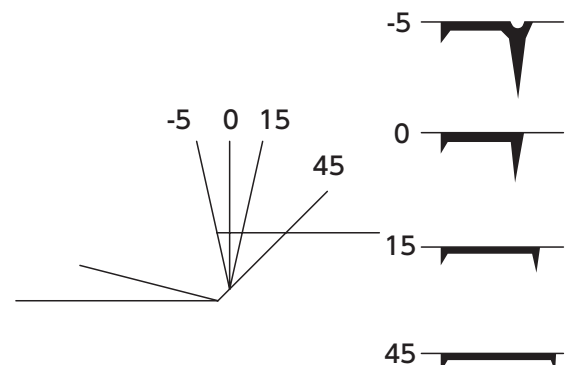
Lead Angles

When cutting heat resistant alloys consideration should be given to using the largest lead angle possible. When using large lead angles, the cutting forces are spread over a larger surface area of the insert. This will also improve tool life and surface finish while reducing notching. As the lead angle increases the chip will flow more easily.

Feeds

Utilize the superior strength characteristic of SX7, SX3, SX9, SX5 SiAlON ceramics. If excessive wear is encountered while machining heat resistant alloys, increase the feed rate thus minimizing the cutting time.

● Typical insert wear pattern showing the effect of various lead angle changes and the resulting increase of depth of cut notching




Guidelines for Machining HRSA Materials

Troubleshooting (continued)

5 Programming

Rough



Same Depth of Cut



Note) Notch wear on the insert cutting edge as shown is the result of multiple passes being taken at the same depth of cut. This type of wear will minimize tool life. The following programming examples will help to minimize this mode of failure.



change to

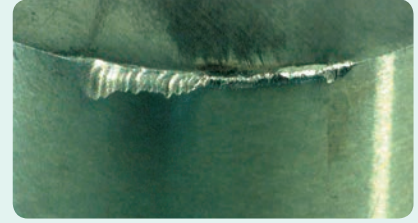Varying Depth of Cut




Note) Another programming change that may help to reduce notching is by varying the depth of cut. Again, the same principle applies, notching takes place at various points on the cutting edge rather than concentrated at one point.

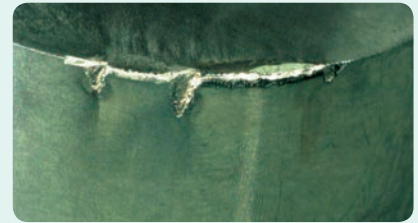Ramping



Note) Programming " Ramping " cuts in the same cutting direction is one of the best procedures to minimize notching. By varying the DOC, wear is distributed over the entire cutting edge not on one point.

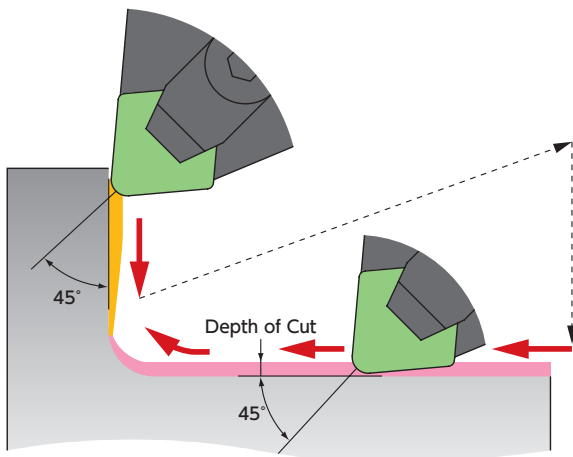Finish



• $\alpha = 45^\circ$

(mm)

Insert radius	DOC
0.4	0.12
0.8	0.23
1.2	0.35
1.6	0.47
2.4	0.70
3.2	0.94

Note) The correct procedure is to take more material off during the previous roughing application.

Then remove the amount of stock suitable for the nose radius of the insert by staying

below the 45° mark of the corner radius.

This will minimize notching and allow a cut from both directions.

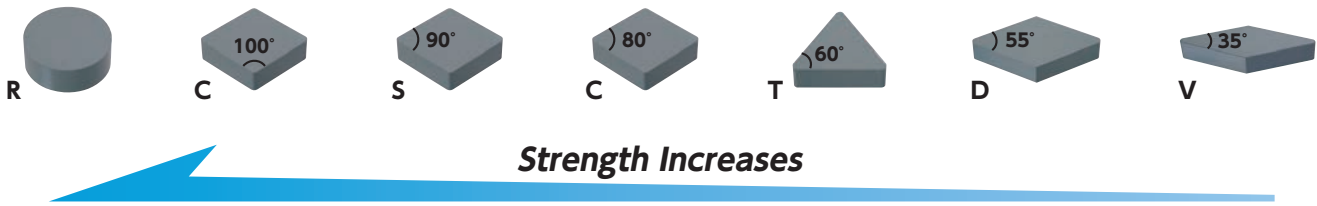
Depth of Cut




Better

Troubleshooting (continued)

6 Insert shape



7 Edge preparation

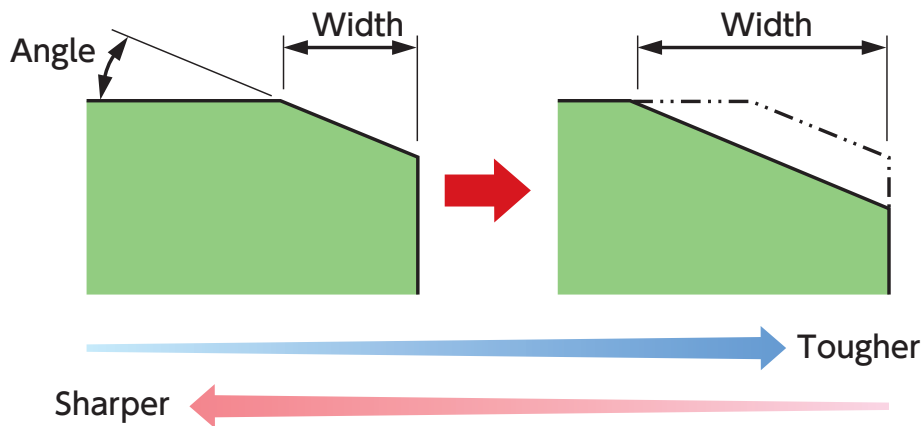

- Slightly larger T-land on the edge preparation may eliminate flaking.

8 Eliminate chatter

Chatter problem is often caused by too much cutting pressure when machining heat resistant alloys especially in profiling or grooving. A non-rigid machine may cause excessive insert wear or insert breakage.

- Increase speeds and decrease feeds
- Use harder grade with higher speed
- Use smaller I.C round insert, or smaller nose radius
- Reduce insert nose radius
- Use positive insert
- Reduce lead angle
- Reduce edge preparation or use sharp edge
- Minimize overhang
- Try a heavy metal boring bar

Guideline for grooving HRSA materials

BIDEMICS / Ceramic grooving inserts provide high speed capability to your process. Whisker ceramic is the most versatile option in this category. NTK also offers BIDEMICS and SiALON grades for more productivity and stability.

	JX1	JX3	SX3	SX7	SX5	WA1/WA5
Speed	●			●	●	●
Feed			●		●	
Versatility	●		●	●		●
Toughness			●		●	
	Can run at up to 480m/min Double the speed of whisker		Double the feed of whisker		Best for Scale and interruption	Versatile grade

● : 1st choice ● : 2nd choice

Application	Grade	Work material	Cutting speed (m/min)						Feed (mm/rev)					Depth of cut (mm)					Coolant
			180	240	300	360	420	480	0.1	0.2	0.3	0.4	0.5	0.5	1.0	1.5	2.0	2.5	
Grooving 	JX1 JX3	Overall	360(180-480)						0.07(0.05-0.1)										WET
	SX5	Waspaloy	210(180-240)						0.15(0.07-0.17)										
	SX3 SX7	Overall	230(180-270)						1.1(0.07-0.15)										
	WA1	Overall	240(180-330)						0.07(0.05-0.1)										

When using SX7/SX5, increase feed rates 100% vs. Whisker Ceramics

When applying JX1/JX3, increase speed to over 300 m/min
When applying SX3/SX7/SX5, increase feed rates 100% vs. Whisker Ceramics

Application Information

≥45°
Work Hardening Layer

When machining a grooved area with multiple passes, the insert radius engages a potentially work hardened area during the last remaining plunge. This programming procedure sets up the potential of corner radius chipping or notching.

Change to

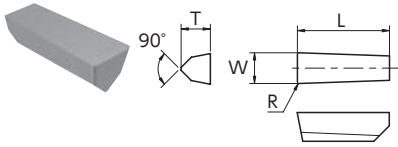
45°

The grooving insert is plunged down both outside walls thus maintaining a good finish. The remaining material can be removed by using a stronger insert shape such as a RCGX style.

VGW..Series - Inserts

VGW

● : 1st Choice ● : 2nd choice




Steel	P				
Stainless Steel	M				
Cast Iron	K			●	●
Non-Ferrous Material	N				
Heat Resistant Alloy	S	●	●	●	●
Hardened Material	H			●	●

Item Number	Dimensions(mm)				Stock			
	W	R	T	L	BIDEMICS		Whisker ceramics	
					JX1	JX3	WA1	WA5
VGW 4125-1 E004	3.18	0.4	4.75	12.7	●	●		
4125-2 E004	3.18	0.8	4.75	12.7	●	●		
4125-2 EX0001	3.18	0.8	4.75	12.7			●	●
4156-1 E004	3.96	0.4	4.75	12.7	●	●		
4156-2 E004	3.96	0.8	4.75	12.7	●	●		
4156-2 EX0001	3.96	0.8	4.75	12.7			●	●
4187-1 E004	4.75	0.4	4.75	12.7	●	●		
4187-2 E004	4.75	0.8	4.75	12.7	●	●		
4187-2 EX0001	4.75	0.8	4.75	12.7			●	●
6250-1 E004	6.35	0.4	6.35	19.05	●	●		
6250-2 E004	6.35	0.8	6.35	19.05	●	●		
6250-2 EX001	6.35	0.8	6.35	19.05			●	●
6250-3 E004	6.35	1.2	6.35	19.05	●	●		
8375-2 EX0001	9.525	0.8	8.56	25.4			●	●

VGW..R

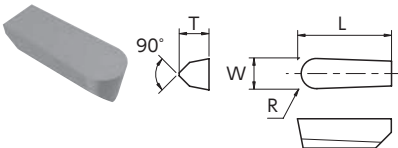● : 1st Choice ● : 2nd choice




Steel	P				
Stainless Steel	M				
Cast Iron	K			●	●
Non-Ferrous Material	N				
Heat Resistant Alloy	S	●	●	●	●
Hardened Material	H			●	●

Item Number	Dimensions(mm)				Stock			
	W	R	T	L	BIDEMICS		Whisker ceramics	
					JX1	JX3	WA1	WA5
VGW 4125-R E004	3.18	1.59	4.75	12.7	●	●		
4125-R EX0001	3.18	1.59	4.75	12.7			●	●
4156-R E004	3.96	1.98	4.75	12.7	●	●		
4156-R EX0001	3.96	1.98	4.75	12.7			●	●
4187-R E004	4.75	2.38	4.75	12.7	●	●		
4187-R EX0001	4.75	2.38	4.75	12.7			●	●
6250-R EX0001	6.35	3.18	6.35	19.05			●	●
8375-R EX0001	9.525	4.76	8.56	25.4				●

New Products
 Tool Materials / Selection Guide
 BIDEMICS, PCD, CBN and Ceramics
 Micrograin Carbide, PVD Coated Carbide
 Insert Item List
 General Turning Toolholders
 Unique Swiss Tooling
 Grooving / Side Turning
 Threading
 Shaper
 ID Tooling
 Application Introduction
 Endmills
 Rotating Tools
 Information
 Index

New Modular Tooling !

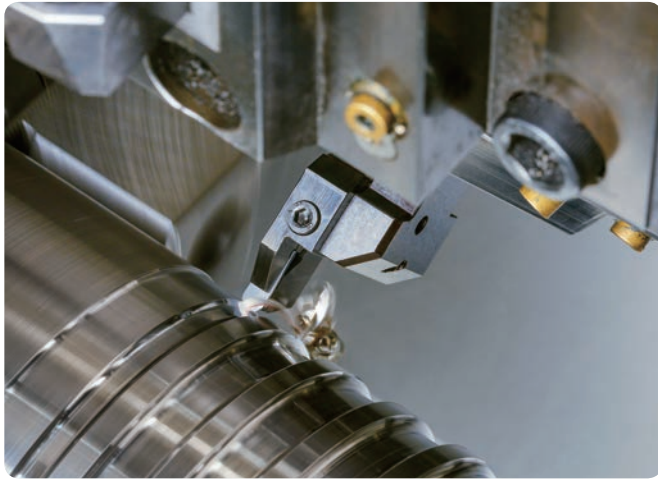Available in 3 different styles




Features


- The best rigidity
- Available in 3 different styles



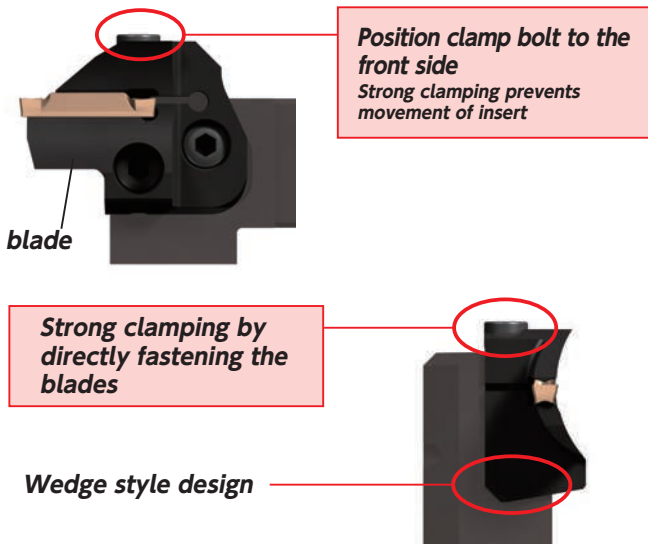Most rigid blade type system



Tool rigidity comparison

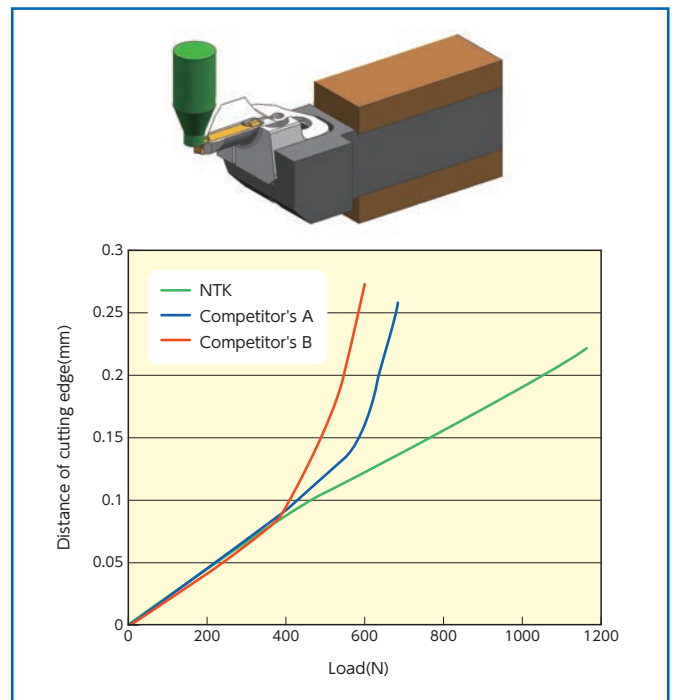

VGW Style



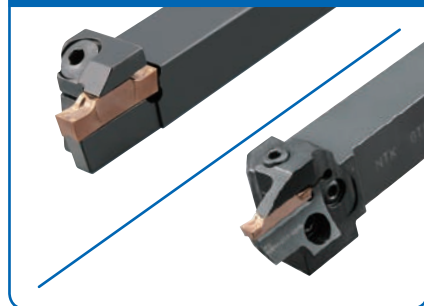
→L16

RCGX Style RPGX Style



→L20

Grooving/Face grooving for PVD coated carbide insert





→H40

Modular Holdet Body

GTWP-H

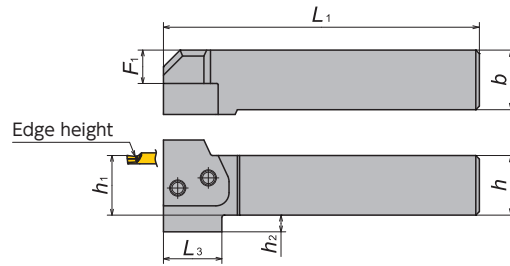Straight style toolholders





Right-Hand style shown

Toolholder	Stock		Dimensions(mm)							Parts	
	R	L	<i>h</i>	<i>b</i>	<i>h</i> ₁	<i>L</i> ₁	<i>F</i> ₁	<i>h</i> ₂	<i>L</i> ₃	Screw	Wrench
GTWP [®] / ₁ 2020-H	●	●	20.0	20.0	20.0	107.5	9	8	28.5	FSI28-6.0×18	LW-4
2525-H	●	●	25.0	25.0	25.0	132.5	14	7	24.5	FSI28-6.0×18	LW-4
3232-H	●	●	32.0	32.0	32.0	152.5	21	—	—	FSI28-6.0×18	LW-4

GKWP-H

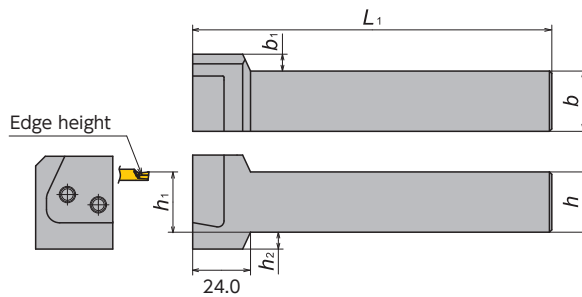L-style toolholders



Right-Hand style shown
*Use opposite hand blade


Toolholder	Stock		Dimensions(mm)						Parts	
	R	L	<i>h</i>	<i>b</i>	<i>h</i> ₁	<i>L</i> ₁	<i>b</i> ₁	<i>h</i> ₂	Screw	Wrench
GKWP [®] / ₁ 2020-H	●	●	20.0	20.0	20.0	124	12	8	FSI28-6.0×18	LW-4
2525-H	●	●	25.0	25.0	25.0	149	7	7	FSI28-6.0×18	LW-4
3232-H	●	●	32.0	32.0	32.0	169	—	—	FSI28-6.0×18	LW-4

Guidelines for Machining HRSA Materials


VGW..Series - Blades

GBVR

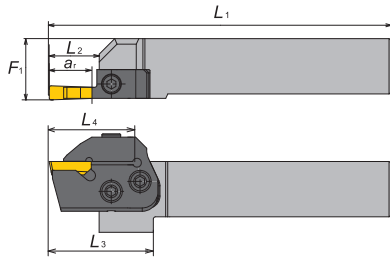For GTWP-H



For GKWP-H

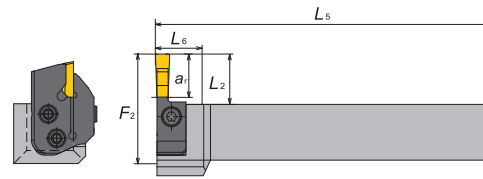

Right hand


Hand	Blade number	Stock	Holder	Insert	Dimensions(mm)								
					L ₁	L ₂	L ₃	L ₄	L ₅	L ₆	F ₁	F ₂	a _r
Right	GBVR-VGW4-3T09	●	GTWPR2020-H	VGW4125	118.7	11.2	39.7	34.1	124.3	24.3	22.3	31.2	9.5
			GKWPL2020-H	VGW4156	118.7	11.2	39.7	34.1	124.7	24.7	22.7	31.2	9.5
			GTWPR2525-H	VGW4125	143.7	11.2	35.7	34.1	149.3	24.3	27.3	36.2	9.5
			GKWPL2525-H	VGW4156	143.7	11.2	35.7	34.1	149.7	24.7	27.7	36.2	9.5
			GTWPR3232-H	VGW4125	163.7	11.2	—	34.1	169.3	24.3	34.3	43.2	9.5
			GKWPL3232-H	VGW4156	163.7	11.2	—	34.1	169.7	24.7	34.7	43.2	9.5
	GBVR-VGW4-4T14	●	GTWPR2020-H	VGW4156	125.0	17.5	46.0	40.5	124.4	24.4	22.4	37.5	14.2
			GKWPL2020-H	VGW4187	125.0	17.5	46.0	40.5	124.8	24.8	22.8	37.5	14.2
			GTWPR2525-H	VGW4156	150.0	17.5	42.0	40.5	149.4	24.4	27.4	42.5	14.2
			GKWPL2525-H	VGW4187	150.0	17.5	42.0	40.5	149.8	24.8	27.8	42.5	14.2
			GTWPR3232-H	VGW4156	170.0	17.5	—	40.5	169.4	24.4	34.4	49.5	14.2
			GKWPL3232-H	VGW4187	170.0	17.5	—	40.5	169.8	24.8	34.8	49.5	14.2
	GBVR-VGW6-6T14	●	GTWPR2020-H	VGW6218	125.0	17.5	46.0	40.5	124.8	24.8	22.8	37.5	14.2
			GKWPL2020-H	VGW6250	125.0	17.5	46.0	40.5	125.2	25.2	23.2	37.5	14.2
			GTWPR2525-H	VGW6218	150.0	17.5	42.0	40.5	149.8	24.8	27.8	42.5	14.2
			GKWPL2525-H	VGW6250	150.0	17.5	42.0	40.5	150.2	25.2	28.2	42.5	14.2
			GTWPR3232-H	VGW6218	170.0	17.5	—	40.5	169.8	24.8	34.8	49.5	14.2
			GKWPL3232-H	VGW6250	170.0	17.5	—	40.5	170.2	25.2	35.2	49.5	14.2
	GBVR-VGW6-6T19	●	GTWPR2020-H	VGW6250	130.1	22.6	51.1	45.6	124.7	24.7	22.7	42.6	19.0
			GKWPL2020-H	VGW6281	130.1	22.6	51.1	45.6	125.1	25.1	23.1	42.6	19.0
			GTWPR2525-H	VGW6250	155.1	22.6	47.1	45.6	149.7	24.7	27.7	47.6	19.0
			GKWPL2525-H	VGW6281	155.1	22.6	47.1	45.6	150.1	25.1	28.1	47.6	19.0
			GTWPR3232-H	VGW6250	175.1	22.6	—	45.6	169.7	24.7	34.7	54.6	19.0
			GKWPL3232-H	VGW6281	175.1	22.6	—	45.6	170.1	25.1	35.1	54.6	19.0
	GBVR-VGW8-8T19	●	GTWPR2020-H	VGW8312	135.2	27.7	56.2	50.7	125.5	25.5	23.5	47.7	19.0
			GKWPL2020-H	VGW8344	135.2	27.7	56.2	50.7	125.9	25.9	23.9	47.7	19.0
			GTWPR2525-H	VGW8312	160.2	27.7	52.2	50.7	150.5	25.5	28.5	52.7	19.0
			GKWPL2525-H	VGW8344	160.2	27.7	52.2	50.7	150.9	25.9	28.9	52.7	19.0
GTWPR3232-H			VGW8312	180.2	27.7	—	50.7	170.5	25.5	35.5	59.7	19.0	
GKWPL3232-H			VGW8344	180.2	27.7	—	50.7	170.9	25.9	35.9	59.7	19.0	
GBVR-VGW8-8T28	●	GTWPR2020-H	VGW8344	137.7	30.2	58.7	53.2	125.3	25.3	23.3	50.2	28.5	
		GKWPL2020-H	VGW8375	137.7	30.2	58.7	53.2	125.8	25.8	23.8	50.2	28.5	
		GTWPR2525-H	VGW8344	162.7	30.2	54.7	53.2	150.3	25.3	28.3	55.2	28.5	
		GKWPL2525-H	VGW8375	162.7	30.2	54.7	53.2	150.8	25.8	28.8	55.2	28.5	
		GTWPR3232-H	VGW8344	182.7	30.2	—	53.2	170.3	25.3	35.3	62.2	28.5	
		GKWPL3232-H	VGW8375	182.7	30.2	—	53.2	170.8	25.8	35.8	62.2	28.5	

Note : All dimensions shown are obtained when blade is set in the holder.


VGW..Series - Blades

GBVL

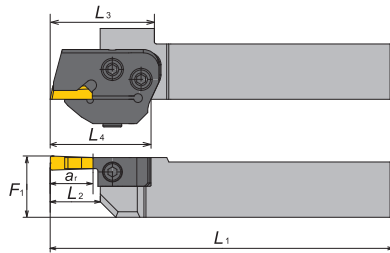For GTWP-H



For GKWP-H

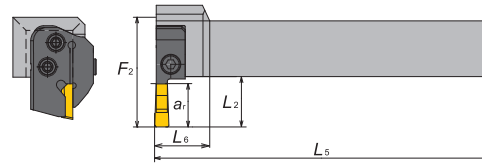

● Left hand


Hand	Blade number	Stock	Holder	Insert	Dimensions(mm)								
					L ₁	L ₂	L ₃	L ₄	L ₅	L ₆	F ₁	F ₂	a _r
Left	GBVL-VGW4-3T09	●	GTWPL2020-H	VGW4125	118.7	11.2	39.7	34.1	124.3	24.3	22.3	31.2	9.5
			GKWPR2020-H	VGW4156	118.7	11.2	39.7	34.1	124.7	24.7	22.7	31.2	9.5
			GTWPL2525-H	VGW4125	143.7	11.2	35.7	34.1	149.3	24.3	27.3	36.2	9.5
			GKWPR2525-H	VGW4156	143.7	11.2	35.7	34.1	149.7	24.7	27.7	36.2	9.5
			GTWPL3232-H	VGW4125	163.7	11.2	—	34.1	169.3	24.3	34.3	43.2	9.5
	GKWPR3232-H	VGW4156	163.7	11.2	—	34.1	169.7	24.7	34.7	43.2	9.5		
	GBVL-VGW4-4T14	●	GTWPL2020-H	VGW4156	125.0	17.5	46.0	40.5	124.4	24.4	22.4	37.5	14.2
			GKWPR2020-H	VGW4187	125.0	17.5	46.0	40.5	124.8	24.8	22.8	37.5	14.2
			GTWPL2525-H	VGW4156	150.0	17.5	42.0	40.5	149.4	24.4	27.4	42.5	14.2
			GKWPR2525-H	VGW4187	150.0	17.5	42.0	40.5	149.8	24.8	27.8	42.5	14.2
			GTWPL3232-H	VGW4156	170.0	17.5	—	40.5	169.4	24.4	34.4	49.5	14.2
	GKWPR3232-H	VGW4187	170.0	17.5	—	40.5	169.8	24.8	34.8	49.5	14.2		
	GBVL-VGW6-6T14	●	GTWPL2020-H	VGW6218	125.0	17.5	46.0	40.5	124.8	24.8	22.8	37.5	14.2
			GKWPR2020-H	VGW6250	125.0	17.5	46.0	40.5	125.2	25.2	23.2	37.5	14.2
			GTWPL2525-H	VGW6218	150.0	17.5	42.0	40.5	149.8	24.8	27.8	42.5	14.2
			GKWPR2525-H	VGW6250	150.0	17.5	42.0	40.5	150.2	25.2	28.2	42.5	14.2
			GTWPL3232-H	VGW6218	170.0	17.5	—	40.5	169.8	24.8	34.8	49.5	14.2
	GKWPR3232-H	VGW6250	170.0	17.5	—	40.5	170.2	25.2	35.2	49.5	14.2		
	GBVL-VGW6-6T19	●	GTWPL2020-H	VGW6250	130.1	22.6	51.1	45.6	124.7	24.7	22.7	42.6	19.0
			GKWPR2020-H	VGW6281	130.1	22.6	51.1	45.6	125.1	25.1	23.1	42.6	19.0
GTWPL2525-H			VGW6250	155.1	22.6	47.1	45.6	149.7	24.7	27.1	47.6	19.0	
GKWPR2525-H			VGW6281	155.1	22.6	47.1	45.6	150.1	25.1	28.1	47.6	19.0	
GTWPL3232-H			VGW6250	175.1	22.6	—	45.6	169.7	24.7	34.7	54.6	19.0	
GKWPR3232-H	VGW6281	175.1	22.6	—	45.6	170.1	25.1	35.1	54.6	19.0			
GBVL-VGW8-8T19		GTWPL2020-H	VGW8312	135.2	27.7	56.2	50.7	125.5	25.5	23.5	47.7	19.0	
		GKWPR2020-H	VGW8344	135.2	27.7	56.2	50.7	125.9	25.9	23.9	47.7	19.0	
		GTWPL2525-H	VGW8312	160.2	27.7	52.2	50.7	150.5	25.5	28.5	52.7	19.0	
		GKWPR2525-H	VGW8344	160.2	27.7	52.2	50.7	150.9	25.9	28.9	52.7	19.0	
		GTWPL3232-H	VGW8312	180.2	27.7	—	50.7	170.5	25.5	35.5	59.7	19.0	
GKWPR3232-H	VGW8344	180.2	27.7	—	50.7	170.9	25.9	35.9	59.7	19.0			
GBVL-VGW8-8T28	●	GTWPL2020-H	VGW8344	137.7	30.2	58.7	53.2	125.3	25.3	23.3	50.2	28.5	
		GKWPR2020-H	VGW8375	137.7	30.2	58.7	53.2	125.8	25.8	23.8	50.2	28.5	
		GTWPL2525-H	VGW8344	162.7	30.2	54.7	53.2	150.3	25.3	23.3	55.2	28.5	
		GKWPR2525-H	VGW8375	162.7	30.2	54.7	53.2	150.8	25.8	28.8	55.2	28.5	
		GTWPL3232-H	VGW8344	182.7	30.2	—	53.2	170.3	25.3	35.3	62.2	28.5	
GKWPR3232-H	VGW8375	182.7	30.2	—	53.2	170.8	25.8	35.8	62.2	28.5			

Note : All dimensions shown are obtained when blade is set in the holder.

Guidelines for Machining HRSA Materials

RCGX/RPGX..Series - Inserts

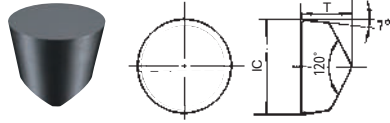RCGX




● : 1st Choice ● : 2nd Choice

Steel	P								
Stainless Steel	M								
Cast Iron	K			●	●	●	●	●	●
Non-Ferrous Material	N								
Heat Resistant Alloy	S	●	●	●	●	●	●	●	●
Hardened Material	H						●	●	

Item Number	Dimensions(mm)		Stock							
	IC	T	BIDEMICS		SIALON ceramics			Whisker ceramics		
			JX1	JX3	SX7	SX3	SX9	WA1	WA5	
RCGX 060400 T00520	6.35	4.76							●	●
060400 T00820	6.35	4.76	●	●						
060700 T00520	6.35	7.94							●	
090700 E004	9.525	7.94	●	●						
090700 T00520	9.525	7.94				●	●	●	●	
090700 T01020	9.525	7.94						●		
090700 T00820	9.525	7.94	●	●						●
0908 TNB	9.525	7.86					●	●	●	
120700 E004	9.525	7.94	●	●						
120700 T00520	12.70	7.94				●	●	●	●	
120700 T00820	12.70	7.94	●	●						●
120700 T01020	12.70	7.94						●		
120700 Z01520	12.70	7.94						●		
1208 TNB	12.70	7.86					●			

RPGX

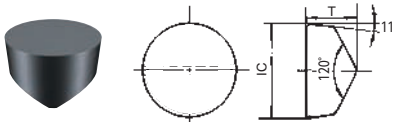● : 1st Choice ● : 2nd Choice




Steel	P								
Stainless Steel	M								
Cast Iron	K			●	●	●	●	●	●
Non-Ferrous Material	N								
Heat Resistant Alloy	S	●	●	●	●	●	●	●	●
Hardened Material	H						●	●	

Item Number	Dimensions(mm)		Stock							
	IC	T	BIDEMICS		SIALON ceramics			Whisker ceramics		
			JX1	JX3	SX7	SX3	SX9	WA1	WA5	
RPGX 060400 T00520	6.35	4.76							●	
090700 E004	6.35	7.94	●	●						
090700 T00520	9.525	7.94				●	●	●	●	
090700 T00820	9.525	7.94	●	●	●					●
0908 TNB	9.525	7.86					●	●	●	
120700 E004	9.525	7.94	●	●						
120700 T00520	12.70	7.94				●	●	●	●	
120700 T01020	12.70	7.94						●		
120700 T00820	12.70	7.94	●	●	●					●
1208 TNB	12.70	7.86					●			

RCGX/RPGX..Series - Toolholders

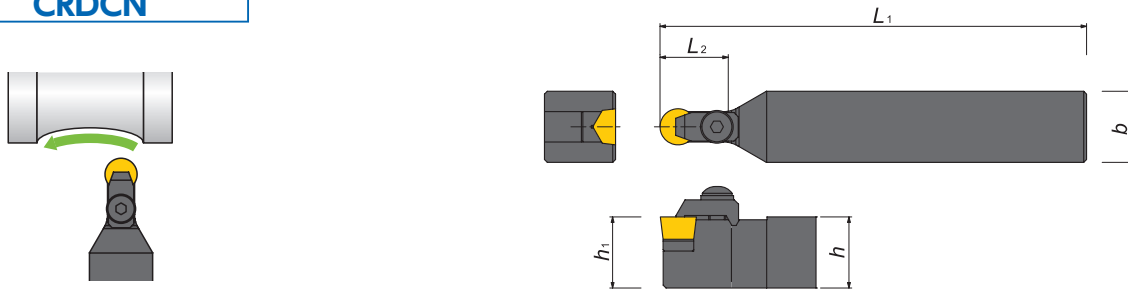CRDCN



● Holders

Item Number	Stock	Dimensions(mm)					Gage insert
		h	b	L_1	h_1	L_2	
CRDCN3225P06	●	32	25	170	32	20	RCGX/RPGX0607 (08)
3225P09	●	32	25	170	32	20	RCGX/RPGX0907 (08)
3225P12	●	32	25	170	32	25	RCGX/RPGX1207 (08)


● Spare Parts

Item Number	Clamp Screw	Washer	Shim	Clamp	Spring pin	Wrench
	CRDCN3225P06					—
3225P09	BS0625	WS-6	HARCGX0908V	HC35KR-6075	2 * 8AW	LW-4
3225P12	BS0625	WS-6	HARCGX1208V	HC35KR-6076	2.5 * 8AW	LW-4

Modular Holder Body


GTWP-H

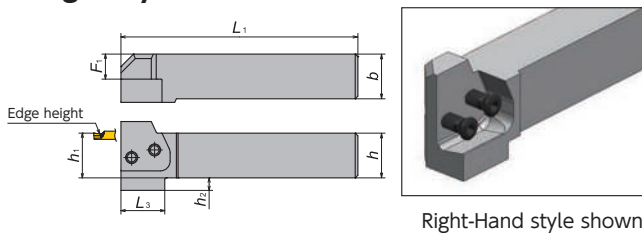Straight style toolholder



GKWP-H

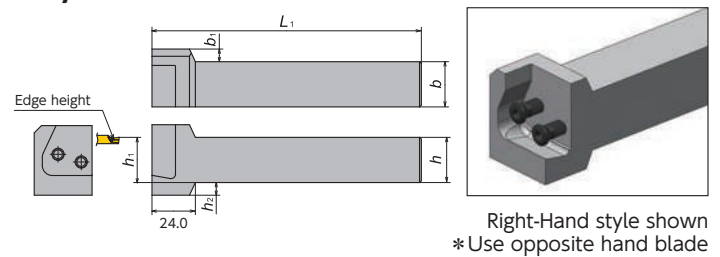L-style toolholder



● Toolholder Body

Toolholder	Stock		Dimensions(mm)						Parts		
	R	L	h	b	h_1	L_1	F_1	h_2	L_3	Screw	Wrench
GTWP ^{R/L} 2020-H	●	●	20.0	20.0	20.0	107.5	9	8	28.5	FSI28-6.0×18	LW-4
2525-H	●	●	25.0	25.0	25.0	132.5	14	7	24.5	FSI28-6.0×18	LW-4
3232-H	●	●	32.0	32.0	32.0	152.5	21	—	—	FSI28-6.0×18	LW-4

● Toolholder Body


Toolholder	Stock		Dimensions(mm)						Parts	
	R	L	h	b	h_1	L_1	b_1	h_2	Screw	Wrench
GKWP ^{R/L} 2020-H	●	●	20.0	20.0	20.0	124	12	8	FSI28-6.0×18	LW-4
2525-H	●	●	25.0	25.0	25.0	149	7	7	FSI28-6.0×18	LW-4
3232-H	●	●	32.0	32.0	32.0	169	—	—	FSI28-6.0×18	LW-4

Guidelines for Machining HRSA Materials


RCGX/RPGX..Series - Blades

GBRR

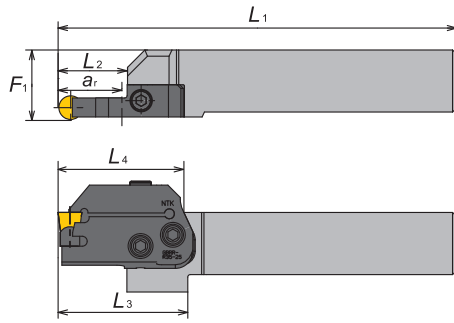For GTWP-H



For GKWP-H

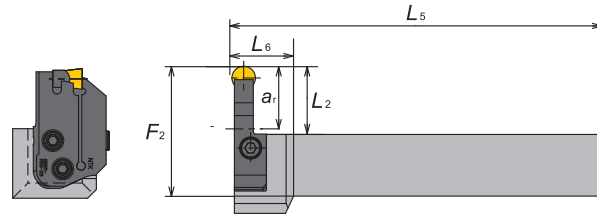

● Right hand


Hand	Blade number	Stock	Holder	Insert	Dimensions(mm)								
					L ₁	L ₂	L ₃	L ₄	L ₅	L ₆	F ₁	F ₂	a _r
Right	GBRR-R23-19	●	GTWPR2020-H	RCGX0604	130.1	22.6	51.1	45.6	125.0	25.0	23.0	42.6	19.0
			GKWPL2020-H	RPGX0604	130.1	22.6	51.1	45.6	125.0	25.0	23.0	42.6	19.0
			GTWPR2525-H	RCGX0604	155.1	22.6	47.1	50.7	150.0	25.0	28.0	47.6	19.0
			GKWPL2525-H	RPGX0604	155.1	22.6	47.1	50.7	150.0	25.0	28.0	47.6	19.0
			GTWPR3232-H	RCGX0604	175.1	22.6	—	53.2	170.0	25.0	35.0	54.6	19.0
			GKWPL3232-H	RPGX0604	175.1	22.6	—	53.2	170.0	25.0	35.0	54.6	19.0
	GBRR-R35-25	●	GTWPR2020-H	RCGX0907(08)	135.2	27.7	56.2	45.6	125.0	25.0	23.0	47.7	25.4
			GKWPL2020-H	RPGX0907(08)	135.2	27.7	56.2	45.6	125.0	25.0	23.0	47.7	25.4
			GTWPR2525-H	RCGX0907(08)	160.2	27.7	52.2	50.7	150.0	25.0	28.0	52.7	25.4
			GKWPL2525-H	RPGX0907(08)	160.2	27.7	52.2	50.7	150.0	25.0	28.0	52.7	25.4
			GTWPR3232-H	RCGX0907(08)	180.2	27.7	—	53.2	170.0	25.0	35.0	59.7	25.4
			GKWPL3232-H	RPGX0907(08)	180.2	27.7	—	53.2	170.0	25.0	35.0	59.7	25.4
	GBRR-R45-28	●	GTWPR2020-H	RCGX1207(08)	137.7	30.2	58.7	45.6	125.0	25.0	23.0	50.2	28.5
			GKWPL2020-H	RPGX1207(08)	137.7	30.2	58.7	45.6	125.0	25.0	23.0	50.2	28.5
			GTWPR2525-H	RCGX1207(08)	162.7	30.2	54.7	50.7	150.0	25.0	28.0	55.2	28.5
			GKWPL2525-H	RPGX1207(08)	162.7	30.2	54.7	50.7	150.0	25.0	28.0	55.2	28.5
			GTWPR3232-H	RCGX1207(08)	182.7	30.2	—	53.2	170.0	25.0	35.0	62.2	28.5
			GKWPL3232-H	RPGX1207(08)	182.7	30.2	—	53.2	170.0	25.0	35.0	62.2	28.5

Note : All dimensions shown are obtained when blade is set in the holder.


RCGX/RPGX..Series - Blades

GBRL

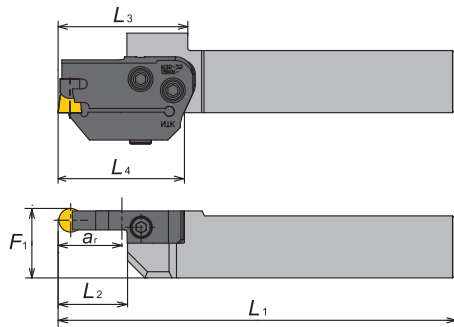For GTWP-H



For GKWP-H

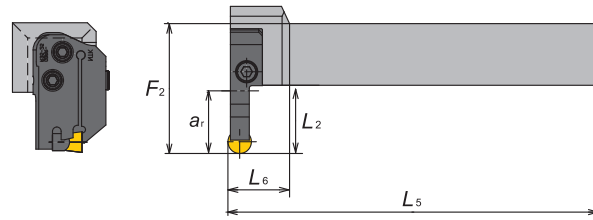

● Left hand


Hand	Blade number	Stock	Holder	Insert	Dimensions(mm)								
					L ₁	L ₂	L ₃	L ₄	L ₅	L ₆	F ₁	F ₂	a _r
Left	GBRL-R23-19	●	GTWPL2020-H	RCGX0604	130.1	22.6	51.1	45.6	125.0	25.0	23.0	42.6	19.0
			GKWPR2020-H	RPGX0604	130.1	22.6	51.1	45.6	125.0	25.0	23.0	42.6	19.0
			GTWPL2525-H	RCGX0604	155.1	22.6	47.1	50.7	150.0	25.0	28.0	47.6	19.0
			GKWPR2525-H	RPGX0604	155.1	22.6	47.1	50.7	150.0	25.0	28.0	47.6	19.0
			GTWPL3232-H	RCGX0604	175.1	22.6	—	53.2	170.0	25.0	35.0	54.6	19.0
			GKWPR3232-H	RPGX0604	175.1	22.6	—	53.2	170.0	25.0	35.0	54.6	19.0
	GBRL-R35-25	●	GTWPL2020-H	RCGX0907(08)	135.2	27.7	56.2	45.6	125.0	25.0	23.0	47.7	25.4
			GKWPR2020-H	RPGX0907(08)	135.2	27.7	56.2	45.6	125.0	25.0	23.0	47.7	25.4
			GTWPL2525-H	RCGX0907(08)	160.2	27.7	52.2	50.7	150.0	25.0	28.0	52.7	25.4
			GKWPR2525-H	RPGX0907(08)	160.2	27.7	52.2	50.7	150.0	25.0	28.0	52.7	25.4
			GTWPL3232-H	RCGX0907(08)	180.2	27.7	—	53.2	170.0	25.0	35.0	59.7	25.4
			GKWPR3232-H	RPGX0907(08)	180.2	27.7	—	53.2	170.0	25.0	35.0	59.7	25.4
	GBRL-R45-28	●	GTWPL2020-H	RCGX1207(08)	137.7	30.2	58.7	45.6	125.0	25.0	23.0	50.2	28.5
			GKWPR2020-H	RPGX1207(08)	137.7	30.2	58.7	45.6	125.0	25.0	23.0	50.2	28.5
			GTWPL2525-H	RCGX1207(08)	162.7	30.2	54.7	50.7	150.0	25.0	28.0	55.2	28.5
			GKWPR2525-H	RPGX1207(08)	162.7	30.2	54.7	50.7	150.0	25.0	28.0	55.2	28.5
			GTWPL3232-H	RCGX1207(08)	182.7	30.2	—	53.2	170.0	25.0	35.0	62.2	28.5
			GKWPR3232-H	RPGX1207(08)	182.7	30.2	—	53.2	170.0	25.0	35.0	62.2	28.5

Note : All dimensions shown are obtained when blade is set in the holder.

Guidelines for Machining HRSA Materials

RCGY..Series - Inserts

● : 1st Choice ● : 2nd choice





Steel	P								
Stainless Steel	M								
Cast Iron	K			●	●	●	●	●	●
Non-Ferrous Material	N								
Heat Resistant Alloy	S	●	●	●	●	●	●	●	●
Hardened Material	H							●	●

Item Number	Dimensions(mm)		Stock							
			BIDEMICS		SIALON ceramics			Whisker ceramics		
	IC	T	JX1	JX3	SX7	SX3	SX9	WA1	WA5	
RCGY 090603 TNB	6.35	4.76							●	
120603 TNB	6.35	7.94							●	

RCGY..Series - Toolholders

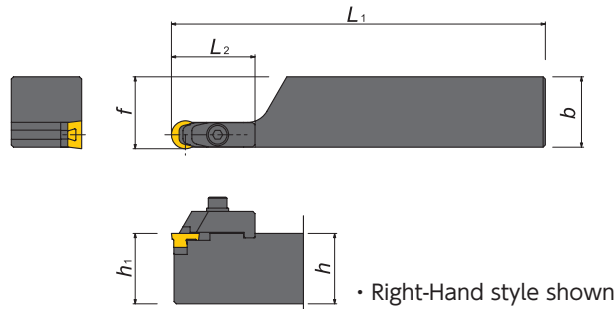CRDCN



● Holders


Item Number	Stock		Dimensions(mm)						Gage insert
	R	L	h	b	L ₁	h ₁	f	L ₂	
CRXC3232P09Y	●		32	32	170	32	32.7	28	RCGY090603
3232P12Y	●		32	32	170	32	32.7	38	RCGY120603

● Spare Parts

Item Number	Clamp Screw	Washer	Shim	Shim Screw	Spring	Clamp	Wrench
CRXC3232P09Y							
CRXC3232P09Y	CS0425	WS-4	HAR09Y	M2*8	ASGL4	CRN4	LW-3
3232P12Y	CS0525	WS-5	HAR12Y	M3*8	ASGL5	CRN5	LW-4

RNGN..Series - Inserts

● : 1st Choice ● : 2nd choice



Material	Grade	Stock	Stock	Stock	Stock	Stock	Stock	Stock	Stock
Steel	P								
Stainless Steel	M								
Cast Iron	K			●	●	●	●	●	●
Non-Ferrous Material	N								
Heat Resistant Alloy	S	●	●	●	●	●	●	●	●
Hardened Material	H							●	●

Item Number	Dimensions(mm)		Stock							
	IC	T	BIDEMICS		SiALON ceramics			Whisker ceramics		
			JX1	JX3	SX7	SX3	SX9	WA1	WA5	
RNGN 120400 T00520	12.70	4.76				●			●	
120400 T00820	12.70	4.76								●
120400 T00525	12.70	4.76						●	●	
120400 T01020	12.70	4.76						●	●	
120400 T02025	12.70	4.76						●	●	
120700 E002	12.70	7.94						●		
120700 E004	12.70	7.94	●	●	●	●		●		
120700 T00520	12.70	7.94				●		●	●	
120700 T00525	12.70	7.94						●	●	
120700 T00820	12.70	7.94	●	●	●			●	●	●
120700 T01020	12.70	7.94						●	●	
120700 Z01520	12.70	7.94						●		
120700 K20015	12.70	7.94								★
150700 T00520	15.875	7.94						●		
150700 T00525	15.875	7.94						●	●	
150700 T00820	15.875	7.94						●		●
190700 T00520	19.05	7.94						●		
190700 T00525	19.05	7.94						●		
190700 T00820	19.05	7.94							●	●
190700 T01020	19.05	7.94							●	
190700 K20015	19.05	7.94							●	●
250700 T00520	25.4	7.94						●	●	
250700 T00820	25.4	7.94								●

RNGN..Series - Toolholders

C54/CRDNN

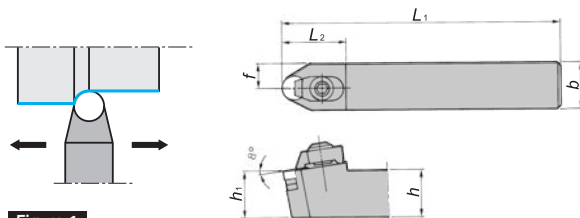


Figure-1

C55/CRGNR

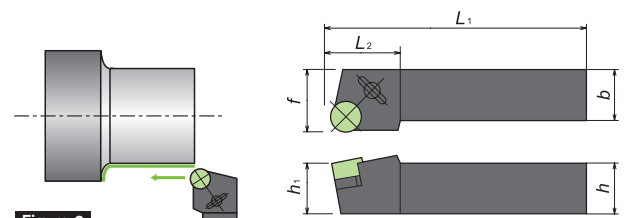


Figure-2

Right-Hand style shown

● Holders

Figure	Item Number	Stock			Dimensions(mm)						Gage insert
		R	N	L	h	b	L ₁	h ₁	f	L ₂	
1	C54M-44		●		25	25	160	25	12.5	33	RN□N1204 (1207)
	CRDNN2525M12		●		25	25	150	25	12.5	34	
	3225P12		●		32	25	170	32	12.5	34	
2	C55%-33	●			19	19	140	19	28	30	RNGN1204
	-44	●		●	25	25	160	25	30	30	RN□N1204 (1207)
	-45	●			32	25	160	32	30	30	
	CRGN%3225P12	●			32	25	170	32	32	30	


● Spare Parts

Figure	Item Number	Clamp	Shim	Clamp Screw	Shim Screw	Wrench	Snap ring
1	C54M-44						
	CRDNN2525M12						
	3225P12						
2	C55%-33	CC08M	ARN42				
	-44						
	-45						
	CRGN%3225P12						

Machining Mill Rolls with NTK Ceramics and CBNs

Features

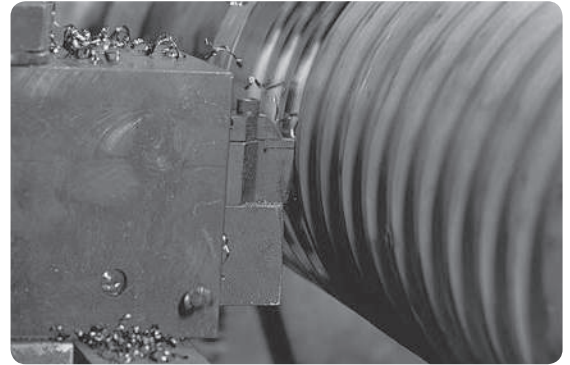
- *In addition to our general purpose ceramic HC2 grade, NTK offers HC7 for higher productivity*
- *WA1's wear resistance is an advantage when roughing carbide and hardened rolls*
- *ZC7 covers a wide range of applications such as carburized or induction hardened steels.*



Recommended Cutting Conditions

Roll Material	Grade		Cutting speed (m/min)			Feed (mm/rev)	Depth of cut (mm)	DRY	WET	
			Shore Hardness Scale							
			55-65	65-72	72-					
Steel ex. D2	Ceramic	HC7	140-180	100%	80%	60%	0.1-0.3	0.6-1.9	●	
	Ceramic	HC2	100-140	100%	80%	60%	0.1-0.3	0.6-1.9	●	
Chilled Cast Iron	Ceramic	HC7	140-180	100%	80%	60%	0.1-0.3	0.6-1.9	●	
	Ceramic	HC2	100-140	100%	80%	60%	0.1-0.3	0.6-1.9	●	
Ductile Cast iron	Ceramic	HC7	90-180	100%	80%	60%	0.1-0.3	0.6-1.9	●	
	Ceramic	HC2	80-140				0.1-0.3	0.6-1.9	●	
Carbide	CBN	B22	30-60				0.1-0.3	0.25	●	
	Whisker	WA1/WA5	50-150				0.1-0.3	0.25-2.0	●	
CPM Rolls ex. Powdered Metal	Ceramic	HC7	120-150				0.1-0.3	0.6-1.9	●	
Continuous cuts 42-97 Shore hardness	Ceramic	ZC7	40-200	Finish			0.08-0.2	0.1-0.8	●	●


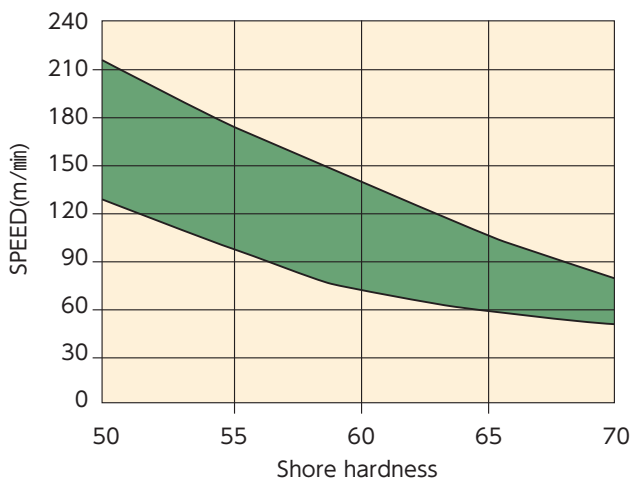
Recommended Speed Chart



Recommended Feed Chart

Nose radius	Depth of cut (mm)	Feed (mm/rev)	
		30 micro	60 micro
0.4	0.2	0.05-0.08	0.08-0.1
0.8	0.4	0.08-0.1	0.1-0.12
1.2	0.5	0.1-0.12	0.12-0.16
1.6	0.8	0.1-0.14	0.15-0.19
6.35	2.0	0.18-0.25	0.25-0.35

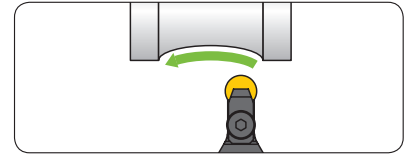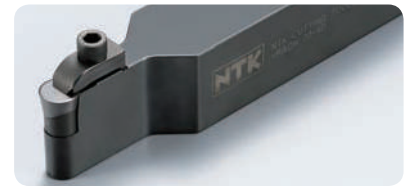CRDCN for RCGX inserts



U.S. rebar size chart		
Imperial bar size	Metric size	Nominal diameter (mm)
#2	#6	6.35
#3	#10	9.525
#4	#13	12.7
#5	#16	15.875
#6	#19	19.05
#8	#25	25.4

Key Points for Machining Mill Rolls

- **Hardness of the roll is an important factor. As the roll gets harder the Cutting speed should be reduced.**
- **RCGX style inserts are the preferred insert for rigidity and cost savings.**
- **If making multiple passes with one edge, vary your DOC to move the wear on the insert edge and reduce notch wear.**
- **If you encounter chatter, increase your feed rate. Variable RPM controllers are helpful to reduce harmonics.**
- **Heavy chatter is often a sign of tooling being above centerline.**
- **Chilled and ductile iron rolls are typically softer and short chipping materials. Even after running in the mill, these rolls rarely exceed a 67 Shore hardness.**
- **Tool steel and CPM rolls run quite similar and are normally over 100 Shore hardness. These rolls have a higher Chrome and Cobalt content and are considered a longer chipping material. The combination of the material type and hardness require a slower speed to run successfully.**
- **RCGX0907 & 1207 feed rate runs best at 0.15 mm/rev.**


Types, Applications and Features of Rolls

Mill Rolls	Applications	Features
Forged rolls <ul style="list-style-type: none"> ● Cr-Mo-based ● High-speed-steel-based ● Carbide-based 	Bloom-milling at heavy rolling load. Work rolls for rough cold rolling, and rolls for reinforcement.	Strong and relatively high in heat resistance.
Cast iron rolls <ul style="list-style-type: none"> ● Carbide based 	Semi-rolling or finishing that requires a very heavy load.	More wear-resistant and high-heat-resistant than steel in between ordinary steel and cast-iron-based steel.
Cast Steel rolls <ul style="list-style-type: none"> ● Adamite roll for deep profile ● Chilled roll for boards and wire steel process ● Grain roll for steel finishing process boards (Resistant to thermal crack) ● Ductile roll for boards, profile steel, and bar wire steel process (Rolls for roughing and finishing use) ● Special cast iron roll 	Wide range of applications from bloom-milling and semi-rolling to finishing.	Suitable for the applications that require heat resistance and strength. Suitable for the applications that require wear resistance.
Carbide rolls	<ul style="list-style-type: none"> ● Pinch mills ● Wire rod ● Wire flattening or forming ● ERW tube mills ● Turks heads ● Hot & Cold rolls ● Work reducing rolls 	Preferred in abrasive operations. High wear capabilities.

Machining Mill Rolls with NTK Ceramics and CBNs

CDH..Series - Inserts

● : 1st Choice ● : 2nd choice




Steel	P								
Stainless Steel	M								
Cast Iron	K	●	●	●	●	●	●	●	●
Non-Ferrous Material	N								
Heat Resistant Alloy	S			●	●	●	●	●	●
Hardened Material	H	●	●	●	●	●	●	●	●

Item Number	Dimensions(mm)			Ceramics					CBN
				Alumina - TiC		SiAlON	Whisker		
	IC	T	H	HC2	HC7	SX9	WA1	WA5	B22
CDH22PN	12.70	6.35	3.18	●					
33PN	19.05	9.52	6.35	●					
42PN	25.40	12.70	6.75						
43PN	25.40	19.05	6.75						
53PN	31.75	19.05	9.92						

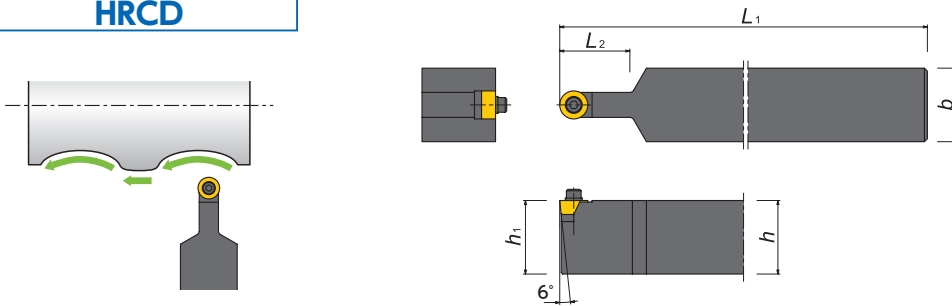CDH..Series - Toolholders





HRCD



● Holders


Item Number	Stock			Dimensions(mm)					Gage insert
	R	N	L	h	b	L ₁	h ₁	L ₂	
HRCD-22		●		50	50	300	50	30	CDH22
-33		●		50	50	300	50	50	CDH33
-42				50	50	300	50	80	CDH42
-43				50	50	300	50	80	CDH43
-53				50	50	300	50	100	CDH53

● Spare Parts

Item Number	Clamp Screw	Washer	Shim	Wrench
HRCD-22	 CS0316	 W120	 HACDH22	 LW-2.5
HRCD-33	CS0625	W110	HACDH33	LW-5
HRCD-42	1/4-20UNC * 11/4	W106	HACDH42	LWU-4
HRCD-43	1/4-20UNC * 11/2	W106	HACDH43	LWU-4
HRCD-53	3/8-16UNC * 11/2	W107	HACDH53	LWU-5

RCGX..Series - Inserts

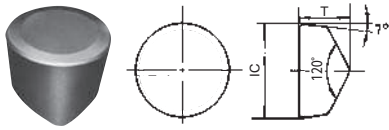● : 1st Choice ● : 2nd choice





Steel	P							
Stainless Steel	M							
Cast Iron	K	●	●	●	●	●	●	●
Non-Ferrous Material	N							
Heat Resistant Alloy	S			●	●	●	●	●
Hardened Material	H	●	●	●	●	●	●	●

Item Number	Dimensions(mm)		Ceramics					CBN
			Alumina - TiC		SiAlON	Whisker		
	IC	T	HC2	HC7	SX9	WA1	WA5	B22
RCGX 060400 T00520	6.35	4.76				●	●	
060400 T02020	6.35	4.76		★			★	
060600 P07015	6.35	6.21					★	
060700 T00520	6.35	7.94				●		
090700 T00520	9.525	7.94			●	●		
090700 T00820	9.525	7.94					●	
090700 T01020	9.525	7.94				●		
090700 K20015	9.525	7.94		★				★
0908 PN	9.525	7.86	●					
0908 TNB	9.525	7.86			●	●		
120700 T00520	12.70	7.94			●	●		
120700 T00820	12.70	7.94					●	
120700 T01020	12.70	7.94				●		
120700 Z01520	12.70	7.94				●		
120700 K20015	12.70	7.94		★				★
1208 PN	12.70	7.86	●					
1208 TBN	12.70	7.86			●			

RCGX..Series - Toolholders

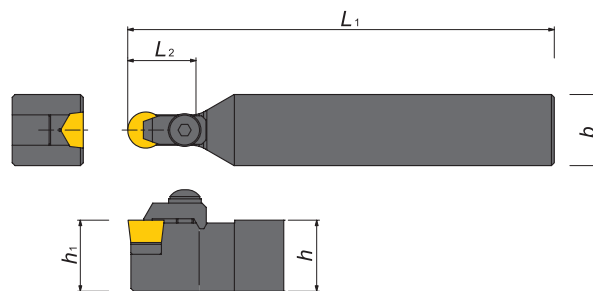CRDCN



● Holders

Item Number	Stock			Dimensions(mm)				Gage insert		
	R	N	L	h	b	L ₁	h ₁		f	L ₂
CRDCN2525M06				25	25	150	25	—	20	RCGX0607(08)
2525M09				25	25	150	25	—	20	RCGX0907(08)
2525M12				25	25	150	25	—	20	RCGX1207(08)

● Spare Parts



Item Number	Clamp Screw	Washer	Shim	Clamp	Spring pin	Wrench
CRDCN3225P06	BS0520	WS-5	HARCGX06	HC35KR-4099	—	LW-3
3225P09	BS0625	WS-6	HARCGX0908V	HC35KR-6075	2 * 8AW	LW-4
3225P12	BS0625	WS-6	HARCGX1208V	HC35KR-6076	2.5 * 8AW	LW-4

New Products
 Tool Materials / Selection Guide
 BIDEKMS, PCD, CBN and Ceramics
 Micrograin Carbide, PVD Coated Carbide
 Insert Item List
 General Turning Toolholders
 Unique Swiss Tooling
 Grooving / Side Turning
 Threading
 Shaper
 ID Tooling
 Application Introduction
 Endmills
 Rotating Tools
 Information
 Index

Modular Holder Body

GTWP-H

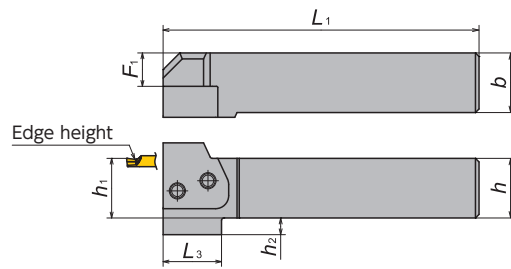Straight style toolholders





Right-Hand style shown

Toolholder	Stock		Dimensions(mm)							Parts	
	R	L	h	b	h_1	L_1	F_1	h_2	L_3	Screw	Wrench
GTWP^{PR}L 2020-H	●	●	20.0	20.0	20.0	107.5	9	8	28.5	FSI28-6.0×18	LW-4
2525-H	●	●	25.0	25.0	25.0	132.5	14	7	24.5	FSI28-6.0×18	LW-4
3232-H	●	●	32.0	32.0	32.0	152.5	21	—	—	FSI28-6.0×18	LW-4

GKWP-H

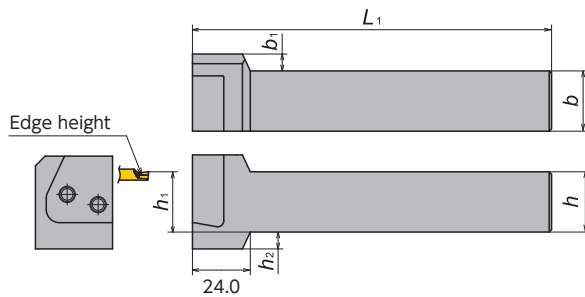L-style toolholders




Right-Hand style shown
*Use opposite hand blade

Toolholder	Stock		Dimensions(mm)						Parts	
	R	L	h	b	h_1	L_1	b_1	h_2	Screw	Wrench
GKWP^{PR}L 2020-H	●	●	20.0	20.0	20.0	124	12	8	FSI28-6.0×18	LW-4
2525-H	●	●	25.0	25.0	25.0	149	7	7	FSI28-6.0×18	LW-4
3232-H	●	●	32.0	32.0	32.0	169	—	—	FSI28-6.0×18	LW-4


RCGX/RPGX..Series - Blade

GBRR/L

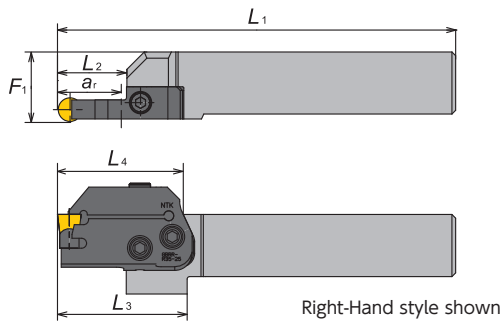
For GTWP-H



For GWPL-H



For GWPR-H



● Right hand

Hand	Blade number	Stock	Holder	Insert	Dimensions(mm)								
					L ₁	L ₂	L ₃	L ₄	L ₅	L ₆	F ₁	F ₂	a _r
Right	GBRR-R23-19	●	GTWPR2020-H	RCGX0604	130.1	22.6	51.1	45.6	125.0	25.0	23.0	42.6	19.0
			GKWPL2020-H	RPGX0604	130.1	22.6	51.1	45.6	125.0	25.0	23.0	42.6	19.0
			GTWPR2525-H	RCGX0604	155.1	22.6	47.1	50.7	150.0	25.0	28.0	47.6	19.0
			GKWPL2525-H	RPGX0604	155.1	22.6	47.1	50.7	150.0	25.0	28.0	47.6	19.0
			GTWPR3232-H	RCGX0604	175.1	22.6	—	53.2	170.0	25.0	35.0	54.6	19.0
	GKWPL3232-H	RPGX0604	175.1	22.6	—	53.2	170.0	25.0	35.0	54.6	19.0		
	GBRR-R35-25	●	GTWPR2020-H	RCGX0907(08)	135.2	27.7	56.2	45.6	125.0	25.0	23.0	47.7	25.4
			GKWPL2020-H	RPGX0907(08)	135.2	27.7	56.2	45.6	125.0	25.0	23.0	47.7	25.4
			GTWPR2525-H	RCGX0907(08)	160.2	27.7	52.2	50.7	150.0	25.0	28.0	52.7	25.4
			GKWPL2525-H	RPGX0907(08)	160.2	27.7	52.2	50.7	150.0	25.0	28.0	52.7	25.4
			GTWPR3232-H	RCGX0907(08)	180.2	27.7	—	53.2	170.0	25.0	35.0	59.7	25.4
	GKWPL3232-H	RPGX0907(08)	180.2	27.7	—	53.2	170.0	25.0	35.0	59.7	25.4		
GBRR-R45-28	●	GTWPR2020-H	RCGX1207(08)	137.7	30.2	58.7	45.6	125.0	25.0	23.0	50.2	28.5	
		GKWPL2020-H	RPGX1207(08)	137.7	30.2	58.7	45.6	125.0	25.0	23.0	50.2	28.5	
		GTWPR2525-H	RCGX1207(08)	162.7	30.2	54.7	50.7	150.0	25.0	28.0	55.2	28.5	
		GKWPL2525-H	RPGX1207(08)	162.7	30.2	54.7	50.7	150.0	25.0	28.0	55.2	28.5	
		GTWPR3232-H	RCGX1207(08)	182.7	30.2	—	53.2	170.0	25.0	35.0	62.2	28.5	
GKWPL3232-H	RPGX1207(08)	182.7	30.2	—	53.2	170.0	25.0	35.0	62.2	28.5			

Note : All dimensions shown are obtained when blade is set in the holder.

● Left hand


Hand	Blade number	Stock	Holder	Insert	Dimensions(mm)								
					L ₁	L ₂	L ₃	L ₄	L ₅	L ₆	F ₁	F ₂	a _r
Left	GBRL-R23-19	●	GTWPL2020-H	RCGX0604	130.1	22.6	51.1	45.6	125.0	25.0	23.0	42.6	19.0
			GKWPR2020-H	RPGX0604	130.1	22.6	51.1	45.6	125.0	25.0	23.0	42.6	19.0
			GTWPL2525-H	RCGX0604	155.1	22.6	47.1	50.7	150.0	25.0	28.0	47.6	19.0
			GKWPR2525-H	RPGX0604	155.1	22.6	47.1	50.7	150.0	25.0	28.0	47.6	19.0
			GTWPL3232-H	RCGX0604	175.1	22.6	—	53.2	170.0	25.0	35.0	54.6	19.0
	GKWPR3232-H	RPGX0604	175.1	22.6	—	53.2	170.0	25.0	35.0	54.6	19.0		
	GBRL-R35-25	●	GTWPL2020-H	RCGX0907(08)	135.2	27.7	56.2	45.6	125.0	25.0	23.0	47.7	25.4
			GKWPR2020-H	RPGX0907(08)	135.2	27.7	56.2	45.6	125.0	25.0	23.0	47.7	25.4
			GTWPL2525-H	RCGX0907(08)	160.2	27.7	52.2	50.7	150.0	25.0	28.0	52.7	25.4
			GKWPR2525-H	RPGX0907(08)	160.2	27.7	52.2	50.7	150.0	25.0	28.0	52.7	25.4
			GTWPL3232-H	RCGX0907(08)	180.2	27.7	—	53.2	170.0	25.0	35.0	59.7	25.4
	GKWPR3232-H	RPGX0907(08)	180.2	27.7	—	53.2	170.0	25.0	35.0	59.7	25.4		
GBRL-R45-28	●	GTWPL2020-H	RCGX1207(08)	137.7	30.2	58.7	45.6	125.0	25.0	23.0	50.2	28.5	
		GKWPR2020-H	RPGX1207(08)	137.7	30.2	58.7	45.6	125.0	25.0	23.0	50.2	28.5	
		GTWPL2525-H	RCGX1207(08)	162.7	30.2	54.7	50.7	150.0	25.0	28.0	55.2	28.5	
		GKWPR2525-H	RPGX1207(08)	162.7	30.2	54.7	50.7	150.0	25.0	28.0	55.2	28.5	
		GTWPL3232-H	RCGX1207(08)	182.7	30.2	—	53.2	170.0	25.0	35.0	62.2	28.5	
GKWPR3232-H	RPGX1207(08)	182.7	30.2	—	53.2	170.0	25.0	35.0	62.2	28.5			

Note : All dimensions shown are obtained when blade is set in the holder.

Machining Mill Rolls with NTK Ceramics and CBNs


RNGN..Series - Inserts

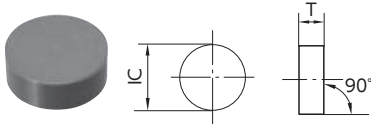● : 1st Choice ● : 2nd choice



Material	Grade	Steel	Stainless Steel	Cast Iron	Non-Ferrous Material	Heat Resistant Alloy	Hardened Material
P	M						
K	N	●	●	●	●	●	●
S	H	●	●	●	●	●	●

Item Number	Dimensions(mm)		Ceramics					CBN
			Alumina - TiC		SiAlON	Whisker		
	IC	T	HC2	HC7	SX9	WA1	WA5	B22
RNGN120400T00520	12.7	4.76				●		
120400T00820	12.7	4.76					●	
120400T00525	12.7	4.76				●		
120400T01020	12.7	4.76				●		
120400T01025	12.7	4.76	●					
120400T02025	12.7	4.76				●		
RNGN120700E002	12.7	7.94				●		
120700E007	12.7	7.94	●					
120700T00520	12.7	7.94				●	●	
120700T00525	12.7	7.94				●	●	
120700T00820	12.7	7.94						●
120700T01020	12.7	7.94					●	
120700T02025	12.7	7.94	●					
120700Z01520	12.7	7.94					●	
120700K20015	12.7	7.94		★				★
RNGN150700T00520	15.875	7.94				●		
150700T00525	15.875	7.94				●	●	
150700T00820	15.875	7.94						●
RNGN190700T00520	19.05	7.94				●		
190700T00525	19.05	7.94				●		
190700T00820	19.05	7.94						●
190700T01020	19.05	7.94					●	
190700K20015	19.05	7.94						●
RNGN250700T00520	25.4	7.94				●	●	
250700T00820	25.4	7.94						●
RNGN120400S	12.70	4.76						●



RNGN..Series - Toolholders

C54/CRDNN

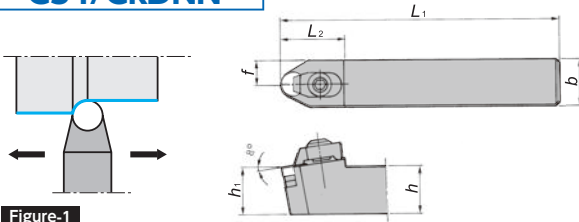


Figure-1

C55/CRGNR

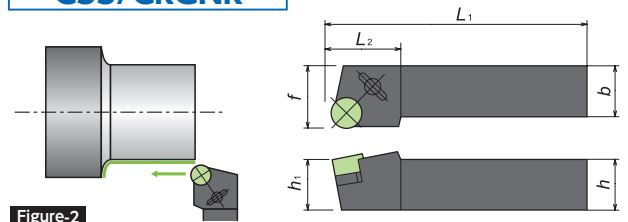


Figure-2

Right-Hand style shown

● Holders


Figure	Item Number	Stock			Dimensions(mm)						Gage insert
		R	N	L	h	b	L ₁	h ₁	f	L ₂	
1	C54M-44		●		25	25	160	25	12.5	33	RN□N1204 (1207)
	CRDNN2525M12		●		25	25	150	25	12.5	34	
	3225P12		●		32	25	170	32	12.5	34	
2	C55%-33	●			19	19	140	19	28	30	RNGN1204
	-44	●		●	25	25	160	25	30	30	RN□N1204 (1207)
	-45	●			32	25	160	32	30	30	
	CRGN%3225P12	●			32	25	170	32	32	30	

● Spare Parts

Figure	Item Number	Clamp	Shim	Clamp Screw	Shim Screw	Wrench	Snap ring
1	C54M-44	CC08M	ARN42	BS0835W	M3 * 12	LW-4	SR08
	CRDNN2525M12						
	3225P12						
2	C55%-33	CC08M	ARN42	BS0829W	M3 * 12	LW-4	SR08
	-44			BS0835W			
	-45						
	CRGN%3225P12						

LNM..Series - Inserts

● : 1st Choice ● : 2nd choice



Steel	P								
Stainless Steel	M								
Cast Iron	K	●	●	●	●	●	●	●	●
Non-Ferrous Material	N								
Heat Resistant Alloy	S				●	●	●	●	●
Hardened Material	H	●	●	●	●	●	●	●	●

Item Number	Dimensions(mm)				Ceramics					CBN
					Alumina - TiC		SiAlON	Whisker		
	w	L	s	R	HC2	HC7	SX9	WA1	WA5	B22
LNM6688PNX8	19.05	38.10	12.70	3.2					●	
6688SN2	19.05	38.10	12.70	3.2				●		
6688SNX6	19.05	38.10	12.70	3.2		●				

RBGX..Series - Inserts


● : 1st Choice ● : 2nd choice

Steel	P								
Stainless Steel	M								
Cast Iron	K	●	●	●	●	●	●	●	●
Non-Ferrous Material	N								
Heat Resistant Alloy	S				●	●	●	●	●
Hardened Material	H	●	●	●	●	●	●	●	●

Item Number	Dimensions(mm)				Ceramics					CBN
					Alumina - TiC		SiAlON	Whisker		
	IC	IC ₁	T ₁	T	HC2	HC7	SX9	WA1	WA5	B22
RBGX16SPN	16	8	8	13	●					
16SSN2	16	8	8	13				●		
16S	16	8	8	13						●
20SPN	20	10	10	15	●					
20S	20	10	10	15						●
26SPN	26	14	10	15	●					
26SSN3	26	14	10	15				●		

Machining Poly-V Pulley Profiles

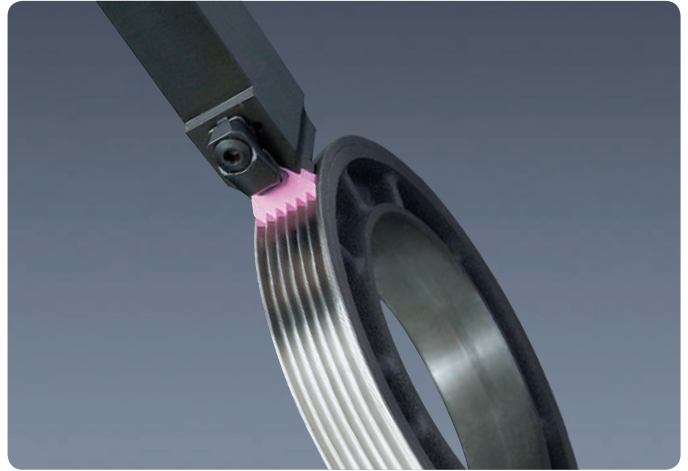Grooving With Ceramics




Features

- High speed machining for Poly-V pulleys
- Up to 6-V grooving with single pass
- Precision inserts for plunging profiles

Recommended Cutting Conditions

Material	Grade	Cutting speed (m/min)	Feed (mm/rev)	DRY	WET
Gray cast iron	HW2	300-600	0.05-0.15	●	

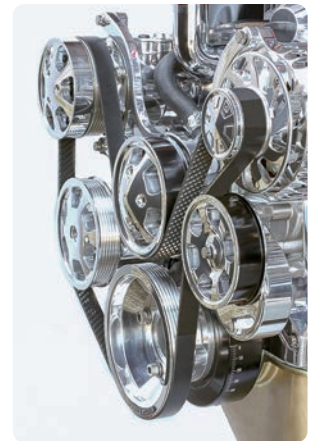

3V

15 kw needed
Insert : PTM33K30504ENB HW2

4V

21 kw needed
Insert : PTM43K40504ENB HW2

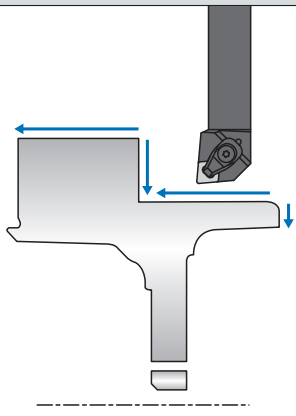
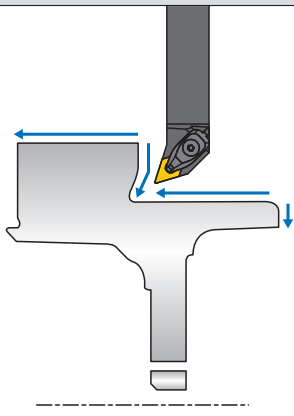
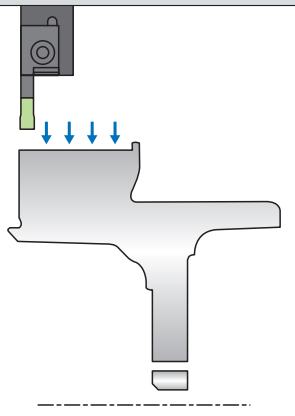
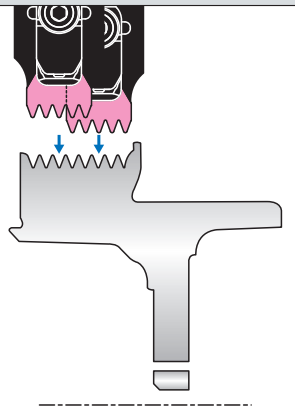
5V

26 kw needed
Insert : PTM53K50504ENB HW2

6V

31 kw needed
Insert : PTM53K60504ENB HW2

High-Speed Pulley Machining Example using NTK Ceramic Tools

	Process #1	Process #2	Process #3	Process #4
	OD and Profile Roughing	OD and Profile Finishing	Plunge Grooving	Poly-V Grooving
Tooling				
Insert	CNGA120412T02020 SX6	DNGA150408T01025 HC6 DNGA150408T01020 SP9	GVGN20600N08 WA1	PTM 53 K50504 ENB HW2*
Cutting Speed (m/min)	600-840	450-600 (HC6) 540-720 (SP9)	300-420	360-450 (420 recommended)
Feed (mm/rev)	0.45-0.6	0.3-0.45 (HC6) 0.45-0.6 (SP9)	0.2-0.25	0.05-0.15
DOC (mm)	2.0-3.0	Process dependent (0.5)	—	—
Coolant	DRY • (WET)	DRY • (WET)	DRY • (WET)	DRY
Life / corner	- 300 pcs	- 300 pcs	- 300 pcs	- 300 pcs

*Please check machine's HP when select insert.

	3V	4V	5V	6V
Required Cutting Power	15kw	21kw	26kw	26kw



- **NTK's Ceramic Inserts ensure in higher productivity and stable tool life for Damper-Pulley machining.**

Machining Tube Scarfing

TSN..Series

HN-ATS

HN59ATS (Right-hand)
HN60ATS (Left-hand)

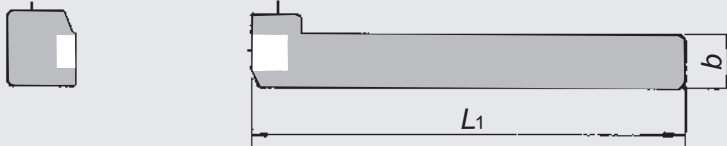
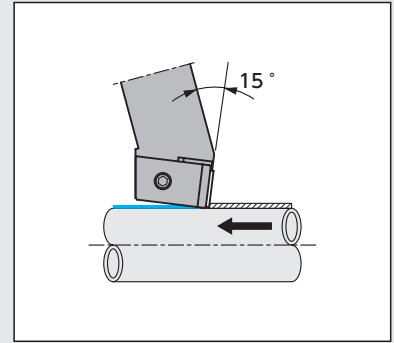



Figure-1

● Left-Hand style shown

HN-BTS

HN59BTS (Right-hand)
HN60BTS (Left-hand)

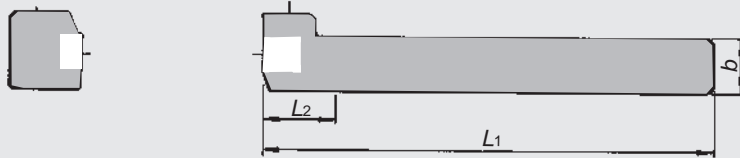
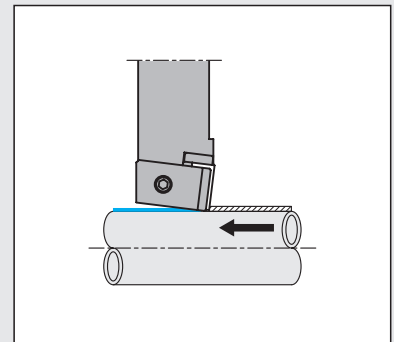




Figure-2

● Left-Hand style shown

TSN..Series - Toolholders


Shape	Code No.		Item Number	Stock		Dimensions (mm)					Gage insert	Shim	Shim Screw	Clamp	Clamp Screw	Wrench						
	59	60		59	60	h	b	L ₁	h ₁	L ₂												
1	5350574		HN59/60ATS-33E			19	19	160	12.5	26												
			-44E	●		25	25	160	18.5	26							TSN45-	ASN423 AZT659D	M3 * 5.5 M3 * 8	HC59/60TS-4	WS0620	LW-3
			-44E-5			25	25	160	18.5	26							TSN55-	ASN522 HAZT1255A	M3 * 8 M4 * 5.5			
2			HN59/60BTS-33E			19	19	160	19	25												
			-44E			25	25	160	25	25							TSN45-	ASN423 AZT659D	M3 * 5.5 M3 * 8	HC59/60TS-4	WS0620	LW-3
			-44E-5			25	25	160	25	25							TSN55-	ASN522 HAZT1255A	M3 * 8 M4 * 5.5			

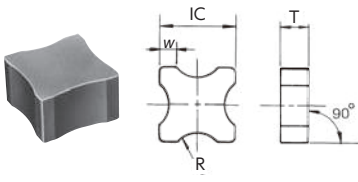TSN..Series - Inserts

Shape	Item Number	Dimensions (mm)				Ceramics	
		R	w	IC	T	CX3*	Stock
	TSN45-10	10	2.10	12.70	7.94	5125323	●
	-12	12	2.10	12.70	7.94	5119987	●
	-14	14	2.10	12.70	7.94	5123914	●
	-16	16	2.10	12.70	7.94	5119995	●
	-18	18	2.10	12.70	7.94	5124839	●
	-20	20	2.10	12.70	7.94	5120001	●
	-25	25	2.10	12.70	7.94	5120027	●
	-30	30	2.10	12.70	7.94	5120019	●
	-35	35	2.10	12.70	7.94	5123922	●
	-40	40	2.10	12.70	7.94	5123948	●
	-50	50	2.10	12.70	7.94	5123906	●
	-60	60	2.10	12.70	7.94		
	-70	70	2.10	12.70	7.94		
	TSN55-15	15	3.20	15.875	7.94		
	-20	20	3.20	15.875	7.94	5270244	●
	-25	25	3.20	15.875	7.94	5270251	●
	-30	30	3.20	15.875	7.94	5270269	●
	-35	35	3.20	15.875	7.94	5144936	●
-40	40	3.20	15.875	7.94	5271218	●	
-45	45	3.20	15.875	7.94	5144944	●	
-70	70	3.20	15.875	7.94			


*CX3 is an alumina-based ceramic similar to HC1.

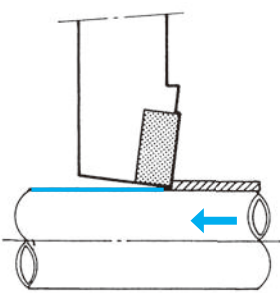Field Result

Tube scarfing	
Work material : SPHT4	
Cutting speed(m/min)=70	
Depth of cut (mm) =3.0	
Width of cutting (mm) =5.0	
Cutting oil : DRY	
NTK : CX3	70 min./corner
Competitor' s black ceramic grade	30 min./corner
CX3 exhibited a tool life more than double that of the competitor' s black ceramic tool.	

MEMO

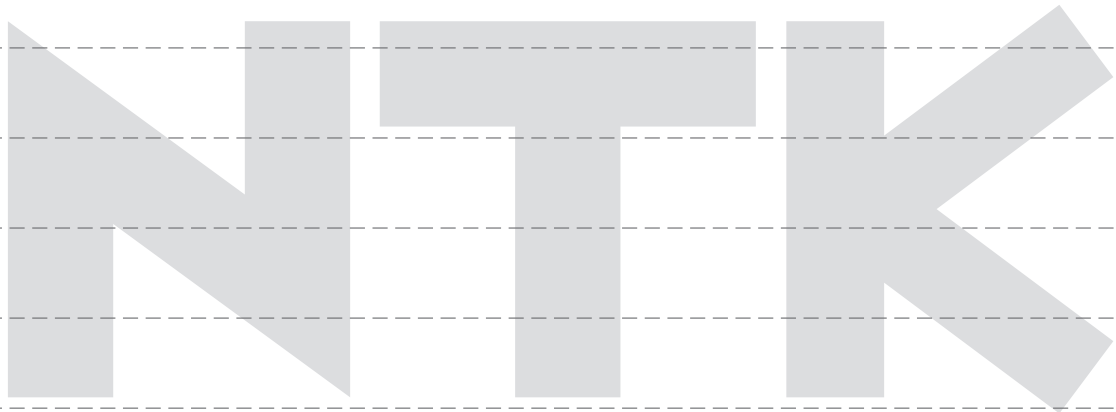New Products
Tool Materials / Selection Guide
BIDEMCS, PCD, CBN and Ceramics
Micrograin Carbide, PVD/Coated Carbide
Insert Item List
General Turning Toolholders
Unique Swiss Tooling
Grooving / Side Turning
Threading
Shaper
ID Tooling
Application Introduction
Endmills
Rotating Tools
Information
Index



M



Endmills

- CERAMATIC / Solid Ceramic EndMills ·· M2
- S-MILL / Solid Carbide EndMills ······ M6
- Small Diameter Indexable Endmills ···· M8

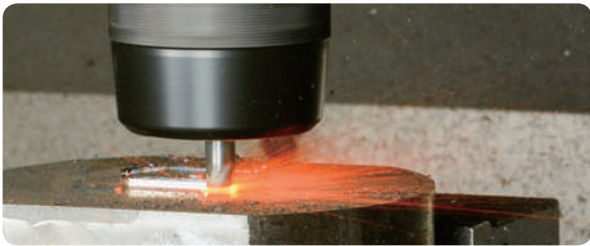
CERAMATIC / Solid Ceramic EndMill



Features

- Extremely high speed machining for HRSA materials with our durable SiAlON grade "SX9"
- More than 15 times higher productivity than a Carbide end mill
- 4, 6 and 8 flutes are available
- Unique patent pending design provides toughness to the edge

RCE for HRSA materials →M4



● Ceramic specialist's design

Helix angle

- Designed for the purpose of:
 - 4-flute: toughness
 - 6-flute: less tool pressure and better chip evacuation

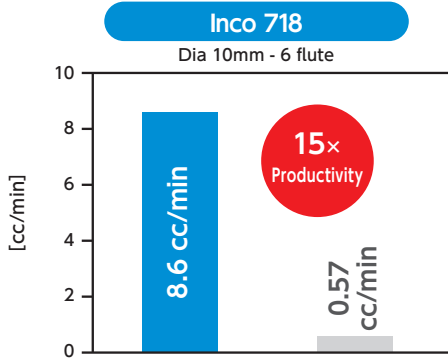


Bottom edge

- Unique shape provides toughness


Flute

- Well balanced for toughness and wear resistance
- Optimized for HRSA materials
- Excellent toughness




	SX9	Carbide
Cutting Speed (m/min)	600	40
Feed (mm/t)	0.03	←
DOC (mm)	3.0	←

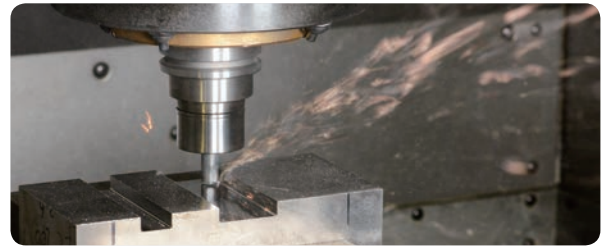RCS for Cast iron / HRSA materials →M5



Helix angle

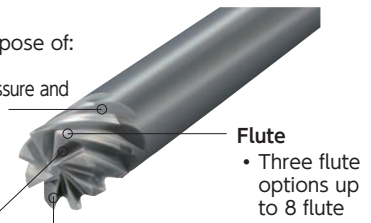- Designed for the purpose of:
 - 4-flute: toughness
 - 6/8-flute: less tool pressure and better chip evacuation




End Gash

- Bigger end gash brings toughness

Edge

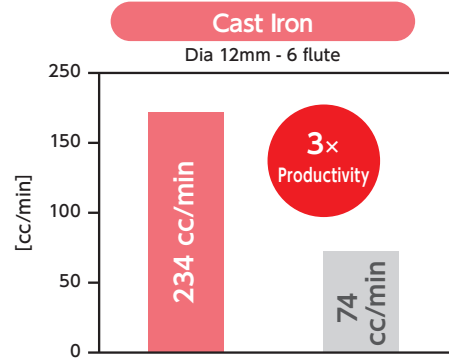- Three flute options up to 8 flute
- Added chamfer provides toughness for cast iron machining



	SX9	Carbide
Cutting Speed (m/min)	700	110
Feed (mm/t)	0.05	←
DOC (mm)	3.5	7.0

4-flute



Slotting



Pocketing



Ramping

6-flute



8-flute



Face Milling



Side Milling



Profiling



Ramping

● **Recommend Cutting Conditions for HRSA material**

Application	Grade	φ D _c	Flute	Cutting Speed (m/min)			Feed (mm/t)	Depth of cut a _p (mm)	Width of cut a _e (mm)	Coolant
				150	600	1000				
Face Milling 	SX9	3/8"	4/6/8	150	600	1000	0.03	1.4	—	DRY
		1/2"								
		5/8"								
		3/4"								
		8mm								
		10mm								
		12mm								
		16mm								
		20mm								
Side Milling 	SX9	3/8"	4/6/8	150	600	1000	0.03	4.8	0.9	DRY
		1/2"								
		5/8"								
		3/4"								
		8mm								
		10mm								
		12mm								
		16mm								
		20mm								
Slotting 	SX9	3/8"	4	150	600	1000	0.03	2.4	—	DRY
		1/2"								
		5/8"								
		8mm								
		10mm								
		12mm								
		16mm								
		4.0								
		2.0								
	SX9	6	150	600	1000	0.03	1.4	—	DRY 	
							1/2"			
							5/8"			
							8mm			
							10mm			
							12mm			
							16mm			
							2.4			
							1.2			
SX9	8	150	600	1000	0.03	2.9	—			
						3/4"				
						16mm				
						3.0				
						3.0				
						3.0				

● **Recommended cutting conditions for Cast Iron**

Application	Grade	φ D _c	Flute	Cutting Speed (m/min)			Feed (mm/t)	Depth of cut a _p (mm)	Width of cut a _e (mm)	Coolant
				150	600	1000				
Face Milling 	SX9	1/2"	4/6/8	150	600	1000	0.1	2.4	—	DRY
		5/8"								
		3/4"								
		12mm								
		16mm								
		20mm								
Side Milling 	SX9	1/2"	4/6/8	150	600	1000	0.1	9.5	2.1	DRY
		5/8"								
		3/4"								
		12mm								
		16mm								
		20mm								
Slotting 	SX9	1/2"	4/6/8	150	600	1000	0.1	2.4	—	DRY
		5/8"								
		3/4"								
		12mm								
		16mm								
		20mm								

For Maximum Productivity

- A continuous cut is recommended. An interrupted cut may cause chipping or breakage.
- When using a Hydraulic or Shrink chuck, blow air to the arbor body, DON'T blow air to the endmill itself.
- A Minimum speed of 300m/min is required. (Don't run at lower speed.)
- A 1.5 degree ramping angle is recommended. Run at 50% lower feed rate when ramping cut.

When cutting HRSA materials

- Continue to machine even if you see BUE, removing BUE may cause chipping or breakage to the edge.
- High speed machining work hardens the material. For this reason, leave at least 0.3mm of material for a finishing process.

Endmills

RCE for HRSA Materials

RCE-H4 (4-flute with Neck)

○ No center cutting edge



Slotting



Pocketing



Ramping



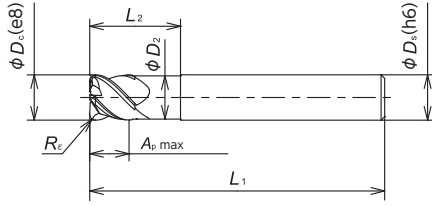
Z=4



35°



1.5°



Tolerances

$\phi D_c / \phi D_s$	e8	h6
8mm, 10mm, 3/8"	-0.024/-0.047	+0/-0.009
12mm, 1/2"	-0.032/-0.059	+0/-0.011

Heat Resistant Alloy S ● : 1st Choice ● : 2nd choice

Item Number	Grade	Flute	ϕD_c		ϕD_s		ϕD_2		R_c		$A_p \text{ max}$		L_1		L_2	
			(mm)	(Inch)	(mm)	(Inch)	(mm)	(Inch)	(mm)	(Inch)	(mm)	(Inch)	(mm)	(Inch)	(mm)	(Inch)
RCEM 080H4R100S	●	4	8.0	—	8.0	—	7.6	—	1.0	—	6.0	—	60	—	16	—
100H4R125S	●		10.0	—	10.0	—	9.6	—	1.25	—	7.5	—	65	—	20	—
120H4R150S	●		12.0	—	12.0	—	11.6	—	1.5	—	9.0	—	70	—	24	—
RCEI 375H4R047S	●		9.525	3/8	9.525	3/8	9.125	.359	1.19	.047	7.14	9/32	63.5	2.5	19.05	3/4
500H4R068S	●	12.7	1/2	12.7	1/2	12.3	.484	1.73	.068	9.525	3/8	69.9	2.75	25.4	1	

RCE-J6 (6-flute)

○ No center cutting edge



Face Milling



Side Milling



Profiling



Ramping



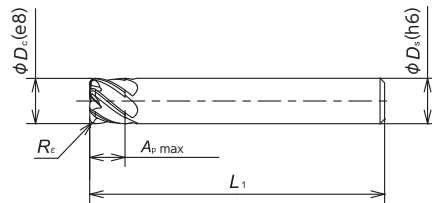
Z=6



40°



1.5°



Tolerances

$\phi D_c / \phi D_s$	e8	h6
8mm, 10mm, 3/8"	-0.024/-0.047	+0/-0.009
12mm, 1/2"	-0.032/-0.059	+0/-0.011

Heat Resistant Alloy S ● : 1st Choice ● : 2nd choice

Item Number	Grade	Flute	ϕD_c		ϕD_s		ϕD_2		R_c		$A_p \text{ max}$		L_1		L_2	
			(mm)	(Inch)	(mm)	(Inch)	(mm)	(Inch)	(mm)	(Inch)	(mm)	(Inch)	(mm)	(Inch)	(mm)	(Inch)
RCEM 080J6R100S	●	6	8.0	—	8.0	—	—	—	1.0	—	6	—	60	—	—	—
100J6R125S	●		10.0	—	10.0	—	—	—	1.25	—	7.5	—	65	—	—	—
120J6R150S	●		12.0	—	12.0	—	—	—	1.5	—	9	—	70	—	—	—
RCEI 375J6R047S	●		9.525	3/8	9.525	3/8	—	—	1.19	.047	7.14	9/32	63.5	2.5	—	—
500J6R068S	●	12.7	1/2	12.7	1/2	—	—	1.73	.068	9.525	3/8	69.9	2.75	—	—	

RCS for Cast Iron / HRSA Materials

RCS-H4

○ No center cutting edge



Slotting



Pocketing



Ramping



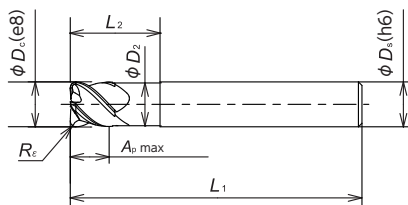
Z=4



35°



1.5°



Tolerances

$\phi D_c / \phi D_s$	e8	h6
12mm, 16mm, 1/2", 5/8"	-0.032/-0.059	+0/-0.011

Cast Iron	K	●
Heat Resistant Alloy	S	●

● : 1st Choice ● : 2nd choice

Item Number	Grade	Flute	ϕD_c		ϕD_s		ϕD_2		R_e		$A_p \text{ max}$		L_1		L_2	
	SX9		(mm)	(Inch)	(mm)	(Inch)	(mm)	(Inch)	(mm)	(Inch)	(mm)	(Inch)	(mm)	(Inch)	(mm)	(Inch)
RCSM 120H4R150S	●	4	12.0	—	12.0	—	11.6	—	1.5	—	9.0	—	70	—	24	—
160H4R200S	●		16.0	—	16.0	—	15.5	—	2.0	—	12.0	—	75	—	32	—
RCSI 500H4R068S	●		12.7	1/2	12.7	1/2	12.3	.484	1.73	.068	9.525	3/8	69.85	2.75	25.4	1
625H4R078S	●		15.875	5/8	15.875	5/8	15.375	.609	1.98	.078	11.91	.469	76.2	3	31.75	1.25

RCS-J6 / RCS-J8

○ No center cutting edge



Face Milling



Side Milling



Profiling



Ramping



Z=6



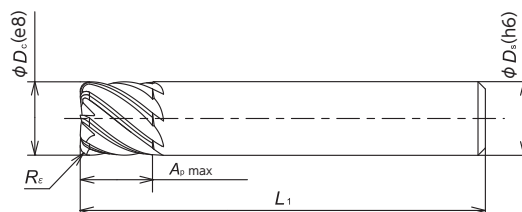

Z=8



40°



1.5°



Tolerances

$\phi D_c / \phi D_s$	e8	h6
12mm, 16mm, 1/2", 5/8"	-0.032/-0.059	+0/-0.011
20mm, 3/4"	-0.040/-0.073	+0/-0.013

Cast Iron	K	●
Heat Resistant Alloy	S	●

● : 1st Choice ● : 2nd choice

Item Number	Grade	Flute	ϕD_c		ϕD_s		ϕD_2		R_e		$A_p \text{ max}$		L_1		L_2	
	SX9		(mm)	(Inch)	(mm)	(Inch)	(mm)	(Inch)	(mm)	(Inch)	(mm)	(Inch)	(mm)	(Inch)	(mm)	(Inch)
RCSM 120J6R150S	●	6	12.0	—	12.0	—	—	—	1.5	—	9.0	—	70	—	—	—
160J6R200S	●		16.0	—	16.0	—	—	—	2.0	—	12.0	—	75	—	—	—
RCSI 500J6R068S	●		12.7	1/2	12.7	1/2	—	—	1.73	.068	9.525	3/8	69.85	2.75	—	—
625J6R078S	●		15.875	5/8	15.875	5/8	—	—	1.98	.078	11.91	.469	76.2	3	—	—
RCSM 200J8R250S	●	8	20.0	—	20.0	—	—	—	2.5	—	15.0	—	110	—	—	—
RCSI 750J8R094S	●		19.05	3/4	19.05	3/4	—	—	2.38	.094	14.29	.562	107.95	4.25	—	—

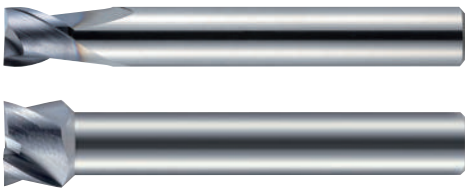
S-MILL / Solid Carbide Endmill



Features

- The tool sharpness creates a remarkable finish on machined surface.
- 2, 3, and 4 flute designs with a selection of diameters to cover a variety of applications. (2 flute available in 2mm ϕ)
- 40, 45, and 50mm lengths ideal for automatic lathes.

Two style



Three flute options



Surface finish

	NTK (S-MILL)	Competitor A	Competitor B
Magnified work material (side face)			
Magnified work material			
	Excellent surface finish	Bad surface finish	
Material: SUS304 (ϕ 16mm) ϕ 6mm -2 flute 3,000 rpm, $F=300$ mm/min, $a_p=3.0$ mm, $a_e=1.2$ mm			

Field Result


SUS416F (D-cut) ϕ 6mm-2 flute	
3,200 rpm	
Feed : 140 mm/min	
DOC : 0.6 mm	
WET	
NTK : S-MILL	12,000 pcs/corner+ α
Competitor's solid endmill	10,000 pcs/corner
<i>The competitor's end mill showed an obvious decrease in surface finish quality as it reached the end of its tool life. NTK's S-MILL maintained a quality surface finish throughout the extent of its longer tool life.</i>	

S45C (AF 8mm HEX) ϕ 6mm-2 flute	
2,600 rpm	
Feed : 480 mm/min	
DOC : 1.0 mm	
WET	
NTK : S-MILL	70 pcs/corner+ α
Competitor's solid endmill	50 pcs/corner
<i>The S-MILL sharpness reduces the occurrence of burrs and tool life is increased; clear improvements over the competitor's tool. The sharp cutting edge also produces noticeably less sound than the current tooling.</i>	

RWEM

○ No center cutting edge

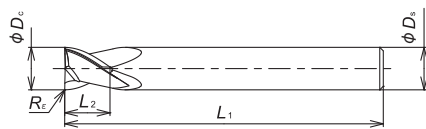Figure-1



Z=2



Z=3



Z=4



35°



Side Milling




Slotting



Profiling

○ No center cutting edge

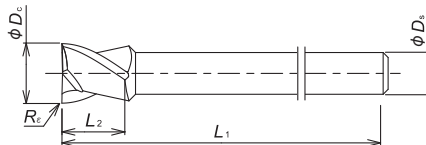Figure-2



Steel	P	●
Stainless steel	M	●

● : 1st Choice ● : 2nd choice



Item Number	Figure	Grade	Flute	ϕD_c		ϕD_s		L_1		L_2		R_e	
				(mm)	(Inch)	(mm)	(Inch)	(mm)	(Inch)	(mm)	(Inch)	(mm)	(Inch)
RWEM020H2R00S04	1	●	2	2.0	.080	4.0	.158	40.0	1.575	2.0	.080	0.0	0.0
RWEM030H2R00S04	1	●		3.0	.118	4.0	.158	40.0	1.575	3.0	.118	0.0	0.0
RWEM040H2R00S04	1	●		4.0	.158	4.0	.158	40.0	1.575	4.0	.158	0.0	0.0
RWEM050H2R00S06	1	●		5.0	.197	6.0	.236	45.0	1.772	5.0	.197	0.0	0.0
RWEM060H2R00S06	1	●		6.0	.236	6.0	.236	45.0	1.772	6.0	.236	0.0	0.0
RWEM070H2R00S08	1	●		7.0	.276	8.0	.315	50.0	1.969	6.0	.236	0.0	0.0
RWEM080H2R00S07	2	●		8.0	.315	7.0	.276	50.0	1.969	6.0	.236	0.0	0.0
RWEM080H2R00S08	1	●		8.0	.315	8.0	.315	50.0	1.969	6.0	.236	0.0	0.0
RWEM100H2R00S07	2	●		10.0	.394	7.0	.276	50.0	1.969	6.0	.236	0.0	0.0
RWEM100H2R00S10	1	●		10.0	.394	10.0	.394	50.0	1.969	6.0	.236	0.0	0.0
RWEM030H3R00S04	1	●	3	3.0	.118	4.0	.158	40.0	1.575	3.0	.118	0.0	0.0
RWEM040H3R00S04	1	●		4.0	.158	4.0	.158	40.0	1.575	4.0	.158	0.0	0.0
RWEM050H3R00S06	1	●		5.0	.197	6.0	.236	45.0	1.772	5.0	.197	0.0	0.0
RWEM060H3R00S06	1	●		6.0	.236	6.0	.236	45.0	1.772	6.0	.236	0.0	0.0
RWEM070H3R00S08	1	●		7.0	.276	8.0	.315	50.0	1.969	6.0	.236	0.0	0.0
RWEM080H3R00S07	2	●		8.0	.315	7.0	.276	50.0	1.969	6.0	.236	0.0	0.0
RWEM080H3R00S08	1	●		8.0	.315	8.0	.315	50.0	1.969	6.0	.236	0.0	0.0
RWEM100H3R00S07	2	●		10.0	.394	7.0	.276	50.0	1.969	6.0	.236	0.0	0.0
RWEM100H3R00S10	1	●		10.0	.394	10.0	.394	50.0	1.969	6.0	.236	0.0	0.0
RWEM030H4R00S04	1	●		4	3.0	.118	4.0	.158	40.0	1.575	3.0	.118	0.0
RWEM040H4R00S04	1	●	4.0		.158	4.0	.158	40.0	1.575	4.0	.158	0.0	0.0
RWEM050H4R00S06	1	●	5.0		.197	6.0	.236	45.0	1.772	5.0	.197	0.0	0.0
RWEM060H4R00S06	1	●	6.0		.236	6.0	.236	45.0	1.772	6.0	.236	0.0	0.0
RWEM070H4R00S08	1	●	7.0		.276	8.0	.315	50.0	1.969	6.0	.236	0.0	0.0
RWEM080H4R00S07	2	●	8.0		.315	7.0	.276	50.0	1.969	6.0	.236	0.0	0.0
RWEM080H4R00S08	1	●	8.0		.315	8.0	.315	50.0	1.969	6.0	.236	0.0	0.0
RWEM100H4R00S07	2	●	10.0		.394	7.0	.276	50.0	1.969	6.0	.236	0.0	0.0
RWEM100H4R00S10	1	●	10.0		.394	10.0	.394	50.0	1.969	6.0	.236	0.0	0.0

[Recommend Cutting Conditions]

Flute	Cutting diameter ϕD_c (mm)	Carbon steel S45C		Alloy steel SCM435		Stainless steel SUS304											
		RPM (min ⁻¹)	Feed (mm/min)	RPM (min ⁻¹)	Feed (mm/min)	RPM (min ⁻¹)	Feed (mm/min)	a_p (mm)	a_e (mm)	a_p (mm)	a_e (mm)	a_p (mm)	a_e (mm)	a_p (mm)	a_e (mm)	a_p (mm)	a_e (mm)
		2 flutes	2.0	6,000	100	6,000	100	6,000	90	≦2.0	0.4	≦0.8	1.0	≦0.6	1.5	≦0.5	1.8
3.0	6,000		210	6,000	240	6,000	180	≦3.0	0.6	≦1.2	1.5	≦0.9	2.3	≦0.7	2.7	≦0.6	
4.0	6,000		320	5,600	300	5,200	240	≦4.0	0.8	≦1.6	2.0	≦1.2	3.0	≦1.0	3.6	≦0.8	
5.0	5,000		370	4,500	330	4,100	260	≦5.0	1.0	≦2.0	2.5	≦1.5	3.8	≦1.2	4.5	≦1.0	
6.0	4,200		380	3,700	340	3,400	270	≦6.0	1.2	≦2.4	3.0	≦1.8	4.5	≦1.5	5.4	≦1.2	
7.0	3,600		370	3,200	330	3,000	270	≦6.0	1.4	≦2.8	3.5	≦2.1	5.3	≦1.7	6.3	≦1.4	
8.0	3,200		360	2,800	320	2,600	250	≦6.0	1.6	≦3.2	4.0	≦2.4	6.0	≦2.0	7.2	≦1.6	
3 flutes	3.0	6,000	250	6,000	250	6,000	220	≦3.0	0.6	≦1.2	1.5	≦0.9	2.3	≦0.7	2.7	≦0.6	
	4.0	6,000	390	5,600	360	5,200	290	≦4.0	0.8	≦1.6	2.0	≦1.2	3.0	≦1.0	3.6	≦0.8	
	5.0	5,000	440	4,500	400	4,100	310	≦5.0	1.0	≦2.0	2.5	≦1.5	3.8	≦1.2	4.5	≦1.0	
	6.0	4,200	460	3,700	410	3,400	330	≦6.0	1.2	≦2.4	3.0	≦1.8	4.5	≦1.5	5.4	≦1.2	
	7.0	3,600	450	3,200	400	3,000	320	≦6.0	1.4	≦2.8	3.5	≦2.1	5.3	≦1.7	6.3	≦1.4	
	8.0	3,200	430	2,800	380	2,600	310	≦6.0	1.6	≦3.2	4.0	≦2.4	6.0	≦2.0	7.2	≦1.6	
	10.0	2,500	380	2,200	330	2,100	280	≦6.0	2.0	≦4.0	5.0	≦3.0	7.5	≦2.5	9.0	≦2.0	
4 flutes	3.0	6,000	290	6,000	290	6,000	250	≦3.0	0.6	≦1.2	1.5	≦0.9	2.3	≦0.7	2.7	≦0.6	
	4.0	6,000	450	5,500	410	5,200	340	≦4.0	0.8	≦1.6	2.0	≦1.2	3.0	≦1.0	3.6	≦0.8	
	5.0	5,000	520	4,500	460	4,100	370	≦5.0	1.0	≦2.0	2.5	≦1.5	3.8	≦1.2	4.5	≦1.0	
	6.0	4,200	540	3,700	480	3,400	380	≦6.0	1.2	≦2.4	3.0	≦1.8	4.5	≦1.5	5.4	≦1.2	
	7.0	3,600	520	3,200	460	3,000	380	≦6.0	1.4	≦2.8	3.5	≦2.1	5.3	≦1.7	6.3	≦1.4	
	8.0	3,200	500	2,800	440	2,600	360	≦6.0	1.6	≦3.2	4.0	≦2.4	6.0	≦2.0	7.2	≦1.6	
	10.0	2,500	440	2,200	390	2,100	320	≦6.0	2.0	≦4.0	5.0	≦3.0	7.5	≦2.5	9.0	≦2.0	

• Cutting conditions (machine, work material...) affects surface finish and burr generation.
If cutting performance is not good with above cutting conditions, please adjust speed and feed by same ratio.

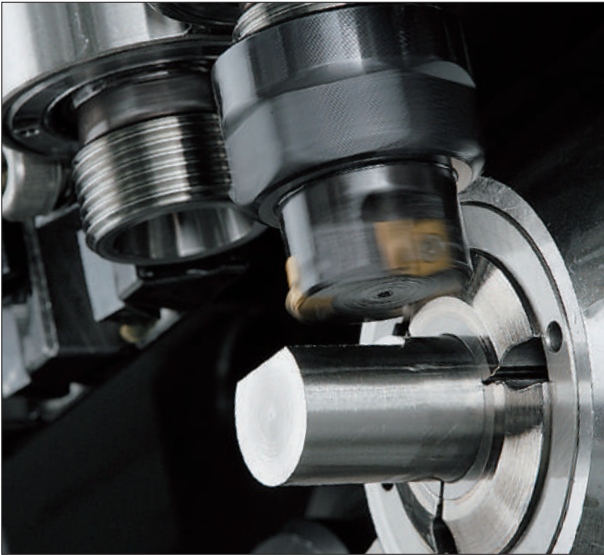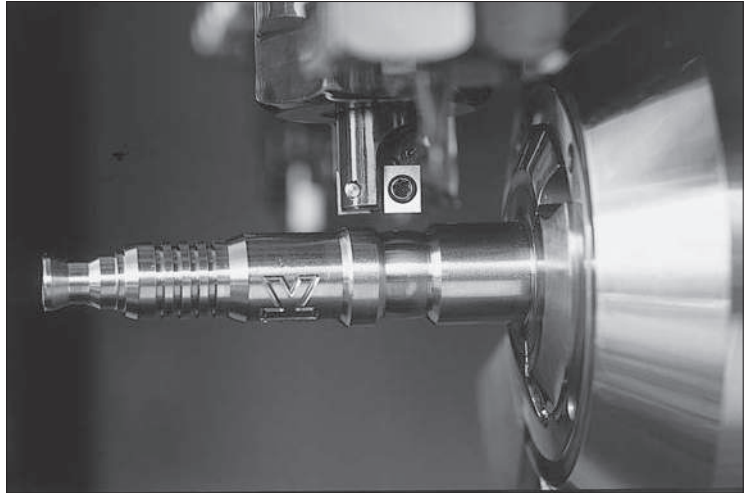Small Diameter Indexable Endmills



Features

- Attach 20mm end mills in ER16 collet
- Just change inserts to index. No need to make any adjustments
- High quality surface finish, as low as 1um (Rz) when wiper inserts are used
- Corner radius as small as 0.05mm
- In addition to D cut, ramp machining can be performed*


*A combination of single-blade type endmills and inserts with center blade is required

[Recommended Cutting Conditions]

Work Material	Speed (m/min)	Axial feed (mm/t)	Traverse feed (mm/t)	Depth of cut (mm)	Width of cut
Steel	80 - 120	~0.03	~0.05	~3.0	~50% of cutter diameter
Stainless Steel	40 - 60	~0.02	~0.04	~2.0	~50% of cutter diameter


Application Example

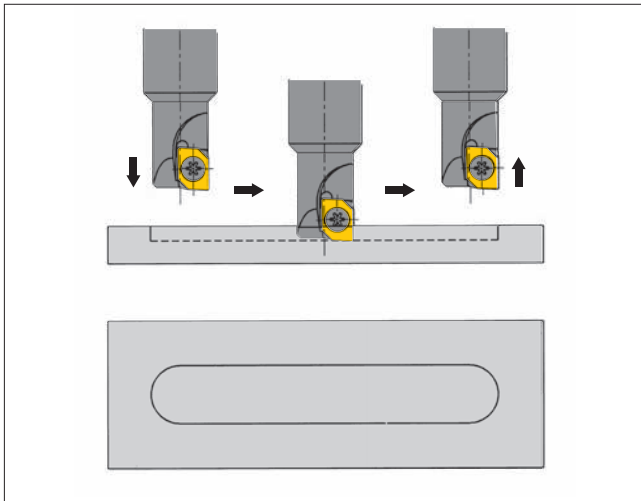Application Example-1




- A single tooth endmill equipped with a center cutting edge insert can be used for both plunge and side cut operations.

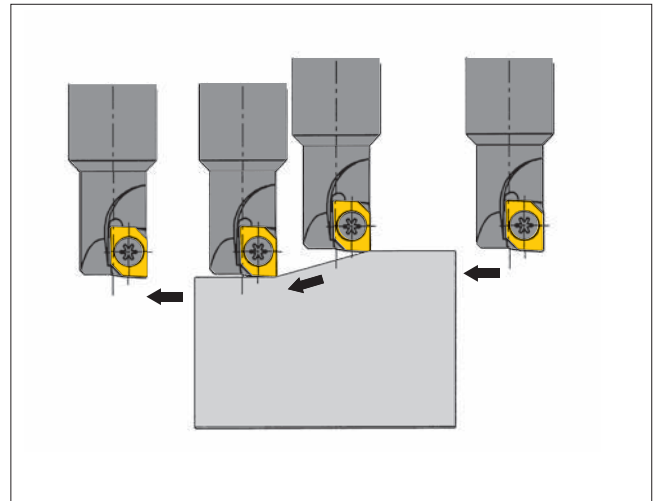Application Example-2



- A single tooth endmill equipped with a center cutting edge insert can be used for slope milling operations.

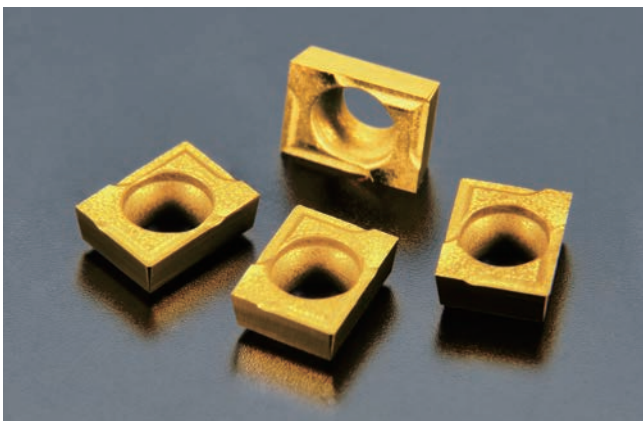Insert




Wiper

- Excellent surface finish obtained with new wiper insert

Chipbreaker

- Less tool pressure with chipbreaker

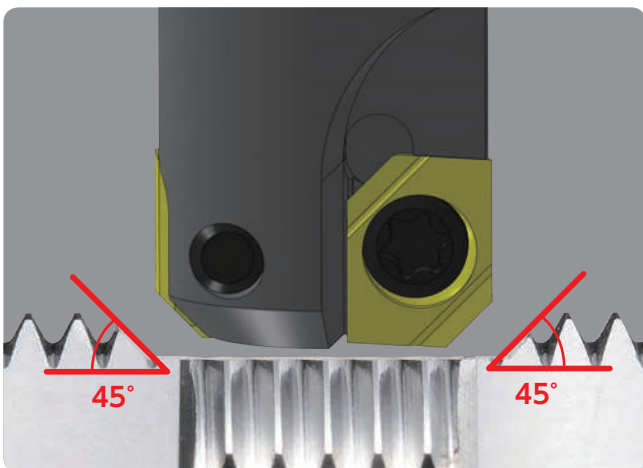45°



Chamfered surface finish insert

S45C	
Speed : 95 m/min	
Feed : 0.14 mm/rev	
DOC : 1.0 mm	
WET	
NTK : QM3 C45 type	700 pcs
Competitor's solid endmill	500 pcs

Endmills

REZ Series

REZ

<D cutting = lead angle 90 type end milling tool>

<D cutting = lead angle 45 type end milling tool>

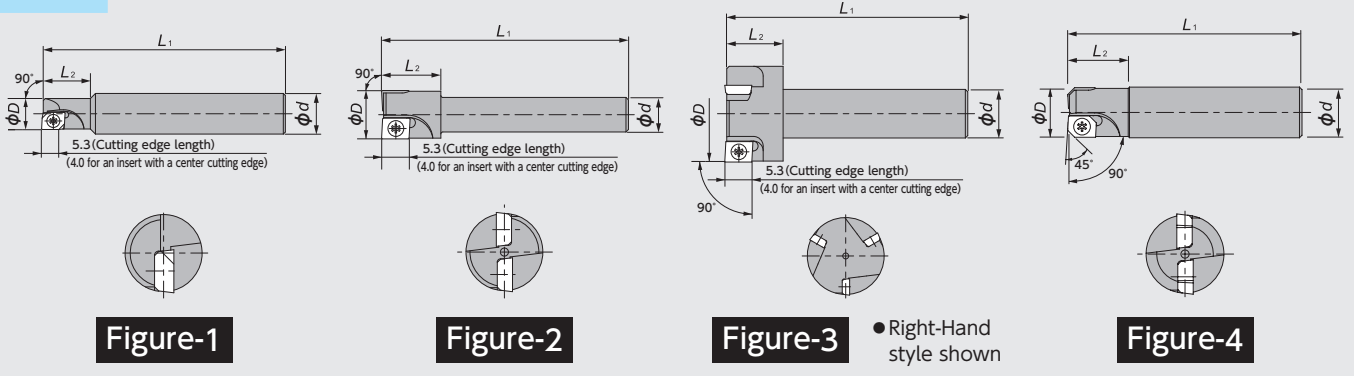


Figure-1

Figure-2

Figure-3

Figure-4

● Right-Hand style shown

REZ Series - Toolholders

Figure	Code No.	Item Number	Stock		No. of teeth	Dimensions (mm)				Gage insert	Spare Parts				
			R	L		φD	φd	L ₁	L ₂		Clamp screw	Wrench			
1	5276498	REZ080C1R212	●		1	8	10	60	12	CZH04□□CFR□□□	FS102-2.2 * 4.0	T-07			
	5285812	100C1R218	●										75		
2	5520317	REZ100B2R329	●		2	10	5	40	10	CZH04□□CFR□□□	FS102-2.2 * 4.3	T-07			
	5120936	100C2R133	●										6		
	5120951	100C2R132	●										7		
	5137971	100C2R141	●										50	12	
	5355458	120C2R141	●												12
	5355466	140C2R141	●												14
3	5520325	REZ150B3R330	●		3	15	5	40	10	CZH04□□CFR□□□	FS102-2.2 * 4.3	T-07			
	5496088	200M3R319	●										7		
	5496096	200M3R320	●										10		
4	5880281	REZ100C2R461	●		2	10	10	50	12	CZH0400CFR-C45 CZH04□□CFR□□□	FS102-2.2 * 4.3	T-07			
	5880299	100C2R466	●										7		

REZ Series - Inserts

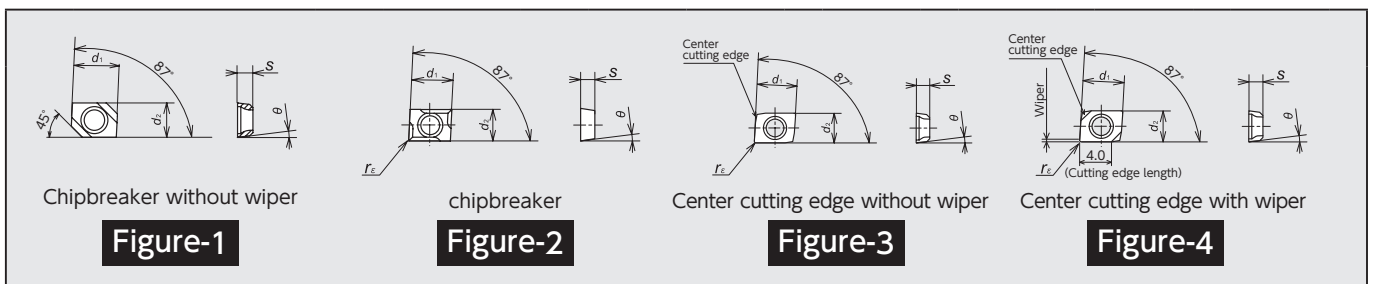


Figure-1

Figure-2

Figure-3

Figure-4

Figure	Item Number	Dimensions (mm)					PVD Coated Carbide									
		d ₁	d ₂	s	θ	C or r _E	ZM3	Stock	TM4	Stock	DT4	Stock	QM3	Stock	DM4	Stock
1	CZH0400CFR-C45 ※	5.56	4.20	1.88	7°	C1.35					5880315	●	5880307	●		
2	CZH04005CFR-BL 0402CFR-BL	5.56	4.20	1.88	7°	0.05			5819008	●					5900907	●
									5818984	●				5900915	●	
3	CZH04005CFR-070 0402CFR-070	5.56	4.20	1.88	7°	0.05	5230479	●	—	—	5849815	●				
							5120944	●	—	—	5849823	●				
4	CZH04005CFR-140 0402CFR-140	5.56	4.20	1.88	7°	0.05	5310883	●	—	—	5849831	●				
							5310958	●	—	—	5849849	●				
	CZH05005CFR-141 0502CFR-141	5.28	5.56	2.18	10°	0.05	5310925	●	—	—						
							5310909	●	—	—						

※ Must be used with REZ100C2R461/466Cutters.

REL Series

REL
Standard type end milling tool
Cutter diameter : $\phi 10$

● Right-hand style shown

REL Series - Toolholders

Code No.	Item Number	Stock		No. of teeth	Dimensions (mm)					Gage insert	Spare Parts		
		R	L		ϕD	ϕd	ϕd_1	L_1	L_2		Clamp screw	Wrench	
5092358	REL100C2R107	●		2	10	7	(1.2)	50	12	CLH04 CFN-045		FS102-2.2*4.3	
5092374	100C2R106	●				10							

REL Series - Inserts

Item Number	Dimensions (mm)					PVD coated carbide	
	d_1	d_2	s	θ	r_ϵ	ZM3	Stock
CLH04005CFN-045	5.56	4.20	1.88	7°	0.05	5101894	●
0402CFN-045					0.2	5066535	●

Precaution for using REL type

When using the REL type end milling tool, tapering will occur on the side machined area of the work piece by the following amount:

Depth of cut (mm)	Top face machining dia - Bottom face machining dia (mm)
2	0.05
3	0.08
4	0.12
5	0.15

RCL type rectangular tooth chamfering type



Features

- Cycle time can be reduced by using micro-grain carbide grade inserts. (Compared with the high-speed steel (HSS) end milling tools).
- Improved surface finish

① Cutter diameter and machining conditions

Cutter diameter	Recommended module	Recommended feed rate
φ 14	2.25 or less	0.3mm /rev or less
φ 12	2.15 or less	0.3mm /rev or less

If the recommended module or the recommended feed rate is exceeded, the clamping screw should be re-tightened at least once or twice a day to prevent loss of secure clamping.

Precautions

- ① When mounting the end milling tool, ensure a minimum amount of overhang from the chuck to the tool nose in order to prevent run out during machining (Target value: approx. 20 mm)
- ② As is probably known, gear tooth chamfering applies shock loading due to interrupted cutting. For this reason, the holder and clamping screw may deteriorate quicker than normal. Therefore, we request that you replace the holder and clamping screw periodically with new ones for safer and more stable operation.
- ③ In addition, please re-tighten the clamping screw regularly to avoid loss of clamping force during machining.

[Actual examples]

Gear tooth chamfering on sleeve	
Work material : SCM415	
Cutting speed (m/min) = 154	
No. of revolutions (min ⁻¹) = 3,500	
Cutting oil : WET	
NTK : ZM3 2-insert	2,000 pcs
Competitor's PVD-coated carbide Single insert	200 pcs

Gear chamfering on speed gear	
Work material : SCr420 (HB140 ~ 230)	
Cutting speed (m/min) = 42	
No. of revolutions (min ⁻¹) = 955	
Cutting oil : WET	
NTK : ZM3 2-insert	1,500 pcs
SKH55 Solid	100 pcs

RCL Series

RCL Gear tooth chamfering type

Figure-1 **Figure-2**

Figure-3 **Figure-4**

● Right-hand style shown


RCL Series - Toolholders

Figure	Code No.	Item Number	Stock		Dimensions (mm)							Adjust bolt hole	Gage insert	Spare Parts	
			R	L	ϕD	ϕd	ϕd_1	h	L_1	L_2	L_3			Clamp screw	Wrench
1	5025952	RCL120D2R050	●		12	12	($\phi 3$)	11	60	15	(5)	M4 * 20L	CLH0402C□□□□-004	FS101-2.5 * 5	CLR-15S (A)
	5025945	L050		●											
	5005046	RCL140D2R021	●		14	14	($\phi 4$)	13	55	(6)	M6 * 20L	CLH050□□CFN			
	5005053	L021		●											
2	5034913	RCL120D2R059	●		12	14	($\phi 3$)	13	55	15	(5)	M6 * 20L	CLH0402C□□□□-004	FS101-2.5 * 5	CLR-15S (A)
	5034921	L059		●											
3	5005236	RCL140Z2R020	●		14	14	($\phi 4$)	-	54	30	(6)	-	CLH050□□CFN	FS101-2.5 * 5	CLR-15S (A)
	5005228	L020		●											
4	5051792	RCL100D2R066	●		10	10	($\phi 3$)	9.5	60	18	(5)	M4 * 20L	CLH0402C□□□□-035	FS104-2.0 * 4.3	T-06 (B)
	5051784	L066		●											

RCL Series - Inserts

[Cutting edge process]

FN	Sharp edge
TNB	T00525

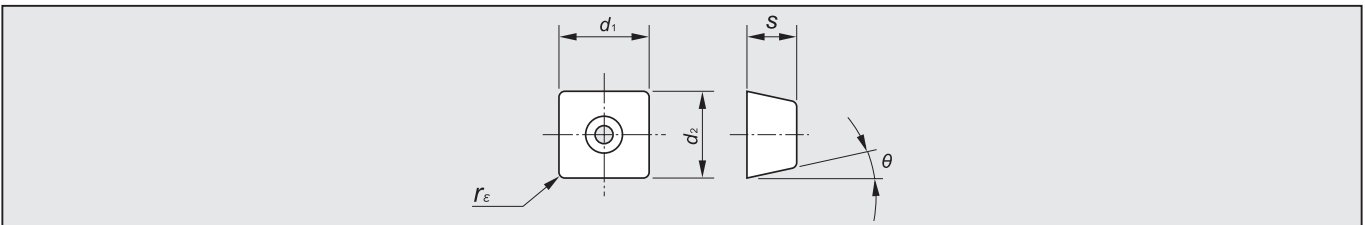


Item Number	Dimensions (mm)					PVD Coated Carbide			
	d_1	d_2	s	θ	r_ϵ	ZM3	Stock	DM4	Stock
CLH0402CFN-035 CTNB035 CFN-004 CTNB004	5.56	4.20	1.88	7°	0.2	5051750	●	5846951	●
						5084819	●	5847744	●
						5027123	●	5847736	●
CLH0502CFN CLH0504CFN	6.35	5.56	2.18	11°	0.4	5019351	●	5827381	●
						5992201	●	5847710	●
						5996186	●	5847702	●

New Products
Tool Materials / Selection Guide
BIDEMCS, PCD, CBN and Ceramics
Micrograin Carbide, PVD/CVD-coated Carbide
Insert Item List
General Turning Toolholders
Unique Swiss Tooling
Grooving / Side Turning
Threading
Shaper
ID Tooling
Application Introduction
Endmills
Rotating Tools
Information
Index

MEMO

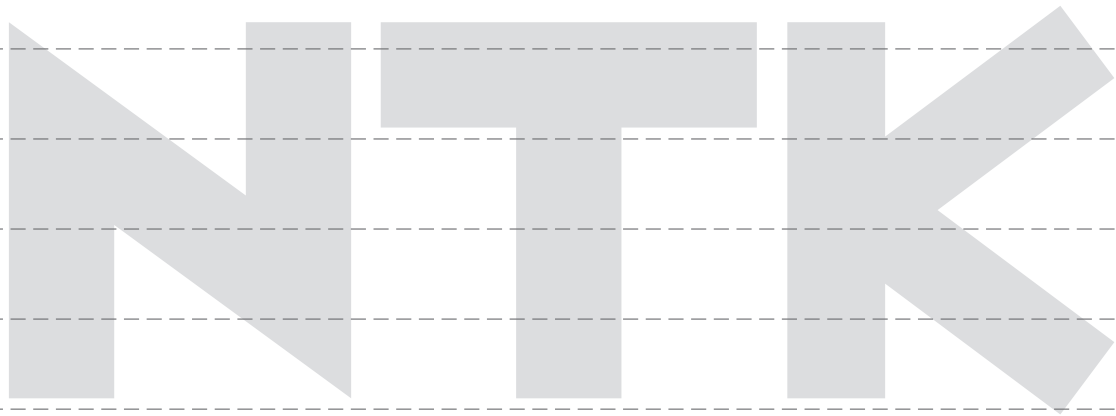New Products
Tool Materials / Selection Guide
BIDEMCS, PCD, CBN and Ceramics
Micrograin Carbide, PVD/CVD-coated Carbide
Insert Item List
General Turning Toolholders
Unique Swiss Tooling
Grooving / Side Turning
Threading
Shaper
ID Tooling
Application Introduction
Endmills
Rotating Tools
Information
Index



N

Rotating Tools (Milling Cutters)

New
Products

Tool Materials /
Selection Guide

BIDEMCS, PCD,
CBN and Ceramics

Micrograin Carbide,
PVD Coated Carbide

Insert
Item List

General Turning
Toolholders

Unique
Swiss Tooling

Grooving /
Side Turning

Threading

Shaper

ID Tooling

Application
Introduction

Endmills

Rotating
Tools


Information

Index


FU-HA (JWNXM)

Stable gray cast iron milling with lower cutting force

- Maximizes ceramic insert potential and can mill faster than 1,000m/min






A.R. 5°
R.R. 4°, 7°, 10°

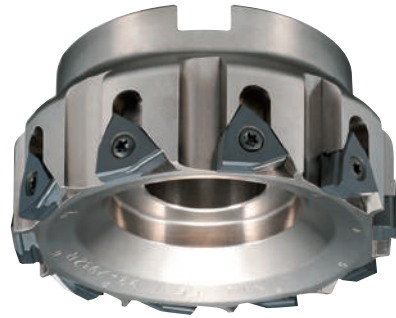

→ N4

FDX

- Extremely economical as SNGN1204 style inserts with 8 cutting edges can be used
- Capable of producing excellent surface finish, by utilising inserts with chipbreakers and wiper facets



A.R. -6°
R.R. -10°




→ N6

NEW

TDX

- Economical & Multi-Functional
- TNGN 1604 style inserts with 6 cutting edges
- Low Cutting Force




NEW




→ N7

HMC


- Hybrid Milling Cutter with adjustable inserts
- Finishing Cast Iron by using SX6 & B30
- Roughing Aluminum by using SX6 & PD1



A.R. -4°
R.R. 0°



NEW

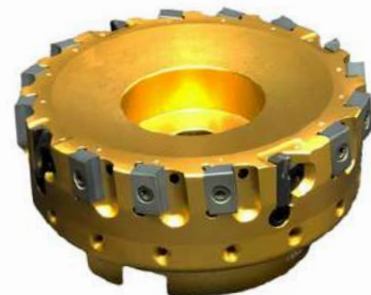

→ N8

XTM


- Offers high efficiency machining due to the multi-blade design and possibility for greater depth of cut
- Offers a reduction in cutting force via our special chipbreaker design



➔ N9

QTE / QTS

- Ceramic milling cutter capable of shoulder milling now released
- Accommodates from $\varnothing 20$ up to $\varnothing 250$ cutters



➔ N10



➔ N10

RNIW / RPIW

- Round insert Milling cutter for cast iron and for high-temperature resistant materials HRSA (Inconell, Rene, MAR, Waspelloy....)



➔ N11



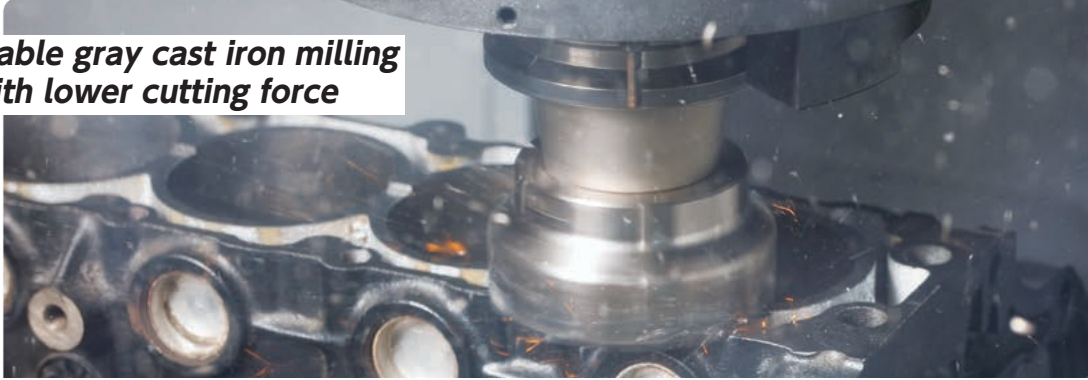
➔ N12



➔ N13

FU-HA Cutter (JWNXM)

- **Stable gray cast iron milling with lower cutting force**



WATCH ON
YouTube

- **Maximizes ceramic insert potential and can mill faster than 1000m/min**

Thanks to lower cutting forces, work piece chipping is reduced
Apply up to A_p 6mm


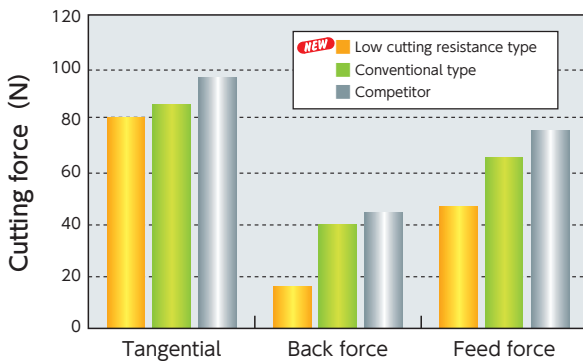
Silicon Nitride grade is the best choice for roughing cast iron with scale. Tool pressure is reduced because of the sharper cutting edge and the ground-in chipbreaker




Available cutter dia. $\phi 63$ - $\phi 160$

Very cost efficient with a unique 6 cutting edge design

Thanks to low-cutting resistance, machine over load is avoided



[Radius type]




[Chamfered type]

Two edge preparation are available.
Radius type good for high feed milling.
Chamfered type with excellent edge sharpness.



Cutting condition

$V_c=800\text{m/min}$ $f_z=0.10\text{mm/t}$ $a_p=3.0\text{mm}$ $a_e=80.0\text{mm}$

Cycle time reduction with single pass and achieve longer tool life.
Lesser machine horsepower required.



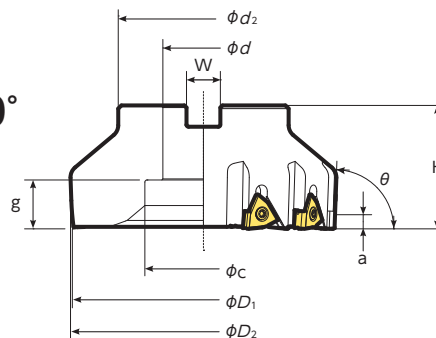A. R. +5°
R. R. +4°, +7°, +10°



JWNXM type milling body

θ	Code No.	Part number	Stock	No of inserts	Dimensions (mm)										Weight (kg)	Rake angle (°)		Centering location type
					ϕD_1	ϕD_2	H	$a_{\ast 1}$	$a_{\ast 2}$	ϕd_1	W	ϕd_2	ϕc	g		A.R.	R.R.	
88°	QUE002327	JWNXM063-88-06R-GM	●	6	63	63	50	5.5	4.5	22	10.4	60	18	15.5	0.9	+5	+4	FMA
	QUE002823	JWNXM080-88-08R-GM	●	8	80	80				27	12.4		36	15			1.1	
	QUE002749	JWNXM100-88-10R-GM	●	10	100	100				32	14.4	80	50	18	1.8	+10		
	JWNXM125-88-12R-GM	●	12	125	125	58				40	16.4		55	23	3			
	JWNXM160-88-16R-GM	●	16	160	160	60				40	16.4	100	72	22	4.9			

※1 Dimension when set the insert [WNX44-C10T01020]
※2 Dimension when set the insert [WNX44-R12T01020]

Parts	
Clamping Screw FSI 26-4.0×12-LH 5861935 Sales quantity 10pcs/case	Wrench LLR-T15 5701909 Sales quantity 5pcs/case

Insert

Shape	Dimensions (mm)	Part number	C or r_{ϵ}	Grade	
		WNX44-C10T01020	C1.0	SX6	●
				SP9	●
		WNX44-R12T01020	R1.2	SX6	●
				SP9	●

● : New standard stock items

Recommended cutting conditions

Grade	Work material	Cutting speed (m/min)											Feed (mm/t)					Depth of cut (mm)
		400	500	600	700	800	900	1000	1100	1200	1300	1400	0.05	0.1	0.15	0.2	0.25	
SX6	Gray cast iron	[Red bar with vertical lines]											[Red bar with vertical lines]					~ 6 (mm)
		[Blue bar with vertical lines]											[Blue bar with vertical lines]					
SP9	Ductile cast iron	[Red bar with vertical lines]											[Red bar with vertical lines]					



Case study

Transmission case			● Work material : FC23		
	current tool		NTK		
Holder	Competitor		JWNXM125A3810R12		
Insert	Ceramic insert		SX6 WNX44-R12T01020		
Cutting speed	(m/min)	500	←		
Feed pertooth	(mm/t)	0.13	←		
Depth of cut	(mm)	1	←		
Coolant		DRY	←		
Tool life	(pcs/coner)	60	120		

As for competitor's milling cutter, we needed to change inserts to new ones due to the wearprogress and lower clamping force of work material after machining 60 pcs. This was caused by increasing Cutting force. NTK NEW Milling cutter "FU-HA MILL" achieved 2 times longer competitor's. Low cutting force avoided the problem occurred by competitor's milling cutter.


New Products
 Tool Materials / Selection Guide
 BIDEIMCS, PCD, CBN and Ceramics
 Micrograin Carbide, PVD Coated Carbide
 Insert Item List
 General Turning Toolholders
 Unique Swiss Tooling
 Grooving / Side Turning
 Threading
 Shaper
 ID Tooling
 Application Introduction
 Endmills
 Rotating Tools
 Information
 Index

FDX Cutter



45°, 75°, 88°, 90°

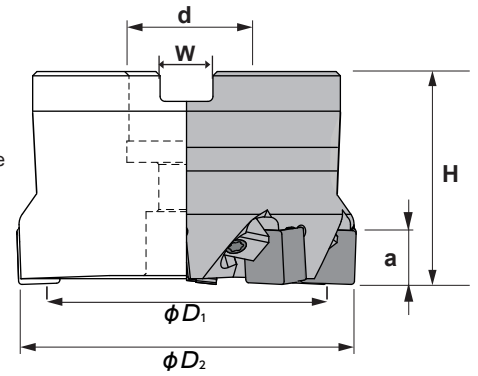Adjustable Cutter available!



Characteristics:

Negative milling cutter with 45°, 75°, 88°, 90° entering angle. Its strong inserts accept high cutting depths and high feed per teeth. First option for cast iron milling.

Spare parts



Clamp - W6226-GM

Clamping screw- AOB-6S-T30-GM

***Will be replaced from 2020:**
WS0616-T15-GM, (QEU003866)



θ	Item number	Reference	Standard	✱	Dimensions (mm)							Weight (kg)
					φD ₁	φD ₂	H	a	φd	W	φd ₂	
45°	QEU003191	FDX050-45-05R-GM	●	5	50	58	50	8	22	10,4	45	0.78
		FDX063-45-06R-GM	●	6	63	72	50	8	22	10,4	58	0.93
	QEU003676	FDX080-45-08R-GM	●	8	80	95	50	8	27	12,4	62	1.21
		FDX100-45-10R-GM	●	10	100	120	50	8	32	14,7	62	1.66
	QEU002622	FDX125-45-13R-GM	●	13	125	146	58	8	40	16,4	83	2.80
75°	QEU000508	FDX050-75-05R-GM	●	5	50	57	50	12	22	10,4	45	0.65
	QEU000509	FDX063-75-06R-GM	●	6	63	70	50	12	22	10,4	58	0.79
	QEU000487	FDX080-75-08R-GM	●	8	80	87	50	12	27	12,4	62	1.06
	QEU000510	FDX100-75-10R-GM	●	10	100	107	50	12	32	14,7	62	1.39
	QEU000493	FDX125-75-13R-GM	●	13	125	132	58	12	40	16,4	83	2.56
		FDX160-75-16R-GM	●	16	160	166	60	12	40	16,4	100	4.1
88°	QEU000477	FDX050-88-05R-GM	●	5	50	51	50	12	22	10,4	45	0.65
	QEU000478	FDX063-88-06R-GM	●	6	63	64	50	12	22	10,4	58	0.79
	QEU000479	FDX080-88-08R-GM	●	8	80	81	50	12	27	12,4	62	1.06
	QEU000480	FDX100-88-10R-GM	●	10	100	101	50	12	32	14,7	62	1.39
	QEU000492	FDX125-88-13R-GM	●	13	125	126	58	12	40	16,4	83	2.56
	QEU000484	FDX160-88-16R-GM	●	16	160	156	60	12	40	16,4	100	4.1
90°	QEU002366	FDX050-90-05R-GM	●	5	50	50	50	12,7	22	10,4	45	0.65
	QEU000515	FDX063-90-06R-GM	●	6	63	63	50	12,7	22	10,4	58	0.79

Applicable inserts

Shape	Dimensions (mm)	Reference	R	Silicon Nitride			Whisker
				SX6	SP9	WA1	
 12.5		SNGN 120408 T00520	0.8			●	
		SNGN 120408 T02020	0.8	●	●		
		SNGN 120412 T00520	1.2			●	
		SNGN 120412 T02020	1.2	●	●		
		SNGN 120416 T00520	1.6			●	
		SNGN 120416 T02020	1.6	●	●		
 12.5 with chipbreaker		SNGF 120412 TRC-C	1.2	●	●		
 6.3 with wiper		SNGN 1204AN TW	—	●	●		
Dimensions (mm)		Reference	R	CBN			
 θ = 45°		FDX 1204-45-50R	—	●		●	
				B30		B52	


NEW

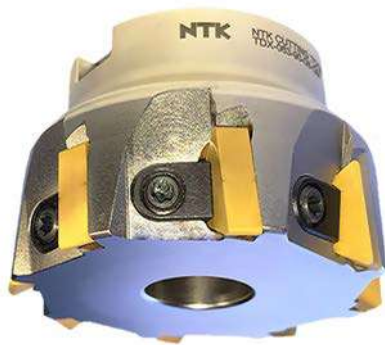TDX Cutter





Characteristics:

Economical & Multi-Functional
TNGN 1604 style inserts with 6 cutting edges



Item number	Reference		D	L	a	d	Insert	
QEU003878	*TDX040-90-04-GM	04	40	50	16	22	TNGN 1604..	0,70
QEU003700	TDX050-90-06-GM	06	50	50	16	22	TNGN 1604..	0,78
QEU003678	TDX063-90-08-GM	08	63	50	16	22	TNGN 1604..	0,93
QEU003679	TDX080-90-10-GM	10	80	50	16	27	TNGN 1604..	1,21
	TDX100-90-14-GM	14	100	50	16	32	TNGN 1604..	1,66
	TDX125-90-16-GM	16	125	63	16	40	TNGN 1604..	2,80

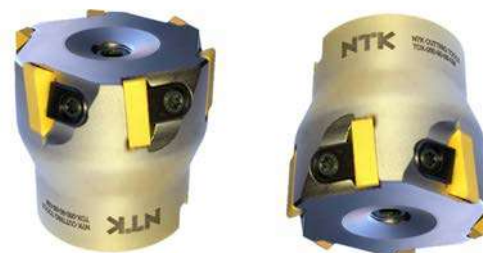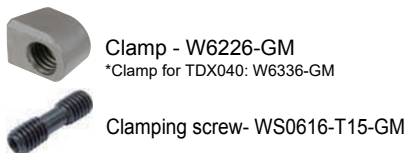Spare parts



Applicable insert

TNGN Triangular negative insert.						TNGN
Reference	l	s	d			
TNGN 1604..	16,50	4,76	9,52			

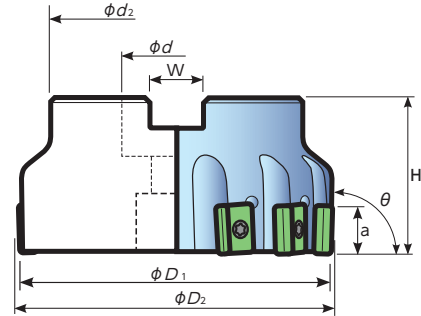
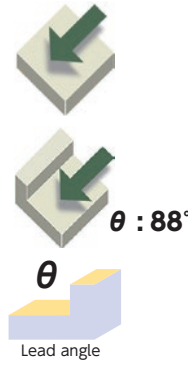
NEW

HMC Cutter





Adjustable HFT-Insert




A.R. -4°
R.R. 0°





θ	Item No.	Reference	Standard	Standard	Dimensions(mm)								Weight (kg)	
					ϕD_1	ϕD_2	H	a	ϕd	W	ϕd_2	ϕc		g
88°	QEU003684	HMC063-88-06/2-GM	●	6/2	63	66	50	14	22	10,4	58			0,76
	QEU003685	HMC080-88-08/2-GM	●	8/2	80	83	50	14	27	12,4	58			0,96
	QEU003686	HMC100-88-10/3-GM	●	10/3	100	103	50	14	32	14,7	77			1,47
	QEU003513	HMC125-88-12/4-GM	●	12/4	125	128	58	14	40	16,4	77			1,92


Spare parts

Parts LNX-Inserts	
Clamping screw 	Wrench 
LRIS-4 * 12 QEU000791 10pcs/case	LLR-25S 5364930 1pcs/case

Parts HFT-Inserts				
Wedge	Axial set screw		Wedge set screw	
	Screw	Screwdriver	Screw	Screwdriver
HLW179 	CS0510A 	LW-4	WS0512 	LW-2.5

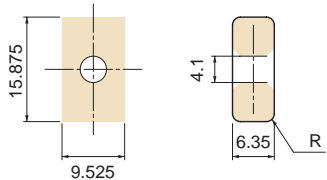Applicable inserts

Shape	Dimensions	Part No.	R	Grade
		LNX 324-08 FNX08 (For Aluminum) LNX 324-08 T00520 (For Cast Iron)	0.8	SX6 ●

Wiper	Shape	Item Number	Corner angle	Max DOC (mm)		A.R.	r_e (mm)	PCD / CBN	
				AL	GG			PD1	B30
Yes (Rounded)		HFT 802006 C05	90°	7.5	0.5	6°	C0.5	●	●
Yes (Rounded)		HFT 802006 R04	90°	7.5	0.5	6°	R0.4	●	●

● : Standard
● : Coming Soon

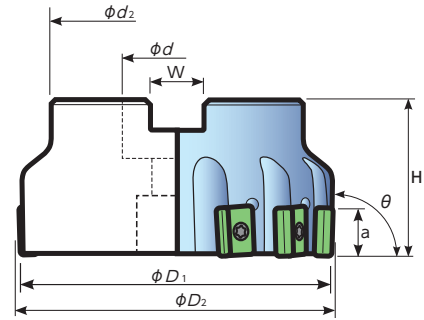

XTM Cutter



A.R.-4°
R.R.0°



$\theta : 88^\circ$



θ	Item No.	Reference	Standard		Dimensions(mm)								Weight (kg)	
					ϕD_1	ϕD_2	H	a	ϕd	W	ϕd_2	ϕc		g
88°	QEU000471	XTM080-88-10R-GM	●	10	80	83	50	14	27	12,4	58			1.1
	QEU000473	XTM100-88-13R-GM	●	13	100	103	50	14	32	14,7	77			1.8
	QEU000475	XTM125-88-16R-GM	●	16	125	128	58	14	40	16,4	77			3.1

Parts	
Clamping screw	Wrench
LRIS-4 * 12 QEU000791	LLR-25S 5364930
10pcs/case	1pcs/case

Screwdrivers (Optional)		
HLR-25S 5485214	XX2815-04 5485172	XX2815-04-25S 5485255
1pc/case	1pc/case	1pc/case



Applicable inserts

Shape	Dimensions	Part No.	R	Grade
		LNX 324-08T01020	0.8	SX6 ●
				SX9 ●
		LNX 324-12T01020	1.2	SX6 ●
				SX9 ●
		LNX 324-16T01020	1.6	SX6 ●
				SX9 ●

● : Standard



Recommended cutting conditions															
Grade	Work material	Cutting speed (m/min)								Feed rate (mm/tooth)					Depth of cut (mm)
		400	500	600	700	800	900	1000	1100	0.05	0.1	0.15	0.2	0.25	
SX6	Normal cast iron														~ 8 (mm)
SX9	Ductile cast iron														

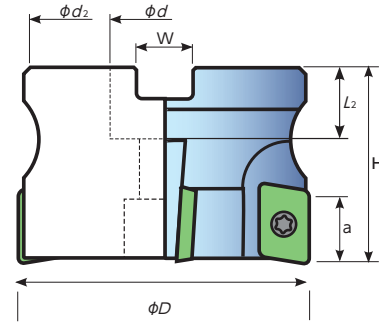QTS Cutter



Reference	Standard	Flutes	Dimensions (mm)							Item No.	Weight (kg)	A.R.	R.R.	Insert Screw	Wrench	Insert
			ϕD	H	L_2	a	ϕd	W	ϕd_2							
QTS040-90-4R-GM	●	4	40	40	18	14	16	8.4	35	QEU000464	0.2	+6°	-13°	521673 M4x9-GM	T-15A	APCW 1604
QTS050-90-5R-GM	●	5	50	40	22	14	22	10.4	45	QEU000465	0.3	+6°	-10°			
QTS063-90-6R-GM	●	6	63	50	22	14	22	10.4	58	QEU000466	1.4	+6°	-12°			
QTS080-90-8R-GM	●	8	80	50	25	14	27	12.4	58	QEU000467	1.9	+6°	-12°			

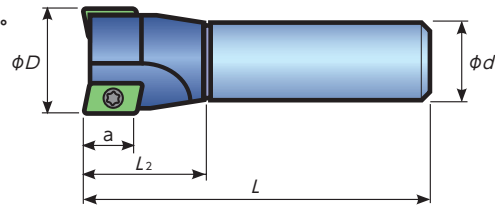QTE Cutter



Reference	Standard	Flutes	Dimensions (mm)					Item No.	Weight (kg)	A.R.	R.R.	Insert Screw	Wrench	Insert
			ϕD	L	L_2	a	ϕd							
QTE025-90-2R-GM	●	2	25	100	30	14	25	QEU000461	0.3	+6°	-13°	521673 M4x9-GM	T-15A	APCW 1604
QTE032-90-3R-GM	●	3	32	110	35	14	32	QEU000462	0.5	+6°	-13°			
QTE040-90-4R-GM	●	4	40	110	37	14	32	QEU000463	0.6	+6°	-13°			


Inserts

Shape	Reference	R	m	Silicon Nitride	
				SX6	SP9
	APCW 160408 T01020	0.8	7.314	●	●
	APCW 160412 T01020	1.2	7.278	●	●
	APCW 160420 T01020	2.0	7.205	●	●
	APCW 1604 PDTR	—	7.163	●	●



Recommended Cutting Conditions

Work Material	Grade	Dry	Wet	Cutting Speed (m/min)							Feed (mm/t)					Depth of Cut (mm)			
				200	350	500	650	800	950	1100	1250	0.05	0.1	0.15	0.2		0.25	0.3	
K	SX6	●	○																~ 8.0
Gray Cast Iron	SP9	●	●																~ 8.0
Ductile Iron	SP9	●	○																~ 8.0

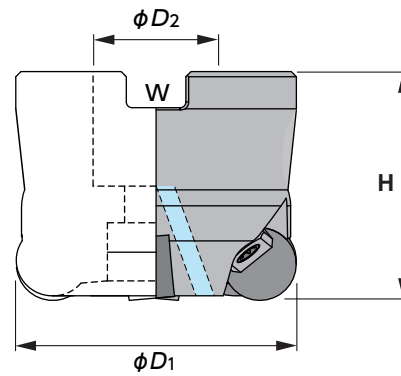RNIW Cutter



Characteristics:
 Round negative insert cutter for slot milling, peripheral milling, ramp milling and drilling, pocket milling and copy milling. It can be used in only one pass (roughing and finishing).



Item No.	Reference	Standard	✳	ϕD_1	Dimensions (mm)			Clamp	Clamping screw	Applicable Insert	Weight (kg)
					H	ϕD_2	W				
QEU000481	RNIW050-05R-GM	●	5	50	50	22	10.4	AMS-6T-GM SP2002-8	AOB-6S-T30-GM	RNGN 1207	0.42
QEU000482	RNIW063-06R-GM	●	6	63							0.55
QEU000459	RNIW080-07R-GM	●	7	80							0.85

● : Standard

***The table shows only a small selection of the RNIW series. For 1204 inserts are also cutters available. Please contact us

Spare parts



Clamp - AMS-6T-GM




Clamping screw - AOB-6S-T30-GM
 *Will be replaced from 2020:
 WS0616-T15-GM, (QEU003866)



Applicable insert

RNGN			Round negative insert		RNGN	
Reference	s	d				
RNGN 1207..	7,94	12,70				

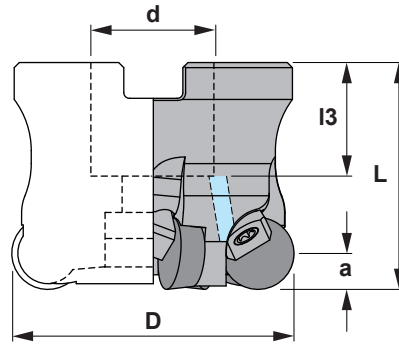
RPIW Cutter



Characteristics:

Round insert cutter for slot milling, peripheral milling, ramp milling and drilling, pocket milling and copy milling.

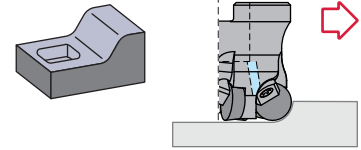It can be used in only one pass (roughing and finishing).



RPIW



Reference		D	L	l3	a	d	Insert	
RPIW040-04R-C	4	40	40	18	6,35	16	RPGN 1204..	0,200
RPIW050-05R-C	5	50	40	20	6,35	22	RPGN 1204..	0,330

Spare parts


Reference					Nm
RPIW040-04R-C	1058-C	6226-C	1166-C	5515-C	3.0
RPIW050-05R-C	912,10-C	6226-C	1166-C	5515-C	3.0

Applicable insert

RPGN		Round negative insert.			
Reference	s	d			
RPGN 1204..	4,76	12,70			



NEW

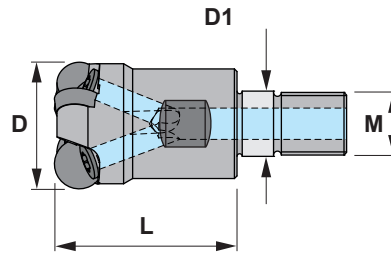RPIW Cutter





Characteristics:



Round insert end mill for slot milling, peripheral milling, ramp milling and drilling, pocket milling and copy milling. It can be used in only one pass (roughing and finishing)



RPIW

Item No.	Reference		L	M	D	D1	Insert	 Kg
QEU002779	RPIW016-02R-C	2	23	M8	16	8,5	RPGN 0602..	0,030
QEU002528	RPIW020-03R-C	3	30	M10	20	10,5	RPGN 0602..	0,060
QEU002527	RPIW025-03R-C	3	35	M12	25	12,5	RPGN 0903..	0,100
QEU002777	RPIW032-04R-C	4	43	M16	32	16,5	RPGN 0903..	0,210
QEU002778	RPIW032-03R-C	3	43	M16	32	16,5	RPGN 1204..	0,220




Spare parts

Reference			Nm
RPIW016-02R-C	1240-C	5515-C	3.0
RPIW020-03R-C	1240-C	5515-C	3.0
RPIW025-03R-C	1250-C	5520-C	4.0
RPIW032-04R-C	1250-C	5520-C	4.0
RPIW032-03R-C	1260-C	5525-C	5.0

Arbor



Applicable insert

RPGN			 	
Reference	s	d		
RPGN 0602..	2,38	6,35		
RPGN 0903..	3,18	9,52		
RPGN 1204..	4,76	12,70		

New Products
Tool Materials / Selection Guide
BIDEMCS, PCD, CBN and Ceramics
Micrograin Carbide, PVD/Coated Carbide
Insert Item List
General Turning Toolholders
Unique Swiss Tooling
Grooving / Side Turning
Threading
Shaper
ID Tooling
Application Introduction
Endmills
Rotating Tools
Information
Index

JHF Cutter

- **More teeth = More productivity**
- **Light weight aluminum body**
- **Adjustable edge height**
- **Produces outstanding surface finishes**
- **Internal coolant supply**
- **Inserts can be regrinded up to 4 times**
- **Set up & Balancing service is available**






● Cutter

Item Number	Stock	✳	Weight (kg)	Dimensions (mm)					Max RPM	Arbor style mm	Arbor bolt	Recommended tightening torque N • m
				ϕD	h	ϕd	b	a				
JHF050C2200R07-GM	●	7	0.23	50	45	22	10.4	6.3	20,000	22	CS1040A	20
JHF063C2200R10-GM	●	10	0.38	63	45	22	10.4	6.3	20,000	22	CS1040A	20
JHF080A2700R12-GM	●	12	0.48	80	45	27	12,4	6	18,000	27	MBC-M12	40
JHF100A3200R16-GM	●	16	0.74	100	45	32	14,4	6	18,000	32	MBC-M12	60
JHF125A4000R22-GM	●	22	1.10	125	45	40	16,4	6	15,000	40	MBC-M12	80

* Includes inserts and parts


● Insert

Wiper	Shape	Item Number	Corner angle	Max DOC (mm)	A.R.	r_ϵ (mm)	PCD
							PD1
Yes (Rounded)	For Standard use 	HFT 802006 C05	90°	7.5	6°	C0.5	●
Yes (Rounded)		HFT 802006 R04	90°	7.5	6°	R0.4	●
Yes (Straight)	For less tool pressure 	HFT 702010 W05	90°	6.5	10°	Double chamfer	●

● Spare Parts

Item number	Arbor bolt	Wedge	Axial set screw		Wedge set screw	
			Screw	Screwdriver	Screw	Screwdriver
JHF050C2200R07-GM	CS1040A	HLW179	CS0510A	LW-4	WS0512	LW-2.5
JHF063C2200R10-GM						
JHF080A2700R12-GM	MBC-M12					
JHF100A3200R16-GM						
JHF125A4000R22-GM						

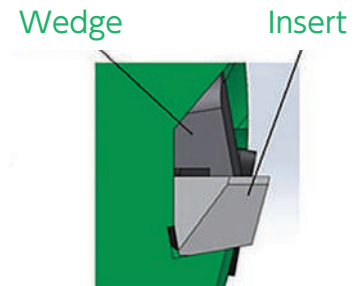● Safety clamp mechanism





● Unique pocket prevents inserts from becoming dislodged

● Field Result

Part : Transmission Case
Material : ADC12

Cutter : JHF063C220R10
Insert : HFT802005C05 PD1


	NTK	Competitor's
Number of edges	10	6
Insert grade	PD1	PCD
RPM	10,000	12,000
SFM	6490	7790
IPM	400	312
IPT	0.004	0.004
DOC	.02"	.02"
Spindle load	23%	34%
Flatness	6 μm	20 μm

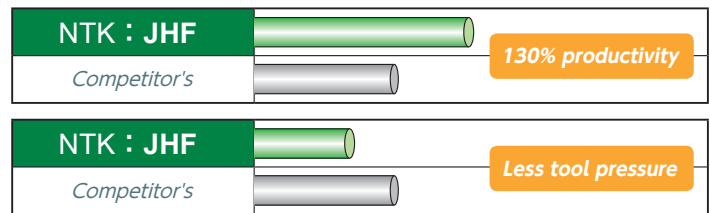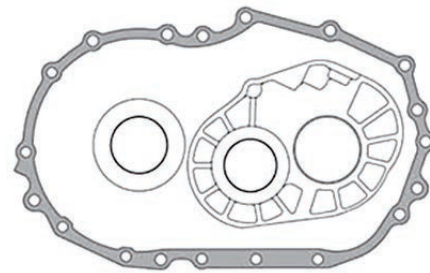

● Recommend Cutting Conditions

Work Material	Grade	Dry	Wet	Cutting Speed (m/min)										Feed (mm/t)					Depth of Cut (mm)		
				300	900	1500	2100	2700	3300	3900	4500	5100	5700	0.05	0.1	0.15	0.2	0.25		0.3	
N	PD1	○	●																		~ 6.35
Aluminum Alloy (Si ≤ 13)																					
Aluminum Alloy (Si ≥ 13)	PD1	○	●																		~ 6.35

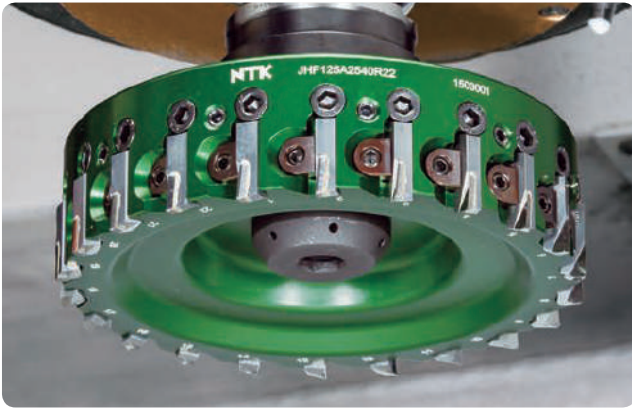More teeth=More productivity




- Easy to cut cycle time

Light weight aluminum body



- A 25 HP machine can mount a ϕ 125 mm cutter

Adjustable edge height




Axial set screw

- Easy adjustment system for axial direction

Safety clamp mechanism

Wedge Insert




- Unique pocket prevents inserts from becoming dislodged

NTK Regrinding Program

- Inserts can be reground up to (4*) times.
- The diameter and height of the insert will change by .004" after each regrinding.
- The set of inserts placed back in to the cutter must have the same amount of stars indicating number of regrinding.

The number of regrinding per insert may vary depending on cutting Conditions.

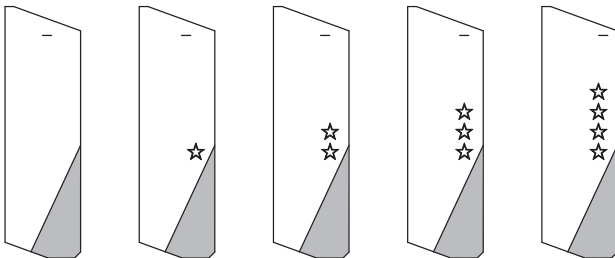Each insert will be marked with a star to indicate how many times it has been reground.



New

After 1st
regrinding

After 2nd
regrinding

After 3rd
regrinding

After 4th
regrinding

- 1 Send the inserts back to NTK Cutting Tools.
Minimum order is 30 pcs.
Note: Send always inserts with the same amount of regrinding stars.
(For orders greater than 50 pcs, NTK will manage the inserts in lots for regrinding process.)



- 2 Delivery will be 6-8 weeks upon receiving your inserts.



- 3 The insert number will be changed to the following HFT802006C05 RPD1.



- 4 When installing NTK inserts into a cutter, please make sure that all the inserts have the same number of regrinding stars.

Internal coolant supply

- Coolant through mounting bolt for better chip evacuation

Produces outstanding surface finishes

- Unique cutting edge wiper produces excellent surface finishes

Reduced cutting forces

- Sharp multi-faceted cutting edges reduce tool pressure

High speed capability

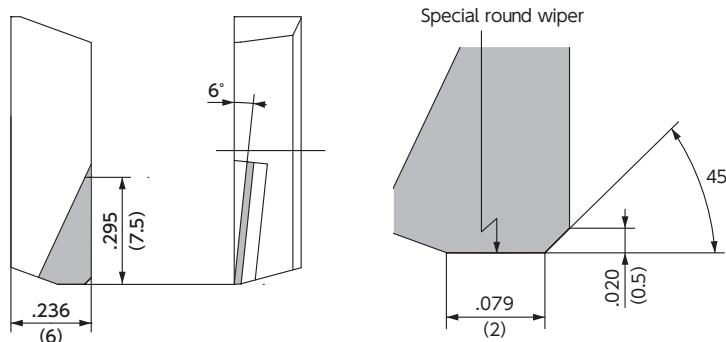
- Up to 20,000 rpm capability

Less burrs

- A 45 degree chamfer on the insert reduces edge burrs

Inserts can be reground up to 4 times

- Refer to back cover page for details





HFT802006C05 shown.

Field Result

Part : Chain Cover
Material : ADC12


Cutter : JHF125A2540R22
Insert : HFT802006C05 PD1

	NTK	Competitor's
Number of edges	22	14
n (min-1)	10,000	←
Vc (m/min)	3,925	←
Vf (mm/min)	13,200	8,400
f (mm/t)	0.06	←
DOC (mm)	2.8 (1 Pass)	2.0 + 0.8 (2 Passes)
Tool life	50,000pcs	10,000pcs

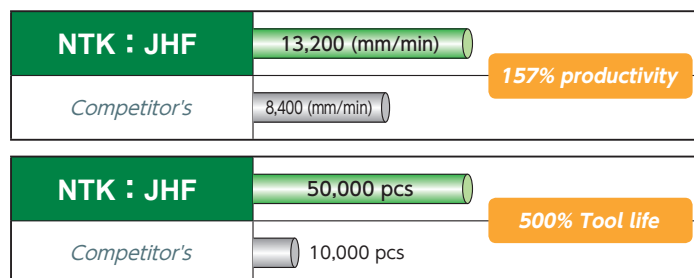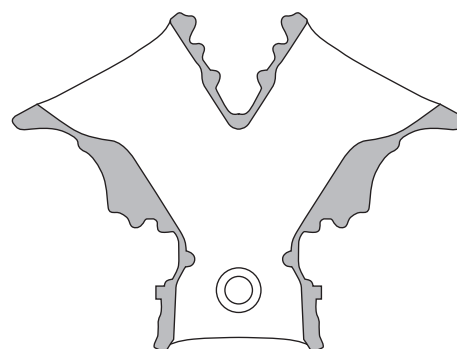

MEMO

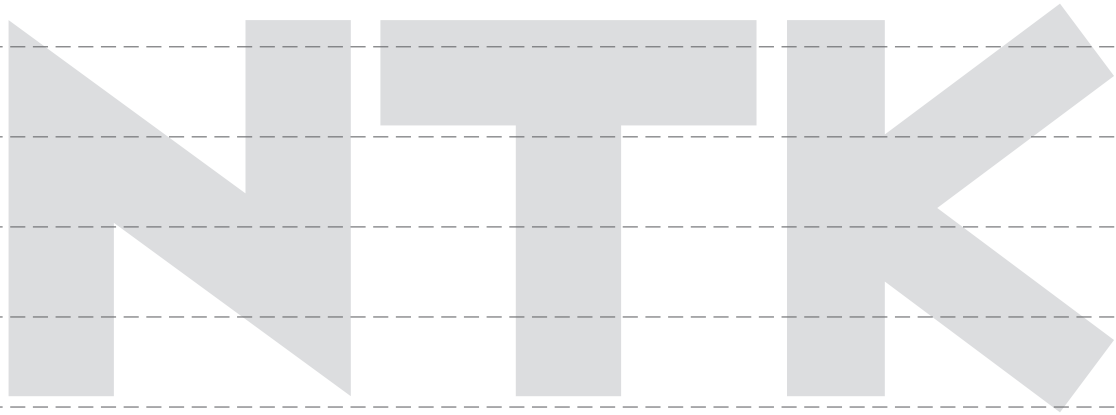New Products
Tool Materials / Selection Guide
BIDEMCS, PCD, CBN and Ceramics
Micrograin Carbide, PVD/Coated Carbide
Insert Item List
General Turning Toolholders
Unique Swiss tooling
Grooving / Side Turning
Threading
Shaper
ID Tooling
Application Introduction
Endmills
Rotating Tools
Information
Index





Information

● Grade Comparison Chart	O2
● Turning Tool Terminology	O4
● Milling Cutter Terminology	O5
● Calculation Formula for Turning	O6
● Troubleshooting for Turning	O8
● Calculation Formula for Milling Processes	O10
● Troubleshooting for Milling	O12
● Surface Roughness Standards	O14
● Spare Parts - Wrenches	O16
● Clamp Screws and Wrenches	O17
● Material Cross Reference Chart	O18
● Ni-based Heat Resistant Alloys	O20
● Co-based Heat Resistant Alloys	O24
● Swiss Machine List	O26
● Hardness Comparison Chart	O32

Grade Comparison Chart

BIDEMICS/Ceramics

	NTK	GREENLEAF	HERTEL	INDEXABLE	ISCAR	KENAMETAL	KYOCERA	NEWCOMER	ROMAY	SANDVIK	SPK	SSANGYONG	SUMIOTOMO	TAEGUTECH	TUNGALOY	VALENITE
Cast iron K	HC1 HW2	GEM19	AC5	I50	IN11	K060	KA30	NP5200	CC10			SZ200 SZ300		AB120 AW20		
	HC2 HC6	GEM7	HT610CA MC2	I100	IN22 IN23	K090 KY1615	A65 A66N PT600M	NP5000	CC20 CC30	CC620 CC650 CC6050	SN60 SN80 SH2	SD200 ST100 ST300 ST500 SD200 TA300 TC300	NB90S	AB30	LX11 LX21 CX710	Q32
	SX6 SP9	CSN100 CSN200 GSN100 HSN100 HSN200			MW30 MW43	I56 I58 I580	KY3000 KY3400 KY3500 KYK25 KYK35 KY4400 KYK10 KY1320	CS7050 KS500 KS6000 KS6050	CC510 CC513 CC514 CC5145C CC515 CC516 CC516SC	CC1690 CC6090 CC6190	SL506 SL508 SL550C SL554C SL654 SL808 SL854C	SN26 SN300 SN400 SN500 SN600 SN700 SN800	NS260 NS260C SN2000K SN2100K	AS10 AS500 SC10 AW20 AB30 AB20	CX710 FX105	VPQ130 VPQ135
Heat resistant alloy S	JX1 JX3															
	WA1 WA5	WG300 WG600 WG700			IW7	KY1525 KY4300			CC60	CC670		SW400 SW500 SW700 SW800	WX1500 WX120	TC430		
	SX3 SX7 SX9	XSYTIN-1			MW37	I59	KY1540 KY2100 KYS25 KYS30 KYS30 KYS30 KYSM10	CF1 KS6030 KS6040	CC5477	CC6060 CC650 CC6065		SN800 SN900	WX2500 WX2000	AS20	M101S	
Hardened material H	HC7 ZC7	GEN7	HT610CA	I100	IN22 IN23 IN420	KY1615 KY4400	A65 A66N KT66 PT600M		CC30SC	CC6050 CC650		ST500 TM300 TC100 TC300	NB90S NB150H	AW120 AB30	LX11	Q35 VPZ205 VPZ215
	WA1 WA5	WG300 WG600 WG700			IW7	KY4300 KYS25				CC670		SW400 SW500 SW700 SW800				

BIDEMICS/CBN

	NTK	DIJET	HITACHI	INDEXABLE	ISCAR	KENAMETAL	KYOCERA	MITSUBISHI	SANDVIK	SECO	SPK	SSANGYONG	SUMIOTOMO	TAEGUTECH	TUNGALOY	WALTER
Cast iron K	B23 B30 B16	JBN330 JBN795	BH200 BH250	CBN90 CBN95 CBN100	IB50 IB55 IB85	KB1345 KB1630 KB5630 KB9610 KB9640 KB1340	KBN60M KBN65B KBN900	BC5030 MB710 MB730 MB5015 MBS140	CB7525 CB7925	CBN20 CBN050C CBN200 CBN300 CBN300P CBN350 CBN600	WBN100 WBN105 WBN115 WBN120 WBN750	SBN1000 SBN1600	BN500 BN600 BN700 BNS800	KB90 KB90A TB650 TB670 TB730	BX470 BX480 BX850 BX870 BX905 BX910 BX930 BX950 BXC90	
	Heat resistant alloy S	JP2			CBN80	KB1340 KB1630 KB5630		MB730		CBN170			BN700	KB90 TB730	BX950	
Hardened material H	B52 B36 B40 B5K B6K B22	JBN245 JBN300	BH200 BH250	CBN45 CBN50 CBN60 CBN70	IB10HC IB20H IB25HA IB25HC IB50 IB55	KB1340 KB1610 KB1625 KB5610 KB5625 KB5630 KB9610 KB9640	KBN05M KBN10C KBN10M KBN25C KBN25M KBN30M KBN35N KBN510 KBN525 KBN900	BC8020 MB810 MB825 MB835 MB8025 MBC010	CB20 CB50 CB7015 CB7025 CB7525	CBN10 CBN050C CBN100 CBN150 CBN160P CBN170 CBN200 CBN300P CBN350	WBN500 WBN550 WBN600 WBN650	SBN1000 SBN2000 SBN4000	BN250 BN300 BN350 BN1000 BN2000 BNC80 BNC100 BNC150 BNC160 BNC200 BNC300 BNC2010 BNC2020 BNX10 BNX20 BNX25 BNX300	KB50 TB610 TB650 TB670	BX310 BX330 BX360 BX380 BX530 BXC50 BXM10 BXM20	VPC225 WLB30 WLB50
		JBN245 JBN300	BH200 BH250	CBN45 CBN50 CBN60 CBN70	IB50 IB55	KB9610 KB9640	KBN510 KBN525 KBN900	MB8025 MBC010	CB7015 CB7025 CB7525	CBN200 CBN300P CBN350	WBN500 WBN550 WBN600 WBN650	SBN1000 SBN2000 SBN4000	BN250 BN300 BN350 BN1000 BN2000 BNC80 BNC100 BNC150 BNC160 BNC200 BNC300 BNC2010 BNC2020 BNX10 BNX20 BNX25 BNX300	KB50 TB610 TB650 TB670	BX310 BX330 BX360 BX380 BX530 BXC50 BXM10 BXM20	VPC225 WLB30 WLB50

PCD

	NTK	DIJET	INDEXABLE	ISCAR	KENAMETAL	KYOCERA	MITSUBISHI	SANDVIK	SECO	SSANGYONG	SUMIOTOMO	TAEGUTECH	TUNGALOY	WALTER
Non-ferrous material N	PD1 PD2	JDA10 JDA30 JDA40 JDA715 JDA735 JDA745	PCD3 PCD-F PCD-UF	ID5 ID8	KD1400 KD1405 KD1425 KD1410 KD1415 KD1425	KPD001 KPD010 KPD230	MD205 MD220 MD230	CD10	PD10 PD20 PD30	SPD1000 SPD2000 SPD3000	DA10 DA90 DA150 DA200 DA1000 DA2200	KP100 KP300 KP500	DX110 DX120 DX140 DX160 DX180	WCD10

(Note) This chart is based on published data and not authorized by each manufacturer

● Non coated carbide

	NTK	DIJET	GREENLEAF	HITACHI	INDEXABLE	ISCAR	KENAMETAL	KYOCERA	mitsubishi	ROMAY	SANDVIK	SECO	SUMIOTOMO	TAEGUTECH	TUNGALOY	WALTER
Steel P	KM1 KM3	DX30 DX35 SR30 SRT	G20M G60 G50 G70	EX35 EX40 EX45 WS10	CI5 CI6 CI7 CI9	IC50M IC54 IC70 IC28	KU10 K420 K125M	PW30	UT120T			S10M S25M S60M	A30 ST10P ST20E ST30E ST40E	CT3000	TX40 UX25 UX30	
Non-ferrous material N	KM1 KM3	CR1 KG03 KG1 KG10 KG20 KG30 KT9 LF12	G02 G23	WH02 WH05 WH10 WH20D	CI1 CI2 CI3 CI4 CI65	IC04 IC10 IC20 IC28	K313 K68 K110M K115M K600 K1	GW15 GW25 KW10	HT105T HT110 UT120T	R600	H10 H10F H13A	883 890 HX	EH520 G10E H1	UF1	G1F G2 G2F G3 KS05F KS15F KS20 TH03 TH10 TU10	WK1 WSN10

● PVD coated carbide



	NTK	DIJET	GREENLEAF	HITACHI	INDEXABLE	ISCAR	KENAMETAL	KYOCERA	mitsubishi	SANDVIK	SECO	SUMIOTOMO	TAEGUTECH	TUNGALOY	WALTER	
Steel P	VM1 ZM3 QM3 TM4 DT4 DM4	JC5003 JC5015 JC5030 JC5040	G915 G920 G925 G935	CY15 CY150 CY250 CY9020 HC844 IP2000 IP3000	CI25A CI29	IC328 IC507 IC5510 IC807 IC907 IC908 IC928 IC3028 IC830 IC570	KC5010 KC5025 KC5510 KC5525 KCU10 KCU25 KC710 KC720 KC722 KC730 KC735M KC792M	PR915 PR930 PR1005 PR1025 PR1115 PR1215 PR1225	VP10MF VP10RT VP15TF VP20MF VP20RT	GC1125 GC1525 GC15 GC1025 GC1145 GC2035 GC2145 GC4125	CP200 CP250 CP500	AC350 AC520U AC530U ACZ150 ACZ310 ACZ330 ACZ350	TT1040 TT7220 TT8010 TT8020 TT9030 TT9080	AH120 AH130 AH140 AH710 AH725 AH730 AH740 GH130 GH330 SH730 AH330 GH730	WSM30 WXM33 WXP20 WXP43	
Stainless steel M	ST4 VM1 ZM3 QM3 TM4 DT4 DM4	JC5003 JC5015 JC5030 JC5040	G915 G920 G925	CY250 CY9020 IP050S IP100S	CI23 CI24 CI29	IC308 IC507 IC520 IC807/907 IC908 IC928 IC1008 IC1028 IC3028 IC830 IC570	KC5010 KC5025 KC5510 KC5525 KCU10 KCU25 KC710 KC720 KC722 KC730 KC735M KC792M	PR915 PR930 PR1025 PR1125 PR1215 PR1225	VP10MF VP10RT VP15TF VP20MF VP20RT	GC15 GC1005 GC1025 GC1105 GC1115 GC1125 GC1145 GC1255 GC2030 GC2035 GC4125	CP200 CP250 CP500 TS2000 TS2500	AC350 AC510U AC520U AC530U AC6040M ACZ150 ACZ310 ACZ350 EH510Z EH520Z AC6030M AC610M AC830P AC630M	TT1040 TT5080 TT7010 TT7080 TT7220 TT8010 TT8020 TT9030 TT9080 TT9020	AH120 AH130 AH140 AH710 AH725 AH730 GH130 GH330 GH730 SH730 AH330	WXM20 WXM33 WXN10 WXP20 WXP43	
Cast iron K	QM3 DM4	JC5003 JC5015		CY10H CY100H CY9020		IC507 IC508 IC908 IC910 IC808 IC1008	KC5010 KC5025 KC5510 KC5525 KCU10 KCU25 KC720 KC730	PR905 PR1215	VP10RT VP15TF VP20RT	GC1020 GC1125 GC15	CP200 CP250 CP500 DTS2500 TK1000 TK2000 TS2000	AC510U AC520U AC530U ACZ310 EH10Z EH20Z EH510Z AC405K	TT1040 TT6080 TT7010 TT7080	AH110 AH120 GH110 GH130		
Heat resistant alloy S			G920 G925			IC807/907 IC908 IC830	KC5010 KC5510 KC5525 KC7310 KCU10 KCU25			GC15 GC1005 GC1025 GC1105 GC1115 GC1125 GC2145 GC4125		AC510U AC520U AC530U	TT8125 TT8135 TT8020 TT9030 TT9080 TT9020	AH905		
Hardened material H							KC5010 KC5510 KCU10 KCU25			GC1010 GC1025 GC1030		AC503U				

● CVD coated carbide

	NTK	DIJET	GREENLEAF	HITACHI	INDEXABLE	ISCAR	KENAMETAL	KYOCERA	mitsubishi	ROMAY	SANDVIK	SECO	SUMIOTOMO	TAEGUTECH	TUNGALOY	WALTER	
Cast iron K	CP1 CP7	JC050W JC105V JC110V JC215V JC605W JC605X JC610	GA5022 GA5023	GM25 GM8015 GM8020 GM8025 HG3305 HG3315 HG8010 HX3505 HX3515	CIN2 CINX CIT3 CIT6 CIX	IC418 IC428 IC9007 IC9015 IC9150	KCK05 KCK15 KCK20 KCP05 KCP10 KCP25 KCP30 KC9325	CA4010 CA4115 CA4120 CA4505 CA4515 CA5505	MC5005 MC5015 MY5015 UC5105 UC5115 UE6110	R100 R200 R500		GC3005 GC3205 GC3210 GC3215 GC4215 GC4315	MK1500 TH1000 TK1000 TK2000 TP200 TP2500 TX150	AC300G AC410K AC420K AC700G AC810P AC820P AC8025P ACK200	TT6300 TT6800 TT7005 TT7015	T1015 T1115 T5105 T5115 T5125	WPP01 WPP10 WPP20

Turning Tool Terminology

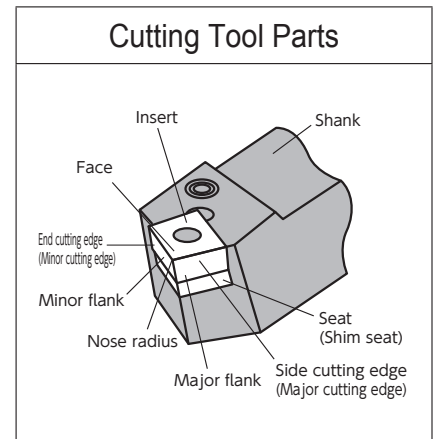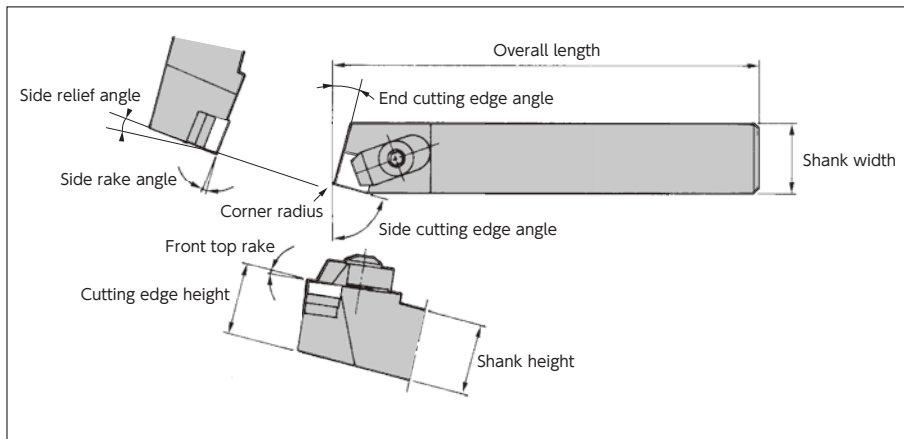
Toolholder part names



Holder rigidity

Toolholder deflection
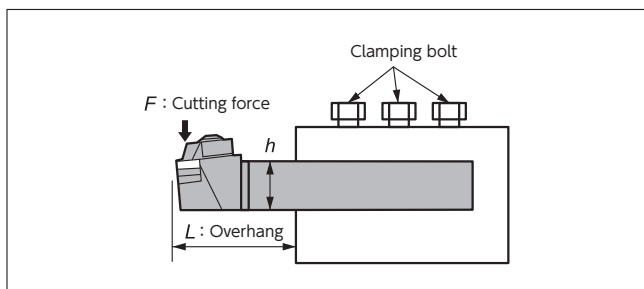
$$\delta = \frac{4 \times F \times L^3}{E \times b \times h^3} = \frac{4 \times k_c \times f \times L^3}{E \times b \times h^3}$$




Symbol	Term	Unit
δ	Deflection amount	mm
b	Shank width	mm
h	Shank height	mm
E	Young's modulus	N/mm ²
a_p	Depth of cut	mm
f	Feed amount	mm/rev
k_c	Specific cutting force	N/mm ²
L	Overhang	mm
F	Cutting force	N

$$(F = k_c \times a_p \times f)$$

Boring bar deflection
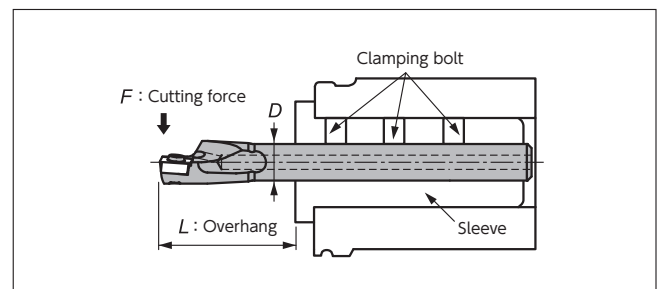
$$\delta = \frac{64 \times F \times L^3}{3 \times E \times \pi \times D^4} = \frac{64 \times k_c \times a_p \times f \times L^3}{3 \times E \times \pi \times D^4}$$




Symbol	Term	Unit
δ	Deflection amount	mm
D	Shank width	mm
E	Young's modulus	N/mm ²
a_p	Depth of cut	mm
f	Feed amount	mm/rev
k_c	Specific cutting force	N/mm ²
L	Overhang	mm
F	Cutting force	N

$$(F = k_c \times a_p \times f)$$

An important factor in improving the rigidity of a toolholder is to ensure the overhang of the tool shank is as short as possible.

Milling Cutter Terminology

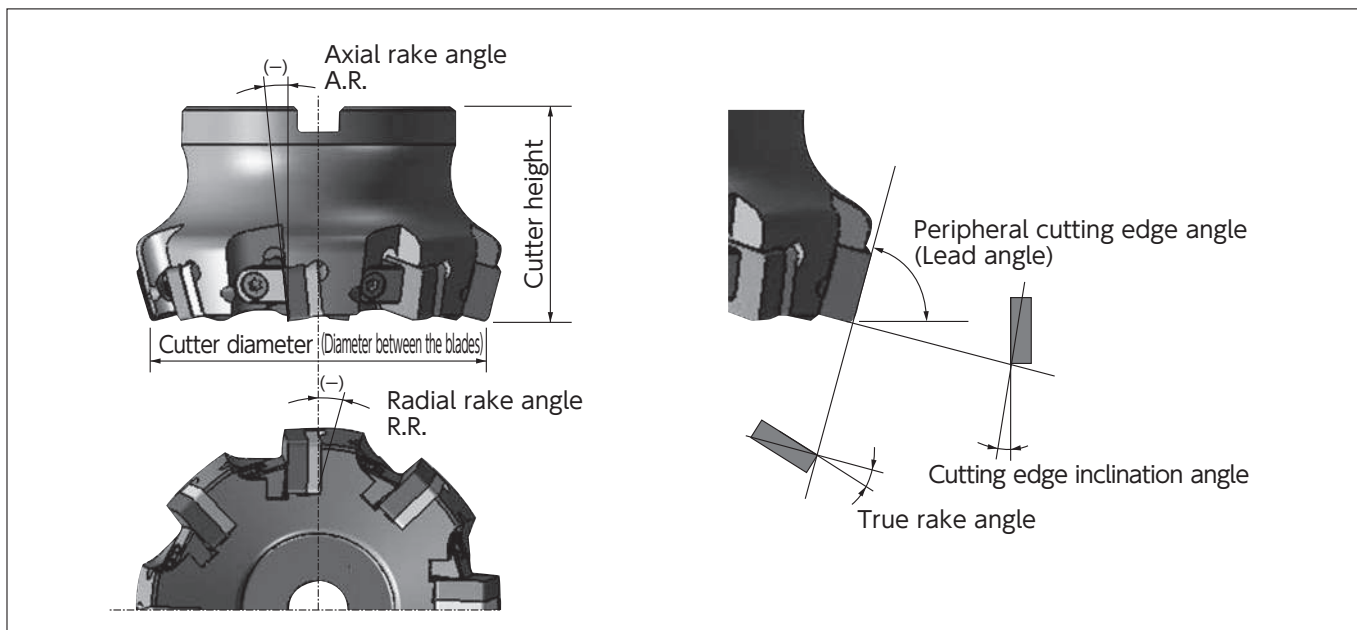Milling cutter terminology



Functions of each cutting edge angle

Name	Function	Effects
Radial rake angle: R.R.	Controls the direction of chip evacuation and cutting force	Negative (-): Excels in chip control performance
Axial rake angle: A.R.	Controls the direction of chip evacuation and cutting force	Positive (+): Excels in cutting performance and BUE resistance
Lead angle	Controls the thickness and evacuation direction of chips	Larger lead angles decrease the thickness of chips and relieves cutting load
True rake angle	Actual rake angle	Larger angles excel in cutting performance and BUE resistance, but lower the cutting edge strength Smaller angles increase the cutting edge strength but lower the BUE resistance
Cutting edge tilt angle	Controls the direction of chip evacuation	Larger angles excel in chip control performance and relieve cutting load, but lower the strength of the insert corner

Functions of each angle

(Lead angle) : Relationship of this angle and chip thickness


Lead angle : 45 degrees	
Lead angle : 75 degrees	
Lead angle : 90 degrees	

《Rake angle》 : Combinations and characteristics

Combinations of the angles for basic cutting edge shapes	(+) Axial rake angle : positive	(-) Axial rake angle : negative	(+) Axial rake angle : positive
		Radial rake angle : positive (+)	Radial rake angle : negative (-)
Double-positive cutting edge shape (DP edge shape)	Double-negative cutting edge shape (DN edge shape)	Negative-positive cutting edge shape (NP edge shape)	
Radial rake angle (R.R.)	Positive (+)	Negative (-)	Negative (-)
Axial rake angle (A.R.)	Positive (+)	Negative (-)	Positive (+)
Insert specification	Positive (single side used)	Negative (both sides used)	Positive (single side used)
Work material			
Steel	●	—	●
Cast iron	—	●	●
Aluminum alloy	●	—	—

Calculation Formula for Turning

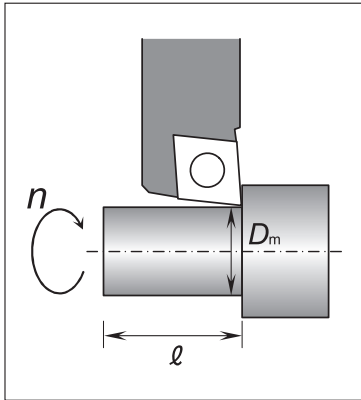Calculating the cutting speed



Calculating the cutting speed from the rotation speed

$$v_c = \frac{\pi \times D_m \times n}{1000}$$

(m/min)

v_c : Cutting speed (m/min)
 D_m : Machining diameter (mm)
 n : Spindle speed (min^{-1})
 π : Pi (3.14)

Calculating the revolution speed from the cutting speed

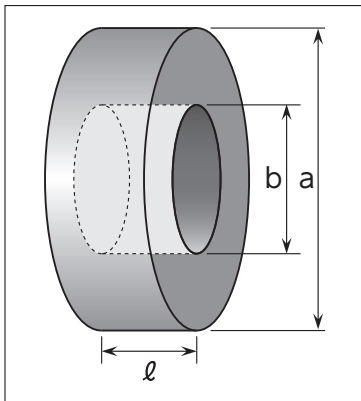
$$n = \frac{1000 \times v_c}{\pi \times D_m}$$

(min^{-1})

Example : Obtaining a cutting speed for machining a work piece of 200 mm diameter at the spindle speed of $1,000 \text{ min}^{-1}$:

$$v_c = \frac{\pi \times 200 \times 1000}{1000} = \underline{628 \text{ (m/min)}}$$

Calculating the cutting time



Calculating the cutting time for OD (ID) machining

$$T = \frac{l}{f \times n}$$

(min)

T : Cutting time (min)
 l : Cutting length (mm)
 f : Feed rate (mm/rev)
 n : Spindle speed (min^{-1})

Calculating the cutting time for facing

$$T = \frac{\pi \times (a^2 - b^2)}{4000 \times v_c \times f}$$

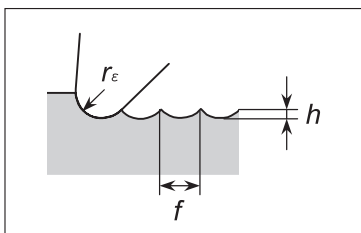
(min)

T : Cutting time (min)
 v_c : Cutting speed (m/min)
 f : Feed amount (mm/rev)
 π : Pi (3.14)

Example : Obtaining a cutting time for machining of work to be cut 100 mm long at the spindle speed of $1,000 \text{ min}^{-1}$ and at a feed rate of 0.1 mm/rev:

$$T = \frac{100}{0.1 \times 1000} = \underline{1 \text{ (min)}}$$

Calculating the theoretical surface roughness



$$h = \frac{f^2}{8 r_\epsilon} \times 1000$$

(μm)

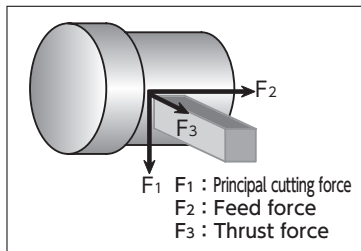
h : Theoretical surface roughness (μm)
 f : Feed amount (mm/rev)
 r_ϵ : Corner radius (mm)

Example : Obtaining the theoretical surface roughness when machining with an insert having 0.8 corner radius at a feed rate of 0.1 mm/rev:

$$h = \frac{0.1^2}{8 \times 0.8} \times 1000 = \underline{1.56 \text{ (}\mu\text{m)}}$$

[Guidelines for actually finished surface roughness]
 Steel type work: Theoretical surface roughness $\times 1.5$ to 3
 Cast iron type work: Theoretical surface roughness $\times 3$ to 5

● Calculating the cutting force



$$F = k_c \times a_p \times f$$

(N)

F : Cutting force (N)

k_c : Specific cutting force (N/mm²) *See the table below.

a_p : Depth of cut (mm)

f : Feed amount (mm/rev)

Example : Calculating the cutting force for grey cast iron cut at the feed rate of 0.2 mm/rev and with a depth of cut of 3 mm:

$$F = 1800 \times 3 \times 0.2 = \underline{1080 \text{ (N)}}$$

● Calculating the power required

$$P_c = \frac{v_c \times f \times a_p \times k_c}{60 \times 10^3 \times \eta}$$

(kW)

P_c : Required power (kW)

v_c : Cutting speed (m/min)

f : Feed amount (mm/rev)

a_p : Depth of cut (mm)

k_c : Specific cutting force (N/mm²) *See the table below.

η : Mechanical efficiency (0.7~0.8)

Example : Calculating the cutting power for the machining of grey cast iron at a cutting speed of 700 m/min, feed rate of 0.4 mm/rev, and with a depth of cut of 2 mm (with 0.8 set as the mechanical efficiency):

$$P_c = \frac{700 \times 0.4 \times 2 \times 1400}{60 \times 10^3 \times 0.8} = \underline{16.33 \text{ (kW)}}$$

● Specific cutting force

Work material	Tensile strength or hardness	Specific cutting force (N/mm ²) “ k_c ” to cutting feed rate (mm/rev)					
		0.1mm/rev	0.2mm/rev	0.3mm/rev	0.4mm/rev	0.6mm/rev	
Soft steel	520	3,610	3,100	2,720	2,500	2,280	
Medium steel	620	3,080	2,700	2,570	2,450	2,300	
Hard steel	720	4,500	3,600	6,250	2,950	2,640	
Tool steel	SKD	670	3,040	2,800	2,630	2,500	2,400
		770	3,150	2,850	2,620	2,450	2,340
Cr-Mo steel	SCM	600	3,610	3,200	2,880	2,700	2,500
		730	4,500	3,900	3,400	3,150	2,850
Alloy steel	SNCM	900	3,070	2,650	2,350	2,200	1,980
		HB350	3,310	2,900	2,580	2,400	2,200
Gray cast iron	FC	HB200	2,110	1,800	1,600	1,400	1,330

● Calculating the volume of chips produced

$$Q = v_c \times f \times a_p$$

(cm³/min)

Q : Volume of evacuated chips (cm³/min)

v_c : Cutting speed (m/min)

a_p : Depth of cut (mm)

f : Feed amount (mm/rev)

Example : Obtaining the volume of chips evacuated per minute for machining at a cutting speed of 700 m/min, feed of 0.4 mm/rev, and a depth of cut of 2mm

$$Q = 700 \times 0.4 \times 2 = \underline{560 \text{ (cm}^3\text{/min)}}$$

Troubleshooting for Turning


Type of problem		Corrective measures	Material/grade selection				Cutting conditions				Tool shape				Machine/installation					
			Change to a harder material/grade	Change to a tougher material/grade	Change to a material/grade more resistant to thermal shock	Change to a material/grade more resistant to deposition	Cutting speed ↓	Feed rate ↑	Depth of cut ↑	Coolant Use non-water-soluble type Review dry or wet operation	Review the type of chipbreaker	Rake angle ↓	Nose radius of the insert ↑	Side cutting edge angle ↑	Cutting edge strength, honing	Improve the accuracy of insert	Improve the rigidity of the holder	Improve the installation accuracy of the cutting tool	Review the overhang of the cutting tool	Prevent vibration of the machine, improve the machine rigidity
Short tool life	Excessive insert wear	Unsuitable tool material/grade	●																	
		Unsuitable cutting edge shape									●	→	→	→	→					
		Improper cutting conditions					↓	↑												
	Fracture/chipping of the cutting edge	Unsuitable tool material/grade		●																
		Improper cutting conditions					↓	↓												
		Insufficient cutting edge strength									●		→		→					
		Thermal shock			●		↓	↓	↓	●	Dry									
		Built-up edge				●	↑	↑		●	Wet									
Insufficient toughness															●	●	●	●		
Poor dimensional accuracy	Variation in dimensions during cutting	Improper accuracy of insert													●					
		Clearance/relief of the work/tool									●	→	→	→	→	●	●	●	●	
	Need for offsetting during cutting	Increased flank wear	●										→							
		Built-up edge				●	↑													
		Improper cutting conditions					↓	↑												
Poor surface finish	Poor surface roughness	Deposition							●	Wet										
		Unsuitable cutting edge shape									●		→							
		Chatter					↓	↓	↓						●	●	●	●		
Heat	Deterioration in tool life/accuracy due to excessive heat generation	Improper cutting conditions				↓	↓	↓												
		Unsuitable cutting edge shape									●	→		→						
Burring, chipping, scuffing	Burring	Boundary wear	●																	
		Improper cutting conditions					↓	↑												
		Unsuitable cutting edge shape									●	→	→	→	→					
	Chipping	Improper cutting conditions					↓	↓												
		Unsuitable cutting edge shape									●	→	→	→	→					
		Vibration														●	●	●	●	
	Scuffing	Unsuitable tool material/grade			●															
		Improper cutting conditions					↑			●	Wet									
Unsuitable cutting edge shape										●	→		→							
Vibration															●	●	●	●		
Chip control	Elongated chips	Improper cutting conditions				↓	↑	↑		Wet										
		Chipbreaker's effective chip control range									●									
		Unsuitable cutting edge shape											→	→						

Troubleshooting Case Studies: Turning

	Case/Symptom	Possible causes	Corrective measures
Insert	VB wear	<ul style="list-style-type: none"> ●The material / grade is too soft ●Cutting speed is too high ●Relief angle is too small 	<ul style="list-style-type: none"> ●Use a coated grade ●Choose a material/grade highly resistant to wear ●Decrease the cutting speed
	Wear on face	<ul style="list-style-type: none"> ●High temperature causes chemical reactions between the insert material and chips 	<ul style="list-style-type: none"> ●Use a coated grade ●Decrease both of the cutting speed and feed rate ●Widen the rake angle
	Notching wear	<ul style="list-style-type: none"> ●The work surface is too hard ●Boundary area has been oxidized ●Burs, caused by chips in the sheared form, have been cut 	<ul style="list-style-type: none"> ●Widen the side cutting edge angle ●Make the nose radius larger so that cutting is performed within the radius ●Use a round insert
	Chipping/ fracture	<ul style="list-style-type: none"> ●Feed rate is too high ●Chips have become trapped ●Chatter resulting in vibration 	<ul style="list-style-type: none"> ●Enlarge the honed edge ●Make the nose radius larger ●Narrow the rake angle to secure the cutting edge strength
	Flaking	<ul style="list-style-type: none"> ●This is due to compressive forces being applied to the cutting edge from elastic deformation in the area being cut ●This occurs when deposited/adhered material is peeled off 	<ul style="list-style-type: none"> ●Change the cutting conditions by checking the cutting edge ●Choose a material/grade highly resistant to fracture ●Increase the coolant rate and pressure ●Improve the run-out of the main spindle of the machine
	Plastic deformation	<ul style="list-style-type: none"> ●High cutting force and excessive heat is applied to the cutting edge 	<ul style="list-style-type: none"> ●Choose a material/grade highly resistant to wear ●Decrease both of the cutting speed and feed rate ●Make the nose radius larger ●Use coolant
	Built-up edge	<ul style="list-style-type: none"> ●This occurs because the cutting temperature is lower than the recrystallization temperature of the work material 	<ul style="list-style-type: none"> ●Increase the cutting speed ●Use coolant with excellent lubrication performance ●Change to a grade with less affinity to the work material
	Deposition	<ul style="list-style-type: none"> ●The deposition is caused to the face by a chemical reactions of the work material due to heat generation 	<ul style="list-style-type: none"> ●Increase the cutting speed ●Widen the relief angle ●Hone the face with a mirror-like-surface finish ●Change to a grade with less affinity to the work material
	Clamping crack	<ul style="list-style-type: none"> ●The insert was clamped under improper seating conditions 	<ul style="list-style-type: none"> ●Clean the clamping areas and install the insert in the recommended way ●Tighten to the specified torque
Work piece	Chipping	<ul style="list-style-type: none"> ●The feed rate is too high ●An unsuitable insert was selected 	<ul style="list-style-type: none"> ●Decrease the feed rate ●Use a smaller edge preparation ●Change to a grade highly resistant to boundary wear ●Change the cutting edge angle of the holder
	Burring	<ul style="list-style-type: none"> ●The feed rate is incorrect ●The shape of insert is not suitable 	<ul style="list-style-type: none"> ●Decrease the feed rate ●Use a smaller edge preparation
	Chatter mark	<ul style="list-style-type: none"> ●The cutting force is too great ●The rigidity of the work piece and cutting tool is insufficient 	<ul style="list-style-type: none"> ●Decrease the feed rate ●Use a smaller edge preparation ●Ensure tool overhang is minimised ●Change the cutting edge angle of the holder
	Gouging	<ul style="list-style-type: none"> ●Vibration of the cutting edge due to deposition/built-up edge 	<ul style="list-style-type: none"> ●Increase the cutting speed ●Use cutting oil excellent in lubrication performance ●Change to a grade with less affinity to the work material

Calculation Formula for Milling Processes

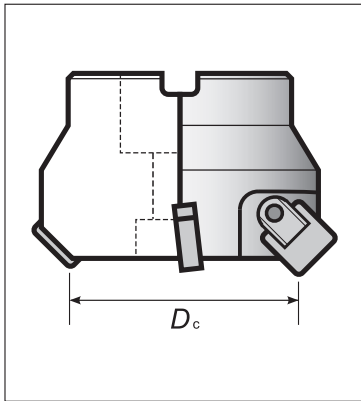Calculating the cutting speed



Calculating the cutting speed from the rotation speed

$$v_c = \frac{\pi \times D_c \times n}{1000}$$

(m/min)

v_c : Cutting speed (m/min)

D_c : Cutter diameter (mm)

n : Spindle speed (min^{-1})

π : Pi (3.14)

Calculating the revolution speed from the cutting speed

$$n = \frac{1000 \times v_c}{\pi \times D_c}$$

(min^{-1})

Example : Obtaining the cutting speed for machining with an 200 mm diameter cutter at the Spindle speed of 1,000 min^{-1} :

$$v_c = \frac{\pi \times 200 \times 1000}{1000} = \underline{628 \text{ (m/min)}}$$

Calculating the feeding speed and feed rate

Calculating the feed rate per blade

$$f_z = \frac{v_f}{z \times n}$$

(mm/t)

f_z : Inch amount per tooth (mm/t)

v_f : Table feed (mm/min)

z : Number of tooth

n : Spindle speed (min^{-1})

Calculating the feeding speed per minute

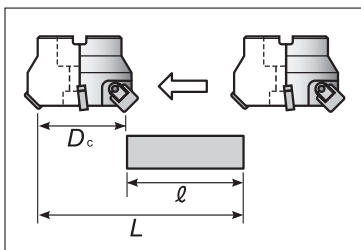
$$v_f = f_z \times z \times n$$

(mm/min)

Example : Obtaining the feed rate for milling with a 10-teeth cutter at the 0.2mm/t and the revolution speed of 1,000 min^{-1}

$$v_f = 0.2 \times 10 \times 1000 = \underline{2000 \text{ (mm/min)}}$$

Calculating the machining time



$$T = \frac{L}{v_f}$$

(min)

T : Cutting time (min)

L : Total length of table feed (mm)
($\ell + D_c$)

v_f : Table feed (mm/min)

Example : Obtaining the machining time for milling 200 mm on a work piece fed at the rate of 1000 (mm/min)

$$T = \frac{200}{1000} = \underline{0.2 \text{ (min)}}$$

● Calculating the cutting power

$$P_c = \frac{a_e \times a_p \times v_f \times k_c}{60 \times 10^6 \times \eta}$$

- P_c : Required power (kW)
- a_e : Cutting length (mm)
- a_p : Depth of cut (mm)
- v_f : Feed rate (mm/min)
- k_c : Specific cutting force (N/mm²) *See the table below.
- η : Mechanical efficiency (0.7~0.8)

Example : Calculating the power required to machine gray cast iron for a length of 150 mm, at a feed rate of 1,100 mm/min, and with a depth of cut of 3 mm (with 0.8 set as the mechanical efficiency and 0.2 mm as the feed par tooth/blade)

$$P_c = \frac{150 \times 3 \times 1100 \times 1400}{60 \times 10^6 \times 0.8} = \underline{14.44 \text{ (kW)}}$$

● Specific cutting force

Work material		Tensile strength or hardness	Specific cutting force (N/mm ²) “ k_c ” to cutting feed amount (mm/rev)				
			0.1mm/t	0.2mm/t	0.3mm/t	0.4mm/t	0.6mm/t
Soft steel		520	2,200	1,950	1,820	1,700	1,580
Medium steel		620	1,980	1,800	1,730	1,600	1,570
Hard steel		720	2,520	2,200	2,040	1,850	1,740
Tool steel	SKD	670	1,980	1,800	1,730	1,700	1,600
		770	2,030	2,030	1,800	1,750	1,700
Cr-Mo steel	SCM	600	2,180	2,000	1,860	1,800	1,670
		730	2,540	2,250	2,140	2,000	1,800
Alloy steel	SNCM	900	2,000	1,800	1,680	1,600	1,500
		HB350	2,100	1,900	1,760	1,700	1,530
Gray cast iron	FC	HB200	1,750	1,400	1,240	1,050	970
Aluminum alloy	AC,ADC	160	580	480	400	350	320

※For power required for NTK HCC, please refer to page P31.

● Calculating the volume of evacuated chips

$$Q = a_e \times a_p \times v_f$$

- Q : Volume of evacuated chips (cm³/min)
- a_e : Cutting length (mm)
- a_p : Depth of cut (mm)
- v_f : Feed rate (mm/min)

Example : Obtaining the volume of chips evacuated per minute for machining at a cutting speed of 700 m/min, feed rate of 0.4 mm/rev, and with a 2 mm depth of cut:







$$Q = 150 \times 3 \times 1100 = \underline{495 \text{ (cm}^3\text{/min)}}$$

- New Products
- Tool Materials / Selection Guide
- BIDEMCS, PCD, CBN and Ceramics
- Micrograin Carbide, PVD/Coated Carbide
- Insert Item List
- General Turning Toolholders
- Unique Swiss Tooling
- Grooving / Side Turning
- Threading
- Shaper
- ID Tooling
- Application Introduction
- Endmills
- Rotating Tools
- Information
- Index

Troubleshooting for Milling





Type of problem		Possible cause		Material/grade selection				Cutting conditions					Tool shape									
				Change to a harder material/grade	Change to a tougher material/grade	Change to a material/grade more resistant to thermal shock	Change to a material/grade more resistant to deposition	Cutting speed ↓	Feed rate ↑	Depth of cut ↑	Review cutter diameter and cutting width	Review tool path	Coolant		Relief angle of insert ↓	Nose radius of cutting edge ↑	Cutting edge strength, honing ↑	Number of teeth/blades	Enlarge the chip pocket	Check the wiper shape	Improve accuracy of cutting edge run-out	Improve rigidity of tool
													Wet	Dry								
Damaged or broken cutting edge of the insert	Increased flank wear	Improper cutting conditions										●										
		Unsuitable cutting edge shape	●											↗		↘			●			
	Increased wear on face	Improper cutting conditions					↘	↘	↘				●									
		Unsuitable cutting edge shape	●											↘	↘	↘						
	Fracture/chipping on cutting edge	Improper cutting conditions						↘	↘			●										
		Unsuitable cutting edge shape		●										↘	↘	↘			●	●	●	
	Thermal shock	Improper cutting conditions					↘	↘	↘					●								
		Unsuitable cutting edge shape			●										↗		↘					
Built-up edge	Improper cutting conditions					↗	↗					●										
	Unsuitable cutting edge shape				●									↗		↘						
Machining accuracy	Poor surface finish	Improper cutting conditions					↗	↘	↘				●									
		Unsuitable cutting edge shape	●			●										↘	↘		●	●		
	Burring	Improper cutting conditions						↕	↘		●	●							●			
		Unsuitable cutting edge shape												↗	↘	↘			●			
	Chipping	Improper cutting conditions						↘	↘			●							●			
		Unsuitable cutting edge shape												↗	↘	↘	↘		●			
Poor flatness and parallelism	Improper cutting conditions						↘	↘			●		↗	↘	↘	↘		●	●	●		
Others	Increased chatter/vibration	Improper cutting conditions					↘	↘	↘	●	●			↗	↘	↘	↘					
		Improper cutting conditions					↗	↘				●	●									
	Poor chip evacuation	Unsuitable tool/blade edge shape												↗			↘	●				

Troubleshooting Case Studies: Milling

	Case/Symptom	Possible causes	Corrective measures
Insert	VB wear 	<ul style="list-style-type: none"> ●Cutting speed is too high. ●Feed rate is too low. ●The shape of the insert is not suitable. ●The material / grade of the insert is not suitable. 	<ul style="list-style-type: none"> ●Decrease the cutting speed. ●Increase the feed rate. ●Make the nose radius larger. ●Change to a grade highly resistant to boundary wear.
	Notching wear 	<ul style="list-style-type: none"> ●The material / grade of the inserts is not suitable. ●The shape of the cutter is not suitable ●The shape of insert is not suitable. 	<ul style="list-style-type: none"> ●Change to a grade highly resistant to boundary wear. ●Widen the rake angle. ●Change the Insert shape to a different one.
	Chipping / fracture 	<ul style="list-style-type: none"> ●The cutting speed is incorrect. ●The shape of the cutter is not suitable ●The shape of insert is not suitable. 	<ul style="list-style-type: none"> ●Decrease the feed rate and depth of cut in order to reduce the cutting force. ●Use a smaller edge preparation. ●Prepare the cutting edge to give it a round honing. ●Change to a grade highly resistant to fracture.
	Thermal crack 	<ul style="list-style-type: none"> ●The cutting conditions are incorrect ●The material / grade of insert is not suitable 	<ul style="list-style-type: none"> ●Decrease the cutting speed. ●Change to dry cutting from wet cutting. ●Use a material / grade highly resistant to thermal shock
Work piece	Chipping 	<ul style="list-style-type: none"> ●The feed rate is too high. ●An unsuitable insert is selected. ●The shape of the cutter is not suitable. 	<ul style="list-style-type: none"> ●Decrease the feed rate. ●Use a smaller edge preparation ●Change to a grade highly resistant to boundary wear. ●Set the lead angle at 45 degrees.
	Burring 	<ul style="list-style-type: none"> ●The feed rate is incorrect. ●The shape of insert is not suitable. ●The shape of the cutter is not suitable. 	<ul style="list-style-type: none"> ●Adjust the feed rate. ●Use a smaller edge preparation. ●Make the lead angle narrower.

- New Products
- Tool Materials / Selection Guide
- BIDEMCS, PCD, Micrograin Carbide, CBN and Ceramics
- Micrograin Carbide, PVD Coated Carbide
- Insert Item List
- General Turning Toolholders
- Unique Swiss Tooling
- Grooving / Side Turning
- Threading
- Shaper
- ID Tooling
- Application Introduction
- Endmills
- Rotating Tools
- Information
- Index


Surface Roughness Standards

		JIS B0601 (2001) ISO 4287(1997) / ISO 1302(2002)	JIS B0601 (1994) JIS B0031 (1982)	
Cross-section curve		No filter, digital signal	No filter, digital signal	
	Evaluation length	Shape length	—	
	Maximum height	Pt	—	
	10-point average roughness	—	—	
Roughness curve		Phase correction, band $\lambda_s - \lambda_c$	Phase correction, short wavelength λ_c	
	Evaluation length	Determine individually for each standard length λ_c .	Average for λ_n , calculated for each standard length λ_c	
	Maximum height	Maximum height Rz	Maximum height Ry	
	Set standard length based on height parameters Rz, Rmax, and Ry.	0.25mm	0.1~0.5 μ m	0.1~0.5 μ m
		0.8mm	0.5~10 μ m	0.5~10 μ m
		2.5mm	10~50 μ m	10~50 μ m
	Dimension indicated in drawing			
	10-point average roughness		Rz_{JIS}	Rz
	Center line average roughness		Ra₇₅	Ra75
	Arithmetic average roughness		Arithmetic average roughness Ra	Arithmetic average roughness Ra
	Set standard length based on height parameters Rz, Rmax, and Ry.	0.25mm	0.1~0.5 μ m	0.1~0.5 μ m
		0.8mm	0.5~10 μ m	0.5~10 μ m
2.5mm		10~50 μ m	10~50 μ m	
Dimension indicated in drawing				

Theoretical surface roughness

The theoretical surface roughness for lathe machining is the minimum value which can be obtained under the set machining conditions, and can be expressed by the following formula.
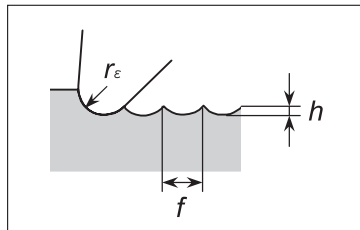
$$h_{(\mu\text{m})} = \frac{f^2}{8 r_\epsilon} \times 1000$$



- h : Theoretical surface roughness (μm)
- f : Feed amount (mm/rev)
- r_ϵ : Nose radius (mm)

Actual surface roughness

- When machining steel: Theoretical surface roughness x 1.5~3
- When machining cast iron: Theoretical surface roughness x 3~5

Surface finish improvement measures




- Increase the nose radius.
- Use a wiper insert.
- Adjust the cutting speed and/or feed amount.
- Change the material and/or shape of the insert

Relationship with triangle symbols




Arithmetic average roughness Ra (μm)	Maximum height Rz (μm)	10-point average roughness Rz _{JIS} (μm)	※ (Triangle symbol)
0.025	0.1	0.1	▽▽▽▽
0.05	0.2	0.2	
0.1	0.4	0.4	
0.2	0.8	0.8	▽▽▽
0.4	1.6	1.6	
0.8	3.2	3.2	
1.6	6.3	6.3	▽▽
3.2	12.5	12.5	
6.3	25	25	
12.5	50	50	▽
25	100	100	

- Examples of reading
 - (i) When Ra = 1.6 μm → 1.6 μm Ra
 - (ii) When Rz = 6.3 μm → 6.3 μm Rz
 - (iii) When Rz_{JIS} = 6.3 μm → 6.3 μm Rz_{JIS}

※ The finishing symbols (triangle symbol ▽ and symbol ~) are no longer used in JIS pursuant to the 1994 revision.

JIS B0601 (1982) JIS B0031 (1982)	JIS B0601 (1970) JIS B0031 (1970)	JIS B0601 (1970)	
No filter, analog signal	No filter, analog signal	No filter, analog signal	
One standard length	One standard length	One standard length	
R _{max}	R _{max} (S indication)	H _{max} (S)	
R _z	R _z (Z indication)	—	
2RC, short wavelength cut-off λ _c	2RC, short wavelength cut-off λ _c	—	
One measured length ≥ 3λ _c	One measured length ≥ 3λ _c	—	
—	—	—	
0.8μm or less	0.8μm or less	Select from 0.3, 1, 3, 5 and 10mm	
0.8~6.3μm	0.8~6.3μm	Select from 0.3, 1, 3, 5 and 10mm	
6.3~25μm	6.3~25μm	Select from 0.3, 1, 3, 5 and 10mm	
	Surface symbol or triangle symbol	Triangle symbol	
		0.8S or less	▽▽▽▽
	—	1.5S~6S	▽▽▽
	—	12S~25S	▽▽
—	—	35S or higher	▽
—	—	—	
R _a	R _a ("a" indication)	—	
—	—	—	
—	—	—	
R _a shall be 12.5μm or less.	λ _c shall be 0.8 mm.	—	
12.5~100μm	—	—	
	Surface symbol or triangle symbol	—	
	0.2a or less	▽▽▽▽	
	0.4a~1.6a	▽▽▽	
	3.2a~6.3a	▽▽	
	12.5a to 25a or more	▽	

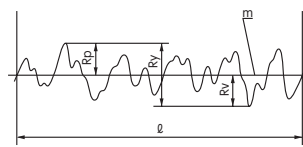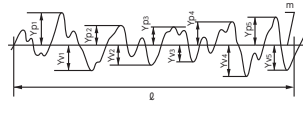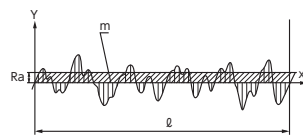● Obtaining the surface roughness






Type	New symbol	Old symbol	Calculation	Obtaining method (example)
	JIS B0601: '01	JIS B0601: '94		
Max. height (Peak)	R _z	R _y	The addition of the max. value for the depth R _v and the max. height R _p on the roughness curve for the reference length: $R_z = R_p + R_v$	
Average roughness of 10 points	R _{z_{JIS}}	R _z	The addition of the average of the maximum to fifth highest vales and the average of the deepest to the fifth deepest values on the roughness curve for the reference length: $R_{z_{JIS}} = \frac{(Y_{p1} + Y_{p2} + Y_{p3} + Y_{p4} + Y_{p5}) + (Y_{v1} + Y_{v2} + Y_{v3} + Y_{v4} + Y_{v5})}{5}$	
Arithmetic average of roughness	R _a	R _a	The average of absolute values on the roughness curve f(x) for the reference length: $R_a = \frac{1}{l} \int_0^l \{f(x)\}$	

● Conditions for measuring R parameters

Non-cyclic wave form (random wave form)		Settings for measuring	
Range of R _a (μm)	Range of R _z (μm)	Reference length λ _r (mm)=cut-off λ _c (mm)	Evaluated length λ _n (mm)= λ _r × 5
0.006 < R _a ≤ 0.2	0.025 < R _z ≤ 0.1	0.08	0.4
0.02 < R _a ≤ 0.1	0.1 < R _z ≤ 0.5	0.25	1.25
0.1 < R _a ≤ 2	0.5 < R _z ≤ 10	0.8	4
2 < R _a ≤ 10	10 < R _z ≤ 50	2.5	12.5
10 < R _a ≤ 80	50 < R _z ≤ 200	8	40

Spare Parts - Wrenches

Standard Items


Item Number	Appearance
CLR-13S (Formerly RLR-13S)	
CLR-15S (Formerly RLR-15S)	
RLR-20S	
LLR-25S	
LLR-25S-20*65	
LLR-28S	





Optional Items

<LLR Type>

Item Number	Appearance
LLR-13S	
LLR-15S	
LLR-20S	

<Driver type wrench for increased adaptability>

Item Number	Magnetic Driver Handle
XX2815-04	

Item Number	Replaceable Bits
HLR-13S	
HLR-15S	
HLR-20S	
HLR-25S	

<Driver type wrench kits>

Item Number	Contents
XX2815-04-13S	XX2815-04 with HLR-13S
XX2815-04-15S	XX2815-04 with HLR-15S
XX2815-04-20S	XX2815-04 with HLR-20S
XX2815-04-25S	XX2815-04 with HLR-25S




Clamp Screws and Wrenches

Clamp Screw			Dimension (mm)				Standard Wrench		Adaptable standard wrench		
Appearance	Order Code	Item Number	a	b	c	θ (°)	Order Code	Item Number	LR	Hexalobular (6-LOBE)	
	5704739	LR-S-2×3.5	M2×P0.4	3.1	3.5	82	5681994	CLR-13S	LR-1	T-6	
	5907704	LR-S-2×3.7	M2×P0.4	3.1	3.7	82					
	5907712	LR-S-2×4.4	M2×P0.4	3.1	4.4	82					
	5907720	LR-S-2×5.5	M2×P0.4	3.0	5.5	90					
	5907738	LR-S-2.5×4.8	M2.5×P0.45	3.6	4.8	82	5681978	CLR-15S	LR-2	T-7	
	5704747	LR-S-2.5×5.5	M2.5×P0.45	3.6	5.5	82					
	5907746	LR-S-2.5×6	M2.5×P0.45	3.5	6.0	90					
	5907753	LR-S-2.5×6.8	M2.5×P0.45	3.5	6.8	90					
		5773619	LR-S-3×5.8	M3×P0.5	4.1	5.8	90	5485164	RLR-20S	LR-3	T-10
		5907761	LR-S-3×6.2	M3×P0.5	5.2	6.2	82				
5907779		LR-S-3×7.8	M3×P0.5	4.0	7.8	90					
5907787		LR-S-4×5.8	M4×P0.7	5.8	6.0	82					
5907795		LR-S-4×9	M4×P0.7	5.8	9.0	82					
5116991	LR-S-4×10PW	M4×P0.7	5.8	10.0	90	5681978	CLR-15S	LR-2	T-7		
	5534029	LRIS-2×6	M2×P0.4	2.6	6.0	60	5681994	CLR-13S	LR-1	T-6	
	5907803	LRIS-2.2×6	M2.2×P0.45	3.15	6.0	60					
	5989181	LRIS-2.5×5	M2.5×P0.45	3.6	5.0	60	5681978	CLR-15S	LR-2	T-7	
	5907811	LRIS-2.5×7	M2.5×P0.45	3.6	7.0	60					
	5907829	LRIS-3×6	M3×P0.5	4.0	6.0	60	5485164	RLR-20S	LR-3	T-10	
	5428156	LRIS-3×8	M3×P0.5	4.2	8.0	60					
	5477328	LRIS-4×5	M4×P0.7	5.85	5.0	60	5364930 5794698	LLR-25S LLR-25S-20 * 65	LR-4	T-15	
	5907837	LRIS-4×6	M4×P0.7	5.85	6.0	60					
	5977566	LRIS-4×8	M4×P0.7	5.85	8.0	60					
	5907845	LRIS-4×10	M4×P0.7	5.85	10.0	60					
5684105	LRIS-4×12	M4×P0.7	5.85	12.0	60	5364948	LLR-28S	-	T-20		
5907852	LRIS-5×10	M5×P0.8	7.0	9.5	60						
5116983	LRIS-4×10PW	M4×P0.7	5.7	10.0	60	5681978	CLR-15S	LR-2	T-7		
5090576	LRIS-4×12PW	M4×P0.7	5.7	12.0	60						

Attention: When tightening screws

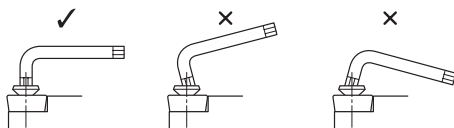- Make sure the wrench tip and wrench hole are neither deformed nor stripped
- Engage the wrench straight to screw hole



- Do not apply more torque than the recommended amount (as shown to the right)

Note: Wrenches and bits come in a pack of five
Clamp screws come in a pack of ten

Recommended Tightening Torque

Item Number	Recommended Tightening Torque (N·m)
CLR LLR HLR 13S	0.7
CLR LLR HLR 15S	1.4
RLR LLR HLR 20S	3.0
LLR HLR 25S	5.0
LLR HLR 28S	7.0
LW-4	12
LW-5	15

Material Cross Reference Chart

ISO	Country	U.S.A.	Japan	Germany	ISO	Country	U.S.A.	Japan	Germany	
	Standard	AISI / SAE	JIS	DIN		Standard	AISI / SAE	JIS	DIN	
Stainless steel [M]	Stainless Steel (Ferrite/Martensitic)				Cast iron [K]	Malleable cast iron				
	403	SUS403	X6Cr13			—	FCMB310	—		
	416	SUS416	X7Cr14			32510	FCMW330	EN-GJMB350-10		
	430	SUS430	X12CrS13			40010	FCMW370	EN-GJMB450-6		
	410	SUS410	X6Cr17			50005	FCMW490	EN-GJMB550-4		
		SUS420J2	X10Cr13			70003	FCMP540			
	405		X46Cr13			A220-70003	FCMP590	EN-GJMB650-2		
	420		X6CrAl13			A220-80002	FCMP690	EN-GJMB700-2		
	431	SUS431	X20Cr13			Gray cast iron				
	430F	SUS430F	X19CrNi17-2			No 20 B	FC100	EN-GJL-100		
	434	SUS434	X14CrMoS17			No 25 B	FC150	EN-GJL-150		
	CA6-	SCS5	X6CrMoS17-2			No 30 B	FC200	EN-GJL-200		
	405	SUS405	X3CrNiMo13-4			No 35 B	FD250	EN-GJL-250		
	HNV6	SUH4	X10CrAl13			No 40 B	—	—		
	446	SUH446	X85CrMoV18-2			No 45 B	FC300	EN-GJL-300		
	EV8	SUH35,SUH36	X10CrAl2-4			No 50 B	FC350	EN-GJL-350		
	S44400		X53CrMnNiN21-9			No 55 B	—	EN-JLZ		
			X1CrMoTi18-2			A436 Type 2	—	GGL-NiCr20-2		
	630		X20CrMoV12-1			Ductile cast iron				
			X5CrNiCuNb16-4			60-40-18	FCD400	EN-GJL-400-15		
	Stainless Steel (Austenitic)					Nonferrous material [N]	—	—	EN-GJL-400-18-LT	
	304L	SUS304	X2CrNi19-11				80-55-06	FCD500	EN-GJL-500-7	
	304	SUS303	X5CrNi18-10				A43D2	—	EN-GJSA-500	
	303	SUS304L	X8CrNiS18-9				—	FCD600	EN-GJS-600-3	
	304L	SCS19	X2CrNi19-11				100-70-03	FCD700	EN-GJS-700-2	
	301	SUS301	X9CrNi18-8				SC64D	C4B5	G-ALSi9MGWA	
	304LN	SUS304LN	X2CrNi18-10				GD-AISI12	AC4A	G-ALMG5	
	316	SUS316	X5CrNiMo17-2-2				356.1	A5052		
	316LN	SUS316LN	X2CrNiMoN17-13-3				A413.0	A6061	GD-ALSi12	
	316L		X2CrNiMoN17-12-2				A380.1	A7075	GD-ALSi8Cu3	
	316L	SCS16	X2CrNiMo18-14-3				A413.1	ADC12	G-ALSi12(Cu)	
		SUS316L					A413.2		G-ALSi12	
	317L	SUS317L	X2CrNiMo18-15-4				A360.2		G-ALSi10Mg(Cu)	
	UNS		X1NiCrMoCu25-20-5				Heat-resistant alloy			
	V 0890A						330	SUH330	X12NiCrSi36 16	
	321	SUS321	X6CrNiTi18-10				SCH15	G-X40NiCrSi36-18		
	347	SUS347	X10CrNiNb18-10			5390A				
	316Ti		X6CrNiMoTi17-12-2			5666		NiCr22Mo9Nb		
	318		X10CrNiMoNb 18-12			5660		NiCr20Ti		
	309	SUH309	X15CrNiSi20-12			5391		NiFe35Cr14MoTi		
	310S	SUH310	X8CrNi25-21			5383		S-NiCr13A16MoNb		
	308	SCS17	X2CrNiMoN17-11-2			4676		NiCr19Fe19NbMo		
	17-7PH		X7CrNiAl 17-7					NiCu30AL3Ti		
	N08028		X1NiCrMoCu31-27-4			AMS 5399		NiCr20TiAk		
	Stainless Steel (Austenitic/Ferrite)					Heat-resistant alloy [S]	AMS 5544		NiCr19Co111MoTi	
S31500		X2CrNiN23-4		AMS 5544			NiCr19Fe19NbMo			
S32900		X8CrNiMo27-5		AMS 5397			NiCo15Cr10MoAl			
S32304		X2CrNiN23-4		5537C			CoCr20W15Ni			
S31803		X2CrNiMoN22-53		AMS 5772			CoCr22W14Ni			
				Titanium alloy						
Hardened material [H]	5130H	SCr430H	34Cr4	AMS R54520			TiAl5Sn2.5			
	5135H	SCr435H	37Cr4	AMS R56400			TiAl6V4			
	4135H	SCM435H	34CrMo4	AMS R56401			TiAl6V4ELI			
	4140H	SCM440H	42CrMo4				TiAl4Mo4Sn4Si0.5			

ISO	Country	U.S.A.	Japan	Germany	ISO	Country	U.S.A.	Japan	Germany
	Standard	AISI/SAE	JIS	DIN		Standard	AISI/SAE	JIS	DIN
Steel P	Carbon steel				Steel P	A573-81	SM400A;B;C SM490A;B;C;YA;YB	S275J2G3 S355J2G3+C2 DS355J2G3 55Si7 S340MGC 100Cr6 16Mo3 16Mo5 14Ni6 21NiCrMo2 40NiCrMo22 17CrNiMo6 15Cr3 42Cr4 55Cr3 15CrMo5 40NiCrMo8-4 15Cr3 13CrMo5 13CrMo4-5 14MoV63 31CrMo12 39CrMoV13 41CrS4 22Mo4 50CoMo4 16MnCr5 31NiCrMo14 50NiCr13 36NiCr6 14NiCr10 14NiCr14	
	A570.36	STKM12A;C	S235JRG2	5120					
	1115		GC16E	9255					
	A573-8165		S235J2G3	9262					
	1015		C15	52100		SUJ2			
	1020		C22	ASTM					
	1213	SUM22	11SMn30	4520					
	12L13	SUM22L	11SMnPb30	ASTM					
			10SPb20	8620		SNM220(H)			
	1215		11SMn37	8740		SNM240			
	12L14		11SMnPb37						
	1015	S15C	Ck15E	5015		SCr415(H)			
	1025	S25C	Ck25E	5140		SCr440			
	A572-60		S380N	5155		SUP9(A)			
	A572-60		17MnV7			SCM415(H)			
	1035		C35	8740		SNM240			
	1045		C45	5015		SCr415(H)			
	1040		35S20	ASTMA182					
	1039		40Mn4	ASTMA182					
	1335	SMn438(H)	36Mn5						
	1330	SCMn1	28Mn6						
	1035	S35C	C35G	L1					
	1045	S45C	C45E	8620					
	1050	S50C	C53G						
	1055		C55						
	1060		C60E						
	1055	S55C	C55E						
	1060	S58C	C60E						
	1095		C101E						
	W1	SK3	C101u	L6					
	W210	SUP4	C105W1	3135		SNC236			
				3415		SNC415(H)			
	Alloy steel					3415;3310	SNC815(H)		
	ASTMA353		X8Ni9	9255					
	2515		12Ni19	9840					
			14NiCrMo13	4340					
	D3	SKD1	X210Cr12	5132		SCr430(H)			
				5140		SCr440(H)			
	H13	SKD61	X40CrMo134	5115					
				4130		SCM420;SCM430			
	A2	SKD12	X100CrMoV51	4137;4135		SCM432;SCCRM3			
		SKD2	X210CrW12	4140;4142		SCM440			
	S1		45WCrV7	4140		SCM440(H)			
	H21	SKD5	X30WCrV93						
			X30WCrV9	6150		SUP10			
		X165CrMoV12							
HW3	SUH1	X45GrSi93							
D3	SUH3	S6-5-2	L3	SKS31					
M2	SKH51	S6-5-2		SKS2,SKS3					
M35	SKH55	S6-5-2-5	L6	SKT4					
M7		S6-9-2							
HNV3		X210Cr12G							
				Cast steel					
					SEMnH1				
					SCMnH/1	G-X120Mn12			

- New Products
- Tool Materials / Selection Guide
- PCD, PCBN and Ceramics
- BIDEMCS, PCD, Micrograin Carbide, PVD/Coated Carbide, CBN and Ceramics
- Insert Item List
- General Turning Toolholders
- Unique Swiss Tooling
- Grooving / Side Turning
- Threading
- Shaper
- ID Tooling
- Application Introduction
- Endmills
- Rotating Tools
- Information
- Index

Ni-based Heat Resistant Alloys

Material Specifications Cross-Reference List-Aerospace Material Designation

Commercial designation	Hardness Brinell HB		Nominal composition Approximate content in %										
	Ann.	Aged	Ni	Cr	Co	Fe	Mo	C	Mn	Si	Al	Ti	Others
Astroloy*	—	—	56.9	15.0	15.0	—	5.25	0.06	—	—	4.0	3.5	0.05
AerMet 100	—	—	11.1	3.1	13.4	70.0	1.20	0.23	—	—	—	0.05	—
GMR 235*	—	—	63.3	15.5	—	10.0	5.2	0.15	0.25	0.6	3.0	2.0	0.06
GMR 235D	—	—	63.0	15.5	—	4.5	5.0	0.15	0.1	0.3	3.5	2.5	0.05
Hastalloy B*	140	—	64.3	0.6	1.25	5.5	28.0	0.1	0.8	0.7	—	—	—
Hastalloy B-3	—	—	65.0	1.5	3.00	1.5	28.5	0.01	3.0	0.1	0.5	—	1.0
Hastalloy C*	200	—	54.1	16.0	1.25	5.75	17.0	0.07	0.8	0.7	—	—	4.0
Hastalloy C-22	—	—	56.0	22.0	2.50	3.00	—	—	0.5	0.1	—	—	3.8
Hastalloy C*22HS	—	—	74.0	22.0	1.00	2.00	—	—	—	—	—	—	0.0
Hastalloy C-276	—	—	57.0	16.0	2.50	5.00	16.0	0.01	1.0	0.1	—	—	1.0
Hastalloy N*	—	—	72.2	7.0	0.25	3.0	16.5	0.06	0.4	0.25	0.5	—	0.21
Hastalloy W*	—	—	62.7	5.0	1.25	5.5	24.5	0.06	0.5	0.5	—	—	—
Hastalloy X*	160	—	47.1	22.0	1.5	18.5	9.0	0.1	0.6	0.6	—	—	0.6
Hastelloy R235*	—	—	61.0	15.0	2.5	10.0	5.5	0.15	0.25	0.6	3.0	2.0	—
Haynes 25	—	—	10.0	20.0	51.0	3.0	1.0	0.10	1.50	0.4	—	—	15.0
Haynes 75	—	—	73.7	20.0	—	5.0	—	0.12	—	—	0.25	0.4	0.5
Haynes 80A	—	—	70.9	20.0	2.0	3.0	—	0.1	—	—	1.5	2.5	—
Haynes 188	—	—	22.0	22.0	39.0	3.0	—	0.1	1.25	0.35	—	—	1.0
Haynes 263	—	25	51.4	20.0	20.0	—	6.0	0.06	—	—	1.0	1.5	—
Haynes 600	—	—	75.9	16.0	—	8.0	—	0.08	—	—	—	—	—
Haynes 625	—	—	61.4	21.0	—	5.0	9.0	0.1	—	—	—	—	3.5
Haynes 718	—	43	53.5	18.0	—	19.0	3.0	0.08	—	—	0.5	0.9	5.0
Haynes X-750	—	37	74.9	16.0	—	7.0	—	0.08	—	—	0.8	0.25	1.0
IN-100*	—	—	61.6	10.0	15.0	—	3.0	0.18	1.2	0.5	5.5	4.75	—
Incoloy A-286	—	—	25.5	15.0	—	56.5	—	—	—	—	—	2.10	—
Incoloy 800	—	—	35.0	23.0	—	39.5	—	0.10	—	—	0.6	0.60	1.8
Incoloy 804*	—	—	41.0	29.5	—	26.0	—	0.1	1.0	0.75	0.25	0.6	0.5
Incoloy 825*	180	—	42.0	21.0	—	30.0	3.0	0.04	—	—	—	1.0	2.0
Incoloy 901*	180	300	44.3	12.5	—	34.0	6.0	0.05	0.24	0.12	0.15	2.7	0.15
Incoloy 903*	—	380	39.0	—	15.0	41.0	—	0.02	—	—	0.7	1.4	3.0
Incoloy 909	—	—	38.0	—	13.0	42.0	1.25	—	—	0.4	0.0	1.5	4.7
Incoloy MA956	—	—	—	20.0	—	74.0	—	—	—	—	4.5	0.5	0.5
Inconel 600*	170	—	75.0	15.5	—	8.0	—	0.05	—	—	—	—	—
Inconel 601*	150	—	60.0	23.0	—	14.0	—	0.05	—	—	1.4	—	—
Inconel 604*	180	—	74.4	15.8	—	7.2	—	0.04	0.2	0.2	—	—	0.1
Inconel 617	—	—	52.0	22.0	12.5	1.5	9.5	—	—	—	1.2	—	—
Inconel 625*	180	—	61.0	21.5	—	2.5	9.0	0.04	0.5	0.5	0.4	0.4	3.6
Inconel 625CLF	—	—	61.0	21.5	—	2.5	9.0	—	—	—	—	—	3.6
Inconel 700*	—	350	46.0	15.0	23.5	0.7	3.75	0.12	0.1	0.3	3.0	2.2	—
Inconel 702*	—	—	79.6	15.6	—	0.35	—	0.04	0.05	0.2	3.0	0.7	—
Inconel 706*	—	—	42.0	16.0	—	40.0	—	0.03	0.2	0.3	0.4	1.75	—
Inconel 713*	—	—	75.0	12.5	—	—	4.2	0.12	—	—	6.1	0.8	—
Inconel 718*	180	380	52.5	19.0	—	19.0	3.0	0.04	0.35	0.35	0.9	0.9	0.1
Inconel 718SPF	—	—	54.0	18.0	—	18.5	3.0	—	—	—	1.0	5.0	—
Inconel 722*	—	380	74.8	15.0	—	6.5	—	0.04	0.55	0.2	0.6	2.4	—
Inconel 751*	—	—	70.0	15.5	—	7.0	—	0.1	1.0	0.5	1.5	2.6	0.5
Inconel 781	—	—	70.0	16.0	—	8.0	—	0.07	2.25	0.15	0.1	3.0	0.2
Inconel 783	—	—	30.0	3.5	26.5	27.0	—	0.03	0.05	—	6.0	0.4	—
Inconel HX	—	—	47.0	22.0	1.5	18.0	9.0	—	—	—	—	—	0.6
Inconel MA754	—	—	77.5	20.0	—	1.0	—	—	—	—	0.3	0.5	0.6
Inconel X-750*	—	390	73.0	15.5	—	7.0	—	0.04	0.35	0.35	0.7	2.5	—
Invar 36	—	—	36.0	0.25	0.5	62.0	—	0.15	0.60	0.40	—	—	1.00
Invar 42	—	—	41.0	—	—	56.0	—	0.50	0.40	—	—	—	1.00
Jessop G39*	130	—	67.5	19.5	—	5.0	3.0	0.5	—	—	—	—	4.5
Jessop G64*	220	—	60.7	11.0	—	2.0	3.0	0.15	—	—	6.0	—	4.0
Jessop G81*	—	300	79.3	20.0	13.0	—	—	0.05	—	—	1.3	2.3	—
Jethete M-152	—	—	2.5	16.8	—	—	1.8	0.12	0.7	0.18	—	—	0.6
Jethete M-252*	—	320	55.3	20.0	10.0	—	10.0	0.15	0.5	0.5	1.0	2.6	—
MAR-M 200*	—	—	69.4	9.0	10.0	—	—	0.15	—	—	5.0	2.0	13.5
MAR-M 246*	—	270	59.5	9.0	10.0	0.2	2.5	0.15	—	—	5.5	1.5	11.5
MAR-M 421*	—	—	62.3	15.5	10.0	—	1.7	0.15	—	—	4.3	1.75	5.3
MAR-M 432*	—	—	52.3	15.5	20.0	—	—	0.15	—	—	2.8	4.3	5.0
Monel 400*	110	—	65.0	—	—	1.5	—	0.12	1.0	—	—	—	32.0
Monel 405	—	—	63.0	—	—	2.5	—	0.30	2.0	0.5	—	—	34.0
Monel K-500*	120	290	64.0	—	—	1.0	—	0.13	0.8	—	2.8	0.6	30.0

* These alloys can be hardened by an aging process

USA		UK	France	Germany		Others
SAE	AMS	BS	AFNOR	Werkst.-Nr	DIN1706	
—	—	—	—	—	—	—
—	—	—	—	—	—	AISI:686
5396A	5396	—	ND37FeV	2.48	NiCr16MoAl S-NiMo30	N10001
5388C	5388	—	—	2.4602	NiCr17Mo17FeW	N10002
5771	5607	—	—	—	—	N10003
—	5786	—	—	—	—	N10004
5390A	5390	—	NC22FeD	2.4603	—	N06002
—	—	—	—	—	—	—
—	—	—	—	—	—	—
—	5872	—	—	—	—	—
—	—	—	—	—	—	—
—	—	—	—	—	—	—
—	5596/5597 5542/5593 5397	—	NC15TNbA	—	—	—
—	—	—	—	LW2.4674	NiCo15Cr10MoAlTi	N13100
—	—	—	—	—	—	—
—	—	3072-76	NC21FeDU	2.4858	NiCr21Mo	N08825
—	5660	—	ZSNCDT42	LW2.4662	NiFe35Cr14MoTi	N09901
—	—	—	—	—	—	—
5540	5580	3072-76	NC15Fe	2.4816	NiCr15Fe	N06600
—	5715	—	—	2.4851	NiCr23Fe	N06601
—	—	—	—	—	—	—
—	5887-89 5666 5879	—	NC22FeDNB	2.4856	NiCr22Mo9Nb	N06625
—	—	—	NK27CADT	—	NiCo29Cr15MoAlTi	—
—	5550	—	—	—	—	N07702
—	5702	—	—	—	—	N09707
—	5391	3146-3	NC12AD	LW2.4670	S-NiCr13Al6MoNb	—
5383	5589	HR8	NC19FeNB	LW24668	NiCr19Fe19NbMo	N07713
—	5596G	—	—	—	—	—
—	5541	—	NC16FeTi	—	NiCr16FeTi	N07722
—	—	—	—	—	—	N07751
—	—	—	—	—	—	—
—	5536	—	—	—	—	—
5542G	5582	—	NC16FeTNb	2.4669	NiCr16FeTi	N07750
—	—	—	—	—	—	—
—	—	—	—	—	NiCr20MoW	—
—	—	—	—	—	NiCr11AlWNb	—
—	—	—	—	—	NiCr20Co18Ti	—
—	5551	—	—	2.4916	S-NiCr19Co	N07252
—	—	—	—	—	NiW13Co10Cr9AlTi	—
—	—	—	—	2.4675	NiCo10W10Cr9AlTi	—
—	—	—	—	—	NiCr16Co10WAlTi	—
—	—	—	—	—	NiCo20Cr16WAlTi	—
4544	4574	3072-76	NU30	2.436	NiCu30Fe	N04400
4676	—	3072-76	—	2.4375	NiCu30Al	N05500

- New Products
- Tool Materials / Selection Guide
- BIDEMCS, PCD and Ceramics
- Micrograin Carbide, PVD/Coated Carbide
- Insert Item List
- General Turning Toolholders
- Unique Swiss Tooling
- Grooving / Side Turning
- Threading
- Shaper
- ID Tooling
- Application Introduction
- Endmills
- Rotating Tools
- Information
- Index

Ni-based Heat Resistant Alloys

Material Specifications Cross-Reference List-Aerospace Material Designation

Commercial designation	Hardness Brinell HB		Nominal composition Approximate content in %										
	Ann.	Aged	Ni	Cr	Co	Fe	Mo	C	Mn	Si	Al	Ti	Others
Monel R-405*	110	—	66.0	—	—	1.2	—	0.15	1.0	—	—	—	31.06
Multimet N155			21.0	22.5	21		3.5	0.16	2.0	1.0			4.50
Nickel 200			99.0			0.4		0.15	0.35	0.35			0.26
Nickel 201			99.0			0.4		0.02	0.35	0.35			0.26
Nimocast 80*	—	—	69.9	20.0	2.0	5.0	—	0.1	—	—	1.0	2.0	—
Nimocast 90*	—	—	52.9	20.0	18.0	5.0	—	0.1	—	—	1.5	2.5	—
Nimocast 713	—	—	72.6	13.4	—	—	4.5	0.12	—	—	6.2	1.0	2.3
Nimocast 842	—	—	57.7	22.0	10.0	—	10.0	0.3	—	—	—	—	—
Nimocast PD16	—	—	43.8	16.5	—	34.0	3.3	0.06	—	—	1.2	1.2	—
Nimocast PE10	—	—	56.4	20.0	—	—	6.0	—	—	—	—	—	9.0
Nimocast PK24	—	—	61.1	9.5	15.0	—	3.0	0.17	—	—	5.5	4.7	1.0
Nimonic 75*	170	—	75.0	19.5	—	4.0	—	0.12	—	—	—	0.4	—
Nimonic 80A*	—	350	75.0	19.5	—	—	—	0.08	—	—	1.4	2.4	—
Nimonic 86			65.0	25.0			10.0						
Nimonic 90*	—	346	59.0	19.5	16.5	—	—	0.08	—	—	1.5	2.5	—
Nimonic 95	—	—	49.9	19.5	—	5.0	—	0.11	—	1.0	2.0	3.5	—
Nimonic 101			48.0	24.2	19.7		1.5				1.4	3.0	
Nimonic 105*	—	320	53.0	15.0	20.0	—	5.0	0.12	—	—	4.7	1.2	—
Nimonic 115*	—	350	59.0	14.2	13.2	—	4.0	0.16	—	—	5.0	4.0	—
Nimonic 242	—	—	58.0	21.5	10.0	—	10.5	—	—	—	—	—	—
Nimonic 263/C263*	—	275	51.5	20.2	20.0	—	6.0	0.06	—	—	0.5	2.0	—
Nimonic 901*	—	350	44.0	12.5	—	35.0	5.7	0.04	—	—	0.3	2.9	—
Nimonic PE11			39.0	18.0		34.0	5.2				0.8	2.3	
Nimonic PE13	—	—	49.0	21.8	1.5	18.5	9.0	0.1	0.5	0.5	—	—	0.6
Nimonic PE16*	—	250	43.5	16.5	—	34.0	3.3	0.06	—	—	1.2	1.2	—
Nimonic PK25	—	—	49.9	19.0	19.5	—	4.0	0.08	0.8	0.8	2.9	2.9	—
Nimonic PK31	—	—	53.8	20.0	14.0	—	4.5	—	—	—	0.4	2.3	5.0
Nimonic PK33*	—	350	55.9	18.0	14.0	0.5	7.0	0.05	0.25	0.25	2.1	2.2	—
R-235*	—	—	63.3	15.0	1.2	10.0	5.5	0.12	0.1	0.3	2.0	2.5	—
Refractaloy 26	—	—	38.0	19.0	20.0	16.0	3.2	0.03	0.8	1.0	0.2	2.75	—
Rene 41	—	—	53.1	19.0	11.0	1.8	10.0	0.09	0.3	0.3	1.5	3.1	—
Rene 63	—	—	54.4	14.0	15.0	0.5	6.0	0.05	0.1	0.2	3.8	2.5	3.5
Rene 77	—	—	57.6	15.0	15.0	0.4	4.2	0.17	0.1	0.1	4.3	3.3	—
Rene 80	—	—	61.0	14.0	9.5	—	4.0	0.15	—	—	—	4.0	8.0
Rene 95	—	—	64.5	14.0	8.0	—	3.5	0.15	—	—	—	2.5	3.5
Rene 100	—	—	60.6	10.0	15.0	—	3.0	0.18	—	—	5.5	4.7	—
Rene 125	—	—	60.0	8.9	10.0	—	2.0	0.1	—	—	4.7	2.5	7.0
TRW 1800	—	—	70.0	13.0	—	—	—	0.1	—	—	6.0	0.06	10.5
TRW V1 A	—	—	70.5	6.0	7.5	—	2.0	0.13	—	—	5.4	1.0	6.3
Udimar 250			18.0		8.0	68.0	5.0				0.1	0.4	
Udimar 300			18.5		9.0	66.0	5.0				0.1	0.7	
Udimet 500*	—	—	51.7	19.0	19.0	—	4.0	0.1	0.1	0.1	3.0	3.0	—
Udimet 520			56.0	19.0	12.0		6.0				2.0	3.0	1.0
Udimet 630	—	—	51.0	17.0	—	17.5	3.0	0.04	—	—	0.6	1.1	4.1
Udimet 700	—	—	54.6	15.0	17.5	—	—	0.1	—	—	4.4	3.4	—
Udimet 710	—	—	55.0	18.0	15.0	0.5	1.5	0.07	—	—	2.5	5.0	1.5
Udimet 718*	180	380	52.5	18.0	—	18.0	3.0	0.05	—	—	0.6	0.1	5.2
Udimet 720			56.0	16.0	14.7		3.0				2.5	5.0	1.3
Udimet alloy D-979			45.0	15.0		27.0	4.0				1.0	3.0	4.0
Udimet L-605			10.0	20.5	50.0	3.0			1.5				15.0
Udimet alloy R41			55.0	19.0	11.0		10.0				1.5	3.1	
Waspaloy*	—	HRC35-42	56.9	19.8	13.5	0.8	4.45	0.07	0.1	0.1	1.4	3.0	—

* These alloys can be hardened by an aging process

USA		UK	France	Germany		Others
SAE	AMS	BS	AFNOR	Werkst.-Nr	DIN1706	
4674	7234	—	—	—	—	N04405
—	—	3146	—	—	—	—
—	—	—	—	—	—	—
—	—	—	—	—	—	—
5391A	—	HC203	NC13AD	2.467	S-NiCr13Al6MoNb	—
—	5397	HC204	NK15CAT	LW2.4674	—	—
—	—	—	—	—	NiFe33Cr17Mo	—
—	—	3146	—	—	—	—
—	—	HR5,203-4	NC20T	2.463	NiCr20Ti	—
—	—	Hr401,601	NC20TA	2.4631	NiCr20TiAk	N07080
—	—	Hr2,202	Nc20ATV	2.4632	NiCr20Co18Ti	N07090
—	—	—	—	—	—	—
—	—	HR3	NCKD20ATV	2.4634	NiCo20C15MoAlTi	—
—	—	HR4	NCK15ATD	2.4636	NiCo15Cr15MoAlTi	—
—	—	—	—	—	—	—
—	—	HR10	NCK20D	2.465	NiCr15Co19MoTi	—
5660C	5661A	—	ZSNCDT42	2.4662	NiCr15MoTi	—
5536E	5754E	HR6,204	NC22FeD	2.4665	NiCr22Fe18Mo	—
—	—	HR207	NW11AC	—	NiFe33Cr17Mo	—
5751A	5753	—	NKOD20ATU	2.4666	NiCr18CoMo	—
—	—	—	—	—	—	—
—	—	—	NC19KDUV	—	NiCr20Co16MoTi	—
—	—	—	—	—	—	—
—	—	—	Z6NKCDT38	—	—	—
—	5399	—	NC19KDT	2.4973	NiCr19Co11MoTi	N07041
—	—	—	—	—	—	—
—	—	—	—	—	—	—
—	—	—	NC14K8	—	—	—
—	—	—	—	—	NiCo15Cr10MoAlTi	—
—	—	—	—	—	—	—
—	—	—	—	—	—	—
—	—	—	—	—	NiTa9Co8W6CrAl	—
—	6512	—	—	—	—	—
—	5751	—	NCK19DAT	2.4983	NiCr18Co18MoTi	N07500
—	—	—	—	2.4668	NiCr19NbMo	—
—	—	—	NCKD20AT	2.4636	NiCo15CrMoAlTi	—
—	—	—	NC18TDA	—	—	—
5383	5589	HR8	NC19FeN	LW2.4668	NiCr19Fe19NbMo	N07718
—	—	—	—	—	—	—
—	5759	—	—	—	—	—
—	5544	—	NC20K14	LW2.4668	NiCr19Fe19NbMo	N07001

- New Products
- Tool Materials / Selection Guide
- BIDEMCS, PCD, CBN and Ceramics
- Micrograin Carbide, PVD/CVD-coated Carbide
- Insert Item List
- General Turning Toolholders
- Unique Swiss Tooling
- Grooving / Side Turning
- Threading
- Shaper
- ID Tooling
- Application Introduction
- Endmills
- Rotating Tools
- Information
- Index

Co-based Heat Resistant Alloys

● Material Specifications Cross-Reference List-Aerospace Material Designation

Commercial designation	Hardness Brinell HB		Nominal composition Approximate content in %										
	Ann.	Aged	Ni	Cr	Co	Fe	Mo	W	Mn	Si	Al	Ti	Others
Air Resist 13	—	—	1.0	—	79.6	2.5	—	11.0	—	—	3.5	—	4.12
Air Resist 213	—	—	—	19.0	65.8	—	—	4.7	—	—	3.5	—	6.68
Altemp S 816	—	—	20.0	20.0	47.6	—	4.0	4.0	—	—	—	—	0.4
FSX 414	—	—	10.0	29.0	52.8	1.0	—	7.0	—	—	—	—	0.25
Haynes 25*	—	—	10.0	20.0	49.0	3.0	—	15.0	1.5	0.5	—	—	0.1
Haynes 36	—	—	10.0	18.5	52.8	2.0	—	14.5	1.2	0.6	—	—	0.4
Haynes 151	—	—	—	20.0	65.6	—	—	12.8	0.5	0.5	—	0.15	0.47
Haynes 188*	—	—	22.0	22.0	38.0	2.5	—	14.0	1.0	0.4	—	—	0.1
HS 6*	—	—	2.5	28.0	60.5	3.0	—	5.0	—	—	—	—	1.0
HS 21*	—	—	3.0	27.0	62.6	2.0	5.0	—	0.6	0.6	—	—	0.25
HS 25	—	—	10.0	20.0	48.4	3.0	—	15.0	1.5	2.0	—	—	0.1
HS 30	—	—	16.0	24.0	51.4	1.0	6.0	—	0.6	0.6	—	—	0.4
HS 31	—	—	10.0	25.0	53.8	1.5	—	8.0	0.6	0.8	—	—	0.4
HS 36	—	—	10.0	18.0	53.1	2.0	—	15.0	1.5	—	—	—	0.4
Inconel 783	—	—	28.5	3.0	34.0	26.0	—	—	—	—	5.4	0.1	3.0
J 1570*	—	—	28.0	19.0	39.0	2.0	—	7.0	—	—	—	—	—
J 1650	—	—	27.0	19.0	38.0	—	—	12.0	—	—	—	—	0.2
Jessop 832	—	—	12.0	19.0	44.0	17.0	2.0	—	0.8	0.3	—	—	3.5
Jessop 834	—	—	12.0	19.0	42.0	20.0	2.0	—	—	—	—	—	6.5
Jessop 865	—	—	10.5	25.5	53.0	2.0	—	7.5	0.6	0.6	—	—	0.45
Jessop 875	—	—	—	21.0	66.0	—	—	11.0	—	—	—	—	2.45
Jessop 887	—	—	10.0	20.0	50.0	3.0	—	15.0	0.5	1.5	—	—	0.1
Jessop X-40	—	—	10.5	25.5	53.0	1.5	—	7.5	0.75	0.75	—	—	0.5
Jessop X-45	—	—	10.5	25.5	54.7	2.0	—	7.0	—	—	—	—	0.25
Jessop X-50	—	—	20.5	25.5	40.3	4.0	—	12.0	—	—	—	—	0.75
Jessop X-63	—	—	10.0	25.0	57.6	1.0	6.0	—	—	—	—	—	0.45
Jetalloy 209	—	—	10.0	20.0	52.0	1.0	—	15.0	—	—	—	2.0	0.02
L-251	—	—	10.0	19.0	56.0	1.0	—	14.0	—	—	—	—	0.4
L-605	—	—	10.0	20.0	51.0	1.6	—	15.0	1.5	0.6	—	—	0.1
M 203	—	—	25.0	20.0	38.0	1.6	—	12.0	0.8	1.0	0.7	2.0	1.67
M 204	—	—	25.0	18.0	42.0	1.6	—	12.0	—	—	—	—	1.27
M 205	—	—	25.0	18.0	40.0	1.6	—	12.0	—	—	2.7	—	1.67
ME16	—	—	—	15.0	23.0	2.0	5	—	—	—	5.0	—	22.25
MP35N	—	—	37.0	21.0	29.2	1.0	10.5	—	0.15	0.15	—	1.0	0.04
MAR-M 302	—	—	—	21.5	57.0	0.75	—	10.0	0.1	0.2	—	—	10.0
MAR-M 322	—	—	—	21.5	60.0	0.75	—	9.0	0.1	0.1	—	0.75	7.7
MAR-M 509	—	—	10.0	23.0	55.0	—	—	7.0	0.05	0.05	—	0.2	4.6
MAR-M 905	—	—	20.0	20.0	55.0	—	—	—	—	—	—	0.5	7.65
MAR-M 918	—	—	20.0	20.0	52.0	0.4	—	—	0.1	0.1	—	0.5	7.65
NF3	—	—	—	14.3	22.4	—	3.9	—	—	—	4.8	4.6	17.90
Refractaloy 70	—	—	20.0	21.0	46.0	0.5	8.0	4.0	—	—	—	—	0.08
STELLITE 6	—	—	—	26.0	72.0	—	—	5.0	—	—	—	—	—
UDIMET 188	—	—	22.0	22.0	38.0	3.0	—	14.0	1.25	—	—	—	—
V-36	—	—	20.0	25.0	43.2	2.4	4.0	2.0	0.6	0.5	—	—	2.29
WI-52	—	—	0.5	21.0	62.6	2.0	—	11.0	0.25	0.25	—	—	2.45

* These alloys can be hardened by an aging process

USA		UK	France	Germany		Others
SAE	AMS	BS	AFNOR	Werkst.-Nr	DIN1706	
—	—	—	—	—	—	—
—	—	—	—	—	—	—
—	(5534)	—	—	LW2.4989	CoCr20Ni20W	—
—	—	—	—	—	—	—
5537C	5759	—	KC20WN	LW2.4964	CoCr20W15Ni	—
—	—	—	—	—	CoCr19W14NiB	—
—	—	—	—	—	CoCr20W13	—
—	5772	—	KC22WN	—	CoCr22W14Ni	—
—	5373	—	—	—	—	R30006
—	5385	3531	—	—	CoCr29Mo	R30021
—	5759	—	KC20WN	LW2.4964	CoCr20W15Ni	—
5380	—	—	—	—	CoCr25NiW	R30030
5382	—	3146	—	LW2.4670	CoCr25NiW	R30031
—	—	—	—	—	CoCr19W14NiB	—
—	5940	—	—	—	—	—
—	—	—	—	—	—	—
—	—	—	—	—	—	—
—	—	—	—	—	CoCr19Fe16NiMoVNb	—
—	—	—	—	—	CoCr19Fe20NiMoVNb	—
—	—	—	—	—	CoCr25NiW	—
—	—	—	—	—	CoCr21W11Nb	—
—	—	—	—	—	CoCr20W15Ni	—
—	5382	3156-2	—	LW2.4670	CoCr25NiW	—
—	—	—	—	—	—	—
—	—	—	—	—	—	—
—	—	—	—	—	—	—
—	—	—	—	—	—	—
—	—	—	—	—	—	—
—	5759	—	—	2.4964	CoCr20W15Ni	R30605
—	—	—	—	—	—	—
—	—	—	—	—	—	—
—	—	—	—	—	—	—
—	5844	—	—	—	—	—
—	—	—	—	—	CoCrW10TaZrB	—
—	—	—	—	—	CoCr22W9TaZrNb	—
—	—	3146-3	—	—	CoCr24Ni10WTaZrB	—
—	—	—	—	—	—	—
—	—	—	—	—	CoCr20Ni20Ta	—
—	—	—	—	—	—	—
—	—	—	—	—	—	—
—	—	—	—	—	CoCr25NiMoWNb	—
—	—	—	—	—	CoCr12MoW	—

- New Products
- Tool Materials / Selection Guide
- BIDEMCS, PCD, CBN and Ceramics
- Micrograin Carbide, PVD/Coated Carbide
- Insert Item List
- General Turning Toolholders
- Unique Swiss Tooling
- Grooving / Side Turning
- Threading
- Shaper
- ID Tooling
- Application Introduction
- Endmills
- Rotating Tools
- Information
- Index

Swiss Machine List

Citizen/Cincom

Machine Model	Gang Station			Turret Station				Sleeve Station	Hand	Max cutting dia
	Metric		Number of tools	Metric		Number of tools		Metric		mm
	h×b	L		h×b	L	Turret	Station	mm		
A12	□10	100	5	—	—	—	—	φ 19.05/φ 20	R	φ 12
A16	□10	100	5	—	—	—	—	φ 19.05/φ 20	R	φ 16
A20	□12(□13)	120	5-7	—	—	—	—	φ 25.4	R	φ 20
A25	□12(□13)	120	5/6	—	—	—	—	φ 25.4	R	φ 25
A32	□16	150	6	—	—	—	—	φ 25.4	R	φ 32
B12, B12E	□10	100	5	—	—	—	—	φ 19.05/φ 20	R	φ 12
B16E	□10	120	5	—	—	—	—	φ 19.05/φ 20	R	φ 16
B20	□12(□13)	120	6	—	—	—	—	φ 19.05/φ 20	R	φ 20
BL12	□10	60-120	5	—	—	—	—	φ 19.05/φ 20	R	φ 12
BL20	□12(□13)	120	7	—	—	—	—	φ 19.05/φ 20	R	φ 20
BL25	□12(□13)	120	7	—	—	—	—	φ 19.05/φ 20	R	φ 25
C12	□10	120	6	—	—	—	—	φ 19.05	R	φ 12
C16	□10	120	6	—	—	—	—	φ 19.05	R	φ 16
C32	□16	130	5	—	—	—	—	φ 25.4	R	φ 32
D25 VIII	□16	—	10	—	—	—	—	φ 25.4	R	φ 25
E32	—	—	—	□16(19×13)	90	2	10/Turret	φ 25.4	R	φ 32
F10	—	—	—	□10	60	1	10	φ 19.05	R	φ 10
F12	—	—	—	□10	60	1	10	φ 19.05	R	φ 12
F16	—	—	—	□10	60	1	10	φ 19.05	R	φ 16
F20	—	—	—	□16(19×13)	90	1	10	φ 25.4	R	φ 20
F25	—	—	—	□16(19×13)	90	1	10	φ 25.4	R	φ 25
FL25	—	—	—	□16	90	1	12	φ 16	R	φ 25
FL42	—	—	—	□16	90	1	12	φ 16	R	φ 42
G10	—	—	—	□10	60	1	8	—	R	φ 10
G16	—	—	—	□10	60	1	8	—	R	φ 16
G32	—	—	—	□16(19×13)	90	1	10	—	R	φ 32
K12, K12E	□10	100	7	—	—	—	—	φ 20	R	φ 12
K16, K16E	□12	100	6	—	—	—	—	φ 20	R	φ 16
L10	□8	100-130	5	—	—	—	—	φ 15.875	R	φ 10
L12	□10	100	6	—	—	—	—	φ 19.05	R	φ 12
L16, L16E	□12(□10)	130	7	—	—	—	—	φ 19.05	R	φ 16
L20, L20E, L20X	□12	130	7	—	—	—	—	φ 19.05	R	φ 20
L25	□16	130	5	—	—	—	—	φ 25.4	R	φ 25
L32	□16	130	5	—	—	—	—	φ 25.4	R	φ 32
M ₂ 12, M ₃ 12	□10	120	5	□10	60	1	10	φ 19.05	R	φ 12
M ₂ 16, M ₃ 16, M ₄ 16	□10	120	5	□10	60	1	10	φ 19.05	R	φ 16
M ₂ 20, M ₃ 20	□12	130	5	□16	90	1	10	φ 25.4	R	φ 20
M ₂ 32, M ₃ 32, M ₄ 32	□16	130	5	□16	90	1	10	φ 25.4	R	φ 32
M20	□13(□12)	150	5	□10	60	1	10	φ 19.05	R	φ 20
MSL12	□10	120	—	—	—	—	—	—	R	φ 12
R04	□8	120	7	—	—	—	—	φ 15.875	R	φ 4
R07	□8	120	5	—	—	—	—	φ 15.875	R	φ 7
RL02	□16	60-150	Max 6	—	—	—	—	φ 16/φ 20	L	φ 25
RL21	□10(□12)	90	—	—	—	—	—	φ 19.05	R	φ 35

Machine Model	Gang Station			Turret Station				Sleeve Station	Hand	DS-Sleeve item number	Max cutting dia
	Metric		Num ber of tools	Metric		Number of tools		Metric			mm
	h×b	L		h×b	L	Turret	Station				
ECAS-12	□10	95-150	6					φ22	R	SS-DSU-L23 SS-DSU-SK	φ13
ECAS-20	□12(16)	80-144	6					φ22	R	SS-DSU-L23 SS-DSU-SK	φ20
ECAS-20T				□12(16)	80	3	8/Turret	φ22	R	SS-DSU-B8D34	φ20
ECAS-32T	□16	80-120	4	□16	60-78	2	10/Turret	φ22/32	R	SS-DSU-SK	φ32
JNC-10				□8	65	1	6	-	L	—	φ10
JNC-16				□10	80	1	6	-	L	—	φ16
JNC-25/32				□16	78-120	1	10	φ22	R	—	φ25/φ32
KJR-16B/25B				□16	78	1	12/16	φ22	R	—	φ16/φ25
KNC-16/20				□16	68	1	16	φ22	R	—	φ16/φ20
KNC-25II/32II				□16	78	1	20	φ22/32	R	—	φ25/φ32
RNC-10/16	□10	80-120	5					φ22	R	—	φ10/φ16
RNC-16II/16BII	□10	80-120	5					φ22	R	—	φ16
SA-16R	□10	95-120	6					φ22	R	—	φ16
SB-12II/12R/16II	□12(10)	95-130	6(7)					φ22	R	SS-DSU-L23 SS-DSU-SK	φ12/φ13/φ16
SB-16/16R	□12(10)	95-130	6(7)					φ22	R	SS-DSU-L23 SS-DSU-SK	φ16
SB-20/20R	□12(10)	95-130	6(7)					φ22	R	SS-DSU-L23 SS-DSU-SK	φ20
SC-20	□12	95-130	6					φ22	R	—	φ20
SE-12/12B, 16/16B	□10	95-120	5					φ22	R	—	φ13/φ16
SF-25				□16	73-98	1	10	φ22/32	R	—	φ25
SG-42				□16(20)	84-88	1	10	φ22/32	R	—	φ42
SH-12/16	□10	95-120	5					φ22	R	—	φ13/φ16
SH-7	□8	95-120	5					φ22	R	—	φ7
SI-12/12C	□10	80-130	6					φ22	R	—	φ13
SR-10J	□8	67-110	6					φ22	R	SS-DSU-L23 SS-DSU-SK	φ10
SR-16/20	□12	95-120	5					φ22	R	—	φ16/φ20
SR-20J	□12	100-135	6					φ22	R	SS-DSU-L23 SS-DSU-SK	φ20
SR-20R/20RII/20RIII	□12	100-135	6					φ22	R	SS-DSU-L23 SS-DSU-SK	φ20
SR-20RIV	□12	100-130	7					φ22	R	SS-DSU-B8L23	φ20
SR-25J/32J	□16	95-155	6					φ22/32	R	SS-DSU-L23 SS-DSU-SK	φ25/φ32
SR-32, SR-32J, SR-38	□16	100-135	6					φ22	R	—	φ32
SR32JII	□16		6					φ22	R	SS-DSU-B8L23 SS-DSU-B8D34	φ32
SST-16	□12	95-115	5					φ22	R	—	φ16
ST-20				□12(16)	70-78	3	8/Turret	φ22	R	—	φ20
ST-38				□16(20)	85	3	10/Turret	φ22/32	R	—	φ38
SV-12/20	□12	95-135	4	□12	70-78	1	8	φ22	R	—	φ13/φ20
	□12/□16	95-135	5	□16	65-70	1	8				
SV-32	□16	95-135	4	□16	80-88	1	10	φ22/32	R	—	φ32
SV-32J/32JII	□16	95-135	4	□16	65-70	1	8	φ22/32	R	—	φ32
SV-38R	□16+□20 (Cut off)	95-135	5	□16(20)	84-88	1	10	φ22/32	R	SS-DSU-B8D34	φ38
SW-12RII	□10	80-115	6					φ16	R	SS-DSU-B8L23	φ13
SW-20	□12(16)	80-144	6					φ22	R	SS-DSU-B8L23	φ20
SW-7	□8	80-120	4					—	R	—	φ7

New Products
Tool Materials / Selection Guide
BIDEMCS, PCD, CBN and Ceramics
Micrograin Carbide, PVD/Coated Carbide
Insert Item List
General Turning Toolholders
Unique Swiss Tooling
Grooving / Side Turning
Threading
Shaper
ID Tooling
Application Introduction
Endmills
Rotating Tools
Information
Index

Machine Model	Gang Station			Turret Station				Sleeve Station	Hand	Max cutting dia
	Metric		Number of tools	Metric		Number of tools		Metric		
	h×b	L		h x b	L	Turret	Station	mm		mm
P013H/P014H	□8	100-120	6	—	—	—	—	φ16	R	φ1
P033H/P034H	□8	100-120	6	—	—	—	—	φ16	R	φ3
B007-III	□7(□8/□10)	85	8	—	—	—	—	φ25	R	φ7
B073-II	□8	85	9	—	—	—	—	φ20	R	φ7
B074/B07-V	□8	85	9	—	—	—	—	φ20	R	φ7
B074-II	□8	85	6	—	—	—	—	φ20	R	φ7
B0123/B0124/B0125/B0126	□12	85	9	—	—	—	—	φ20	R	φ12
B012F/B012-V/BE12-V	□12	85	9	—	—	—	—	φ20	R	φ12
B0123-II/B0124-II/B0125-II/B0126-II	□12	85	9	—	—	—	—	φ20	R	φ12
B016MF	□12	85	9	—	—	—	—	φ20	R	φ16
B018-III	□12	85	9	—	—	—	—	φ20	R	φ18
B0203/B0204/B0205/B025-II/B0205-III/B0206-II	□12	85	9	—	—	—	—	φ20	R	φ20
B0203-II/B0204-II/B0206-II	□12	85	9	—	—	—	—	φ20	R	φ20
B020F/B020-V/BE20-V	□12	85	9	—	—	—	—	φ20	R	φ20
B026-V	□12(□16)	85	6	—	—	—	—	φ25	R	φ26
B0265-II/B0266-II	□16	100	12	—	—	—	—	φ25	R	φ26
B0325-II/B0326-II	□16	100	12	—	—	—	—	φ25	R	φ32
B0385/B0385L	□16	125	8	—	—	—	—	φ32	R	φ38
B038T	□16	125	3	□20	125	1	8	φ25/φ32	R	φ38
BA20-III	□12	85	6	—	—	—	—	φ25	R	φ20
BA26-III	□12(□16)	85	6	—	—	—	—	φ25	R	φ26
BC18	□12	85	10	—	—	—	—	φ25	R	φ18
BC25	□12	85	10	—	—	—	—	φ10/φ25	R	φ25
BE18	□12	85	9	—	—	—	—	φ20	R	φ18
BH20/BH20Z	□12	85	4	□12	85	1	12	φ25/φ32	R	φ20
BH38	□16	125	7	□20	125	1	12	φ25/φ32	R	φ38
BM07	□8	85	9	—	—	—	—	φ20	R	φ7
BM163/BM164/BM165	□12	85	9	—	—	—	—	φ20	R	φ16
BM20-V	□12	85	9	—	—	—	—	φ20	R	φ20
BN12-III	□12	85	7	—	—	—	—	φ20	R	φ12
BN20-III	□12(□16)	85	7	—	—	—	—	φ20	R	φ20
BS12-V	□12	85	8(12)	—	—	—	—	φ20/φ25	R	φ12
BS18-III	□12	85	7(10)	—	—	—	—	φ14/φ25	R	φ18
BS20-V	□12	85	8(12)	—	—	—	—	φ20/φ25	R	φ20
BS26(ABC)-V	□16	100	7(10)	—	—	—	—	φ16/φ25	R	φ26
BS32C-V	□16	100	6	—	—	—	—	φ16/φ25	R	φ32
BU12	□12	85	4	□12	80	1	8	φ20	R	φ51
BU20	□12	85	4	□12	80	1	8	φ20	R	φ20
BU26	□16	100	7	□20	80	1	8	φ20/φ32	R	φ26
BU38	□16	100	7	□20	80	1	8	φ20/φ32	R	φ38
BW07-III	□12	85	7	—	—	—	—	φ20	R	φ7
BW12-III/BW129Z	□12	85	7	—	—	—	—	φ20	R	φ12
BW20-III/BW209Z	□12(□16)	85	7	—	—	—	—	φ20	R	φ20
C004-III	□13	60-100	6-8	—	—	—	—	-φ10	R/L	φ120
C150	□10	60-100	4-6	—	—	—	—	-φ8	R/L	φ80
C180	□12	60-100	4-6	—	—	—	—	-φ10	R/L	φ120
C220	□13	60-100	6-8	—	—	—	—	-φ10	R/L	φ120
C300-III	□16	100-130	6-10	—	—	—	—	-φ14	R/L	φ170
CH154	□12	60-100	-16	—	—	—	—	-φ10	R/L	φ15
M34J	—	—	—	□20	125	1	12	φ20/φ32	R	φ34

Machine Model	Gang Station			Turret Station				Sleeve Station	Hand	Max cutting dia
	Metric		Number of tools	Metric		Number of tools		Metric		
	h×b	L		h x b	L	Turret	Station	mm		mm
M42J/M42D/M42SD	—	—	—	□20	125	1	12	φ25/φ32	R	φ42
M50SY-III	—	—	—	□20	100	1	12	φ32	R	φ51
M50J	—	—	—	□20	100	1	12	φ20/φ32	R	φ51
MB25	—	—	—	□20	80	2	8/Turret	φ20/φ32	R	φ25
MB35-III	—	—	—	□20	80	2	8/Turret	φ20/φ32	R	φ35
MB38-III	—	—	—	□20	80	2	8/Turret	φ20/φ32	R*	φ38
MB50-III	—	—	—	□20	80	2	8/Turret	φ20/φ32	R	φ50
MU26	—	—	—	□20	80	2	8/Turret	φ20/φ32	R	φ26
MU38	—	—	—	□20	80	2	8/Turret	φ20/φ32	R	φ38
NU50-III	—	—	—	□20	100	1	12	φ20/φ32	R	φ51
B020M-II/SS20M/SS20M-5AX	□10*	46	—	BT15 spindle			24	φ20	R	φ20
S205/S206	□12(□16)	100	8	—	—	—	—	φ20/φ22	R	φ20
SS20	□16	100	8	—	—	—	—	φ20/φ22	R	φ20
SS207/SS207-5AX	□12(□16)	100	8	—	—	—	—	φ20/φ22	R	φ20
SS26	□16	100	7	—	—	—	—	φ20/φ22	R	φ26
SS267/SS267-5AX	□16	100	8	—	—	—	—	φ25	R	φ26
SS32/SS32L	□16	100	7	—	—	—	—	φ20/φ22	R	φ32
SS327/SS327-5AX	□16	100	8	—	—	—	—	φ25	R	φ32
TMB2	—	—	—	□20	125	1	16	φ32	R	φ51
TMU1	—	—	—	□20	125	1	16	φ32	R	φ38
TMA8-IV/TMA8J	□20*	100	—	KM40 spindle			30	—	R	φ220
M06J	—	—	—	□25	150	1	8	φ32/φ40	R	φ260
M06SY	—	—	—	□25	150	1	12	φ32/φ40	R	φ260
M06JC	—	—	—	□20	125	1	8	φ32/φ40	R	φ260
M08J	—	—	—	□25	150	1	8	φ32/φ40	R	φ280
M08SY/M08D/M08SD	—	—	—	□25	150	1	12	φ32/φ40	R	φ280

DMG MORI

Machine Model	Gang Station			Sleeve Station	Hand	Max cutting dia
	Metric		Number of tools	Metric		
	h×b	L		mm		mm
Sprint 20/5	□12	—	6	φ20	R	φ20
Sprint 20/8	□12	—	6	φ20	R	φ20
Sprint 32/5	□16	—	6	φ20	R	φ32
Sprint 32/8	□16	—	6	φ20	R	φ32

Machine Model	Gang Station			Sleeve Station	Hand	Max cutting dia
	Metric		Number of tools	Metric		mm
	h×b	L		mm		
NS-P1053A	□9.5	130	5	—	R	φ10
NN-10C	□10	130	6	φ17	R	φ10
NN-10E	□10	130	6	φ16	R	φ10
NN-10C2	□10	130	6	φ17	R	φ10
NN-10C5	□10	130	6	φ17	R	φ10
NN-10CS (No live tools)	□10	130	5	φ17	R	φ10
NN-10SII	□10	130	5	φ17 (φ23)	R	φ10
NN-10T	□10	130	7	φ17 (φ23)	R	φ10
NN-10SB5	□10	130	5	φ17 (φ23)	R	φ16
NN-16SB5	□10	130	5	φ17 (φ23)	R	φ16
NN-16SB6 Type1	□12.7	130	5	φ17 (φ22)	R	φ16
NN-16SB6 Type2	□12.7	130	5	φ17 (φ22)	R	φ16
NN-16SB6 Type2.5	□12.7	130	5	φ17 (φ22)	R	φ16
NN-16SB6 Type3	□12.7	130	5	φ17 (φ22)	R	φ16
NN-16SB7	□12.7		5(7)	φ16	R	φ16
NN-16HIII	□12	130	6	φ23	R	φ16
NN-20HIII	□12	130	6	φ23	R	φ20
NN-16UIII	□12	130	5	φ23	R	φ16
NN-20UIII	□12	130	5	φ23	R	φ20
NN-20CS	□12.7	130	5(6)	φ22	R	φ20 (φ25)
NN-20U5	□12.7	130	5(6)	φ22	R	φ20 (φ25)
NN-16UB5	□12	130	5	φ23	R	φ16
NN-20UB5	□12	130	5	φ23	R	φ20
NN-20UB7	□12	130	6	φ23	R	φ20
NN-20UB8	□12.7	130	5(6)	φ22	R	φ20 (φ25)
NN-20YB	□12	130	8	φ23	R	φ20
NN-25UB8	□12		5	φ22	R	φ25
NN-32UB8	□16		5	φ22	R	φ32
NN-38UB8	□20		5	φ22/φ32	R	φ38
NN-25YB/32YB	□16	130	8	φ23/φ32	R	φ25/φ32
NN-32YB2	□16	130	5	φ22/φ32	R	φ32
NN-32YB3	□16		5	φ22/φ32	R	φ32
NN-32YB3XB	□16		6	φ22/φ32	R	φ32
NN-16J	□12.7	130	6	φ23	R	φ16
NN-20J	□12.7	130	6	φ23	R	φ20
NN-20J2	□12.7	130	6	φ22	R	φ20
NN-20J3	□12.7		6	φ23	R	φ20
NN-20J3XB	□12.7		5	φ23	R	φ20

TORNOS

Machine Model	Gang Station			Turret Station			Sleeve Station	Hand	Max cutting dia
	Metric		Number of tools	Metric		Number of tools	Metric		mm
	h×b	L		h x b	L				
EvoDECO 10/10	□8		8				φ 20/ φ 25	R	φ 10
EvoDECO 10/8	□8		8				φ 20/ φ 25	R	φ 10
EvoDECO 16/10	□12		10				φ 20/ φ 25	R	φ 16
EvoDECO 16/8	□12		10				φ 20/ φ 25	R	φ 16
EvoDECO 20	□16		10				φ 20/ φ 25	R	φ 25.4
EvoDECO 32	□16		10				φ 20/ φ 25	R	φ 32
Swiss ST 26	□12		17				φ 20/ φ 22/ φ 25	R	φ 25.4
Sigma 20/6	□16		14				φ 20	R	φ 25.4
Sigma 32/6	□16		14				φ 32	R	φ 32
SwissNano	□8		7				φ 12/ φ 16	R	φ 4
Delta 12/4	□12	85	5				φ 20	R	φ 12
Delta 12/5	□12	85	5				φ 20	R	φ 12
Delta 20/4	□12	85	5				φ 20	R	φ 20
Delta 20/5	□12	85	5				φ 20	R	φ 20
Delta 38/5B	□20	125	8				φ 25/ φ 32	R	φ 38
Delta 38/5BL	□20	125	8				φ 25/ φ 32	R	φ 38
Gamma 20/5	□16	100	8				φ 20/ φ 22	R	φ 20
Gamma 20/6	□16	100	8				φ 20/ φ 22	R	φ 20
CT20	□12	100	5					R	φ 20
MultiSwiss 6X16				□16		6	φ 25		
MultiSwiss 8X26				□16		8	φ 25		
MultiSwiss 6X32				□16		8	φ 25		
Swiss GT13	□12		8				φ 20/ φ 22		13
Swiss GT26	□16		9				φ 20/ φ 22		26
Swiss GT26B	□16		8				φ 20/ φ 22		26
Swiss GT32	□16		9				φ 20/ φ 22		32
Swiss GT32B	□16		8				φ 20/ φ 22		32
SwissDeco 26-G	□16		8				φ 20/ φ 25		26
SwissDeco 26-T	□16			□16		8	φ 20/ φ 25		26
SwissDeco 26-TB	□16			□16		8	φ 20/ φ 25		26
SwissDeco 32-G	□16		8				φ 20/ φ 25		32
SwissDeco 26-T	□16			□16		8	φ 20/ φ 25		32
SwissDeco 26-TB	□16			□16		8	φ 20/ φ 25		32

Hanwha Machinery

Machine Model	Gang Station			Turret Station			Sleeve Station	Hand	Max cutting dia
	Metric		Number of tools	Metric		Number of tools	Metric		mm
	h×b	L		h x b	L				
XD 03	□8		6				φ 15.87	R	φ 3
XD 07	□8		6				φ 15.87	R	φ 7
XD 12	□12		5				φ 20	R	φ 12
XD 16	□12		5				φ 20	R	φ 16
XD 20 / 20V	□12		6				φ 25	R	φ 20
XDI20	□12		6				φ 25	R	φ 20
XD 26	□16		5				φ 25	R	φ 26
XD32	□16		5				φ 32	R	φ 32
XD 38	□16		5				φ 32	R	φ 38
XD 42	□20		5				φ 32	R	φ 42
XE 12	□12		6				φ 20	R	φ 12
XE 16	□12		6				φ 20	R	φ 16
XE 20	□12		6				φ 25	R	φ 20
XE 26	□16		5				φ 25	R	φ 26
XE 35	□16		5				φ 32	R	φ 35
XP 12 /12S	□12		6				φ 20	R	φ 12
XP 16 /16S	□12		6				φ 20	R	φ 16
XP 20	□12		6				φ 25	R	φ 20
XP 26 / 26S	□16		5				φ 25	R	φ 26
STL38H	□16		5	□16			φ 32	R	φ 38

Hardness Comparison Chart

Vickers Hardness (HV)	Rockwell hardness			Brinell hardness, 10 mm balls, 3000 kgf load	Tungsten carbide ball	Shore hardness (HS)	Tensile strength Kg/mm ² [N/m ²] Approximate value MPa (1)
	Scale A Load: 60 kgf brale indenter (HRA)	Scale C Load: 150 kgf brale indenter (HRC)	Scale B Load: 100 kgf Diameter 1/16" indenter (HRB)				
	2200	(95.1)	—	—	—	—	—
2100	(94.6)	—	—	—	—	—	
2000	94.2	—	—	—	—	—	
1900	93.7	(80.5)	—	—	—	—	
1800	93.2	(79.2)	—	—	—	—	
1700	92.7	(77.9)	—	—	—	—	
1600	91.8	(76.6)	—	—	—	—	
1500	91.0	(75.3)	—	—	—	—	
1450	90.4	(74.6)	—	—	—	—	
1400	90.0	74.0	—	—	—	—	
1350	89.6	73.4	—	—	—	—	
1300	89.1	72.7	—	—	—	—	
1250	88.6	72.1	—	—	—	—	
1200	88.1	71.5	—	—	—	—	
1150	87.6	70.9	—	—	—	—	
1100	87.1	70.3	—	—	—	—	
1050	86.6	69.6	—	—	—	—	
1000	86.2	68.9	—	—	—	—	
940	85.6	68.0	—	—	97	—	
920	85.3	67.5	—	—	96	—	
900	85.0	67.0	—	—	95	—	
880	84.7	66.4	—	(767)	93	—	
860	84.4	65.9	—	(757)	92	—	
840	84.1	65.3	—	(745)	91	—	
820	83.8	64.7	—	(733)	90	—	
800	83.4	64.0	—	(722)	88	—	
780	83.0	63.3	—	(710)	87	—	
760	82.6	62.5	—	(698)	86	—	
740	82.2	61.8	—	(684)	84	—	
720	81.8	61.0	—	(670)	83	—	
700	81.3	60.1	—	(656)	81	—	
690	81.1	59.7	—	(647)	—	—	
680	80.8	59.2	—	(638)	80	—	
670	80.6	58.8	—	630	—	—	
660	80.3	58.3	—	620	79	—	
650	80.0	57.8	—	611	—	—	
640	79.8	57.3	—	601	77	—	
630	79.5	56.8	—	591	—	—	
620	79.2	56.3	—	582	75	—	
610	78.9	55.7	—	573	—	—	
600	78.6	55.2	—	564	74	—	
590	78.4	54.7	—	554	—	—	
580	78.0	54.1	—	545	72	—	
570	77.8	53.6	—	535	—	—	
560	77.4	53.0	—	525	71	—	
550	77.0	52.3	—	517	—	—	
540	76.7	51.7	—	507	69	—	
530	76.4	51.1	—	497	—	—	
520	76.1	50.5	—	488	67	—	
510	75.7	49.8	—	479	—	—	
500	75.3	49.1	—	471	66	—	

Vickers Hardness (HV)	Rockwell hardness			Brinell hardness, 10 mm balls, 3000 kgf load	Tungsten carbide ball	Shore hardness (HS)	Tensile strength Kg/mm ² [N/m ²] Approximate value MPa (1)
	Scale A Load: 60 kgf brale indenter (HRA)	Scale C Load: 150 kgf brale indenter (HRC)	Scale B Load: 100 kgf Diameter 1/16" indenter (HRB)				
	490	74.9	48.4	—	460	—	—
480	74.5	47.7	—	452	64	—	
470	74.1	46.9	—	442	—	—	
460	73.6	46.1	—	433	62	—	
450	73.3	45.3	—	425	—	—	
440	72.8	44.5	—	415	59	—	
430	72.3	43.6	—	405	—	—	
420	71.8	42.7	—	397	57	—	
410	71.4	41.8	—	388	—	—	
400	70.8	40.8	—	379	55	—	
390	70.3	39.8	—	369	—	—	
380	69.8	38.8	(110.0)	360	52	—	
370	69.2	37.7	—	350	—	—	
360	68.7	36.6	(109.0)	341	50	—	
350	68.1	35.5	—	331	—	—	
340	67.6	34.4	(108.0)	322	47	—	
330	67.0	33.3	—	313	—	—	
320	66.4	32.2	(107.0)	303	45	—	
310	65.8	31.0	—	294	—	—	
300	65.2	29.8	(105.5)	284	42	—	
295	64.8	29.2	—	280	—	—	
290	64.5	28.5	104.5	275	41	—	
285	64.2	27.8	—	270	—	—	
280	63.8	27.0	103.5	265	40	—	
275	63.5	26.4	—	261	—	—	
270	63.1	25.6	102.0	256	38	—	
265	62.7	24.8	—	252	—	—	
260	62.4	24.0	101.0	247	37	825	
255	62.0	23.1	—	243	—	805	
250	61.6	22.2	99.5	238	36	795	
245	61.2	21.3	—	233	—	780	
240	60.7	20.3	98.1	228	34	765	
230	—	18.0	96.7	219	33	730	
220	—	15.7	95.0	209	32	695	
210	—	13.4	93.4	200	30	670	
200	—	(11.0)	91.5	190	29	635	
190	—	(8.5)	89.5	181	28	605	
180	—	(6.0)	87.1	171	26	580	
170	—	(3.0)	85.0	162	25	545	
160	—	(0.0)	81.7	152	24	515	
150	—	—	78.7	143	22	490	
140	—	—	75.0	133	21	455	
130	—	—	71.2	124	20	425	
120	—	—	66.7	114	—	390	
110	—	—	52.3	105	—	—	
100	—	—	56.2	95	—	—	
95	—	—	52.0	90	—	—	
90	—	—	48.0	86	—	—	
85	—	—	41.0	81	—	—	

(1) 1 MPa = 1 N/mm²

(2) This table is an excerpt from the JIS Iron and Steel Handbook

(3) Values in parentheses in the above table are not usually used

P

Index

- Item number (alphabetical order) P2
- keyword (alphabetical order) P8

Item number (alphabetical order)

(○ represents a number and □ represents a letter)

Reference	Page	
#		
1/4-20UNC*11/○	Parts	L26, etc.
1240/-50/-60 -C	Parts	N13
2(○○)*○AW	Parts	L27, etc.
3/8-16UNC*11/○	Parts	L26, etc.
521673-GM	Parts	N10
5515/-20/-25 -C	Parts	N13
A		
ACN○○○	Parts	F9, etc.
ADN○○○	Parts	F13, etc.
AMS-○T	Parts	N11
AOB-○S-T○○	Parts	N11
AOB-○C	Parts	H30, etc.
AOB-5*○○	Parts	H28, etc.
AOS-5*○○	Parts	G58, etc.
AOS-6*○○	Parts	F9, etc.
APCW○○○○○○□○○○○○	Insert	N10
APCW○○○○□□□□	Insert	N10
ARN○○	Parts	L23, etc.
ASG-○	Parts	G58, etc.
ASGL○	Parts	L22, etc.
ASGL○-D	Parts	F9, etc.
ASN○○○	Parts	F17, etc.
ATN○○○	Parts	F23, etc.
AVN○○○	Parts	F27, etc.
AWN○○○-□	Parts	F29, etc.
B		
B○○□-STZ□R/L-○○-□	Holder	K32
BGR○○	Holder	H35
BS○○○○	Parts	F9, etc.
C		
C○○□-SCL□R/L○○□○○-OH	Holder	K28
C○○□-STU□R/L○○□○○-OH	Holder	K30
C○○□-STZ□R/L○○□○○(○)-OH	Holder	K32
C○○□-MBR□○○-OH	Holder	K24
C○○○□-MBR□○○-OH	Holder	K24
C○○□-SEXRR/L□○○○○-OH	Holder	K27
C○○J-MSBR	Holder	K25
C11R/L-○○	Holder	F19
C12R/L-○○	Holder	F17
C13R/L-○○	Holder	F19
C14M-○○	Holder	F17
C15R/L-○○	Holder	F21

Reference	Page	
C16R/L-○○	Holder	F19
C17R/L-○○	Holder	F21
C21R/L-○○	Holder	F23
C22R/L-○○	Holder	F23
C23R/L-○○	Holder	F25
C24R/L-○○	Holder	F25
C25R/L-○○	Holder	F25
C31R/L-○○	Holder	F9
C54M-○○	Holder	F30
C55R/L-○○	Holder	F30
CA1040A	Parts	N15
CC08□	Parts	F9, etc.
CCBNR/L○○○○□○○	Holder	F11
CCET○○○○○○(Carbide)	Insert	E39
CCET○○□○○○(Carbide)	Insert	E39
CCGT○○○○○○(Carbide)	Insert	E39, E40
CCGT○○□○○○(Carbide)	Insert	E39, E40
CCGW○○○○○○(Carbide)	Insert	E40
CCGW○○○○○○PD(CBN)	Insert	E28
CCGW○○□○○○(Carbide)	Insert	E40
CCGW○○□○○○PD(CBN)	Insert	E28
CCKNR/L○○○○□○○	Holder	F11
CCLNR/L○○○○□○○	Holder	F9
CCMT○○○○○○(Carbide)	Insert	E39
CCMT○○□○○○(Carbide)	Insert	E39
CCMT○○○○○○PBF(PCD)	Insert	E28
CCMT○○□○○○P(PCD)	Insert	E28
CCMW○○○○□○○(PCD)	Insert	E28
CDH○○□□	Insert	E17, L26
CDJNR/L○○○○□○○	Holder	F13
CH-FGVR/L○○○○	Holder	H38
CH-GTTR/L○○□○○	Holder	G61, H19
CH-LBML○○○○□	Holder	K6
CH-SDUCR/L○○○○□○○	Holder	G25
CH-STUCR/L○○○○□○○	Holder	G36
CH-SVUPR/L○○○○□○○	Holder	G33
CH-SVXCR/L○○○○□○○	Holder	G56
CH-TBPAR/L○○	Holder	G55
CH-TTPR/L○○	Holder	I 12
CLH○○○○	Insert	M11, M13
CLR-○○S	Parts	O16, etc.
CNGA○○○○○○□○○○○○	Insert	E6
CNGA○○○○○○BQ	Insert	E20
CNGA○○○○○○PQ(CBN)	Insert	E20
CNGA○○○○○○WL□○○○○○	Insert	E6
CNGG○○○○○○(Carbide)	Insert	E36
CNGG○○○○○○□○○○○○AG	Insert	E6
CNGN○○○○○○□○○○○○	Insert	E7
CNGX○○○○○○□○○○○○	Insert	E7
CNMG○○○○○○(Carbide)	Insert	E21, E36

Item number (alphabetical order)

(○ represents a number and □ represents a letter)

Reference		Page
CNMX○○○○○○PF (PCD)	Insert	E21
COUP-R1/8	Parts	K15
CPGH○○○○○○ (Carbide)	Insert	E41
CPR/L5	Parts	H26,etc.
CPR/L6	Parts	H26
CRDCN○○○○□○○	Holder	F32
CRDNN○○○○□○○	Holder	F30
CRGNR/L○○○○□○○	Holder	F30
CRN○	Parts	F33,etc.
CRXCR/L	Holder	F33
CS○○○○○	Parts	F33,etc.
CS○○○○○A	Parts	N15
CSDNN○○○○□○○	Holder	F17
CSHNR/L○○○○□○○	Holder	F19
CSSNR/L○○○○□○○	Holder	F17
CSVB○○	Insert	G50,G96
CSVC○○	Insert	G72,G97
CSVF○○	Insert	G21,G96
CSVG○○	Insert	G97,H15
CSVR/L○○	Holder	G95,etc.
CSVT○○	Insert	G97, I 10
CTDP○○□	Insert	G88
CTDPR/L○○	Holder	G88
CTP○○	Insert	G76,G77,G79
CTPA○○	Insert	G82 ~ G84
CTPAR/L○○	Holder	G55,G81
CTPR/L○○	Holder	G75
CTPS○○□□	Insert	G73,G99
CTPSR/L○○	Holder	G98,etc.
CTPW○○□R/L	Insert	G86
CTPWR/L○○	Holder	G86
CTPX○○FR/L	Insert	G78
CTV○○□	Insert	G91
CTV○○□○○□	Insert	G87,G91
CTVN○○□○	Holder	G87
CTVR/L○○□	Holder	G87,G90
CTWPR/L○○○○□-○○○○	Holder	G89
CVR/L○○□	Parts	H30
CZH○○○○	Insert	M10
D		
DC5TN	Parts	F23,etc.
DC6CN	Parts	F9,etc.
DC6DN	Parts	F13,etc.
DC6VN	Parts	F27,etc.
DCET○○○○○○ (Carbide)	Insert	E42
DCET○○□○○○ (Carbide)	Insert	E42
DCGT○○○○○○ (Carbide)	Insert	E42,E43
DCGT○○□○○○ (Carbide)	Insert	E42,E43

Reference		Page
DCGW○○○○○○ (Carbide)	Insert	E43
DCGW○○○○○○PD (CBN)	Insert	E29
DCGW○○□○○○ (PCD)	Insert	E29
DCGW○○□○○○ (Carbide)	Insert	E29
DCMT○○○○○○ (Carbide)	Insert	E42,E43
DCMT○○○○○○P (PCD)	Insert	E29
DCMT○○□○○○ (Carbide)	Insert	E29,E42,E43
DCMT○○□○○○P (PCD)	Insert	E29
DNGA○○○○○○□○○○○○	Insert	E8
DNGA○○○○○○BQ	Insert	E22
DNGA○○○○○○PQ (CBN)	Insert	E22
DNGG○○○○○○ (Carbide)	Insert	E36
DNGG○○○○○○□○○○○○AG	Insert	E8
DNGN○○○○○○□○○○○○	Insert	E8
DNGX○○○○○○□○○○○○	Insert	E8
DNMG○○○○○○ (Carbide)	Insert	E36
DNMX○○○○○○PF (PCD)	Insert	E23
DS-FGVR/L○○	Holder	H38
DS-GTTR/L○○	Holder	G61,H19
DS-LBMBL○○	Holder	K6
DS-PTXR/L○○(□)-○○	Holder	G39
DS-SCLR/L○○	Holder	G23
DS-SDUR/L○○(□)-○○	Holder	G27
DS-SDXR/L○○(□)-○○	Holder	G27
DS-STTR/L○○□	Holder	I 15
DS-SVVPN○○-○○	Holder	G33
DS-SVXPR/L○○-○○	Holder	G33
DS-SVXR/L○○(□)-○○	Holder	G31
DS-TBPR/L○○	Holder	G53
DS-TTPR/L○○	Holder	I 12
E		
ENGN○○○○○○□○○○○○	Insert	E8
ERGH□○○○○○	Insert	E45,K27
F		
FBV○○□○○□□□□	Insert	H39
FDX○○○○-○○-○○□	Cutter	N6
FGV○○○○R/L□○○□○	Insert	H39
FGVR/L○○○○	Holder	H38
FSI01-○○○*○	Parts	M13
FSI02-○○○*○○○	Parts	M10,etc.
FSI04-○○○*○○○	Parts	M13
FSI17-○○○*○○○	Parts	I 21
FSI22-○○○*○○	Parts	N10
FSI23-○○○*○	Parts	N10
FSI24-○○○*○○○	Parts	I 21

New Products
 Tool Materials / Selection Guide
 BIDEIMS, PCD, CBN and Ceramics
 Micrograin Carbide, PVD/CVD-coated Carbide
 Insert Item List
 General Turning Toolholders
 Unique Swiss Tooling
 Grooving / Side Turning
 Threading
 Shaper
 ID Tooling
 Application Introduction
 Endmills
 Rotating Tools
 Information
 Index

Item number (alphabetical order)

(○ represents a number and □ represents a letter)

Reference		Page
FSI26-○○○*○○-□□	Parts	N5
FSI28-○○○*○○	Parts	H41,etc.
FSS15-○○○*○○	Parts	F9,etc.
FSS16-○○○*○	Parts	K34,etc.
G		
GBWPFR/L-□□○○-○○○○○○	Holder	H41
GEV○○○□	Insert	H36
GKVR/L○○○○-○	Holder	H36
GKWPR/L○○○○□-○○○○	Holder	H29
GKWPR/L○○○○-□	Holder	H41
GTG○○○○○	Insert	H35
GTMA43○○○	Insert	H27
GTMH32○○○	Insert	H22 ~ H25
GTMT43○○○R/L	Insert	H27
GTMX32○○○	Insert	H23 ~ H25
GTPA○○□□○○	Insert	H17
GTPAR/L○○○○	Holder	H17
GTPS○○○□□	Insert	G99,H16
GTTR/L○○	Holder	G61,H19
GTWPR/L○○○○-□	Holder	H41
GTWPR/L○○○○-○○○○	Holder	H28
GTWPR/L○○○○□-○○○○	Holder	H28
GWPFM○○○□○○-□□	Insert	G89,H42
GWPG○○○□○○□-□□	Insert	H29
GWPM○○○□○○□-□□	Insert	H29
H		
H-M○*○○	Parts	I 20
HACDH○○	Parts	F31,etc.
HAR○○Y	Parts	F33,etc.
HARCGX○○	Parts	F32,etc.
HC35KR-○○○○	Parts	F32,etc.
HC6CN	Parts	F9,etc.
HC6DN	Parts	F13,etc.
HC6SN	Parts	F17,etc.
HC6VN	Parts	F27,etc.
HCLNR/L○○○○□○○	Holder	F9
HDHNR/L○○○○□○○	Holder	F15
HDJNR/L○○○○□○○	Holder	F13
HDNNR/L○○○○□○○	Holder	F15
HFT○○○○(○)□○○	Insert	N14
HMC○○○-○○-○○□	Cutter	N8

Reference		Page
HLR-○○S	Parts	O16,etc.
HLW○○○	Parts	N6
HN59Z-○○○○	Holder	I 17
HOSE-CN-CN-○○○	Parts	K14
HRCO-○○	Holder	F31
HSDNN○○○○□○○	Holder	F17
HSSNR/L○○○○□○○	Holder	F17
HVJNR/L○○○○□○○	Holder	F27
HVPNR/L○○○○□○○	Holder	F27
HVVNN○○○○□○○	Holder	F27
HY-NBH○○○○□	Holder	K19
HY-NBH○○○○(○○)□-OH	Holder	K13
J		
JHF○○○□○○○○□○○	Cutter	N14
JOINT-□□-R1/8	Parts	K15
JWNXM○○○□○○○○□○○-□	Cutter	N4,N5
L		
LBM○○○○□□□□	Insert	K7
LBM□○○○○□□□	Insert	K7
LBMAR○○	Holder	K6
LCL○	Parts	F9,etc.
LCS○	Parts	F9,etc.
LLR-○○S	Parts	O16,etc.
LLR-T10	Parts	F9,etc.
LLR-T15	Parts	F23,etc.
LLR-T20	Parts	F9,etc.
LNMO○○○○□□	Insert	E18,L31
LNX○○○-○○□○○○○○	Insert	N9
LRIS-○	Parts	O17,etc.
LR-S-○	Parts	O17,etc.
LS○○○	Parts	N28
LSC○○	Parts	F9,etc.
LSD○○	Parts	F13,etc.
LSP○	Parts	F9,etc.
LSS○○	Parts	F17,etc.
LST○○○	Parts	F23,etc.
LW-○	Parts	F9,etc.

Item number (alphabetical order)

(○ represents a number and □ represents a letter)

Reference		Page
LWU-○	Parts	F31, etc.
M		
M○*○○	Parts	F9, etc.
MBC-M○○	Parts	N23
MBL○○○□□	Insert	K24, K25
N		
NBH○○○○○□	Holder	K8, K9
NGTAR/L○○○○○○○-○○□	Holder	H21, H26
NGTBR/L○○○○○○○-○○□	Holder	H21, H26
NGTNR/L○○○○○○○-○○	Holder	H21, H26
NTTBR/L○○○○○○○	Holder	I 15
P		
PCLNR/L○○○○○□○○	Holder	F9
PDJNR/L○○○○○□○○	Holder	F13
PLUG-RC1/8	Parts	K15
PSBNR/L○○○○○□○○	Holder	F19
PSDNN○○○○○□○○	Holder	F17
PTANR/L○○○○○□○○□	Holder	G39
PTLNR/L○○○○○□○○	Holder	F23
PTM○○□○○○	Insert	L32
PTXNR/L○○○○○□○○□	Holder	G39
Q		
QTE○○○-○○-○□	Cutter	N10
QTS○○○-○○-○□	Cutter	N10
R		
RBGX○○□□□	Insert	E17, L31
RCE□○○○□□○○○○□	Endmill	M4
RCGX○○○○○○○□○○○○○	Insert	E17, L18, L27
RCGX○○○○○□□	Insert	E17, L18, L27
RCGY○○○○○○○□□□	Insert	E17, L22
RCL○○○□○R/L○○○	Holder	M13
RCS□○○○□□○○○○□	Endmill	M5
REL○○○□□○○○○	Holder	M11
REZ○○○□○○○○○	Holder	M10
RLR-○○S	Parts	O16, etc.
RNIW○○○○□○○○□○○	Cutter	N11
RNGN○○○○○○○□○○○○○	Insert	E9, L23, L30, N11
RNGN○○○○○○○□○○○	Insert	E9, L23, L30
RNGN○○○○○○○S	Insert	E23
RPIW○○○□○○○□○○	Cutter	N12
RPGN○○○○○○○□○○○○○	Insert	E15, N12
RPGN○○○○○○○□	Insert	E15,
RPGX○○○○○○○□○○○○○	Insert	E17, L18
RPGX○○○○○□□□	Insert	E17, L18

Reference		Page
RWEM○○○○□○○○○□○○	Endmill	M7
S		
S○○-H	Adapter	K33
S○○□-BGR○○□○○	Holder	H35
S○○□-HCLNR/L○○	Holder	K34
S○○□-HDUNR/L○○	Holder	K35
S○○□-HSKNR/L○○	Holder	K36
S○○□-MBR□○○-OH	Holder	K24
S○○□-SCL□R/L○○□○○-OH	Holder	K28
S○○□-SEXRR/L□○○○○-OH	Holder	K27
S○○□-STU□R/L○○□○○-OH	Holder	K30
S○○□-TCLNR/L○○	Holder	K34
S○○□-TSKNR/L○○	Holder	K36
S○○□-WCLNR/L○○	Holder	K34
S○○□-WDUNR/L○○	Holder	K35
S○○□-WSKNR/L○○	Holder	K36
S○○□-WWLNR/L○○	Holder	K37
SBB○○○□□○○○	Insert	K11
SBFB○○○□○○○□	Insert	K11
SBFS○○○□○○○□	Insert	K11
SBG○○○○○○□□	Insert	H34
SBT○○○□□	Insert	I 16
SCACR/L○○○○○□(□)○○□	Holder	G23
SCGW○○□○○○PQ(CBN)	Insert	E30
SCJ-M○	Parts	K15
SCJ-R1/8	Parts	K15
SCLCR/L○○-□○○	Holder	G23
SCLCR/L○○○○○□○○	Holder	G23
SDCW○○○○○○□	Insert	N8
SDEW○○○○○○○	Insert	E45
SDJCR/L○○-□○○	Holder	G25
SDJCR/L○○○○○□(□)○○□	Holder	G25
SDNCN○○-□○○	Holder	G25
SDQCR/L○○-□○○	Holder	G25
SDW○○○○-○○-○○□	Insert	N8
SDXCR/L○○○○○□○○□	Holder	G25
SFG○○○□○○○□	Insert	H37
SHF□○○○□○○○□	Insert	K21
SNEN○○○○□□○○○○○	Insert	N6
SNGA○○○○○○○□○○○○○	Insert	E10
SNGA○○○○○○○PE(CBN)	Insert	E24
SNGF○○○○○○○□□□-□	Insert	N6
SNGN○○○○○○○□○○○○○	Insert	E10, E11, N13, N15, N17
SNGN○○○○○□□□	Insert	N6
SNGX○○○○○○○□○○○○○	Insert	E11
SNMG○○○○○○○(Carbide)	Insert	E37
SNMN○○○○○○○S(CBN)	Insert	E24

New Products
 Tool Materials / Selection Guide
 BIDE/MCS, PCD, CBN and Ceramics
 Micrograin Carbide, PVD-Coated Carbide
 Insert Item List
 General Turning Toolholders
 Unique Swiss Tooling
 Grooving / Side Turning
 Threading
 Shaper
 ID Tooling
 Application Introduction
 Endmills
 Rotating Tools
 Information
 Index

Item number (alphabetical order)

(○ represents a number and □ represents a letter)

Reference		Page
SPGN○○○○○○○□○○○○○	Insert	E15
SPGN○○○○○○○PQ (CBN)	Insert	E30
SPR1/8	Parts	G34, etc.
SR08	Parts	F9, etc.
SS○○○○○□	Parts	K8, etc.
SS-DSU-□	Holder	G104
SSP○○○□○○	Insert	J4
STACR/L○○○○□○○□	Holder	G36
STTNR/L○○○○○○○	Holder	I 15
STXNR/L○○○○□○○□	Holder	G39
SVACR/L○○○○□○○□	Holder	G29, G62
SVACR/L○○-□○○	Holder	G29
SVJCR/L○○○○□○○□	Holder	G29
SVQCR/L○○-□○○	Holder	G31
SVQPR/L○○○○□○○□	Holder	G33
SVVCN○○-□○○	Holder	G31
SVVCN○○○○□○○	Holder	G31
SVVCR/L○○○○□○○○	Holder	G31
SVXCR/L○○○○□○○□	Holder	G31
SVXPR/L○○○○□○○□	Holder	G33
T		
T-06	Parts	M13
T-07	Parts	I 21
T-15A	Parts	N10
T-20	Parts	N8
TB○○○○R/L	Insert	G59
TBDP○○○○○	Insert	G57
TBDPR/L○○	Holder	G57
TBGN○○○○○○○□○○○○○	Insert	E16
TBMH○○○○○○□○○-○○	Insert	G61
TBP○○□□	Insert	G53
TBPA○○□□	Insert	G55
TBPAR/L○○□-OH	Holder	G55
TBPR/L○○	Holder	G53
TBPS○○□□	Insert	G51, G98
TBR/L○○□	Holder	G58
TBTR/L○○□	Holder	G58
TBVC○○□□○○□	Insert	G56
TBVCR/L○○	Holder	G56
TC5TN	Parts	F23, etc.
TC6CN	Parts	F9, etc.
TCBNR/L○○○○□○○	Holder	F11
TCGH○○○○○○○	Insert	E46
TCGT○○○○○○○	Insert	E46
TCGW○○○○○○○□□	Insert	E46
TCGW○○□○○○□□	Insert	E46
TCLNR/L○○○○□○○	Holder	F9
TDX○○○○-○○-○○□	Cutter	N7

Reference		Page
TF33○○□	Insert	G35
TFD○○□□○○	Insert	E44
TFT○○□□○○	Insert	E48
TFTR/L○○	Holder	G34
TFV○○□□○○	Insert	E51
TFX33○○□□	Insert	G35
TGC○○□○○□○○○□	Holder	I 17
TMN○○□□○○	Insert	I 17
TNEG○○○○○○○ (Carbide)	Insert	E37
TNGA○○○○○○□○○○○○	Insert	E12
TNGA○○○○○○○PH (CBN)	Insert	E25
TNGG○○○○○○○ (Carbide)	Insert	E37
TNGG○○○○○○○□○○○○○AG	Insert	E13
TNGN○○○○○○○□○○○○○	Insert	E12, E13
TNMG○○○○○○○ (Carbide)	Insert	E37
TNMN○○○○○○○S (CBN)	Insert	E26
TNMX○○○○○○○PF (PCD)	Insert	E26
TPGH○○○○○○○	Insert	E47
TPGN○○○○○○○□○○○○○	Insert	E16
TPGN○○○○○○○PT (CBN)	Insert	E31
TPGW○○○○○○○PT (CBN)	Insert	E32
TPMH○○○○○○○ (Carbide)	Insert	E33
TPMT○○○○○○○P (PCD)	Insert	E33
TSDNN○○○○□○○	Holder	D19
TSSNR/L○○○○□○○	Holder	D19
TTFNR/L○○○○□○○	Holder	F25
TTGNR/L○○○○□○○	Holder	F23
TTMH○○○○□○○○	Insert	I 15
TTP○○□R/L	Insert	I 13
TTPR/L○○	Holder	I 12
TTPS○○□□	Insert	G99, I 11
TW○○○○-□□○○○-□○○	Insert	I 22
TWC○□	Cutter	I 20, I 21
V		
VBGT○○○○○○○	Insert	E49
VBGW○○○○○○○PD (CBN)	Insert	E34
VCET○○○○○○○	Insert	E49
VCGT○○○○○○○	Insert	E49, E50, G62
VCGW○○○○○○○H	Insert	E49
VCGW○○○○○○○PD (CBN)	Insert	E34, E35
VCMT○○○○○○○	Insert	E49
VCMW○○○○○○○ (PCD)	Insert	E35
VGW○○○○-○□○○○	Insert	E18, L13
VGW○○○○-○□□○○○	Insert	E18, L13
VGW○○○○-□□○○○	Insert	E18, L13
VGW○○○○-□□□○○○	Insert	E18, L13
VNGA○○○○○○○□○○○○○	Insert	E14
VNGA○○○○○○○BQ	Insert	E27
VNGA○○○○○○○P□ (CBN)	Insert	E27

Item number (alphabetical order)

(○ represents a number and □ represents a letter)

Reference		Page
VNGG○○○○○○○ (Carbide)	Insert	E38
VNMG○○○○○○○ (Carbide)	Insert	E38
VPET○○○○○○○	Insert	E50
VPGT○○○○○○○	Insert	E50
W		
W○○○	Parts	F31, etc.
WCBNR/L○○○○□○○	Holder	F11
WCLNR/L○○○○□○○	Holder	F9
WDHNR/L○○○○□○○	Holder	F15
WDJNR/L○○○○□○○	Holder	F13
WDNNR/L○○○○□○○	Holder	F15
WNGA○○○○○○□○○○○○	Insert	E14
WNGG○○○○○○○ (Carbide)	Insert	E38
WNMG○○○○○○○ (Carbide)	Insert	E38
WNX○○-□○○□○○○○○	Insert	N5
WS○○○	Parts	F31
WS0512	Parts	N6
W6226-GM	Parts	N6, N7
WSDNN○○○○□○○	Holder	F17
WSSNR/L○○○○□○○	Holder	F17
WTFNR/L○○○○□○○	Holder	F25
WTGNR/L○○○○□○○	Holder	F23
WVJNR/L○○○○□○○	Holder	F27
WVPNR/L○○○○□○○	Holder	F27
WVVNN○○○○□○○	Holder	F27
WWLNR/L○○○○□○○	Holder	F29
X		
XTM○○○-○○-○○□	Cutter	N9
XX2815-04	Parts	O16, etc.
Y		
Y-GTPAR/L○○	Holder	H17
Y-GTTR/L○○□	Holder	G61, H19
Y-SDJCR/L	Holder	G27
Y-SDNCN○○-○○□	Holder	G27
Y-SVJCR/L○○○○□○○□-OH	Holder	G29
Y-TBPR/L○○□	Holder	G53

keyword (alphabetical order)

keyword	Description	Page number
A		
A	Chipbreaker for Front turning	B11
A1	Chipbreaker for Front turning	B11
A2	Chipbreaker for Front turning	B11
ACH	Tools for sub-spindle machining	G18
AM3	Chipbreaker for Front turning	B8,G15
AM5	Chipbreaker for ID boring	B9
AMX	Chipbreaker for Front turning	B8,G15
AT	Chipbreaker for Front turning	B10,G17
AZ7	Chipbreaker for Front turning	B8
AZ8	Chipbreaker for Front turning	B9
B		
B1	Chipbreaker for ID boring	B11
B16	Grade (CBN)	C6
B2	Chipbreaker for ID boring	B11
B22	Grade (CBN)	C6
B23	Grade (CBN)	C7
B3	Chipbreaker for ID boring	B11
B30	Grade (CBN)	C7
B36	Grade (CBN)	C7
B40	Grade (CBN)	C7
B52	Grade (CBN)	C7
B5K	Grade (CBN)	C7
B6K	Grade (CBN)	C7
BIDEMICS	Grade (BIDEMICS)	C2,C3
BM	Chipbreaker for Back Turning	G48
C		
C	Chipbreaker for Front turning	B13
CERAMATIC	Solid Ceramic Endmill for HRSA/Cast iron materials	M2
CL	Chipbreaker for Front turning	B8,G15
CP1	Grade (CVD Coated Carbide)	D6
CP7	Grade (CVD Coated Carbide)	D6
CSV	Interchangeable tools	G94
CTPS	Cut-off Tools	G98
CUT DUO EXTRA	Cut-off Tools	G71
CUT DUO	Cut-off Tools	G70
CX	Chipbreaker for Cut-off	G69
D		
D1	Chipbreaker for Front turning	B13
DA	Chipbreaker for Front turning	B13
DM4	Grade (PVD Coated Carbide)	D4
DS Sleeves	Tools for sub-spindle machining	G103
DT4	Grade (PVD Coated Carbide)	D4
F		

keyword	Description	Page number
F05	Chipbreaker for ID boring	B10,K23
F1	Chipbreaker for ID boring	B10,K23
FG	Chipbreaker for ID boring	B9,K23
G		
G	Chipbreaker for Front turning	B12
GT	Chipbreaker for Face Grooving	H42
GV	Chipbreaker for Grooving	H29
GW	Chipbreaker for Grooving	H29
GX	Chipbreaker for Grooving	H9
H		
HC1	Grade (Ceramic)	C9
HC2	Grade (Ceramic)	C9
HC6	Grade (Ceramic)	C9
HFC	Milling Cutters For Aluminum	N22
HPC	Milling Cutters For Aluminum	N32
HW2	Grade (Ceramic)	C9
J		
JP2	Grade (BIDEMICS)	C2
JX1	Grade (BIDEMICS)	C2
JX3	Grade (BIDEMICS)	C2
K		
K	Chipbreaker for Front turning	B10
KHG	Chipbreaker for Front turning	B10
KM1	Grade (Uncoated Carbide)	D6
M		
MOGUL BAR	High rigidity boring bars	K22
P		
PD1	Grade (PCD)	C5
PD2	Grade (PCD)	C5
Q		
QM3	Grade (PVD Coated Carbide)	D4
S		
S	Chipbreaker for Front turning	B10
SATURN DUO	Face turning/grooving tools	H12
SCRUM DUO BLADE	Face turning/grooving tools	H40
SCRUM DUO	Wide grooving tool for Swiss machines	H10
SFC	Milling Cutters For Aluminum	N26
SHAPER DUO	For Hexalobular, HEX and Square socket	J2
SHIFTED	Toolholders for extended guide-bushing	G102
S-MILL	Sharp carbide endmill for Swiss machine	M6
SP9	Grade (Ceramic)	C15
SPLASH	Keep edge cool, smooth chip evacuation	A45,K12

keyword (alphabetical order)

keyword	Description	Page number
ST4	Grade (PVD Coated Carbide)	D4
STICK DUO HYPER	Tools for for ID Tooling (bars with adjustable overhang mechanism)	K18
STICK DUO	Tools for for ID Tooling (Bars type)	K10
SX3	Grade (Ceramic)	C14
SX6	Grade (Ceramic)	C15
SX7	Grade (Ceramic)	C15
SX9	Grade (Ceramic)	C15
T		
TFX	Front turning for large DOC	G35
THREAD WHIRLING	Multi-lead thread machining capability	I 18
TM4	Grade (PVD Coated Carbide)	D5
U		
U	Chipbreaker for Front turning	B10
U1	Chipbreaker for Front turning	B10
U2	Chipbreaker for Front turning	B13
UC1	Grade (Diamond Coated Carbide)	C4
UHG	Chipbreaker for Front turning	B10
UL	Chipbreaker for Front turning	B12,G16
V		
VM1	Grade (PVD Coated Carbide)	D5
W		
WA1	Grade (Ceramic)	C17
WA5	Grade (Ceramic)	C16
Y		
YL	Chipbreaker for Front turning	B8,G15
Y-axis	Chip controlled by gravity	G100,G101
Z		
Z5	Chipbreaker for Front turning	B12
ZC7	Grade (Ceramic)	C9
ZM3	Grade (PVD Coated Carbide)	D5
ZP	Chipbreaker for Front turning	B12
Others		
CLR.../RLR.../LLR...	Wrenches	O16
Multi Clamp holders	Toolholders for General Turning	F6
LR-S.../LRIS...	Clamp Screws	O17
Coolant through holders	SPLASH Series	A45
Adiust centerline height	DS-ACH Toolholders	G18

MEMO

New Products
Tool Materials / Selection Guide
BIDEMCS, PCD, CBN and Ceramics
Micrograin Carbide, PVD/Coated Carbide
Insert Item List
General Turning Toolholders
Unique Swiss tooling
Grooving / Side Turning
Threading
Shaper
ID Tooling
Application Introduction
Endmills
Rotating Tools
Information
Index

